

# 1 Product profile

## 1.1 General description

PNP general-purpose transistors in a small SOT23 (TO-236AB) Surface-Mounted Device (SMD) plastic package.

Table 1. Product overview

| Type number | Package  |          | NPN complement |
|-------------|----------|----------|----------------|
|             | Nexperia | JEDEC    |                |
| BC856       | SOT23    | TO-236AB | BC846          |
| BC856A      |          |          | BC846A         |
| BC856B      |          |          | BC846B         |
| BC857       |          |          | BC847          |
| BC857A      | -        |          | BC847A         |
| BC857B      |          |          | BC847B         |
| BC857C      |          |          | BC847C         |
| BC858B      | -        |          | BC848B         |

### 1.2 Features and benefits

- Low current (max. 100 mA)
- Low voltage (max. 65 V)
- AEC-Q101 qualified

# 1.3 Applications

· General-purpose switching and amplification



## 1.4 Quick reference data

### Table 2. Quick reference data

 $T_{amb}$  = 25 °C unless otherwise specified.

| Symbol           | Parameter                 | Conditions                                     | Min | Тур | Max  | Unit |
|------------------|---------------------------|--|-----|-----|------|------|
| V <sub>CEO</sub> | collector-emitter voltage | open base                                      |     |     |      |      |
|                  | BC856                     | -  | -   | -   | -65  | V    |
|                  | BC857                     |  | -   | -   | -45  | V    |
|                  | BC858B                    | -  | -   | -   | -30  | V    |
| I <sub>C</sub>   | collector current         |  | -   | -   | -100 | mA   |
| I <sub>CM</sub>  | peak collector current    |  | -   | -   | -200 | mA   |
| h <sub>FE</sub>  | DC current gain           | $V_{CE} = -5 \text{ V}; I_{C} = -2 \text{ mA}$ |     |     |      |      |
|                  | BC856                     |  | 125 | -   | 475  | -    |
|                  | BC857                     | -  | 125 | -   | 800  | -    |
|                  | BC856A; BC857A            | -  | 125 | -   | 250  | -    |
|                  | BC856; BC857B; BC858B     |  | 220 | -   | 475  | -    |
|                  | BC857C                    |  | 420 | -   | 800  | -    |

# 2 Pinning information

**Table 3. Pinning information** 

| Pin | Symbol | Description | Simplified outline | Graphic symbol |
|-----|--------|-------------|--------------------|----------------|
| 1   | В      | base        |                    |                |
| 2   | Е      | emitter     | 3                  | C              |
| 3   | С      | collector   | 1 2                | B — E sym132   |

# 3 Ordering information

## **Table 4. Ordering information**

| Type number | Package  |  |         |  |  |  |
|-------------|----------|--|---------|--|--|--|
|             | Name     | Description                              | Version |  |  |  |
| BC856       | TO-236AB | Plastic surface-mounted package; 3 leads | SOT23   |  |  |  |
| BC856A      |          |  |         |  |  |  |
| BC856B      |          |  |         |  |  |  |
| BC857       |          |  |         |  |  |  |
| BC857A      |          |  |         |  |  |  |
| BC857B      |          |  |         |  |  |  |
| BC857C      |          |  |         |  |  |  |
| BC858B      | 1        |  |         |  |  |  |

# 4 Marking

## Table 5. Marking codes

| Type number |     | Marking code |
|-------------|-----|--------------|
| BC856       | [1] | 3D%          |
| BC856A      | [1] | 3A%          |
| BC856B      | [1] | 3B%          |
| BC857       | [1] | 3H%          |
| BC857A      | [1] | 3E%          |
| BC857B      | [1] | 3F%          |
| BC857C      | [1] | 3G%          |
| BC858B      | [1] | 3K%          |

<sup>[1] % =</sup> placeholder for manufacturing site code

# 5 Limiting values

### Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol           | Parameter                 | Conditions               |     | Min | Max  | Unit |
|------------------|---------------------------|--------------------------|-----|-----|------|------|
| V <sub>CBO</sub> | collector-base voltage    | open emitter             |     |     |      |      |
|                  | BC856                     |                          |     | -   | -80  | V    |
|                  | BC857                     |                          |     | -   | -50  | V    |
|                  | BC858B                    |                          |     | -   | -30  | V    |
| V <sub>CEO</sub> | collector-emitter voltage | open base                |     |     |      |      |
|                  | BC856                     |                          |     | -   | -65  | V    |
|                  | BC857                     |                          |     | -   | -45  | V    |
|                  | BC858B                    |                          |     | -   | -30  | V    |
| V <sub>EBO</sub> | emitter-base voltage      | open collector           |     | -   | -5   | V    |
| I <sub>C</sub>   | collector current         |                          |     | -   | -100 | mA   |
| I <sub>CM</sub>  | peak collector current    |                          |     | -   | -200 | mA   |
| I <sub>BM</sub>  | peak base current         |                          |     | -   | -200 | mA   |
| P <sub>tot</sub> | total power dissipation   | T <sub>amb</sub> ≤ 25 °C | [1] | -   | 250  | mW   |
| T <sub>j</sub>   | junction temperature      |                          |     | -   | 150  | °C   |
| T <sub>amb</sub> | ambient temperature       |                          |     | -65 | 150  | °C   |
| T <sub>stg</sub> | storage temperature       |                          |     | -65 | 150  | °C   |

<sup>[1]</sup> Device mounted on an FR4 Printed-Circuit-Board (PCB); single-sided copper; tin-plated and standard footprint.

# 6 Thermal characteristics

#### **Table 7. Thermal characteristics**

| Symbol        | Parameter                                   | Conditions  |     | Min | Тур | Max | Unit |
|---------------|---|-------------|-----|-----|-----|-----|------|
| $R_{th(j-a)}$ | thermal resistance from junction to ambient | in free air | [1] | -   | -   | 500 | K/W  |

[1] Device mounted on an FR4 PCB; single-sided copper; tin-plated and standard footprint.


# 7 Characteristics

## **Table 8. Characteristics**

 $T_{amb}$  = 25 °C unless otherwise specified.

| Symbol                                      | Parameter                    | Conditions   |     | Min  | Тур  | Max  | Unit |
|---|------------------------------|--|-----|------|------|------|------|
| I <sub>CBO</sub>                            | collector-base               | V <sub>CB</sub> = -30 V; I <sub>E</sub> = 0                          |     | -    | -1   | -15  | nA   |
|   | cut-off current              | V <sub>CB</sub> = -30 V; I <sub>E</sub> = 0; T <sub>j</sub> = 150 °C |     | -    | -    | -4   | μA   |
| I <sub>EBO</sub>                            | emitter-base cut-off current | $V_{EB} = -5 \text{ V}; I_C = 0$                                     |     | -    | -    | -100 | nA   |
| h <sub>FE</sub>                             | DC current gain              |  |     |      |      |      | ,    |
|   | BC856                        | $V_{CE} = -5 \text{ V}; I_{C} = -2 \text{ mA}$                       |     | 125  | -    | 475  |      |
|   | BC857                        |  |     | 125  | -    | 800  |      |
| BC856A; BC857A<br>BC856B; BC857B;<br>BC858B |                              |  |     | 125  | -    | 250  |      |
|   |                              |  |     | 220  | -    | 475  |      |
|   | BC857C                       |  |     | 420  | -    | 800  |      |
| V <sub>CEsat</sub> collector-emitter        |                              | I <sub>C</sub> = -10 mA; I <sub>B</sub> = -0.5 mA                    |     | -    | -75  | -300 | mV   |
|   | saturation voltage           | I <sub>C</sub> = -100 mA; I <sub>B</sub> = -5 mA                     | [1] | -    | -250 | -650 | mV   |
| V <sub>BEsat</sub>                          |                              | $I_C = -10 \text{ mA}; I_B = -0.5 \text{ mA}$                        |     | -    | -700 | -    | mV   |
|   | voltage                      | I <sub>C</sub> = -100 mA; I <sub>B</sub> = -5 mA                     | [1] | -    | -850 | _    | mV   |
| $V_{BE}$                                    | base-emitter voltage         | $V_{CE} = -5 \text{ V}; I_{C} = -2 \text{ mA}$                       |     | -600 | -650 | -750 | mV   |
|   |                              | $V_{CE}$ = -5 V; $I_{C}$ = -10 mA                                    |     | -    | -    | -820 | mV   |
| f <sub>T</sub>                              | transition frequency         | $V_{CE} = -5 \text{ V}; I_{C} = -10 \text{ mA}; f = 100 \text{ MHz}$ |     | 100  | -    | -    | MHz  |
| C <sub>c</sub>                              | collector capacitance        | $V_{CB} = -10 \text{ V}; I_E = I_e = 0 \text{ A}; f = 1 \text{ MHz}$ |     | -    | 4.5  | -    | pF   |
| F   | noise figure                 | $I_C$ = -200 μA; $V_{CE}$ = -5 V; $R_S$ = 2 kΩ; f = 1 kHz; B = 200Hz |     | -    | 2    | 10   | dB   |

<sup>[1]</sup> pulsed;  $t_p \le 300 \ \mu s$ ;  $\delta \le 0.02$ 

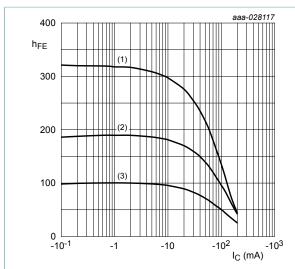


$$V_{CE}$$
 = -5  $V$ 

(1) 
$$T_{amb}$$
 = 150 °C

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = -55$$
 °C

Figure 1. BC856A; BC857A: DC current gain as a function of collector current; typical values

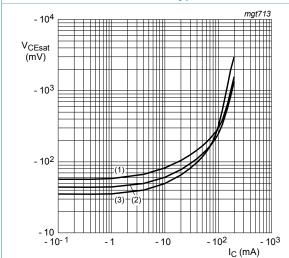


$$I_{\rm C}/I_{\rm B} = 20$$

(1) 
$$T_{amb} = 150 \, ^{\circ}C$$

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = -55$$
 °C

Figure 3. BC856A; BC857A: Collector-emitter saturation voltage as a function of collector current; typical values

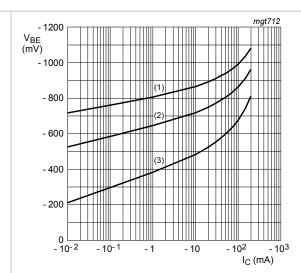


$$V_{CE} = -5 V$$

(1) 
$$T_{amb} = -55 \, ^{\circ}C$$

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = 150 \, ^{\circ}C$$

Figure 2. BC856A; BC857A: Base-emitter voltage as a function of collector current; typical values

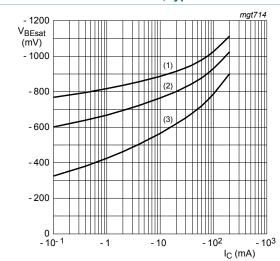


$$I_{\rm C}/I_{\rm B} = 20$$

(1) 
$$T_{amb} = -55 \,^{\circ}C$$

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = 150 \, ^{\circ}C$$

Figure 4. BC856A; BC857A: Base-emitter saturation voltage as a function of collector current; typical values

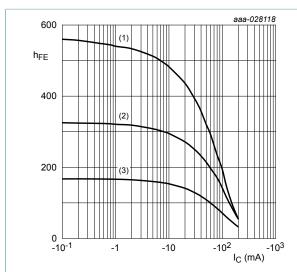


$$V_{CE}$$
 = -5  $V$ 

(1) 
$$T_{amb}$$
 = 150 °C

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

$$(3) T_{amb} = -55 °C$$

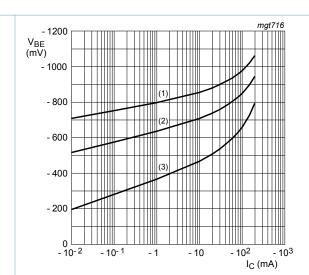

$$V_{CE} = -5 V$$


(1) 
$$T_{amb} = -55 \, ^{\circ}C$$

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = 150 \, ^{\circ}C$$

Figure 5. BC856B; BC857B; BC858B: DC current gain as Figure 6. BC856B; BC857B; BC858B: Base-emitter a function of collector current; typical values



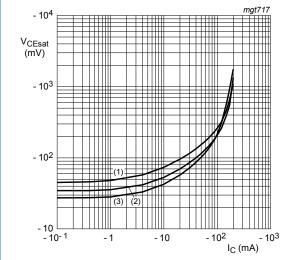


$$I_{\rm C}/I_{\rm B} = 20$$

(1) 
$$T_{amb} = 150 \, ^{\circ}C$$

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = -55$$
 °C

Figure 7. BC856B; BC857B; BC858B: Collector-emitter saturation voltage as a function of collector current; typical values

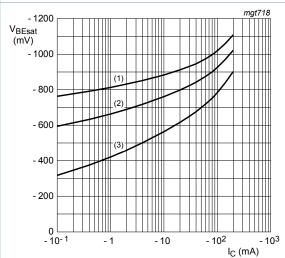


$$I_{\rm C}/I_{\rm B} = 20$$

(1) 
$$T_{amb} = -55 \,^{\circ}C$$

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = 150 \, ^{\circ}C$$

Figure 8. BC856B; BC857B; BC858B: Base-emitter saturation voltage as a function of collector current; typical values

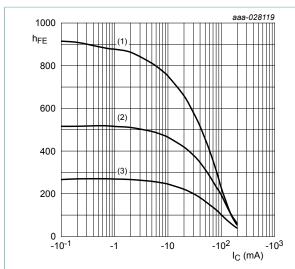


$$V_{CE} = -5 V$$

(1) 
$$T_{amb}$$
 = 150 °C

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = -55$$
 °C

Figure 9. BC857C: DC current gain as a function of collector current; typical values

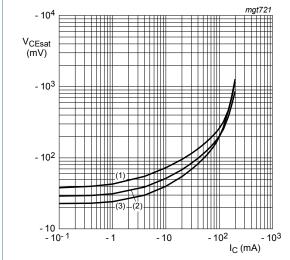


$$I_{\rm C}/I_{\rm B} = 20$$

(1) 
$$T_{amb} = 150 \, ^{\circ}C$$

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = -55$$
 °C

Figure 11. BC857C: Collector-emitter saturation voltage as a function of collector current; typical values

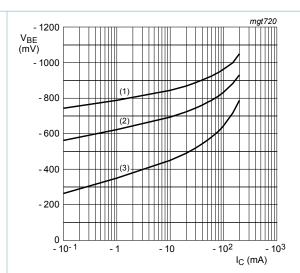


$$V_{CE} = -5 V$$

(1) 
$$T_{amb} = -55 \, ^{\circ}C$$

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = 150 \, ^{\circ}C$$

Figure 10. BC857C: Base-emitter voltage as a function of collector current; typical values

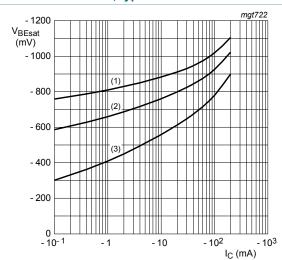

$$I_{\rm C}/I_{\rm B} = 20$$

(1) 
$$T_{amb} = -55 \, ^{\circ}C$$

(2) 
$$T_{amb} = 25 \, ^{\circ}C$$

(3) 
$$T_{amb} = 150 \, ^{\circ}C$$

Figure 12. BC857C: Base-emitter saturation voltage as a function of collector current; typical values


## 8 Test information

# 8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard Q101 - Stress test qualification for discrete semiconductors, and is suitable for use in automotive applications.


# 9 Package outline




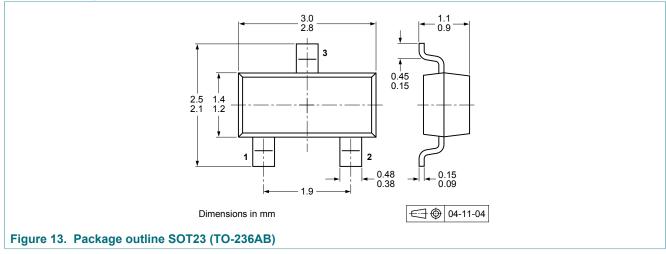

# 10 Soldering

## Table 10. Soldering

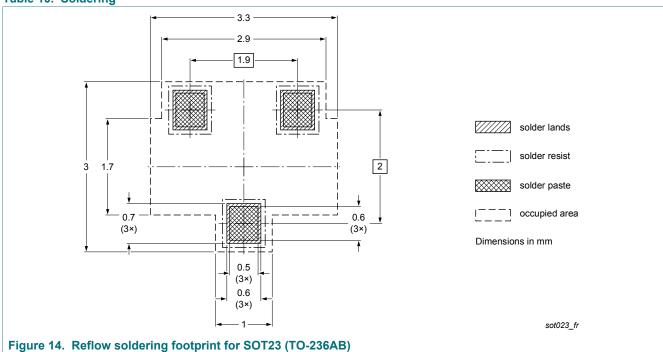

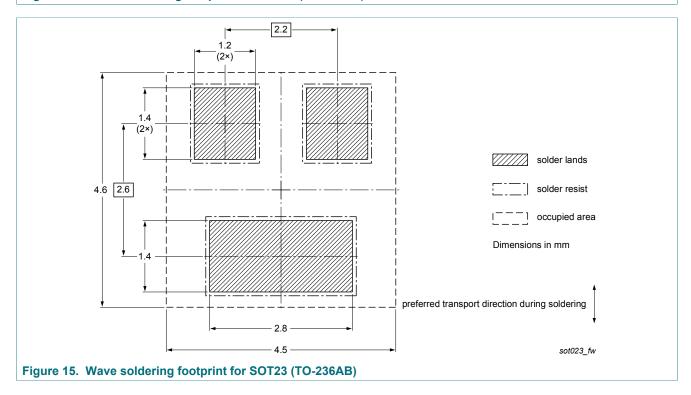

# 11 Revision history

### Table 11. Revision history

| Tuble 11. Reviolen metery |  |                    |                 |                       |  |  |  |  |
|---------------------------|--|--------------------|-----------------|-----------------------|--|--|--|--|
| Document ID               | Release date                           | Data sheet status  | Change notice   | Supersedes            |  |  |  |  |
| BC856_BC857_BC858 v.7     | 20180416                               | Product data sheet | -               | BC856_BC857_BC858 v.6 |  |  |  |  |
| Modifications:            | The format of Nexperia. Legal texts ha |                    | company name wh | ere appropriate.      |  |  |  |  |
| BC856_BC857_BC858 v.6     | 20040106                               | Product data sheet | -               | BC856_BC857_BC858 v.5 |  |  |  |  |

# 12 Legal information

#### 12.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

- Please consult the most recently issued document before initiating or completing a design.
- The term 'short data sheet' is explained in section "Definitions". [2] [3]
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### 12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

## 12.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own

BC856 BC857 BC858

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2018. All rights reserved.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

# BC856; BC857; BC858

65 V, 100 mA PNP general-purpose transistors

# **Contents**

| 1   | Product profile         | 1 |
|-----|-------------------------|---|
| 1.1 | General description     | 1 |
| 1.2 | Features and benefits   |   |
| 1.3 | Applications            | 1 |
| 1.4 | Quick reference data    |   |
| 2   | Pinning information     | 2 |
| 3   | Ordering information    |   |
| 4   | Marking                 |   |
| 5   | Limiting values         |   |
| 6   | Thermal characteristics |   |
| 7   | Characteristics         | 5 |
| 8   | Test information        |   |
| 8.1 | Quality information     |   |
| 9   | Package outline         |   |
| 10  | Soldering               |   |
| 11  | Revision history        |   |
| 12  | Legal information       |   |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



**«JONHON»** (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: http://oceanchips.ru/

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А