

# E-Rated Medium Voltage Fuses For Transformer and Feeder Protection 5.5 kV

## MV055



**CATALOG SYMBOL:** MV055

**E-RATED MEDIUM VOLTAGE FUSES:**

Meets E requirements per ANSI C37.46

Meets Full Range requirements per ANSI C37.40

**FOR TRANSFORMER AND FEEDER PROTECTION**

**VOLTAGE RATING:** 5.5 KV

**INTERRUPTING RATING:** 50KA Maximum Sym.

**CURRENT LIMITING**

**CONSTRUCTION:** Silver ribbon element surrounded by silica filler housed in a fiberglass tube and plated endcaps. An epoxy paint protects the fuse tube from the surrounding environment.

**AGENCY INFORMATION:** UL pending.

**FEATURES:**

• **Standard Clip Center Lengths and Barrel Diameters.**

The new line of Bussmann medium voltage fuses have a standard clip center distance of 12 inches and barrel diameters of 2 or 3 inches which allow fuses to retrofit existing hardware.

• **Open Fuse Indication with Indicator.**

• **100% Tested for Reliability.** All medium voltage fuses are pulsed twice with 90% of their minimum melt I<sup>2</sup>t to guarantee undamaged elements. This test does not affect undamaged elements. A damaged element completely opens when subjected to 90% of the minimum melt I<sup>2</sup>t, allowing it to be detected by a resistance check.

• **Full Range Fuses.** Bussmann medium voltage fuses provide full range protection and are capable of interrupting fault currents up to 50,000A sym.

• **Time Current Curves and Dimensional Data:**

MV055F1CA series, see page 2;

MV055F1DA series, see page 3.

• **Peak Arc Voltage Curves, and Peak Let-Through Data,** see page 4.

• **Fuse Clips,** see page 4.

**Electrical Characteristics**

| Part Number †  | Ampere Rating | Min. Melt I <sup>2</sup> t | Max. Clear I <sup>2</sup> t | Physical Size<br>Length Dia. Clip Center Barrels |   |    |   |
|----------------|---------------|----------------------------|-----------------------------|--------------------------------------------------|---|----|---|
| MV055F1CAX5E   | 5A            | 180                        | 2400                        | 15.75                                            | 2 | 12 | 1 |
| MV055F1CAX7E   | 7A            | 850                        | 8000                        |                                                  |   |    |   |
| MV055F1CAX10E  | 10A           | 850                        | 8000                        |                                                  |   |    |   |
| MV055F1CAX15E  | 15A           | 2070                       | 11000                       |                                                  |   |    |   |
| MV055F1CAX20E  | 20A           | 2370                       | 23000                       |                                                  |   |    |   |
| MV055F1CAX25E  | 25A           | 4650                       | 31000                       |                                                  |   |    |   |
| MV055F1CAX30E  | 30A           | 9490                       | 45000                       |                                                  |   |    |   |
| MV055F1CAX40E  | 40A           | 9490                       | 45000                       |                                                  |   |    |   |
| MV055F1CAX50E  | 50A           | 13600                      | 90000                       |                                                  |   |    |   |
| MV055F1CAX65E  | 65A           | 30700                      | 181000                      |                                                  |   |    |   |
| MV055F1DAX10E  | 10A           | 850                        | 8000                        | 15.75                                            | 3 | 12 | 1 |
| MV055F1DAX15E  | 15A           | 2070                       | 12000                       |                                                  |   |    |   |
| MV055F1DAX20E  | 20A           | 2370                       | 23000                       |                                                  |   |    |   |
| MV055F1DAX25E  | 25A           | 4650                       | 31000                       |                                                  |   |    |   |
| MV055F1DAX30E  | 30A           | 9490                       | 45000                       |                                                  |   |    |   |
| MV055F1DAX40E  | 40A           | 9490                       | 45000                       |                                                  |   |    |   |
| MV055F1DAX50E  | 50A           | 13600                      | 90000                       |                                                  |   |    |   |
| MV055F1DAX65E  | 65A           | 30700                      | 181000                      |                                                  |   |    |   |
| MV055F1DAX80E  | 80A           | 54600                      | 270000                      |                                                  |   |    |   |
| MV055F1DAX100E | 100A          | 116200                     | 580000                      |                                                  |   |    |   |
| MV055F1DAX125E | 125A          | 167400                     | 600000                      | 15.75                                            | 3 | 12 | 1 |
| MV055F1DAX150E | 150A          | 218700                     | 786000                      |                                                  |   |    |   |
| MV055F1DAX175E | 175A          | 227900                     | 1100000                     |                                                  |   |    |   |
| MV055F1DAX200E | 200A          | 297600                     | 1520000                     |                                                  |   |    |   |
| MV055F2DAX250E | 250A          | 669600                     | 2400000                     | 15.75                                            | 3 | 12 | 2 |
| MV055F2DAX300E | 300A          | 874800                     | 3149000                     |                                                  |   |    |   |
| MV055F2DAX350E | 350A          | 911600                     | 4376000                     |                                                  |   |    |   |
| MV055F2DAX400E | 400A          | 1190400                    | 6071000                     |                                                  |   |    |   |
| MV055F2DAX450E | 450A          | 1555000                    | 9796000                     |                                                  |   |    |   |

†To order fuses with the optional striker pin, see Part Number Construction chart below.


**Part Number Construction**

|         | Medium Voltage | Voltage Rating |                | Number of Barrels | Barrel Diameter | Clip Center Distance | Indication Type    | Ampere Rating |
|---------|----------------|----------------|----------------|-------------------|-----------------|----------------------|--------------------|---------------|
| Example | MV             | 055            | F              | 1                 | C               | A                    | X                  | 5E            |
|         |                | 055 = 5.5 KV   | F = Full Range | 1                 | C = 2 inches    | A = 12 inches        | X = Indicator only |               |
|         |                | 155 = 15.5 KV  |                | 2                 | D = 3 inches    | B = 15 inches        | S = Striker Pin    |               |
|         |                |                |                |                   |                 | C = 18 inches        |                    |               |


# E-Rated Medium Voltage Fuses For Transformer and Feeder Protection 5.5 kV - MV055F1CA Series

## MV055


Time-Current Characteristics  
Minimum Melt

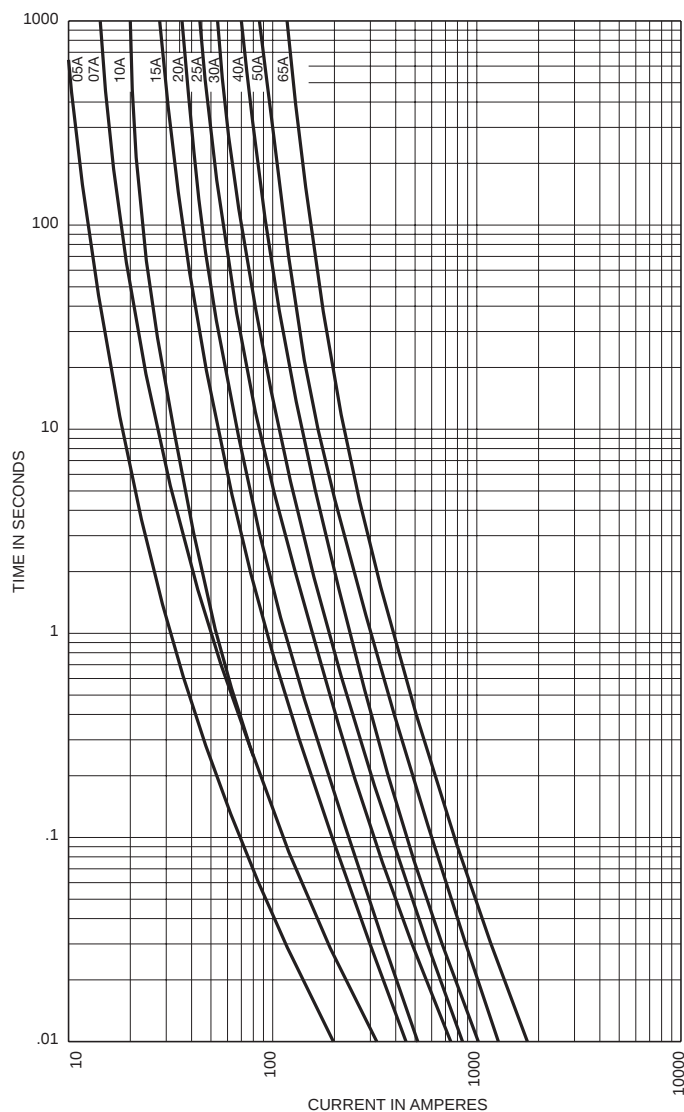

Time-Current Characteristics  
Total Clear

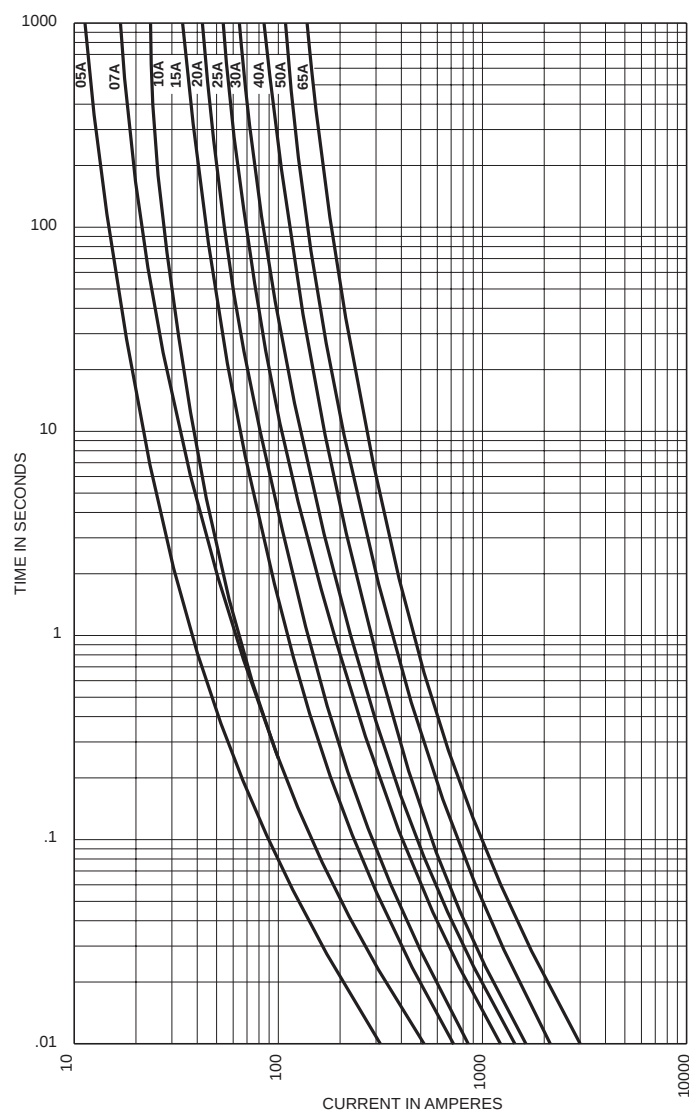


### MV055F1CAX

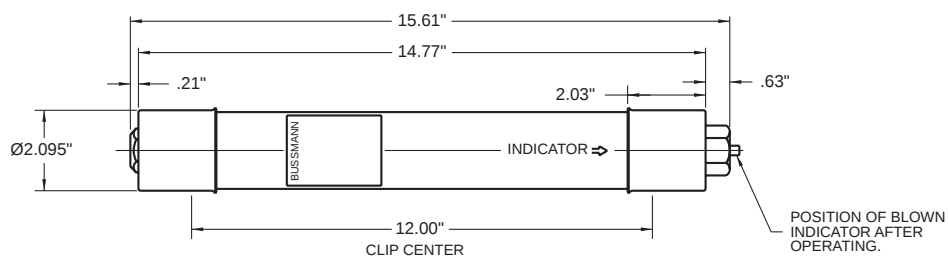


# E-Rated Medium Voltage Fuses For Transformer and Feeder Protection 5.5 kV - MV055F1DA Series

## MV055


Time-Current Characteristics  
Minimum Melt

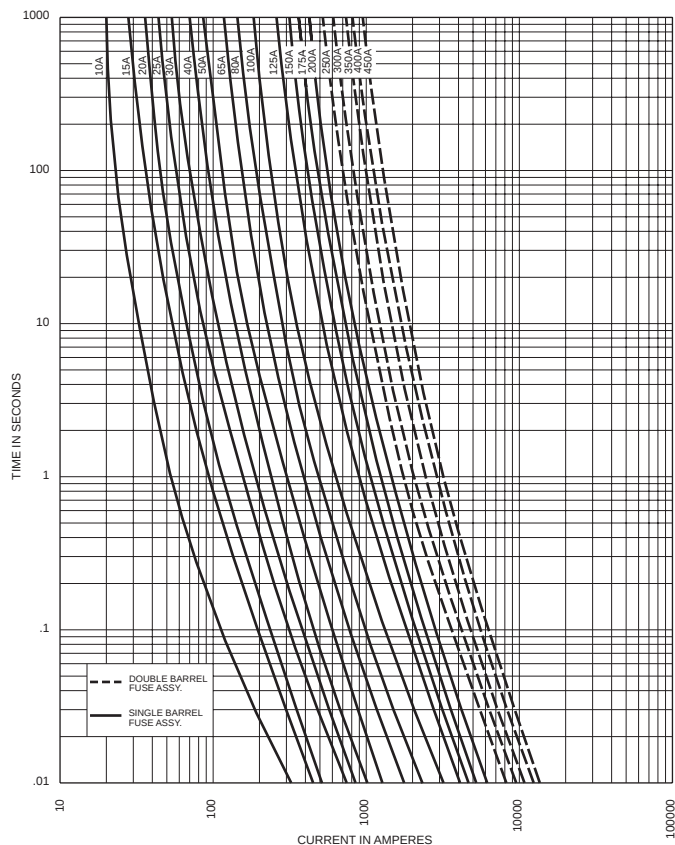


Time-Current Characteristics  
Total Clear

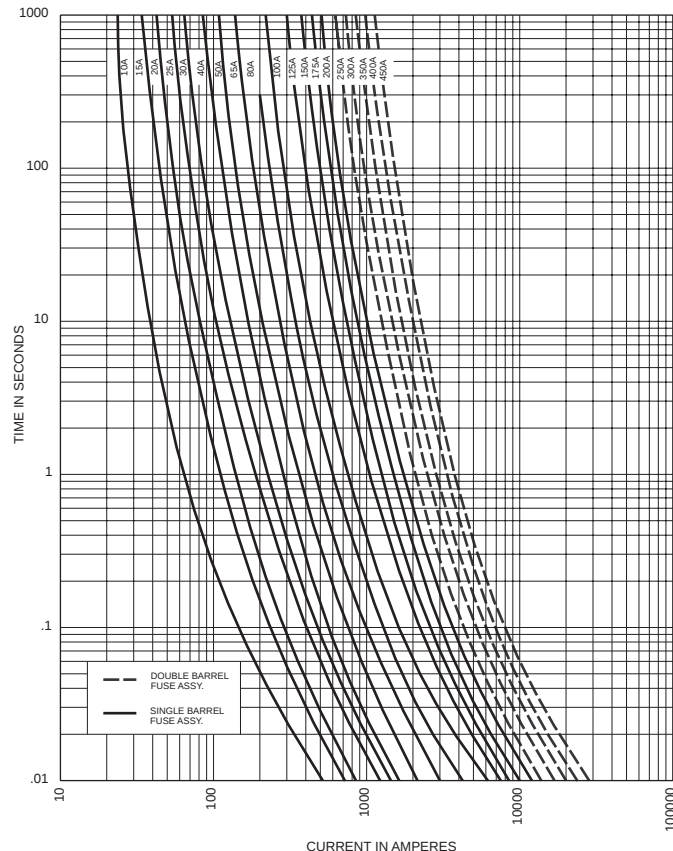

### MV055F1DAX

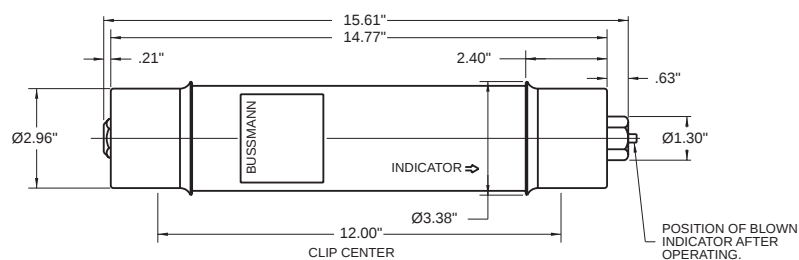



### Double Barrel Dimensions



# E-Rated Medium Voltage Fuses


## For Transformer and Feeder Protection

### 5.5 kV - Peak Arc Voltage & Peak Let-Through Data

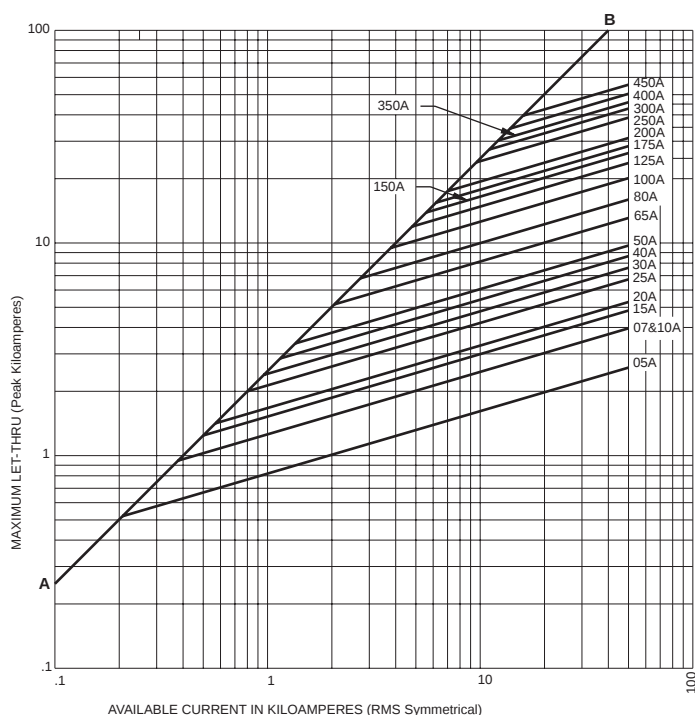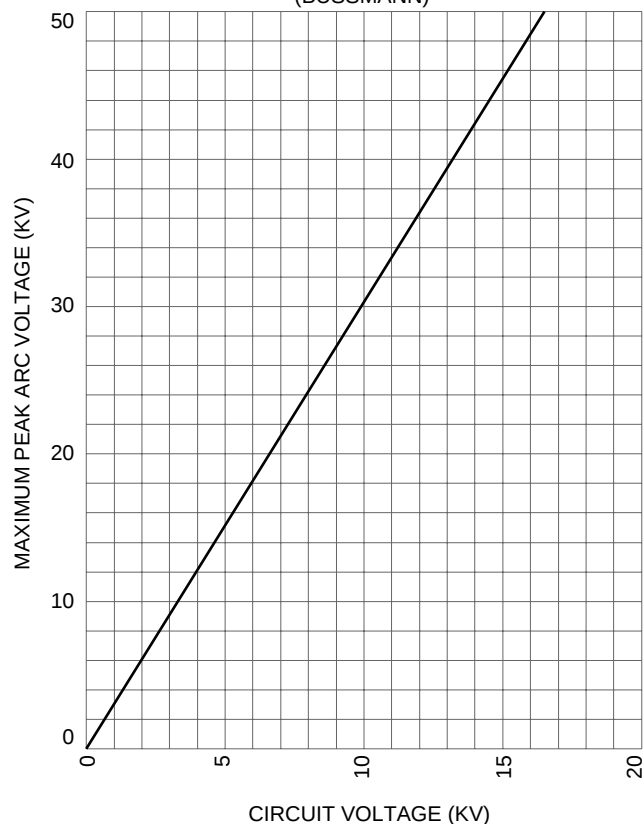**MV055**
**Max. Peak Let-Through Current Curves**

**MAXIMUM PEAK ARC VOLTAGE FOR  
"E" RATED FULL RANGE POWER FUSE  
(BUSSMANN)**

**Recommended Fuse Clips for Medium Voltage Fuses**
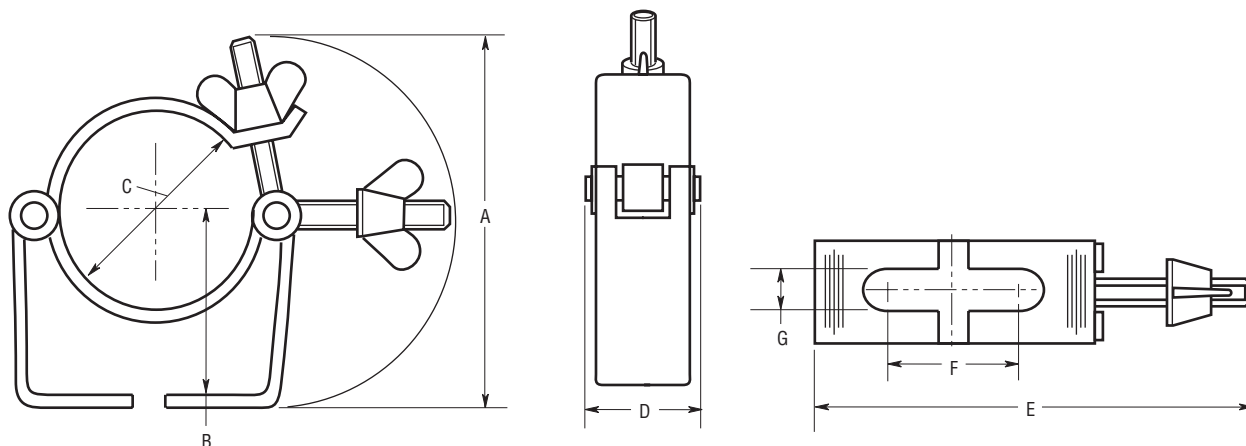
| Part No. | Fuse Diameter | Clip Dimensions |       |       |       |       |       |      |
|----------|---------------|-----------------|-------|-------|-------|-------|-------|------|
|          |               | A               | B     | C     | D     | E     | F     | G    |
| A3354710 | 2"            | 3.74"           | 1.97" | 2.00" | 1.18" | 4.53" | 1.50" | .39" |
| A3354730 | 3"            | 4.13"           | 2.44" | 3.00" | 1.18" | 5.63" | 1.50" | .39" |

Fuseclips are for single barrel applications up to 200E.



# E-Rated Medium Voltage Fuses For Transformer and Feeder Protection 5.5 kV - Cross Reference Data

MV055

## Catalog Number Cross Reference

| Bussmann       | Gould (New)     | Gould (Old)   | Westinghouse | General Electric |            |
|----------------|-----------------|---------------|--------------|------------------|------------|
| MV055F1CAXxxxE | A055F1CORO-xxxE | A550X-xxxE-1B | ----         | ----             | ----       |
| MV055F1DAXxxxE | A055F1DORO-xxxE | A550X-xxxE-1F | 5HLE-xxxE-1  | 9F60FJDxxx       | 9F62DCBxxx |
| MV055F2DAXxxxE | A055F2DORO-xxxE | A550X-xxxE-1  | ----         | ----             | ----       |

## Bussmann Medium Voltage Cross Reference

| kV     | Dia. | Clip Center | Overall Length | Sym. kA | Manufacturer      | E Ratings Available |   |    |    | S = Single Barrel |    |    |    | D = Double Barrel |    |    |     |     |     |     |     |     |     |     |     |     |   |
|--------|------|-------------|----------------|---------|-------------------|---------------------|---|----|----|-------------------|----|----|----|-------------------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|
|        |      |             |                |         |                   | 5                   | 7 | 10 | 15 | 20                | 25 | 30 | 40 | 50                | 65 | 80 | 100 | 125 | 150 | 175 | 200 | 250 | 300 | 350 | 400 | 450 |   |
| 5.5 kV | 2"   | 12"         | 15-3/4"        | 50      | Bussmann          | S                   | S | S  | S  | S                 | S  | S  | S  | S                 | S  |    |     |     |     |     |     |     |     |     |     |     |   |
|        |      |             | 14-11/100"     | 63      | Gould†            | S                   | S | S  | S  | S                 | S  | S  | S  | S                 | S  |    |     |     |     |     |     |     |     |     |     |     |   |
| 5.5 kV | 3"   | 12"         | 15-3/4"        | 50      | Bussmann          |                     |   | S  | S  | S                 | S  | S  | S  | S                 | S  | S  | S   | S   | S   | S   | S   | D*  | D   | D   | D   | D   | D |
|        |      |             | 15-7/8"        | 63      | Gould†            |                     |   | S  | S  | S                 | S  | S  | S  | S                 | S  | S  | S   | S   | S   | S   | S   | D   | D   | D   | D   | D   | D |
|        |      |             | 15-7/8"        | 63      | Westinghouse†     |                     |   |    |    |                   |    | S  | S  | S                 | S  | S  | S   | S   | S   | S   | S   | S   | D   | D   | D   | D   | D |
|        |      |             | 15-7/8"        | 63      | General Electric† |                     |   |    |    |                   |    | S  | S  | S                 | S  | S  | S   | S   | S   | S   | S   | D   | D   | D   | D   | D   | D |

\*Single barrel available as JCU-250E

† Gould, Westinghouse and General Electric are General Purpose Fuses

## Current-limiting medium voltage fuses are classified into three categories:

**Full Range** - defined by ANSI as "a fuse capable of interrupting all currents from the maximum rated interrupting current down to the minimum continuous current that causes melting of the fusible element(s), when the fuse is applied at the maximum ambient temperature specified by the manufacturer." It is able to interrupt any normal 60 cycle current that will melt its element.

**General Purpose** - defined by ANSI C37.40 as "a fuse capable of interrupting all currents from the maximum rated interrupting current down to the current that causes melting of the fusible element in one hour." Not all currents fall within this range. It is possible to receive an overcurrent lower than the value given by the one hour criterion.

**Back-up** - defined by ANSI C37.40 as "a fuse capable of interrupting all currents from the maximum rated interrupting current down to the rated minimum interrupting current." The minimum rated interrupting current is the lowest current that the fuse will be able to clear properly. This creates a need to place a low current interrupting device in series with the back-up rated fuse.

**All Bussmann MV series medium voltage fuses are E-rated and offer Full Range Protection.**

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А