

### Product Description


Qorvo's TGA2594-HM is a packaged power amplifier fabricated on Qorvo's 0.15um GaN on SiC process (QGaN15). Operating from 27 to 31 GHz, the TGA2594-HM achieves 36.5dBm saturated output power with a power-added efficiency of 25%, and 25dB small signal gain.

The TGA2594-HM is offered in a hermetically sealed 22-lead 7x7 mm ceramic QFN designed for surface mount to a printed circuit board. The package has a Cu-Mo base, offering superior thermal management. The TGA2594-HM is ideally suited to support both commercial and military applications.


Both RF ports have integrated DC blocking capacitors and are fully matched to 50 Ohms.

Lead free and RoHS compliant.

### Functional Block Diagram

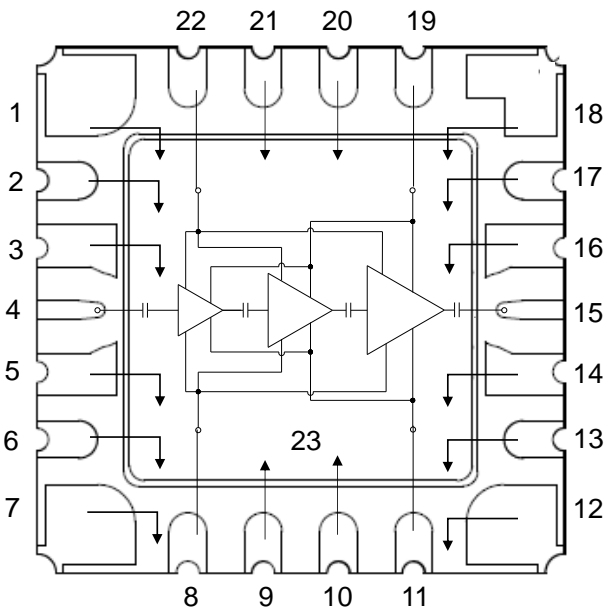

Top View

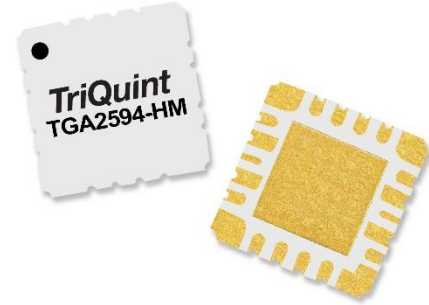

### Product Features

- Frequency Range: 27 – 31 GHz
- $P_{OUT}$ : 36.5 dBm at  $P_{IN} = 14$  dBm
- PAE: 25 % CW
- Small Signal Gain: 25 dB
- IM3: -35 dBc @ 25 dBm  $P_{OUT}$  / Tone
- Bias:  $V_D = +20$  V,  $I_{DQ} = 140$  mA,  $V_G = -3.0$  V Typical
- Package Dimensions: 7 x 7 x 1.3 mm

### Applications

- Military SATCOM Terminals
- Commercial SATCOM Terminals
- Point-to-Point Digital Radio
- Point-to Multipoint Digital Radio

### Ordering Information

Part No.	Description
TGA2594-HM	27 – 31 GHz GaN Power Amplifier



# TGA2594-HM

## 27 – 31 GHz GaN Power Amplifier

### Absolute Maximum Ratings

Parameter	Value / Range
Drain Voltage ( $V_D$ )	+29.5 V
Gate Voltage Range ( $V_G$ )	-5 to 0 V
Drain Current ( $I_D$ )	1.4 A
Gate Current ( $I_G$ )	85 °C: -3 to 17 mA
Power Dissipation ( $P_{DISS}$ ), 85 °C	15 W
Input Power, CW, 50 $\Omega$ , ( $P_{IN}$ )	30 dBm
Mounting Temperature (30 Seconds)	260 °C
Storage Temperature	-55 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

### Recommended Operating

Parameter	Value / Range
Drain Voltage ( $V_D$ )	+20 V
Drain Current ( $I_{DQ}$ )	140 mA
Drain Current Under RF Drive ( $I_{D\_DRIVE}$ )	See plots p. 7
Gate Voltage ( $V_G$ )	-3 V (Typ.)
Gate Current Under RF Drive ( $I_{G\_DRIVE}$ )	See plots p. 7
Temperature ( $T_{BASE}$ )	-40 to 85 °C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

### Electrical Specifications

Parameter	Min	Typ	Max	Units
Operational Frequency Range	27	-	31	GHz
Small Signal Gain	-	25	-	dB
Input Return Loss	-	> 5	-	dB
Output Return Loss	-	> 5	-	dB
Output Power @ $P_{IN} = 14$ dBm	-	36.5	-	dBm
Power Added Efficiency @ $P_{IN} = 14$ dBm	-	25	-	%
IM3 ( $P_{OUT}/\text{Tone} = 25$ dBm/Tone)	-	-35	-	dBc
IM5 ( $P_{OUT}/\text{Tone} = 25$ dBm/Tone)	-	-43	-	dBc
Small Signal Gain Temperature Coefficient	-	-0.05	-	dB/°C
Output Power Temperature Coefficient	-	-0.04	-	dBm/°C

Test conditions unless otherwise noted: 25 °C,  $V_D = +20$  V,  $I_{DQ} = 140$  mA,  $V_G = -3$  V Typ, CW.


### Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{BASE} = 85\text{ }^{\circ}\text{C}$ , $V_D = +20\text{ V}$ (CW)	6.89	$^{\circ}\text{C/W}$
Channel Temperature ( $T_{CH}$ ) (Under RF drive)	Freq=29 GHz, $P_{IN} = 14\text{ dBm}$ , $I_{DQ} = 140\text{ mA}$ , $I_{D\_Drive} = 640\text{ mA}$ , $P_{OUT} = 36\text{ dBm}$ , $P_{DISS} = 9\text{ W}$	147	$^{\circ}\text{C}$

Notes:







1. Thermal resistance measured to back of package.
2. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

### Power Dissipation

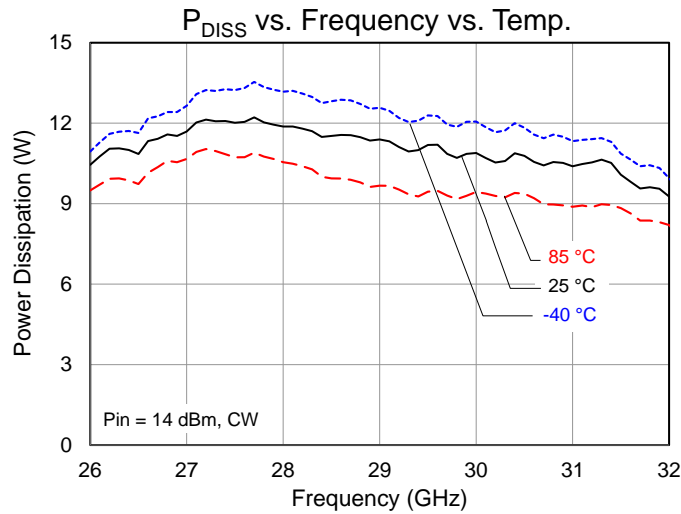






### Performance Plots – Small Signal

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 140\text{ mA}$ ,  $V_G = -3\text{ V}$  Typical, CW.

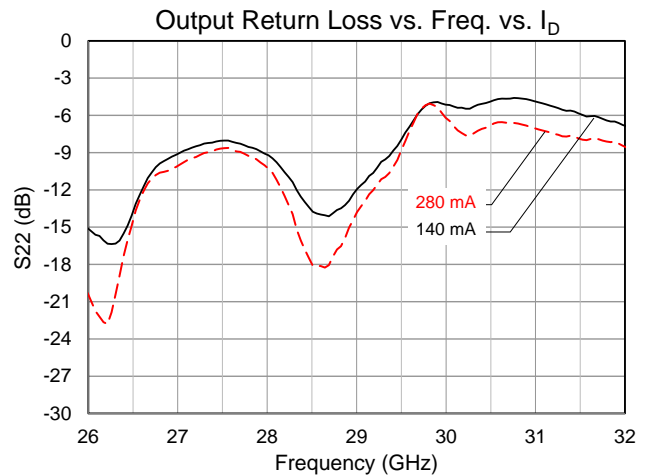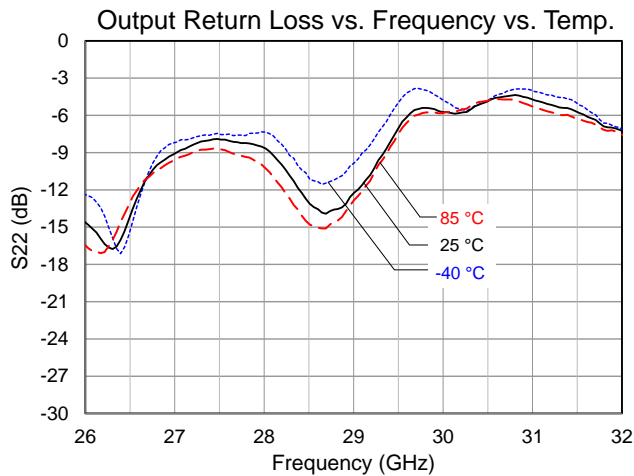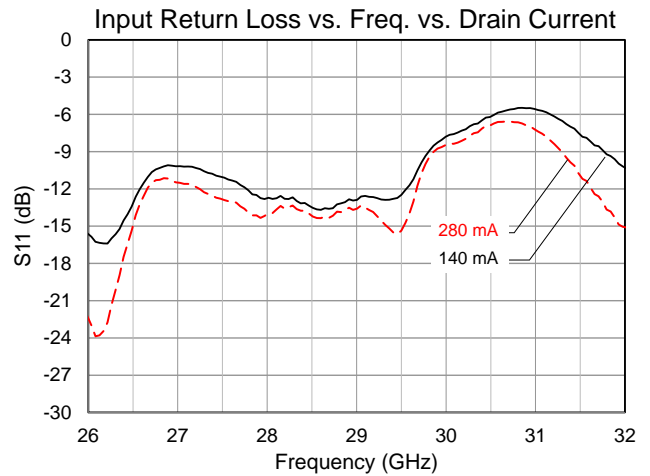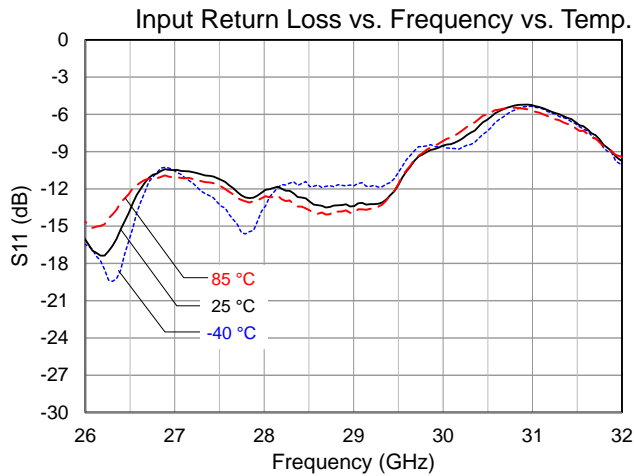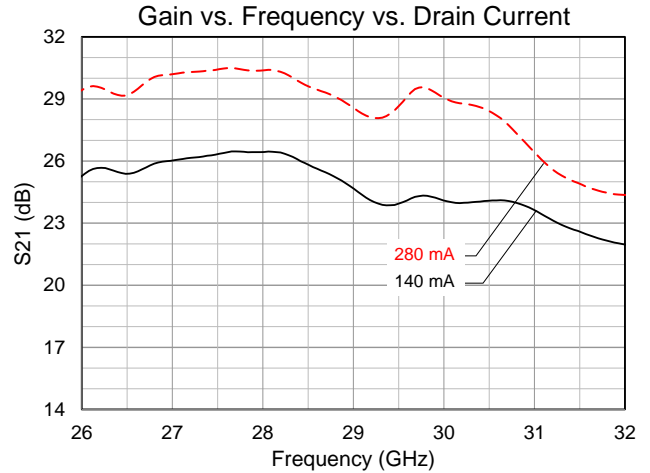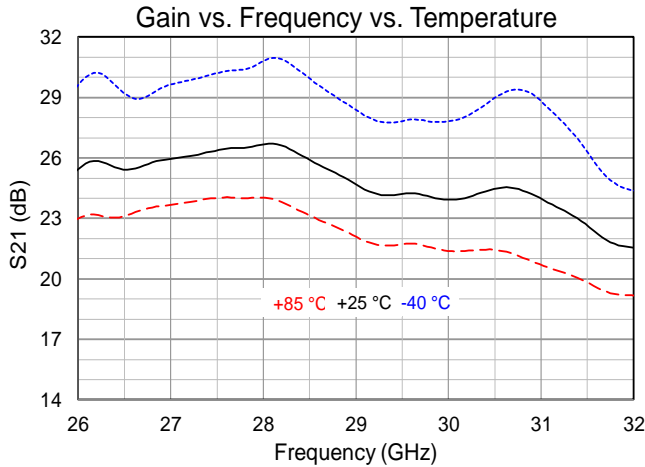







### Performance Plots – Large Signal

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 140\text{ mA}$ ,  $V_G = -3\text{ V}$  Typical, CW.

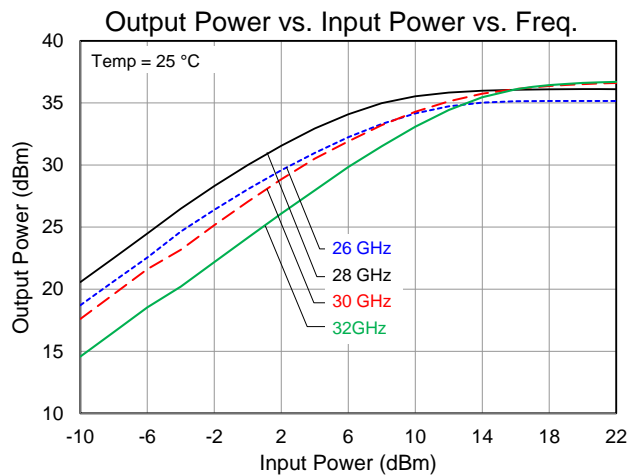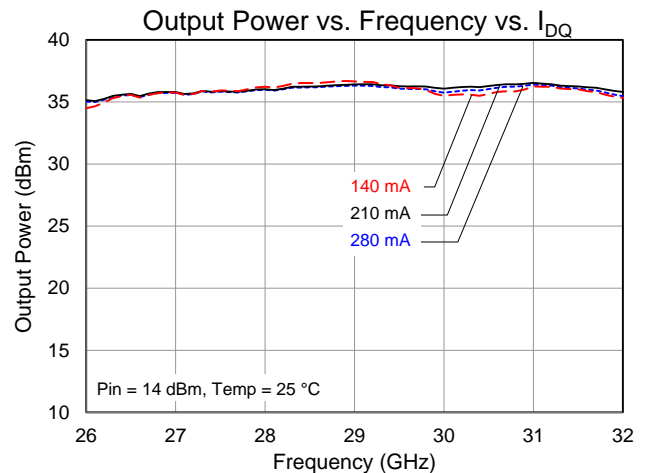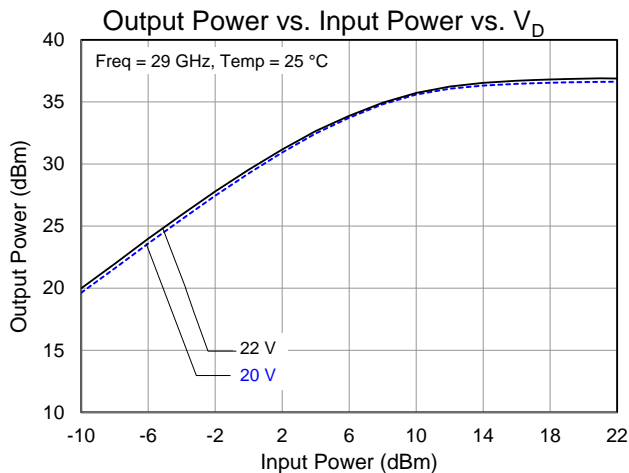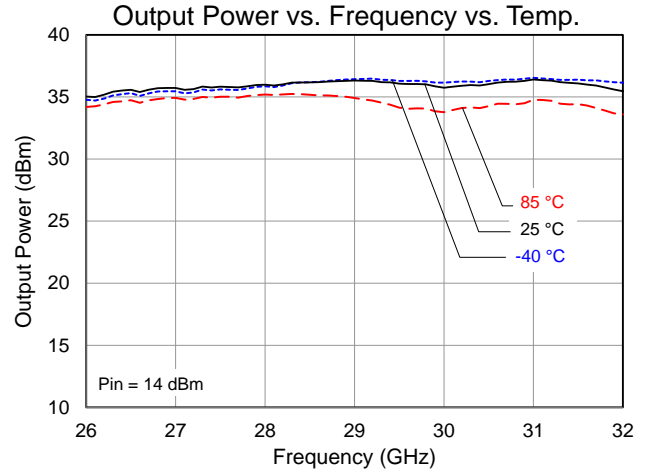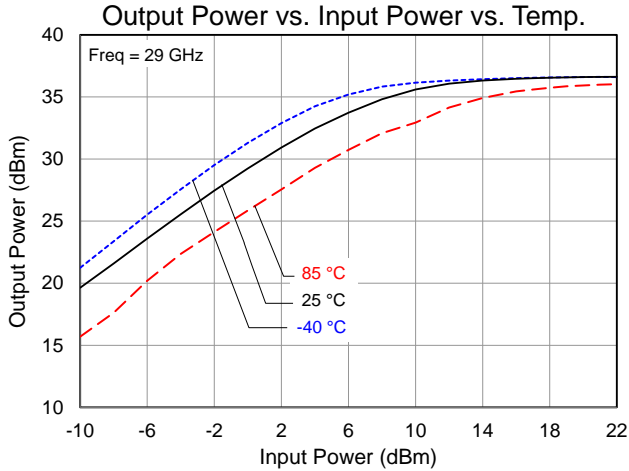







### Performance Plots – Large Signal

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 140\text{ mA}$ ,  $V_G = -3\text{ V}$  Typical, CW.

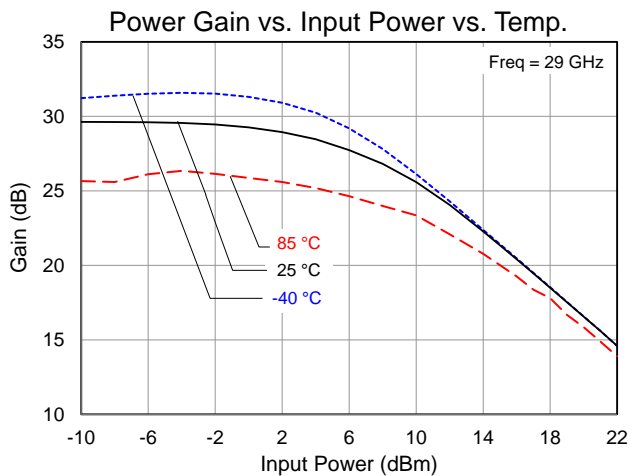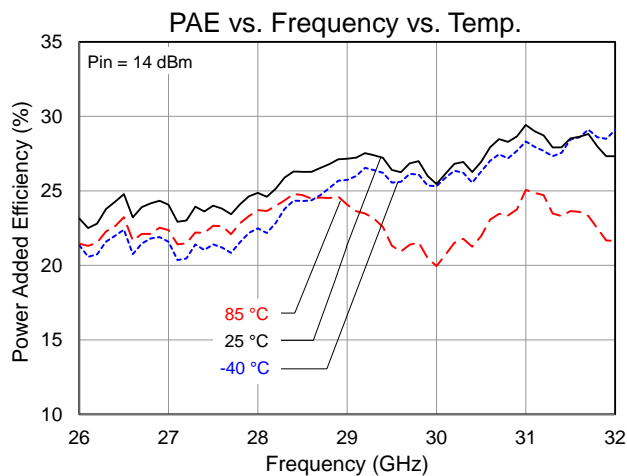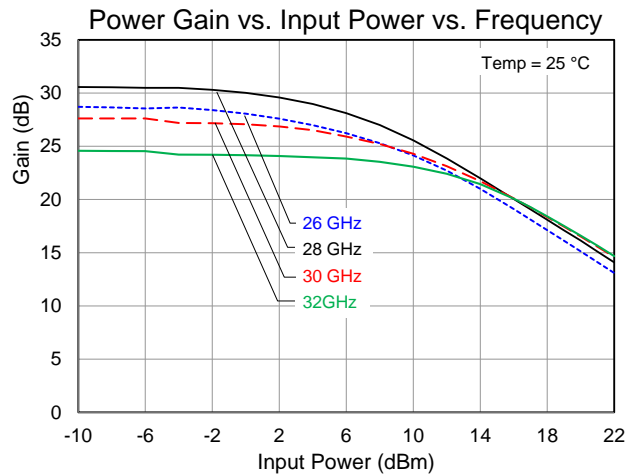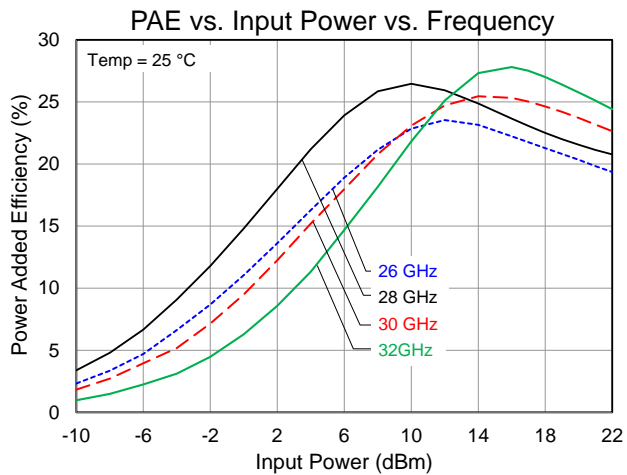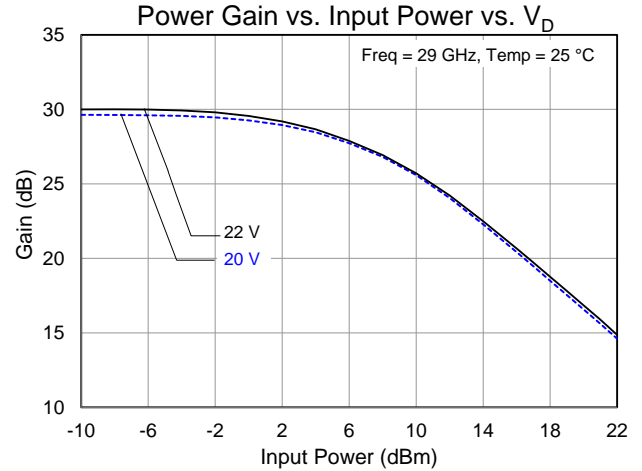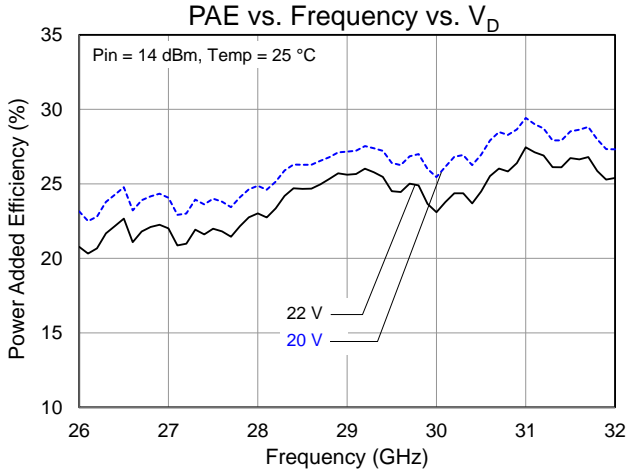







### Performance Plots – Large Signal

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 140\text{ mA}$ ,  $V_G = -3\text{ V}$  Typical, CW.

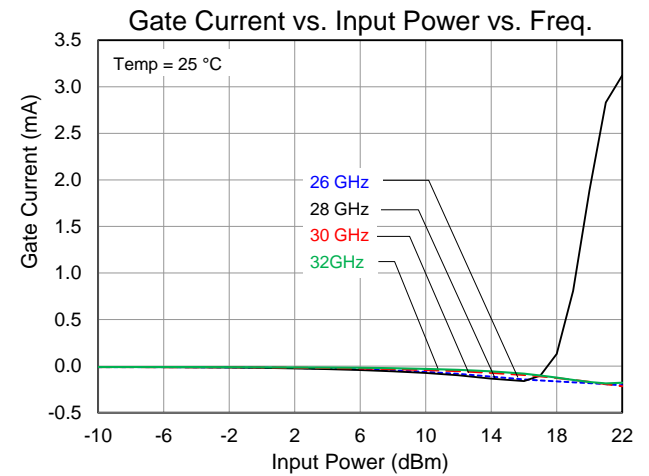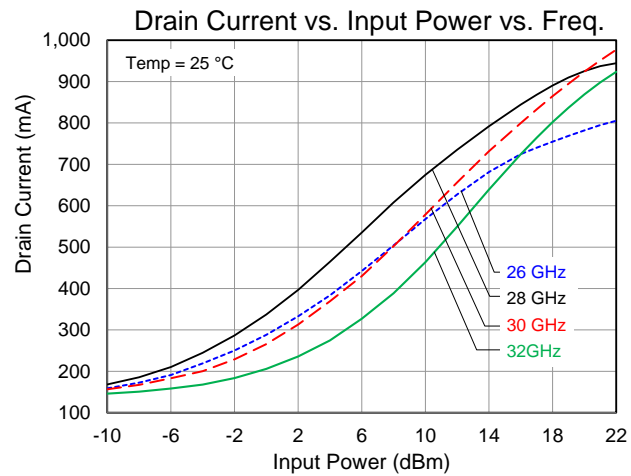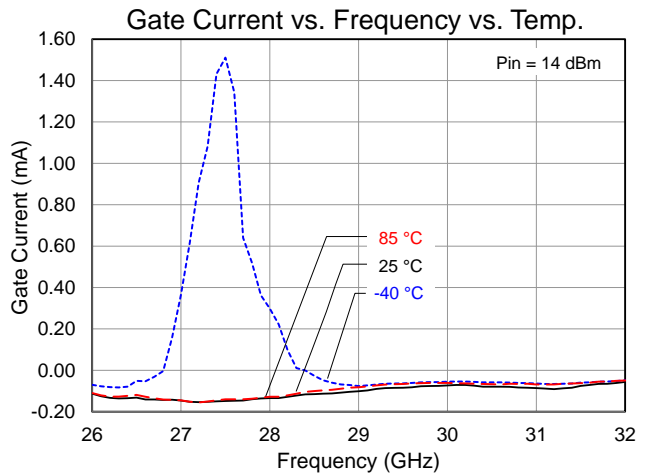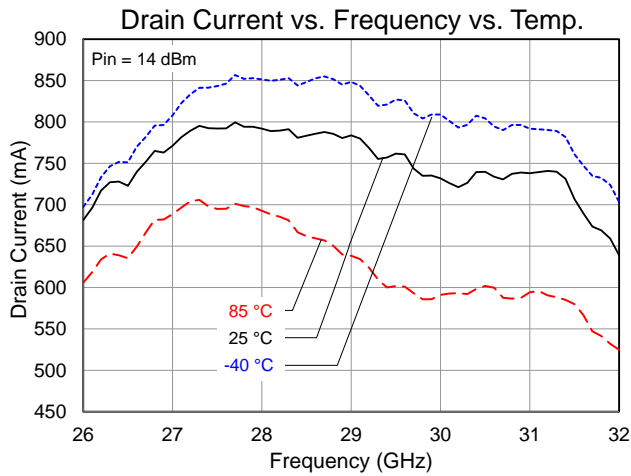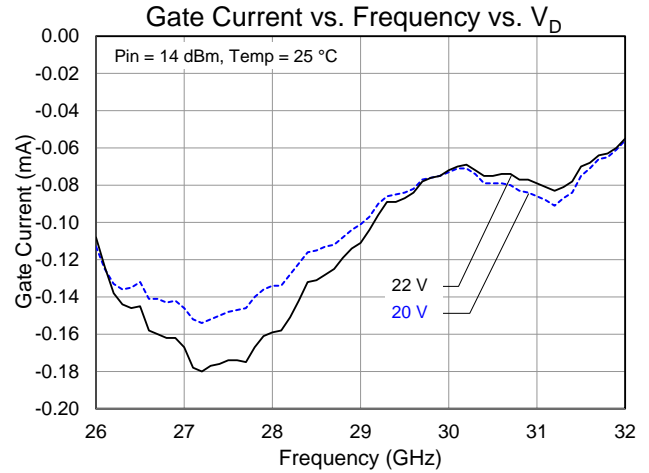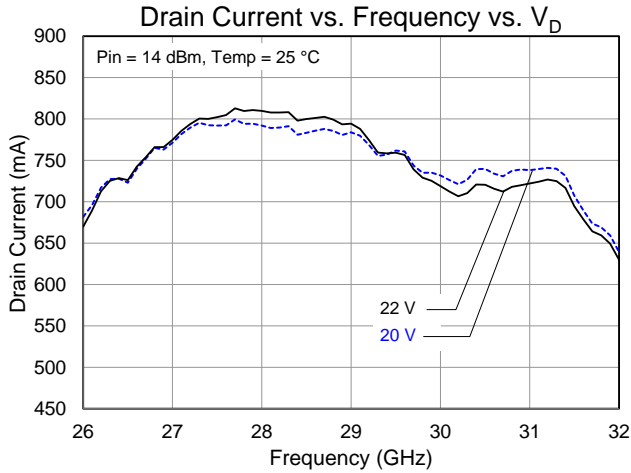


### Performance Plots – Large Signal and Linearity

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 140\text{ mA}$ ,  $V_G = -3\text{ V}$  Typical, CW.

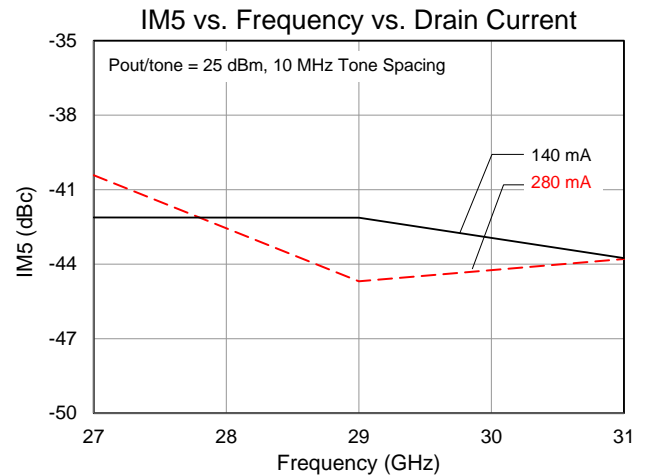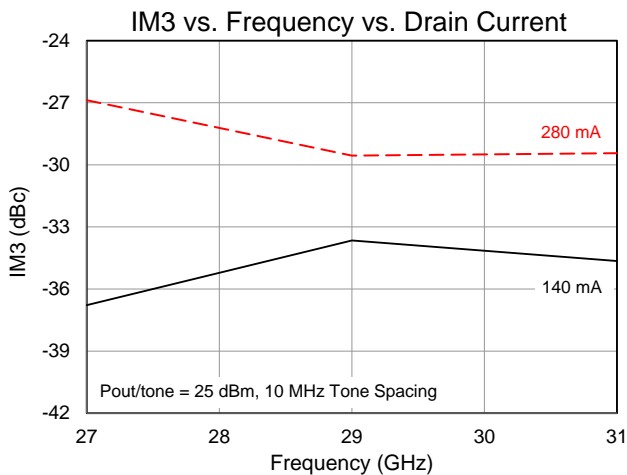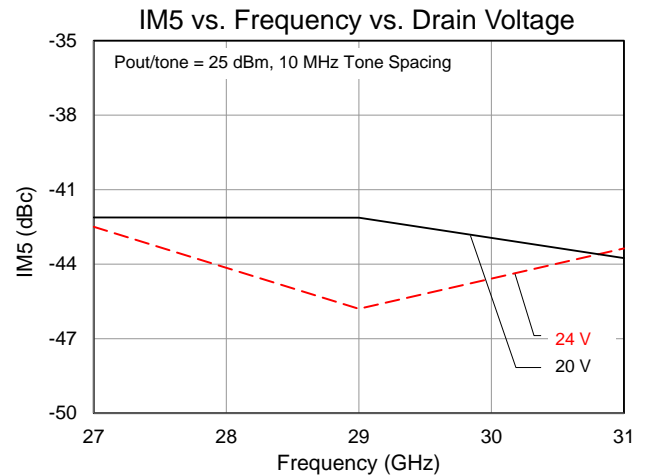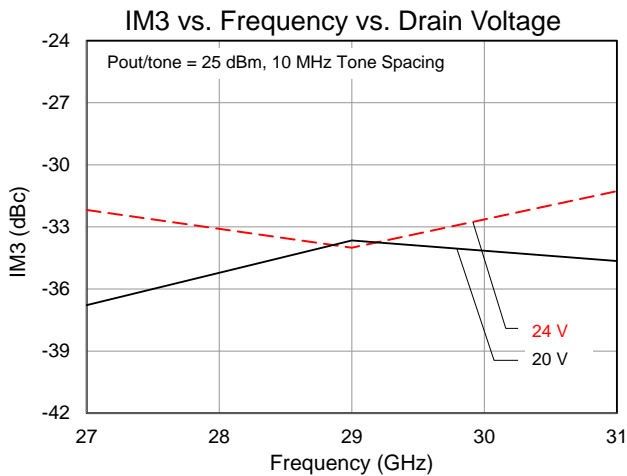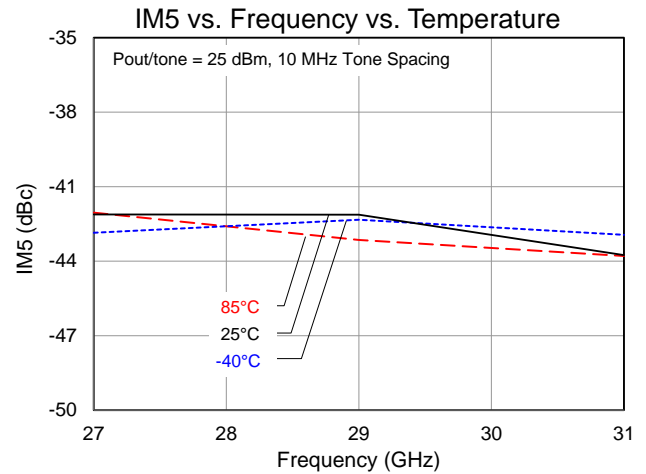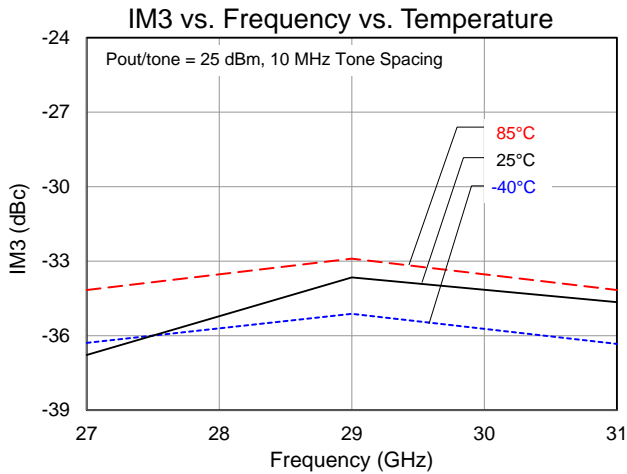



### Applications Information and Pad Layout

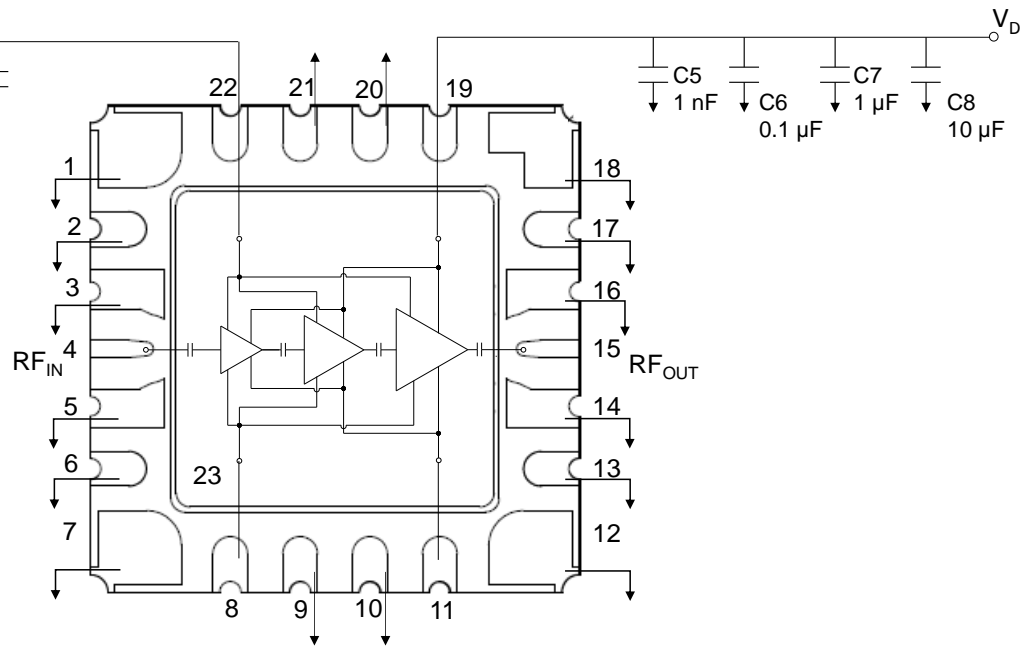

Top View

### Bias Up Procedure

1. Set  $I_D$  limit to 1.2 A,  $I_G$  limit to 10 mA
2. Apply  $-5\text{ V}$  to  $V_G$
3. Apply  $+20\text{ V}$  to  $V_D$ ; ensure  $I_{DQ}$  is approx. 0 mA
4. Adjust  $V_G$  until  $I_{DQ} = 140\text{ mA}$  ( $V_G \sim -3\text{ V Typ.}$ ).
5. Turn on RF supply

### Bias Down Procedure

1. Turn off RF supply
2. Reduce  $V_G$  to  $-5\text{ V}$ ; ensure  $I_{DQ}$  is approx. 0 mA
3. Set  $V_D$  to 0 V
4. Turn off  $V_D$  supply
5. Turn off  $V_G$  supply



### Pad Description

Pad No.	Symbol	Description
1-3, 5-7, 9, 10, 12-14, 16-18, 20, 21, 23	GND	Must be grounded on the PCB.
4	$RF_{IN}$	Output; matched to $50\ \Omega$ ; DC blocked
8, 11	NC	For use with Q EVB, do not connect (pins are connected internal to package)
15	$RF_{OUT}$	Input; matched to $50\ \Omega$ ; DC blocked
19	$V_D$ (1)	Drain voltage; Bias network is required; see recommended Application Information above.
22	$V_G$ (2)	Gate Voltage; Bias network is required; see recommended Application Information above.

Notes:

1. If not using TQ EVB,  $V_D$  may be applied to either pin 11 or pin 19.
2. If not using TQ EVB,  $V_G$  may be applied to either pin 8 or pin 22.

### Evaluation Board

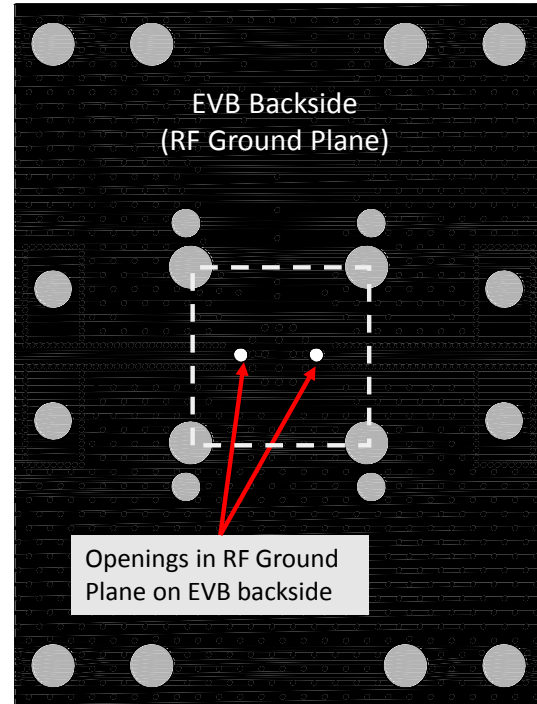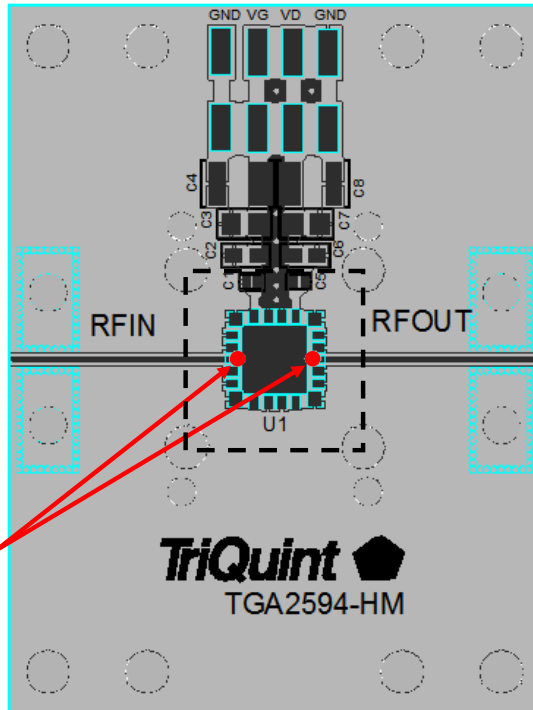

Location of openings on backside of EVB

Openings in RF Ground Plane on EVB backside

- Notes:
1. Existence of 1 mm diameter opening on backside of EVB – the openings are required for all EVBs.
  2. See Assembly Notes (page 11) for additional detail.


### Bill of Materials

Reference Des.	Value	Description	Manuf.	Part Number
C1, C5	1 nF	Cap, 0402, +50 V, 10 %, X7R	Various	–
C2, C6	0.1 $\mu$ F	Cap, 0603, +50 V, 10 %, X7R	Various	–
C3, C7 (1)	1 $\mu$ F	Cap, 0805, +50 V, 10 %, X7R	Various	–
C4, C8 (1)	10 $\mu$ F	Cap, 1206, +50 V, 10 %, X7R	Various	–

- Notes:
1. If the designated application is not sensitive to IM3, capacitors C3, C4, C7, and C8 may omitted.



### Assembly Notes

1. Clean the board or module with alcohol. Allow it to dry fully.
2. Apply solder paste to each pin of the TGA2594-HM, and heat achieve reflow, being careful not to exceed the thermal budget.
3. Clean the assembly with alcohol.
4. To attain quoted RF performance, the following is required:
  - i. On the printed circuit board, there must be two 1 mm (0.0394") diameter openings on the backside (RF Ground Plane) of the circuit board.
    - Location of the openings is contained in the Q Evaluation Board layout.
    - The 1 mm diameter openings for the board are shown in the diagram below in reference to the base of the package.
  - ii. Use of a carrier plate with 2 mm (0.0787") diameter holes.
    - The holes should be located with respect to the package pin-out as shown in the diagram below.
    - The holes should be 4 mm deep.
5. To improve thermal performance, the following is recommended:
  - i. The use of a 4 mil indium shim between the circuit board and the carrier plate.
  - ii. The In shim should have the same hole diameter and positioning as the carrier plate (see diagram below for location with respect to the package backside). The holes should be machined fully through the In shim.

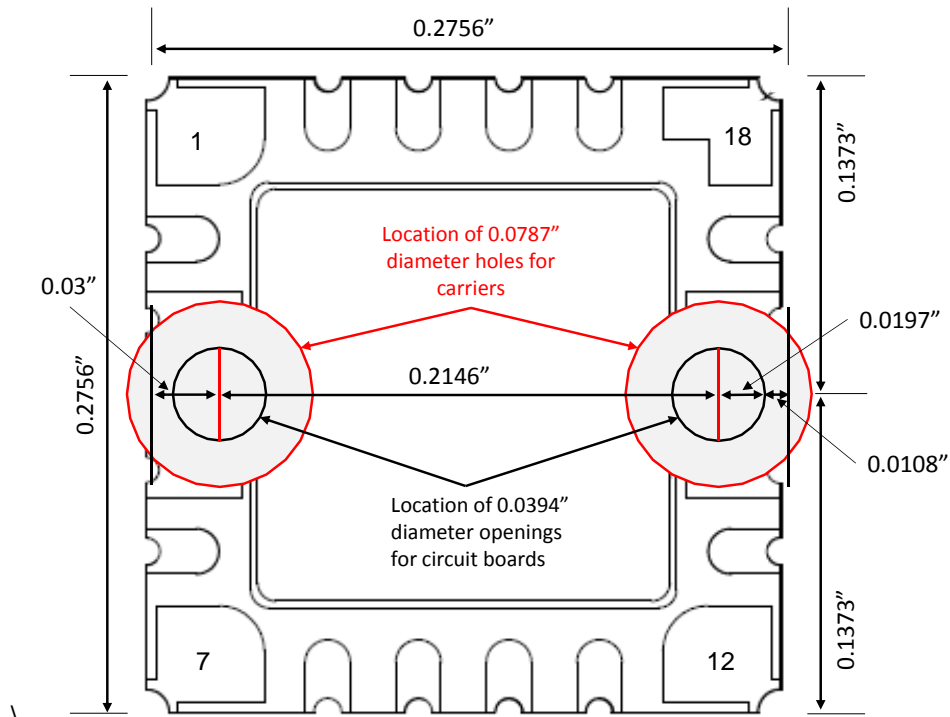

Top View (through package to PCB/carrier)

### Mechanical Information

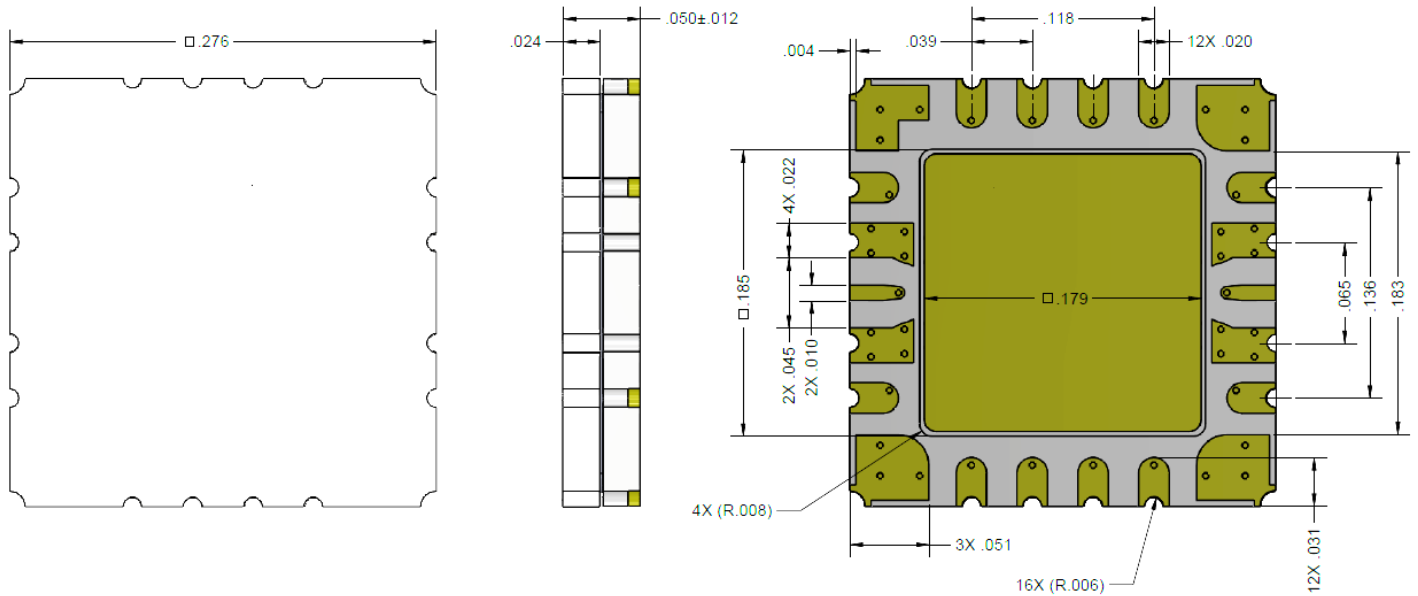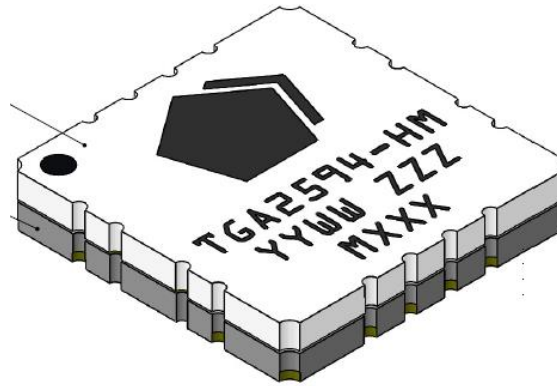

Units: inches

Tolerances: unless specified

x.xx =  $\pm 0.01$

x.xxx =  $\pm 0.006$

Materials:

Package: Metal/Ceramic

Lid: Ceramic

All metalized features are gold plated

Part is solder sealed

Marking:

2594: Part number

YY: Part Assembly year

WW: Part Assembly week

ZZZ: Serial Number

MXXX: Batch ID

## Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 1A, 400 V	JEDEC Standard JESD22 A114
MSL – Convection Reflow	N/A, Hermetic Package	JEDEC standard IPC/JEDEC J-STD-020.



Caution!  
ESD-Sensitive Device

## Solderability

Compatible with the latest version of J-STD-020, Lead-free solder, 260 °C

## RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU. This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

**Web:** [www.qorvo.com](http://www.qorvo.com)

**Tel:** 1-844-890-8163

**Email:** [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

## Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2018 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А