


## WIDE BAND FM IF DEMODULATOR

### ■ GENERAL DESCRIPTION

The **NJM14570** is a wide band IF IC with a maximum IF input frequency of 15 MHz. It includes an IF Amplifier, Quadrature Detector and RSSI.

### ■ PACKAGE OUTLINE



NJM14570RB1


### ■ MAIN APPLICATIONS

- RF ID
- Radar detector
- Wireless Infrared Communication System
- Voice Transmission System
- A few MHz band Signal Detector

### ■ FEATURES

- |                                 |                                                |
|---------------------------------|------------------------------------------------|
| ● Wide Range Operating Voltage  | 1.8V to 9V (recommended supply voltage)        |
| ● Low Operating Current         | 2.9mA (Typ., No Signal)                        |
| ● Wide Range IF Input Frequency | 10.7MHz (Standard)<br>up to 15MHz (Reference)  |
| ● Wide Band FM Detector Range   | DC to 1MHz (Reference)                         |
| ● High FM Detection Sensitivity | -87dBm (12dB SINAD, typ.)                      |
| ● Package Outline               | MSOP8 (TVSP) *<br>*JEDEC MO-187-DA / thin type |

### ■ BLOCK DIAGRAM

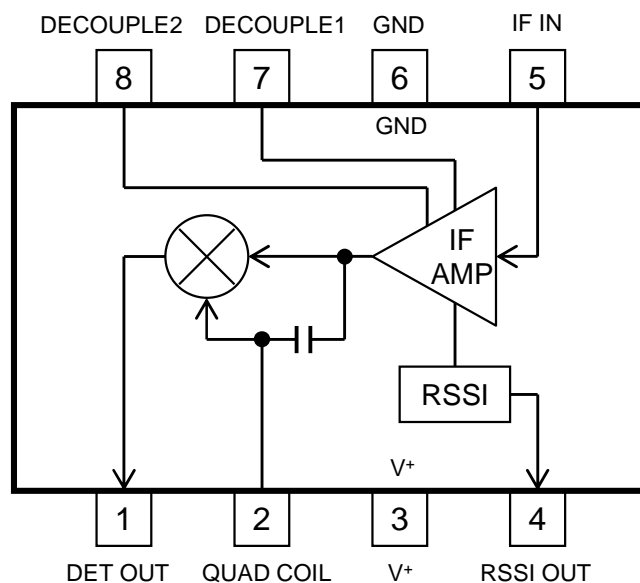

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	10	V
Power Dissipation	P <sub>D</sub>	410	mW
Operating Temperature	T <sub>opr</sub>	- 40 to + 85	°C
Storage Temperature	T <sub>stg</sub>	- 50 to + 125	°C

## ■ RECOMMENDED OPERATIONAL CONDITION

(Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V <sup>+</sup>		1.8	3	9	V

## ■ ELECTRICAL CHARACTERISTICS

(Ta = 25°C, V<sup>+</sup> = 3V, IF IN = 10.7MHz / -30dBm, fdev = ± 50kHz, fmod = 1kHz, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Current Consumption	I <sub>ccq</sub>	IF IN = No Signal,	-	2.9	4.1	mA

### DETECTION


Output Level	V <sub>OUT</sub>		60	100	160	mVrms
Total Harmonics Distortion	THD		-	0.5	2.0	%
Signal to Noise Ratio	S/N		54	60	-	dB
12dB SINAD	SINAD		-	-87	-81	dBm
Limiter Input Resistance	R <sub>LIM</sub>		-	330	-	Ω

### RSSI

RSSI Output Voltage	V <sub>RSSI1</sub>	IF IN = No Signal	0.00	0.05	0.30	V
	V <sub>RSSI2</sub>	IF IN = -60 dBm, No Modulation	0.20	0.40	0.60	V
	V <sub>RSSI3</sub>	IF IN = -30 dBm, No Modulation	0.80	1.05	1.30	V
	V <sub>RSSI4</sub>	IF IN = 0 dBm, No Modulation	1.20	1.50	1.80	V

■ TEST CIRCUIT

This test circuit allows the measurement of all parameters described in "ELECTRICAL CHARACTERISTICS".

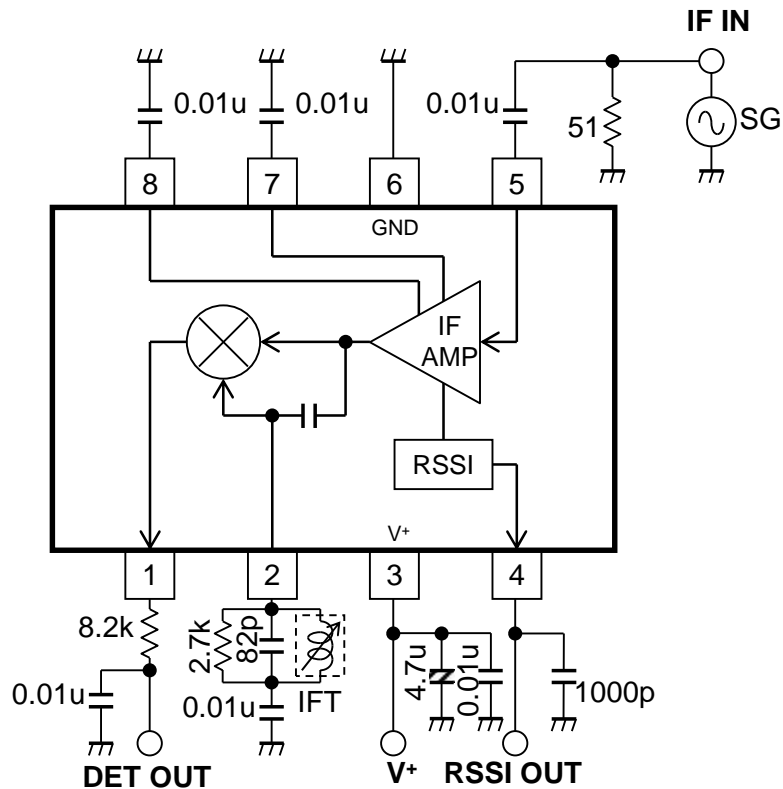

IFT:10.7MHz IF Transformer



■ EVALUATION BOARD

The evaluation board is useful for your design and to have more understanding of the usage and performance of this device. This circuit is the same as TEST CIRCUIT. Note that this board is not prepared to show the recommendation of pattern and parts layout.


● PRINTED CIRCUIT BOARD

Circuit Side View

Ground Side View

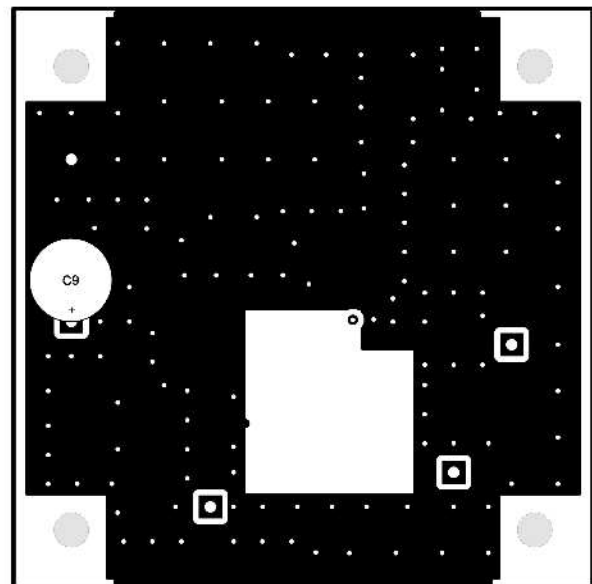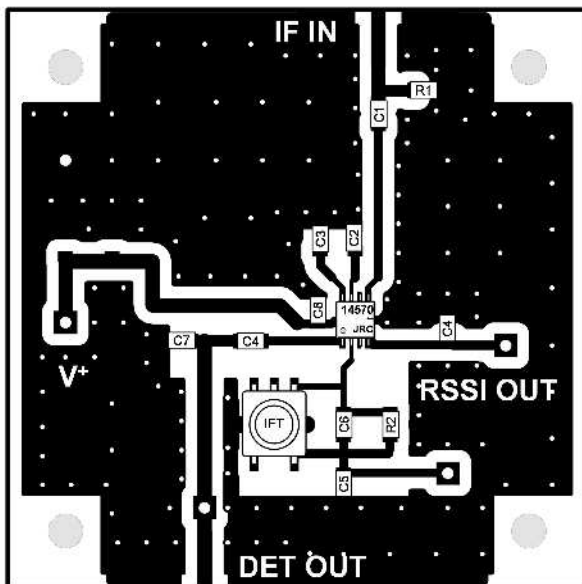

● Circuit Diagram

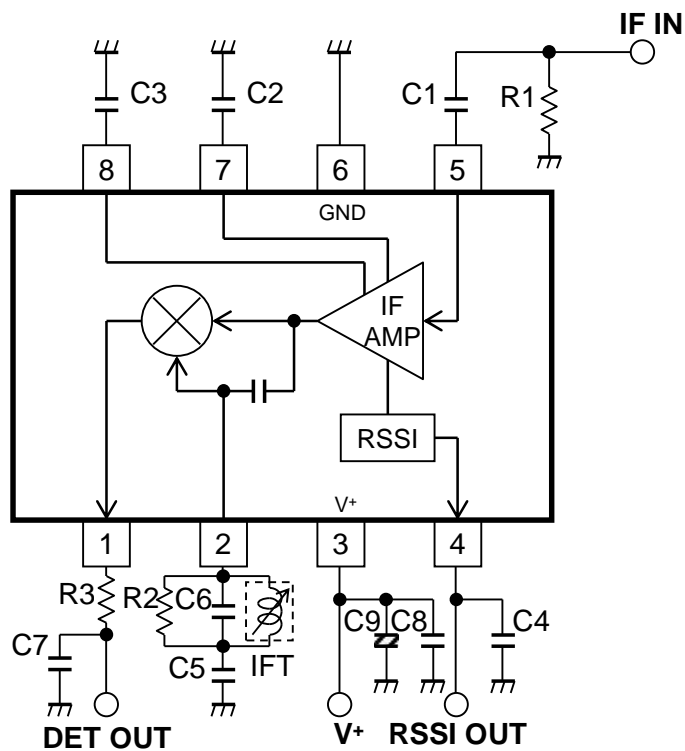

● List of Component

Items	Designation	Value	Items	Designation	Value
Capacitor	C1	0.01uF	Resistor	R1	51Ω
Capacitor	C2	0.01uF			For testing purposes only
Capacitor	C3	0.01uF	Resistor	R2	2.7kΩ
Capacitor	C4	1000pF	Resistor	R3	8.2kΩ
Capacitor	C5	0.01uF			
Capacitor	C6	82pF	Transformer	T1	10.7MHz IF Transformer
Capacitor	C7	0.01uF			
Capacitor	C8	0.01uF	IC	IC1	NJM14570RB1
Capacitor	C9	4.7uF			







## ■ TERMINAL FUNCTION

( $T_a = 25^\circ\text{C}$ ,  $V^+ = 3\text{V}$ , No signal)

Pin No.	SYMBOL	EQUIVALENT CIRCUIT	VOLTAGE	FUNCTION
1	DET OUT		1.5V	<b>FM Detector Output</b>
2	QUAD COIL		3.0V	<b>FM Detector Input</b> Connection for the phase shift circuit.
3 6	$V^+$ GND		3.0V 0.0V	<b>Supply Voltage GND Terminal</b>
4	RSSI OUT		--	<b>Received Signal Strength Indicator Output</b> Pin4 outputs DC level proportional to the log of pin5 input signal level.
5 7 8	IF IN DECOUPLE1 DECOUPLE2		2.6V	<b>5pin: IF Amplifier Input</b> <b>7,8pin: IF Decoupling</b> An external decoupling capacitor is connected to enhance stability. The bandwidth of IF Amplifier can be adjusted. Large capacity: wide band Small capacity: narrow band





**TYPICAL CHARACTERISTICS**

Ta = 25°C, V+ = 3V, IF IN = 10.7MHz / -30dBm, fdev = ± 50kHz, fmod = 1kHz, unless otherwise noted

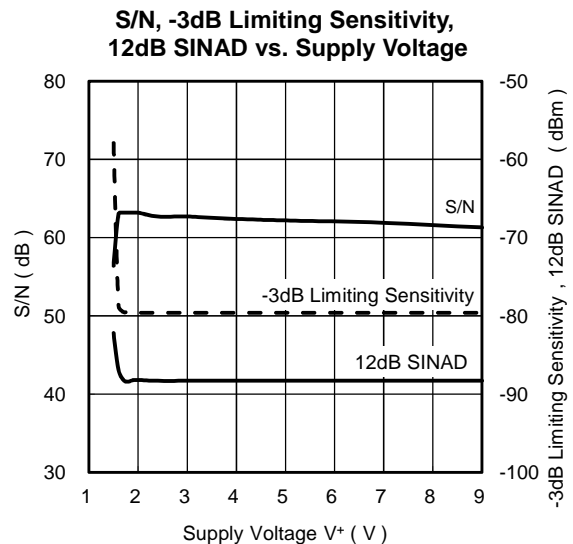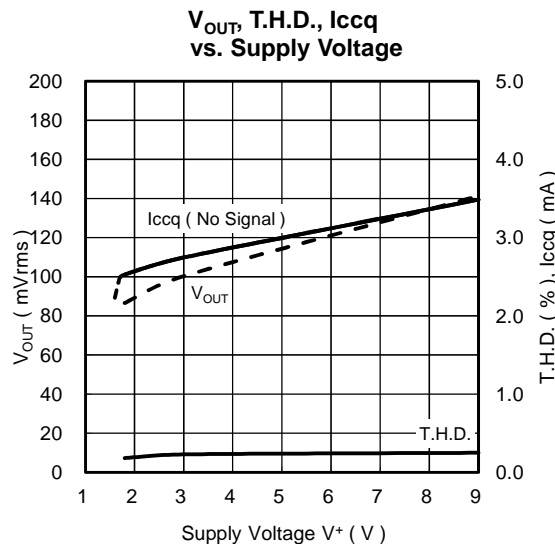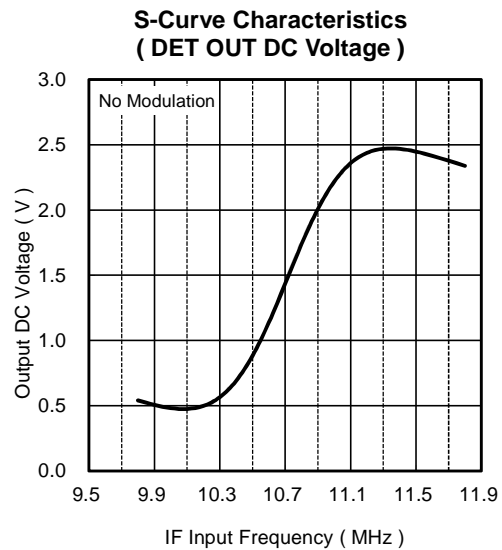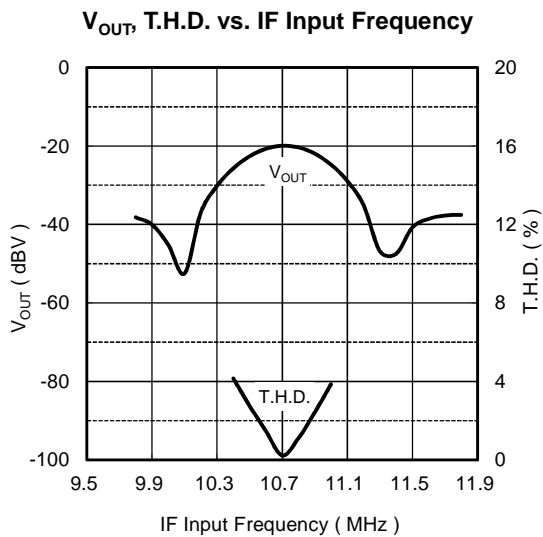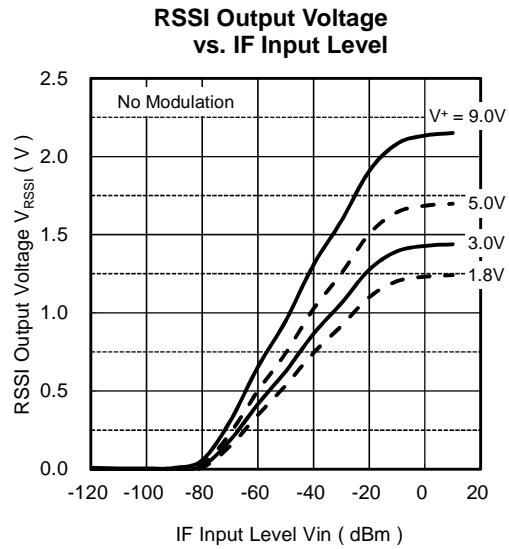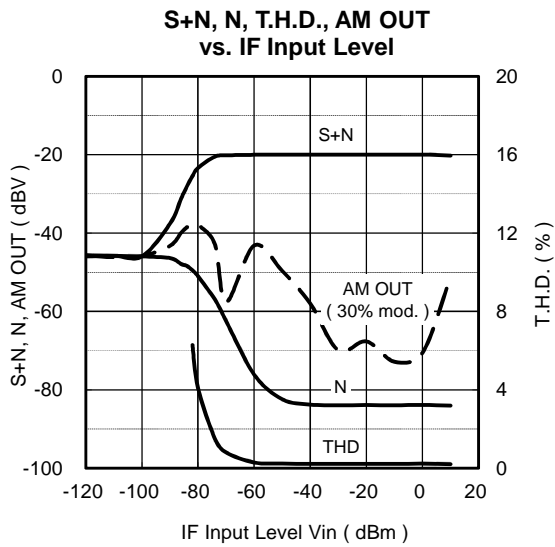





■ **Electrical characteristics by changing damping resistor  $R_D$**

$T_a = 25^\circ\text{C}$ ,  $V^+ = 3\text{V}$ , IF IN = 10.7MHz / -30dBm,  $f_{dev} = \pm 50\text{kHz}$ ,  $f_{mod} = 1\text{kHz}$ , unless otherwise noted

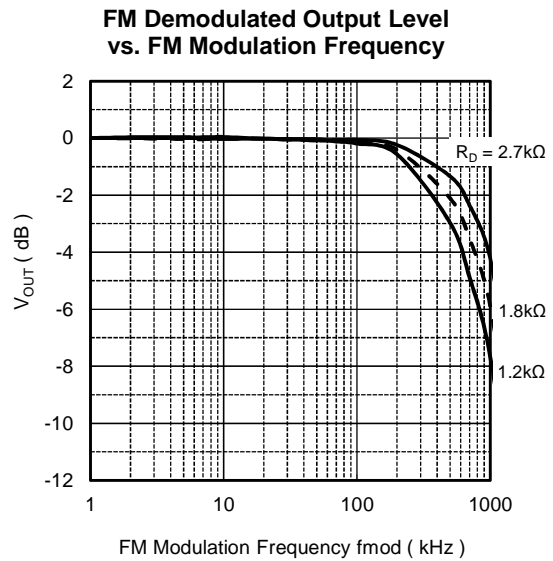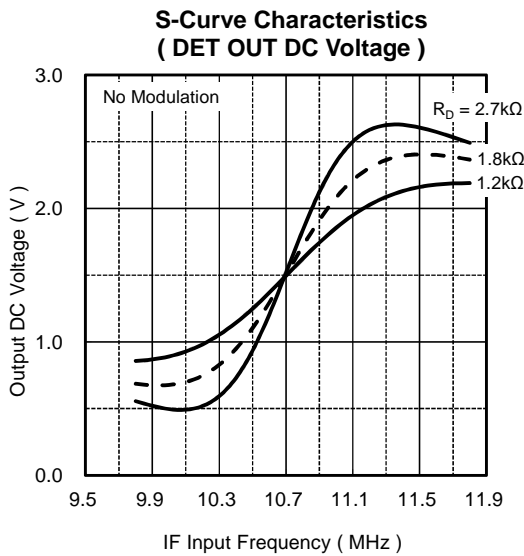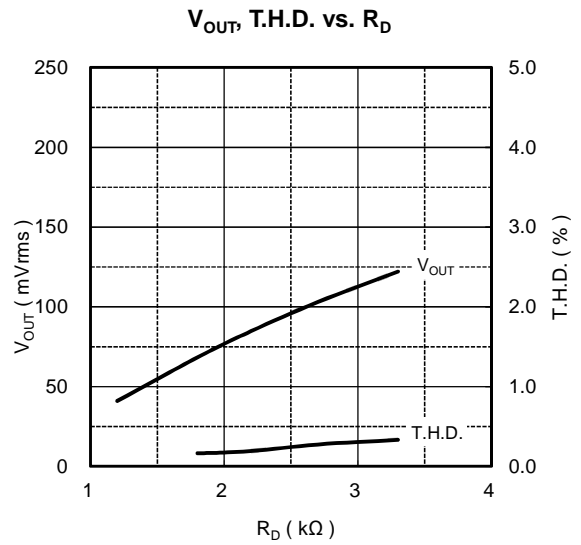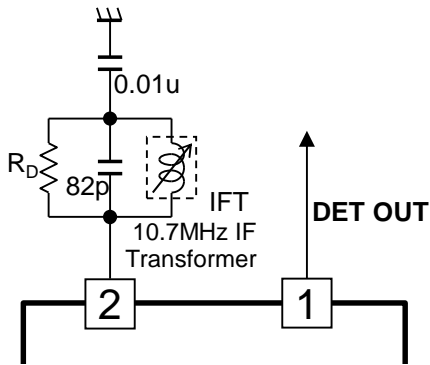

**Ambient Temperature Characteristics**








Ta = 25°C, V+ = 3V, IF IN = 10.7MHz / -30dBm, fdev = ± 50kHz, fmod = 1kHz, unless otherwise noted

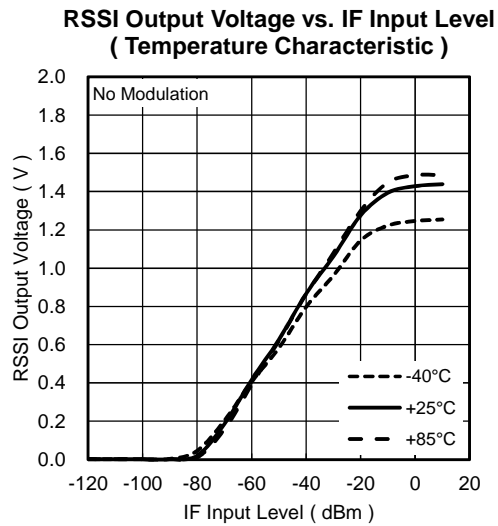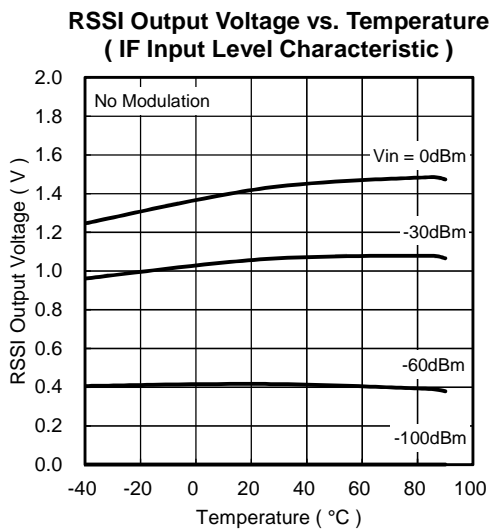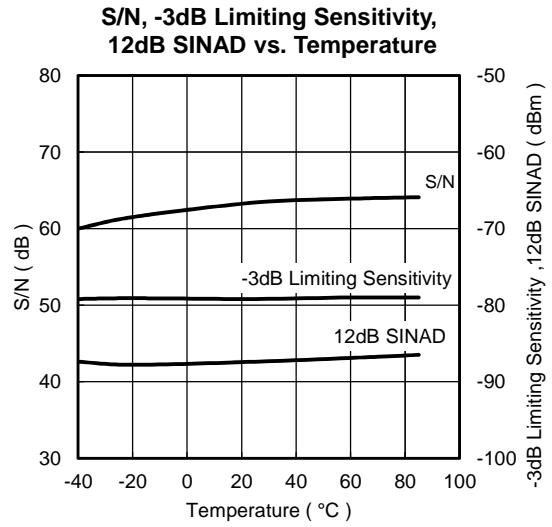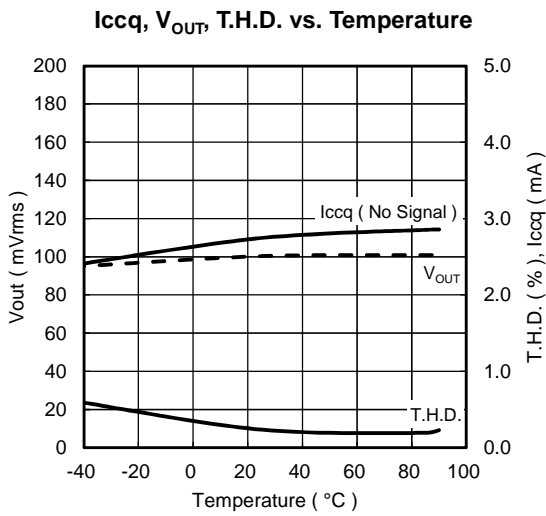










■ RSSI Output Transient Response (IF input ON/ OFF)

Ta = 25°C, V+ = 3V, IF IN = 10.7MHz, No Modulation, unless otherwise noted

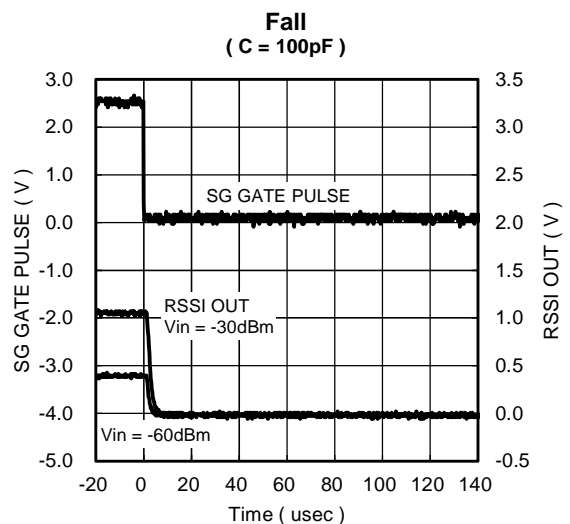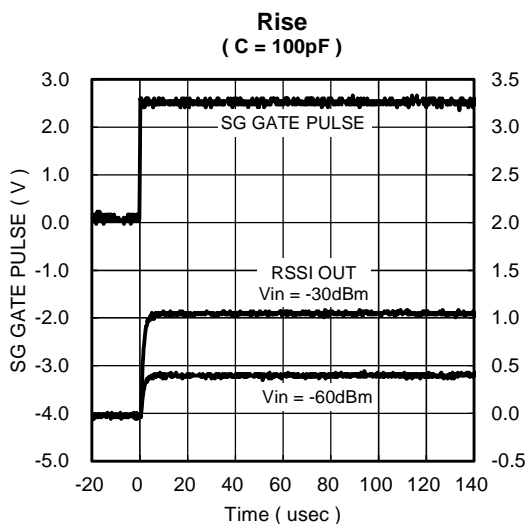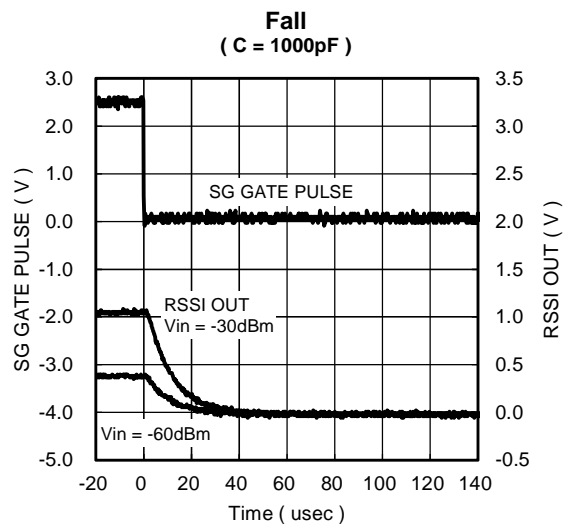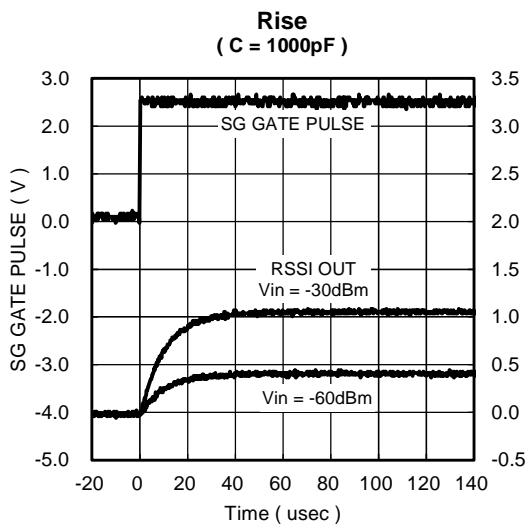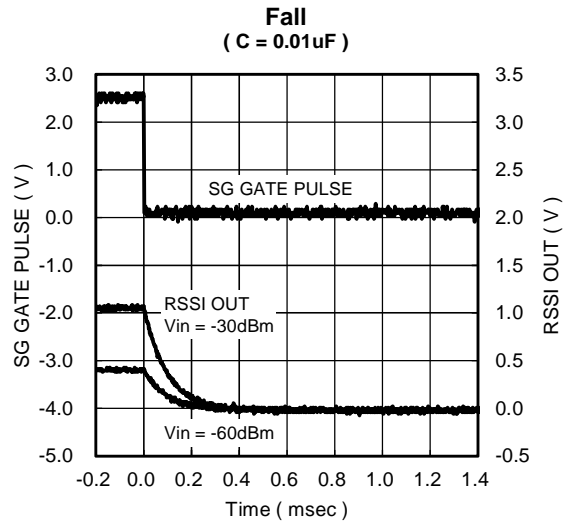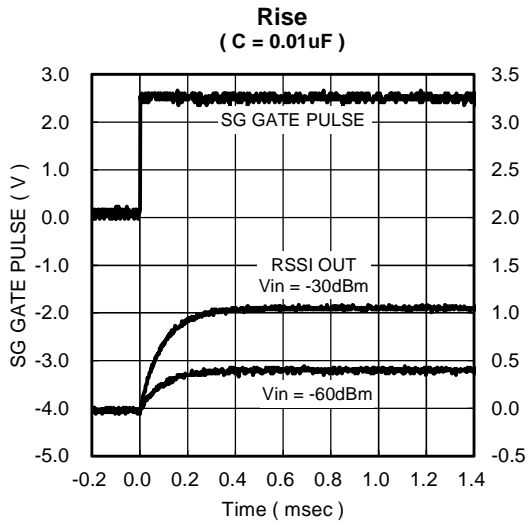


■ RSSI Output Transient Response ( $V^+$  ON/ OFF)

$T_a = 25^\circ\text{C}$ ,  $V^+ = 3\text{V}$ ,  $f_{IN} = 10.7\text{MHz}$ , No Modulation, unless otherwise noted

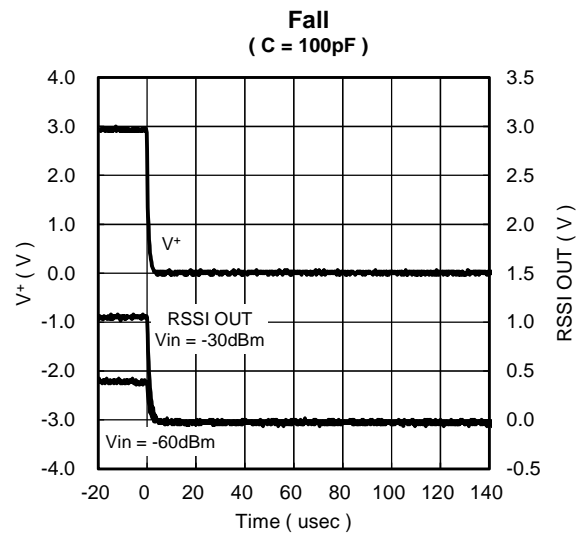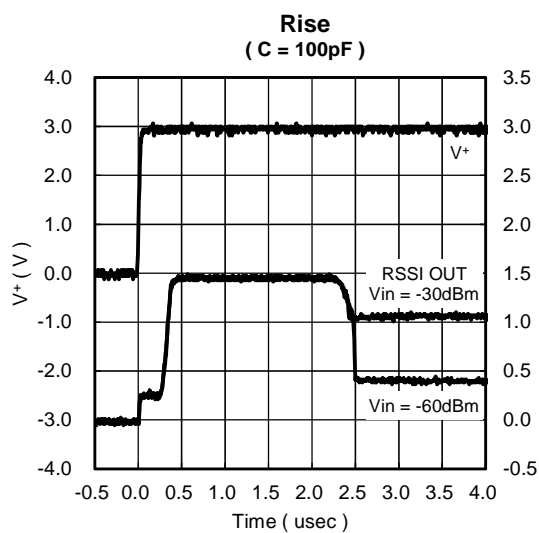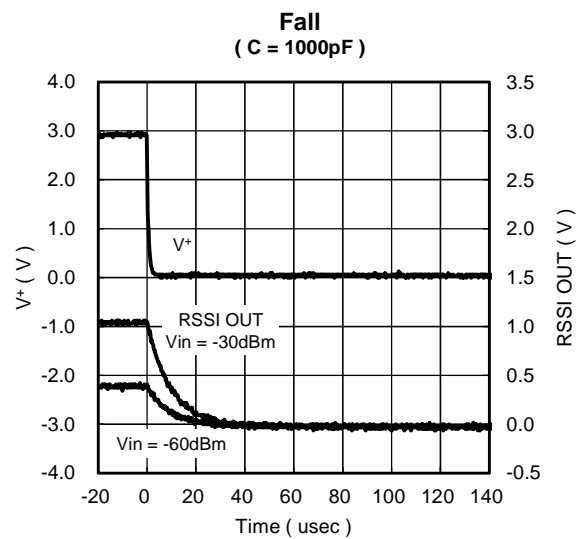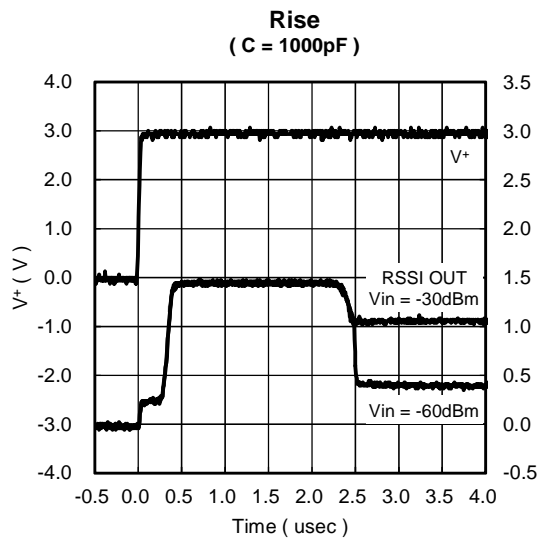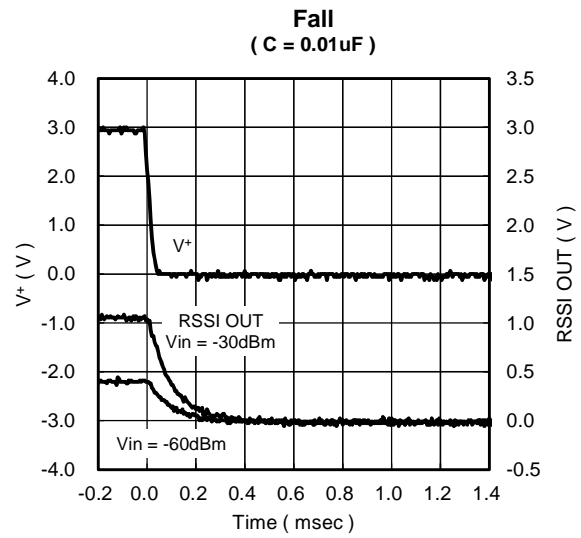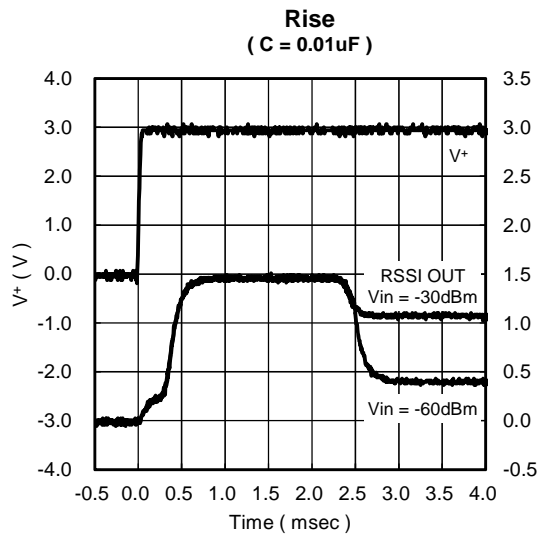




**DETECTOR Output Transient Response**

Ta = 25°C, V+ = 3V, IF IN = 10.7MHz / -30dBm, fdev = ± 50kHz, fmod = 1kHz, unless otherwise noted

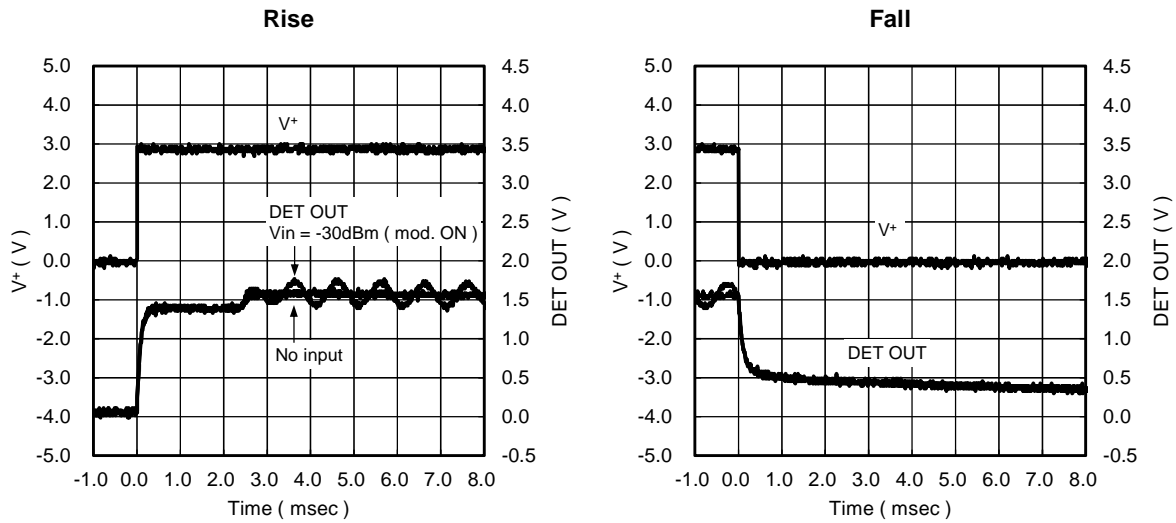


**AM Demodulation output characteristics by using the RSSI output**

Ta = 25°C, V+ = 3V, IF IN = 10.7MHz / -50dBm, AM mod. = 80%, fmod = 10kHz, unless otherwise noted

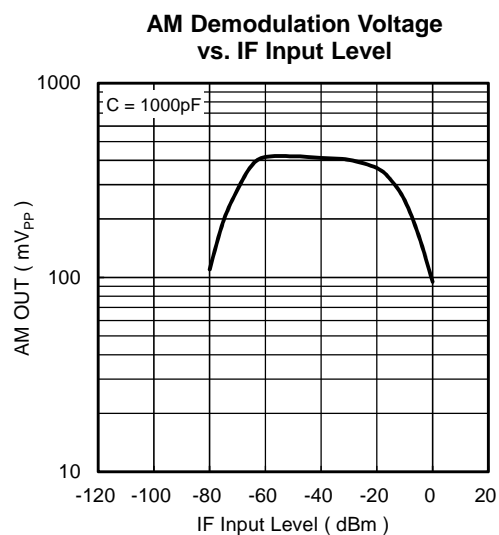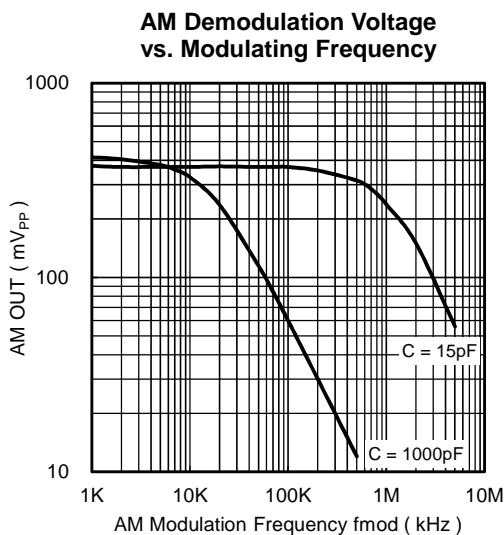


■ Electrical characteristics by using a ceramic discriminator


Ta = 25°C, V+ = 3V, IF IN = 10.7MHz / -30dBm, fdev = ± 50kHz, fmod = 1kHz, unless otherwise noted

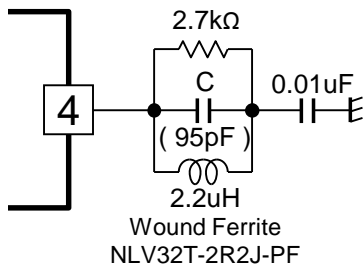


S-Curve Characteristics (DET OUT DC Voltage)

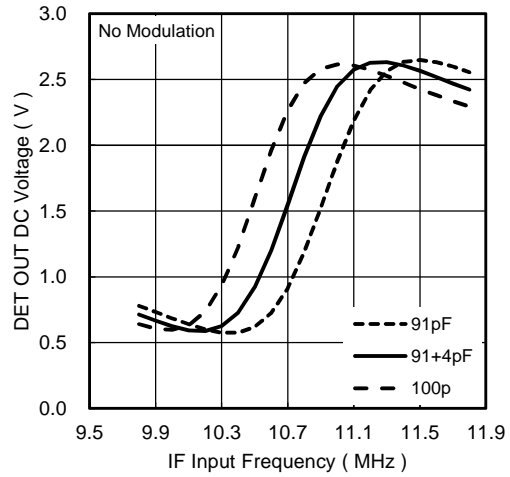

S+N, N, T.H.D., AM OUT vs. IF Input Level

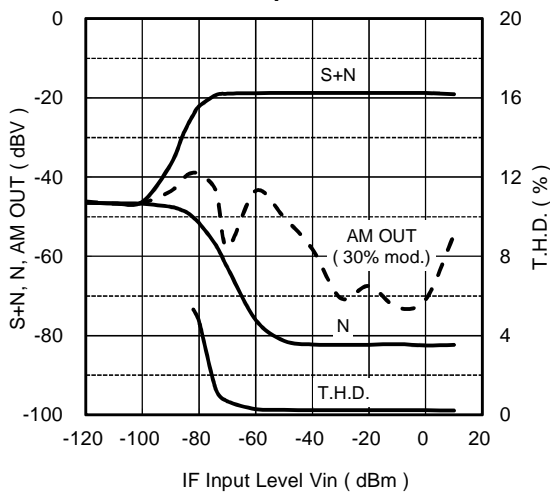


V<sub>OUT</sub>, T.H.D. vs. IF Input Frequency

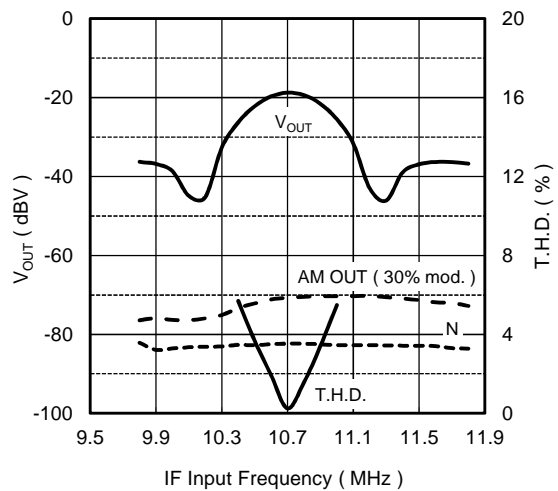


■ Electrical characteristics by using a ceramic discriminator

$V^+ = 3V$ , IF IN = 10.7MHz / -30dBm,  $f_{dev} = \pm 50kHz$ ,  $f_{mod} = 1kHz$ , unless otherwise noted


S-Curve Characteristics  
( DET OUT DC Voltage )

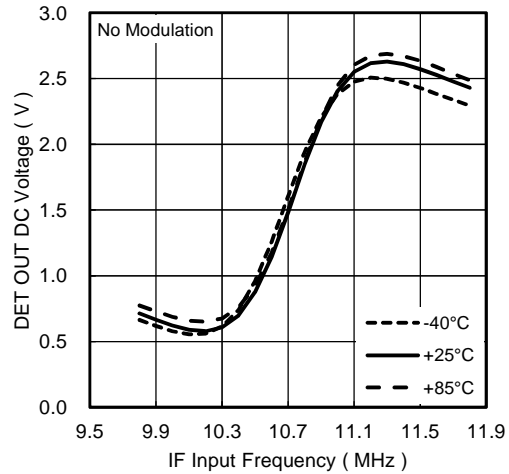


S-Curve Characteristics for wide band  
( DET OUT DC Voltage, IF = -80dBm )

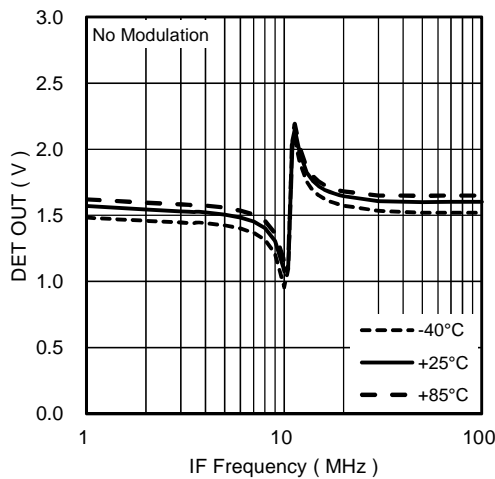


S-Curve Characteristics for wide band  
( DET OUT DC Voltage, IF = -30dBm )

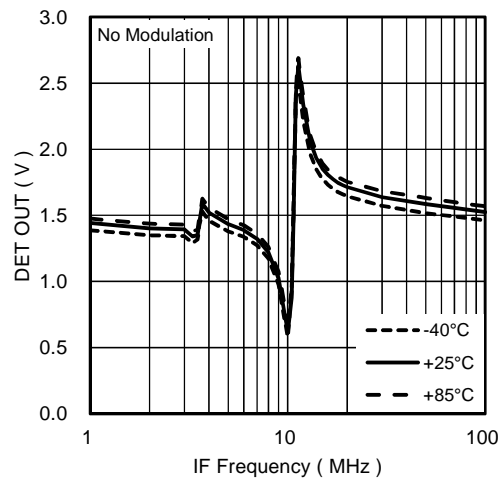

S+N, N, T.H.D., AM OUT  
vs. IF Input Level

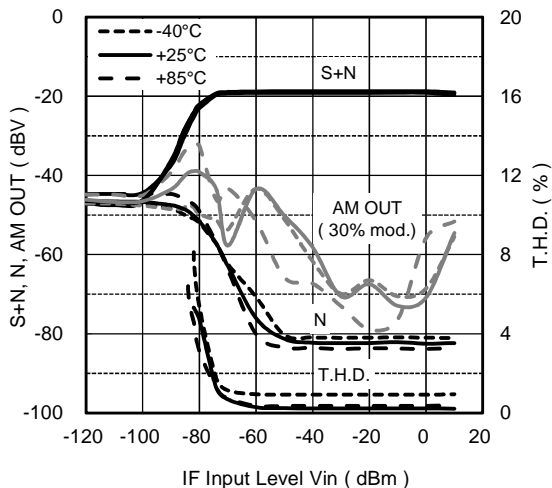

$V_{OUT}$ , T.H.D. vs. IF Input Frequency

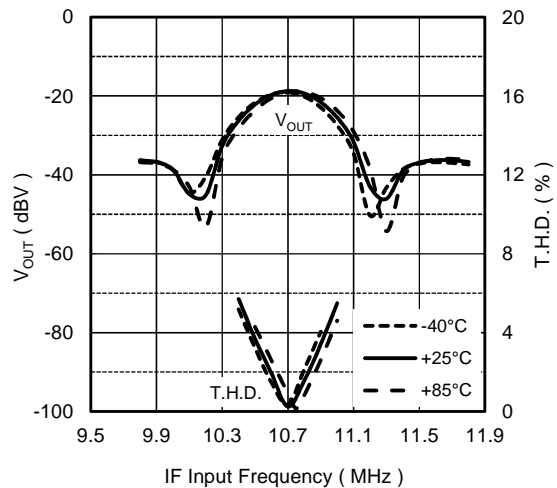

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM14570](#) [NJM14570RB1-TE1](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А