High Isolation SPDT SWITCH

■ GENERAL DESCRIPTION

The NJG1697EM1 is a 1bit control GaAs high isolation SPDT switch MMIC. The NJG1697EM1 features very high isolation and low control voltage. It has integrated DC blocking capacitor at PC port.

It has integrated ESD protection circuits the IC to achieve high ESD tolerance.

The small and thin 6-pin DFN6-M1 package is adopted.

■ PACKAGE OUTLINE



NJG1697EM1

■ APPLICATIONS

Multi-mode 2G/3G and LTE application receive system

Pre PA switching, reception bands switching applications

General purpose switching applications

■ FEATURES

● Low voltage logic control	$V_{CTL(H)}$=1.8V typ.
● Low voltage operation	V_{DD}=2.7V typ.
● High isolation	50dB typ. @f=1.0GHz, P_{IN}=0dBm
	48dB typ. @f=2.0GHz, P_{IN}=0dBm
	43dB typ. @f=2.7GHz, P_{IN}=0dBm
● Low insertion loss	0.45dB typ. @f=1.0GHz, P_{IN}=0dBm
	0.50dB typ. @f=2.0GHz, P_{IN}=0dBm
	0.55dB typ. @f=2.7GHz, P_{IN}=0dBm
● Ultra small & ultra thin package	DFN6-M1 Package (Package size: 1.0 x 1.0 x 0.38mm)

● RoHS compliant and Halogen Free, MSL1

■ PIN CONFIGURATION

(TOP VIEW)

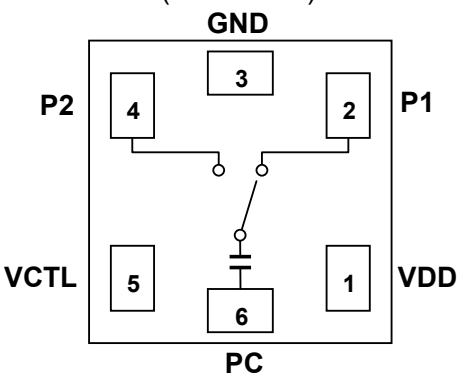

Pin connection
1. VDD
2. P1
3. GND
4. P2
5. VCTL
6. PC

■ TRUTH TABLE

"H"=$V_{CTL(H)}$, "L"=$V_{CTL(L)}$

ON PATH	VCTL
PC-P1	H
PC-P2	L

NOTE: Please note that any information on this datasheet will be subject to change.

■ ABSOLUTE MAXIMUM RATINGS

(T_a=+25°C, Z_s=Z_l=50Ω)

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNITS
RF Input Power	P_{IN}	V_{DD} =2.7V	28	dBm
Supply Voltage	V_{DD}	VDD terminal	5.0	V
Control Voltage	V_{CTL}	VCTL terminal	5.0	V
Power Dissipation	P_D	Four-layer FR4 PCB with through-hole (114.3×76.2mm), Tj=150°C	440	mW
Operating Temperature	T_{opr}		-40~+90	°C
Storage Temperature	T_{stg}		-55~+150	°C

■ ELECTRICAL CHARACTERISTICS1 (DC CHARACTERISTICS)

(General conditions: T_a=+25°C, Z_s=Z_l=50Ω, V_{DD}=2.7V, $V_{CTL(L)}$=0V, $V_{CTL(H)}$=1.8V, with application circuit)

PARAMETERS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage	V_{DD}	VDD terminal	1.5	2.7	4.5	V
Operating Current	I_{DD}		-	15	30	μA
Control Voltage (LOW)	$V_{CTL(L)}$	VCTL terminal	0	0	0.45	V
Control Voltage (HIGH)	$V_{CTL(H)}$	VCTL terminal	1.35	1.8	4.5	V
Control Current	I_{CTL}	$V_{CTL(H)}$ =1.8V	-	5	10	μA

■ ELECTRICAL CHARACTERISTICS2 (RF CHARACTERISTICS)

(General conditions: T_a=+25°C, Z_s=Z_l=50Ω, V_{DD}=2.7V, $V_{CTL(L)}$=0V, $V_{CTL(H)}$=1.8V, with application circuit)

PARAMETERS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Insertion Loss 1	LOSS1	f=0.5GHz, P_{IN}=0dBm	-	0.55	0.75	dB
Insertion Loss 2	LOSS2	f=1.0GHz, P_{IN}=0dBm	-	0.45	0.65	dB
Insertion Loss 3	LOSS3	f=2.0GHz, P_{IN}=0dBm	-	0.50	0.70	dB
Insertion Loss 4	LOSS4	f=2.7GHz, P_{IN}=0dBm	-	0.55	0.75	dB
Isolation 1	ISL1	PC-P1, P2 f=0.5GHz, P_{IN}=0dBm	50	55	-	dB
Isolation 2	ISL2	PC-P1, P2 f=1.0GHz, P_{IN}=0dBm	45	50	-	dB
Isolation 3	ISL3	PC-P1, P2 f=2.0GHz, P_{IN}=0dBm	45	48	-	dB
Isolation 4	ISL4	PC-P1, P2 f=2.7GHz, P_{IN}=0dBm	40	43	-	dB
Input power at 0.2dB Compression Point	$P_{-0.2dB}$	f=2.0GHz	18	22	-	dBm
VSWR	VSWR	f=2.0GHz, On port	-	1.3	1.5	-
Switching time	T_{SW}	50% V_{CTL} to 10/90% RF	-	2	5	μs

■ TERMINAL INFORMATION

No.	SYMBOL	DESCRIPTION
1	VDD	Positive voltage supply terminal. The positive voltage (+1.5~+4.5V) has to be supplied. Please connect a bypass capacitor with GND terminal for excellent RF performance.
2	P1	RF input / output port. External capacitor is required to block the DC bias voltage of internal circuit.
3	GND	Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.
4	P2	RF input / output port. External capacitor is required to block the DC bias voltage of internal circuit.
5	VCTL	Control signal input terminal. This terminal is set to High-Level (+1.35~+4.5V) or Low-Level (0~+0.45V). Please connect a bypass capacitor with GND terminal for excellent RF performance.
6	PC	RF input/output port. No DC blocking capacitor is required for this port because of internal capacitor.

■ ELECTRICAL CHARACTERISTICS (With Application circuit)

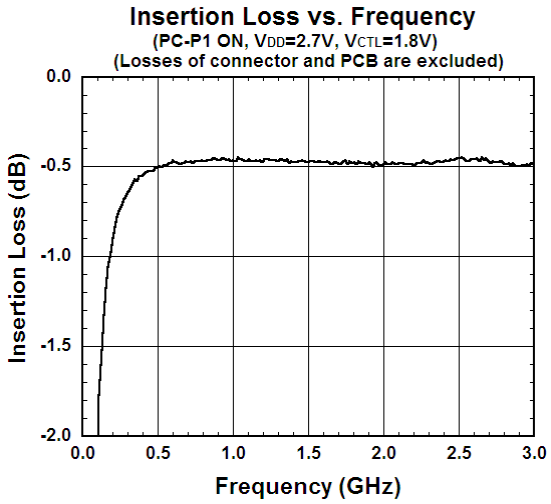

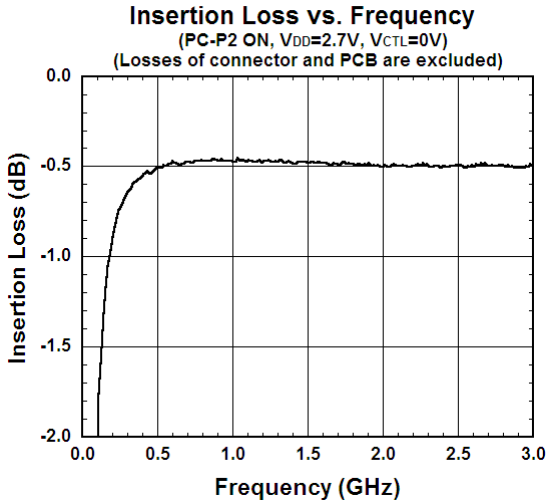

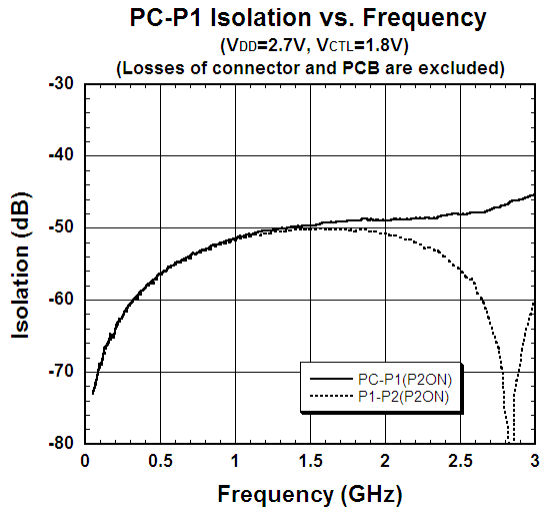

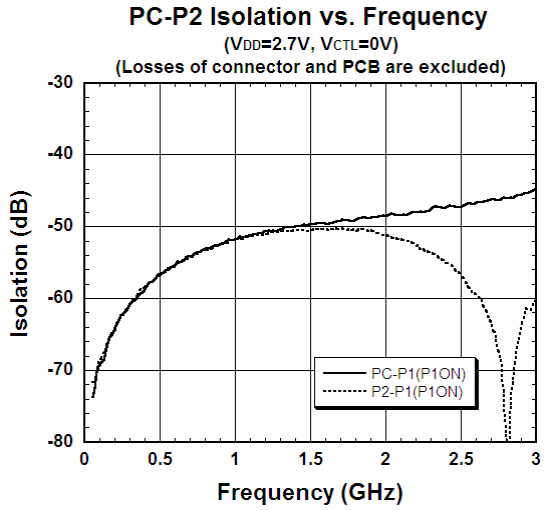

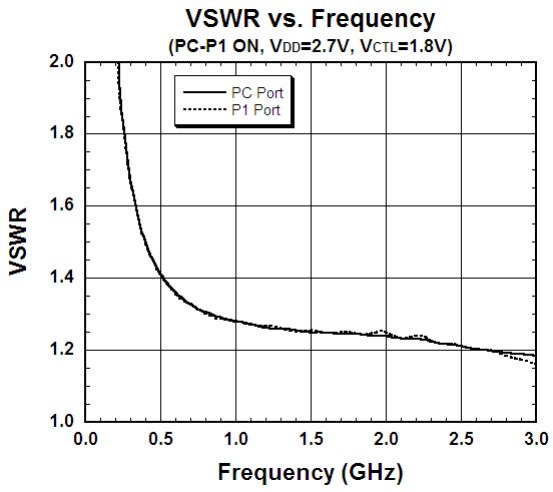

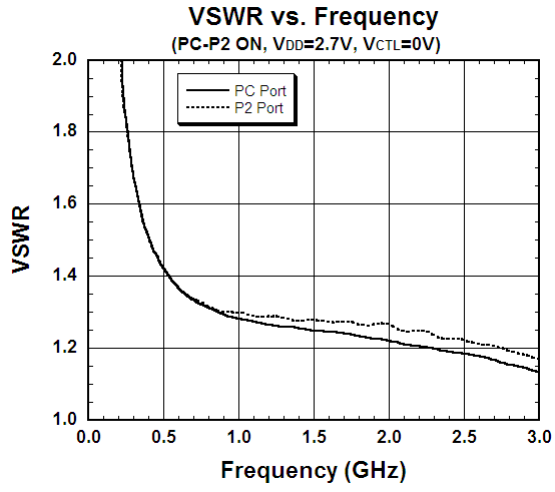

■ ELECTRICAL CHARACTERISTICS (With Application circuit)

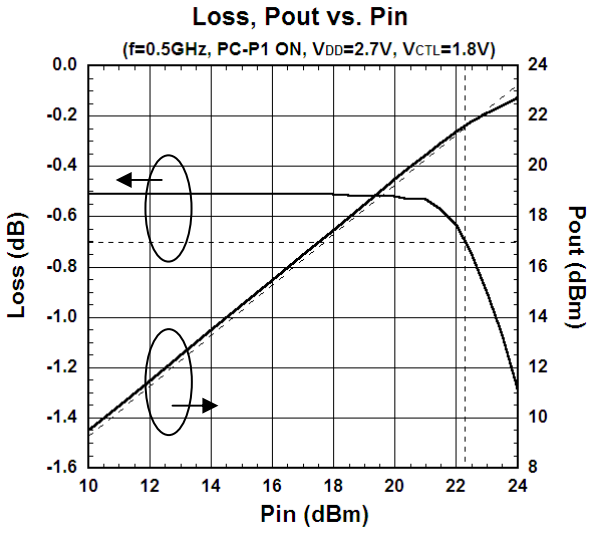

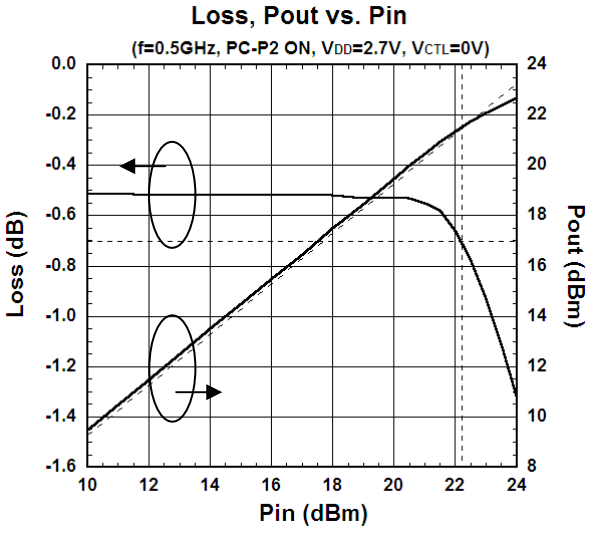

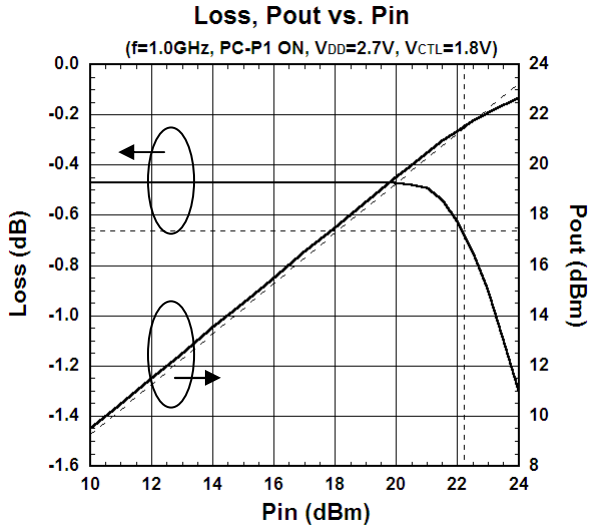

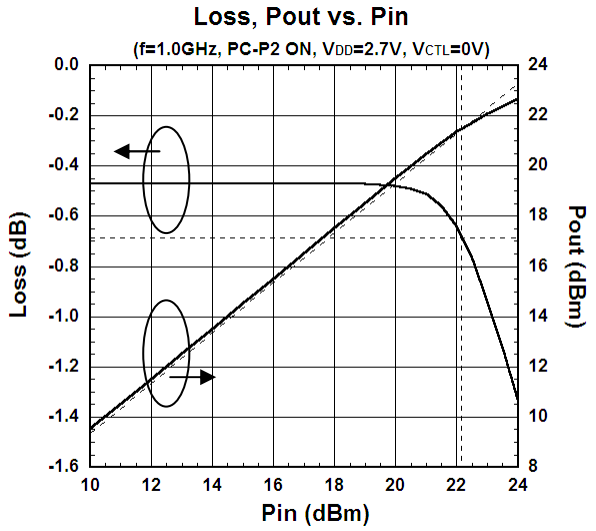

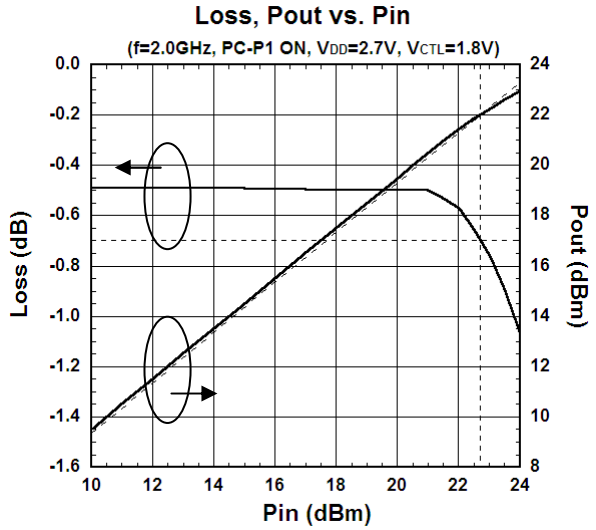

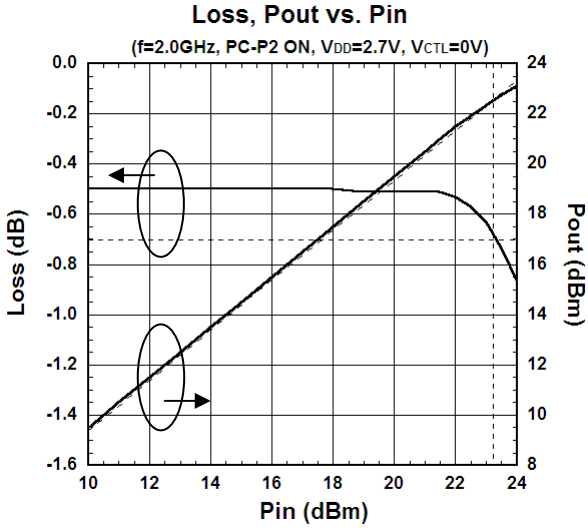

■ ELECTRICAL CHARACTERISTICS (With Application circuit)

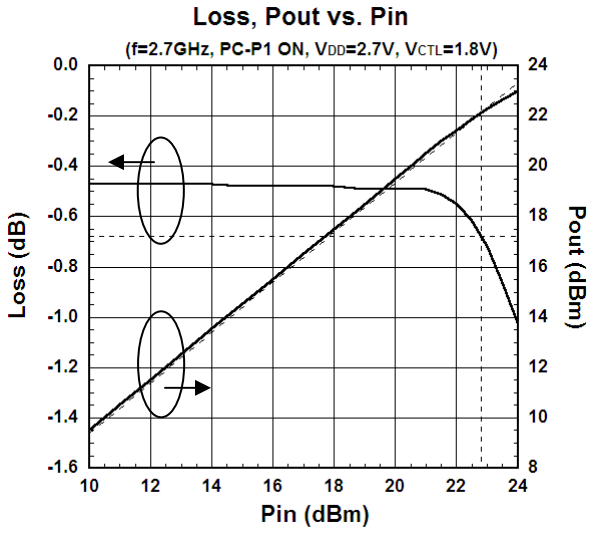

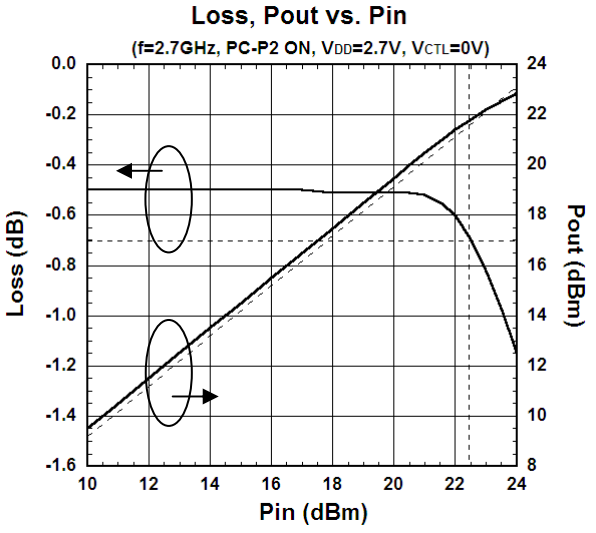

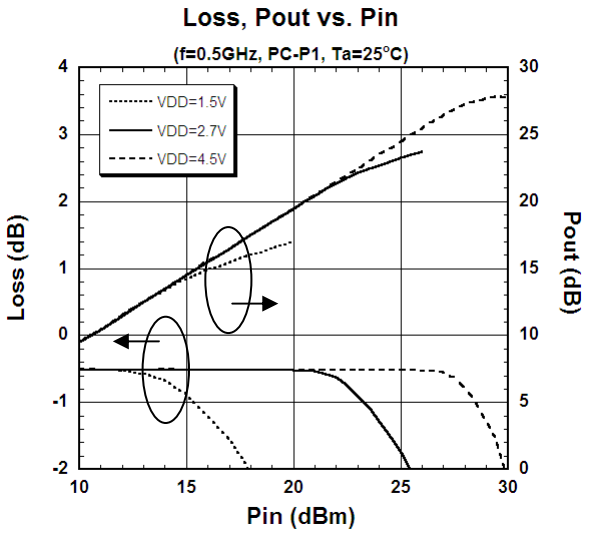

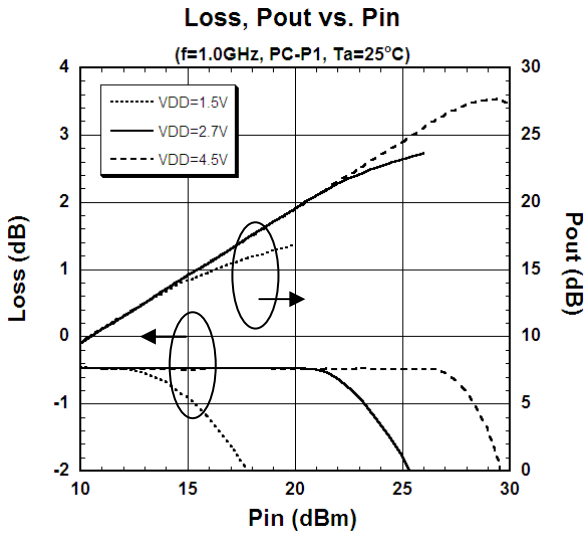

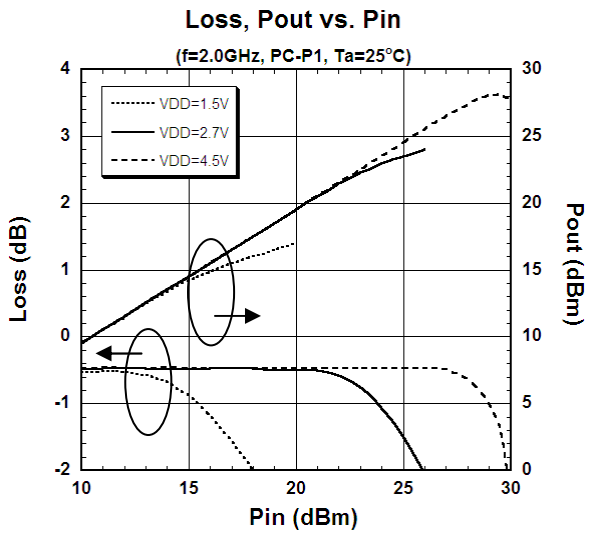

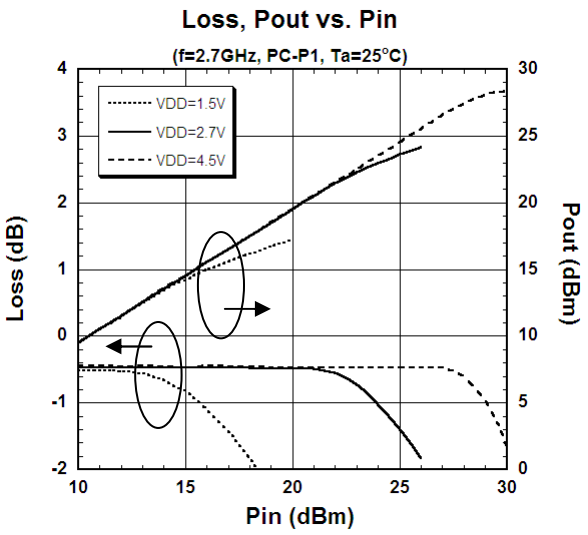

■ ELECTRICAL CHARACTERISTICS (With Application circuit)

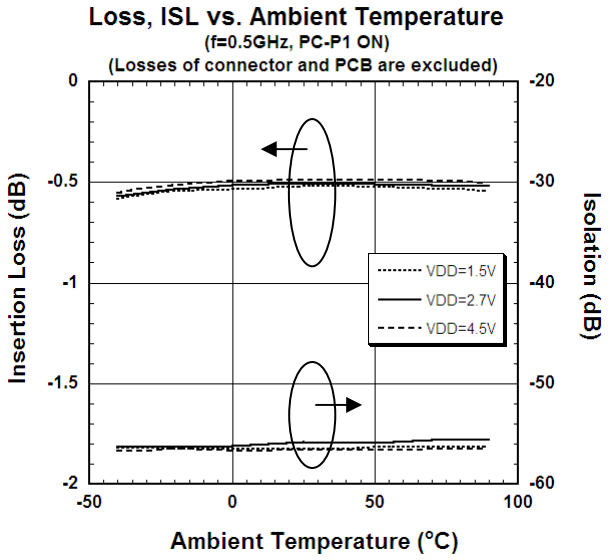

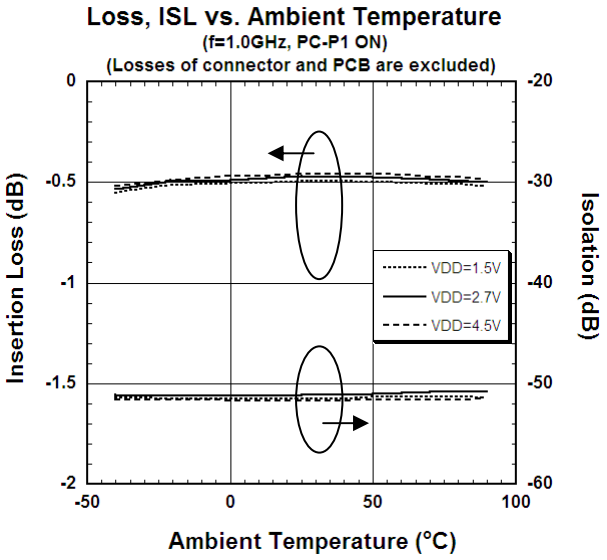

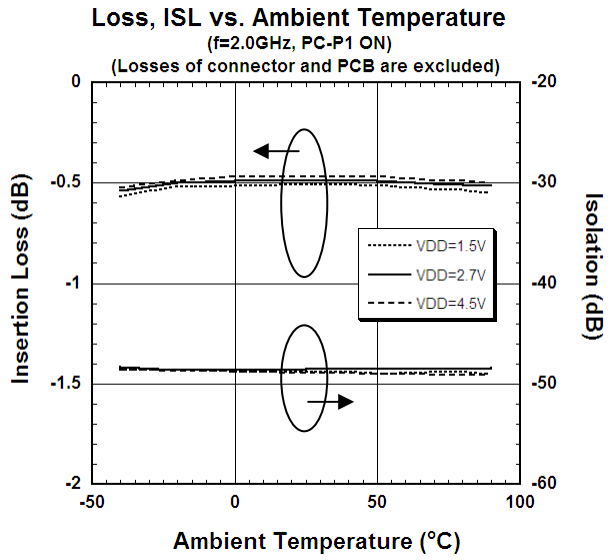

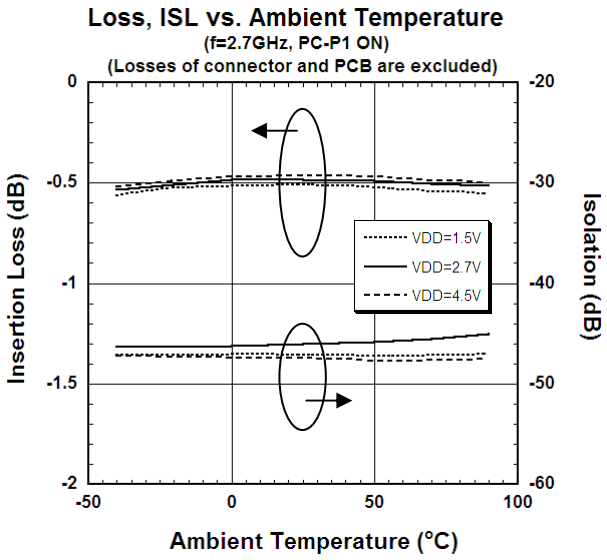

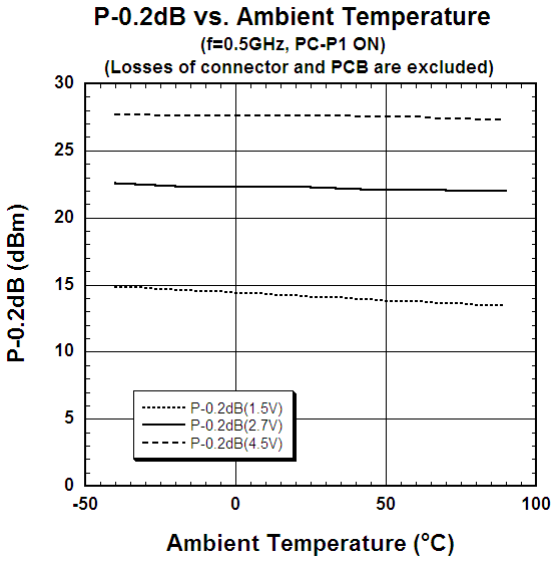

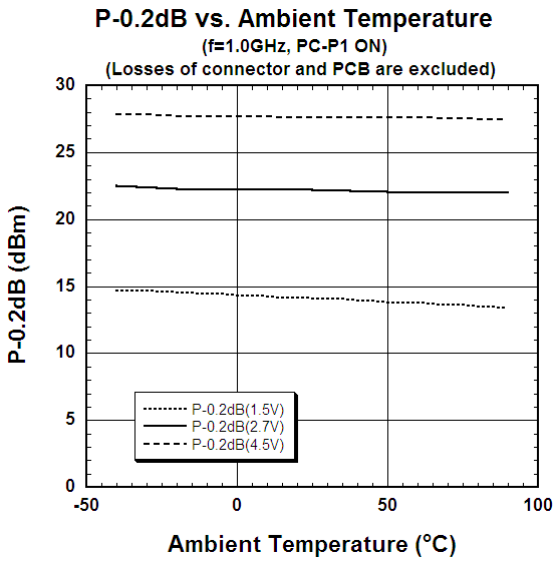

■ ELECTRICAL CHARACTERISTICS (With Application circuit)

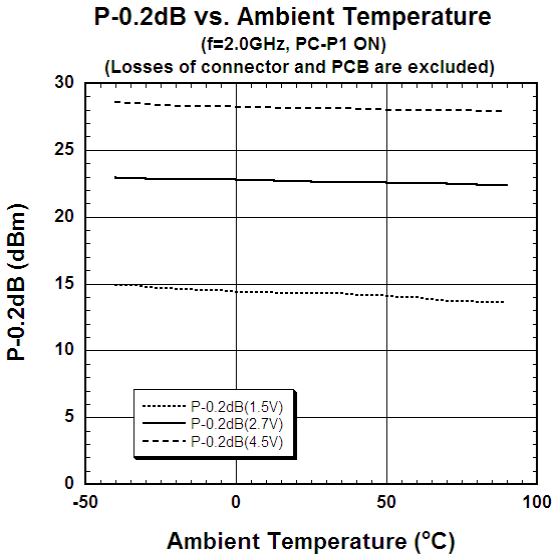

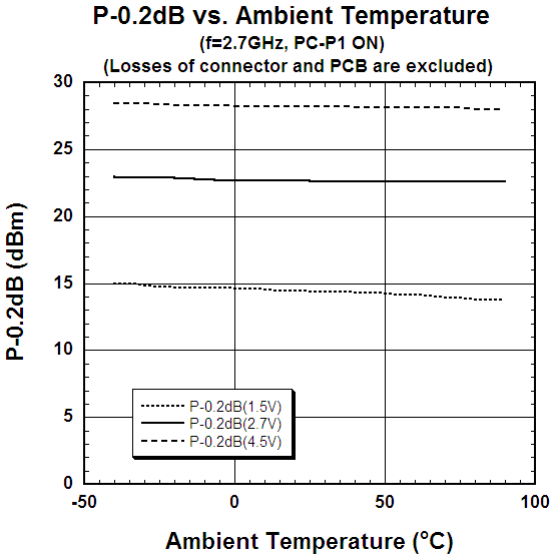

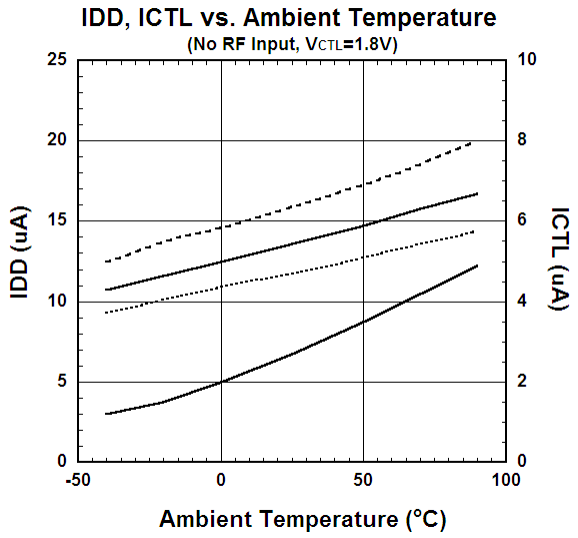

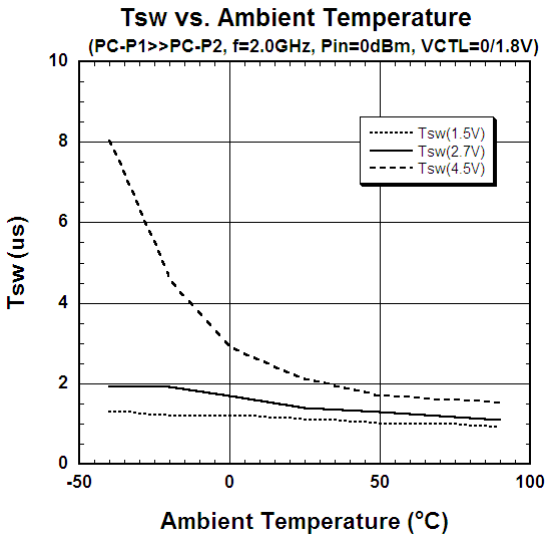

■ APPLICATION CIRCUIT

<Top View>

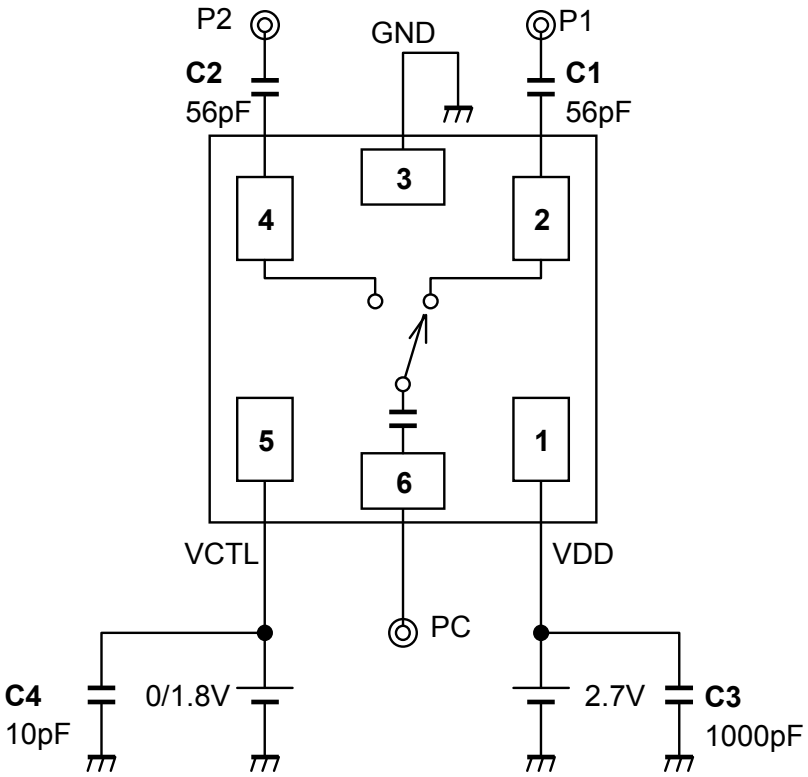

Note:

The DC blocking capacitor is not necessary at PC Port because of the integrated DC blocking capacitor.

■ PARTS LIST

Part ID	Value	Notes
C1~C2	56pF	MURATA (GRM15)
C3	1000pF	MURATA (GRM15)
C4	10pF	MURATA (GRM15)

■ APPLIED CIRCUIT BOARD EXAMPLES

(TOP VIEW)

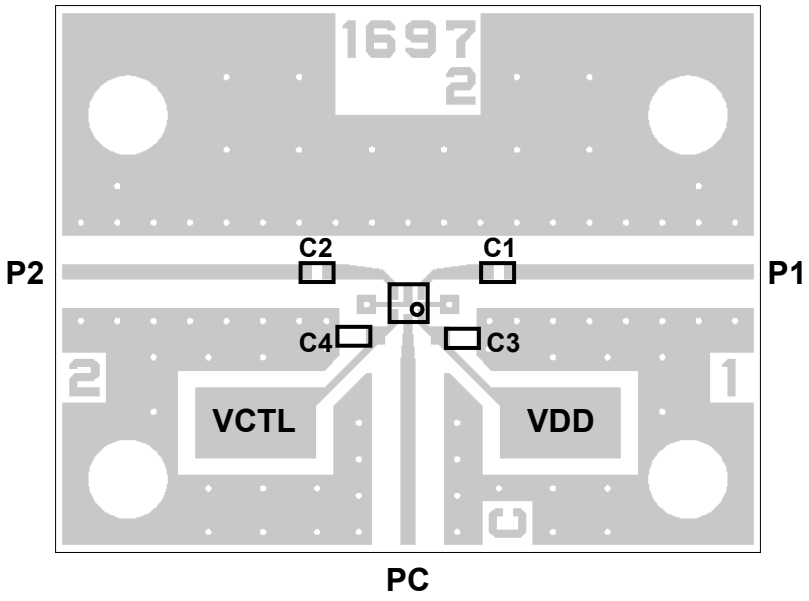

PCB: FR-4, t=0.2mm
Capacitor Size: 1005 (1.0 x 0.5 mm)
Strip Line Width: 0.4mm
PCB Size: 19.4 x 15.0mm
Through Hole Diameter: 0.2mm

Losses of PCB, capacitors and connectors

Paths	Frequency (GHz)	Loss (dB)
PC-P1, PC-P2	0.5	0.12
	1.0	0.17
	2.0	0.30
	2.7	0.36

<PCB LAYOUT GUIDELINE>

(TOP VIEW)

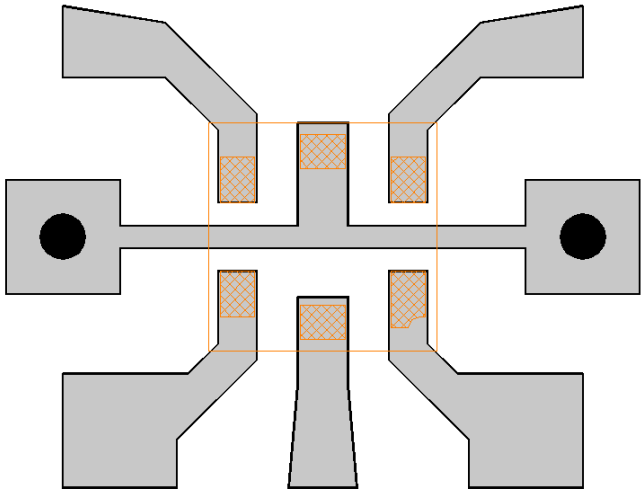



To achieve the isolation specified in the datasheet, it is needed that the ground plane located beneath the device as shown above figure. In this case, the minimum line and space width of PCB is 0.1mm.

PRECAUTIONS

[1] The DC current at RF ports must be equal to zero, which can be achieved with DC blocking capacitors (C1, C2). (However, in case there is no possibility that DC current flows, the DC blocking capacitors are unnecessary, i.e. the RF signals are fed by SAW filters that block DC current by nature, etc.)

[2] To reduce stripline influence on RF characteristics, please locate the bypass capacitor C3 and C4 close to VDD and VCTL terminal.

[3] For good isolation, the GND terminals must be connected to the PCB ground plane of substrate, and the through-holes connecting the backside ground plane should be placed near by the pin connection.

■ RECOMMENDED FOOTPRINT PATTERN (DFN6-M1 PACKAGE REFERENCE)

PKG : 1.0mm x 1.0mm
Pin pitch : 0.5mm

: Land
: Mask (Open area) *Metal mask thickness : 100μm
: Resist(Open area)

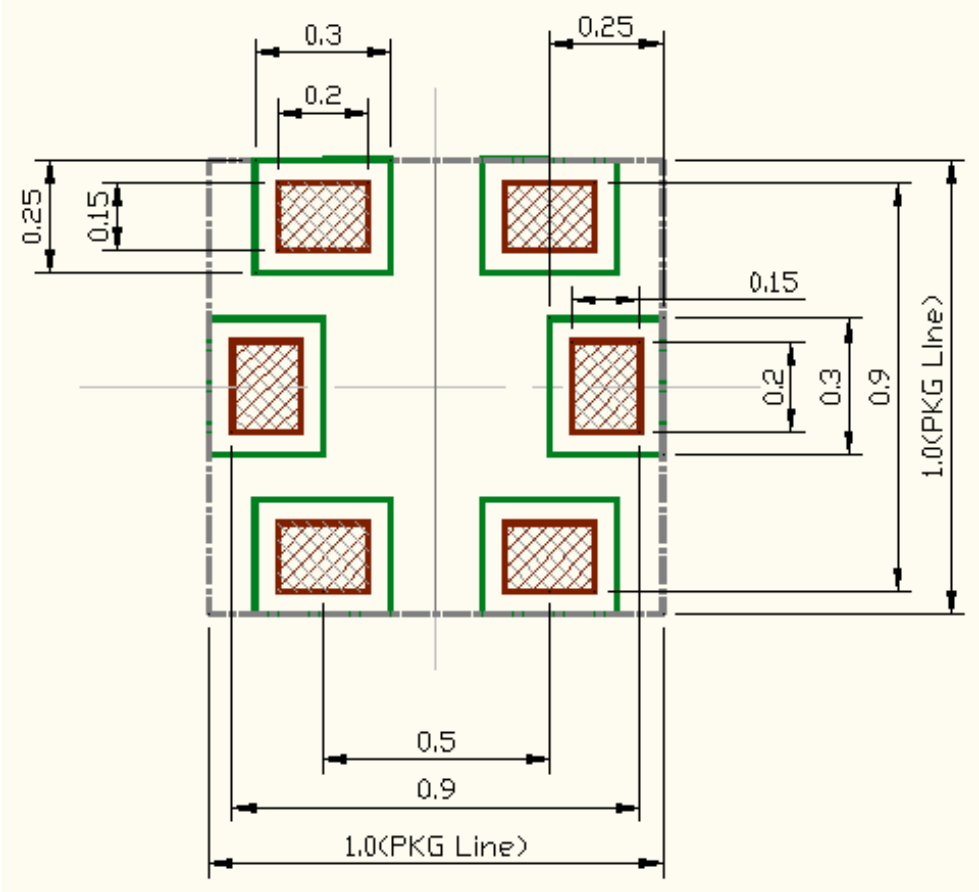

■ PACKAGE OUTLINE (DFN6-M1)

TOP VIEW

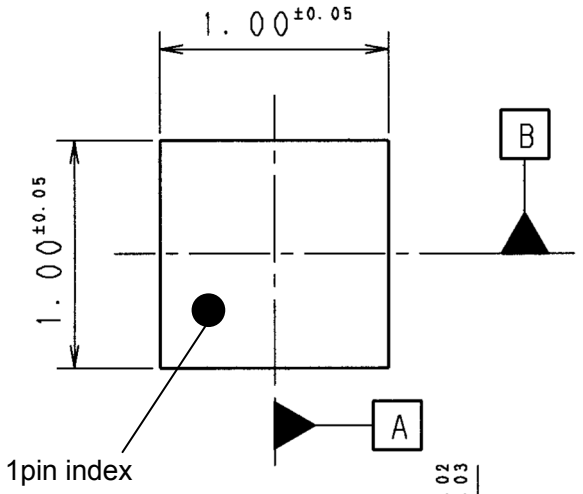

Unit	: mm
Terminal treat	: Au
Terminal core	: Ni
Molding material	: Epoxy resin
Weight	: 0.90mg

SIDE VIEW

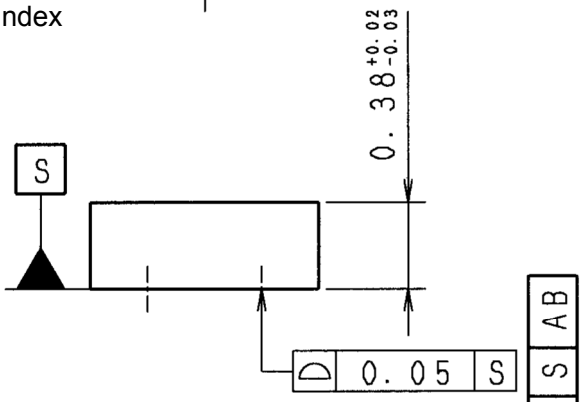

BOTTOM VIEW

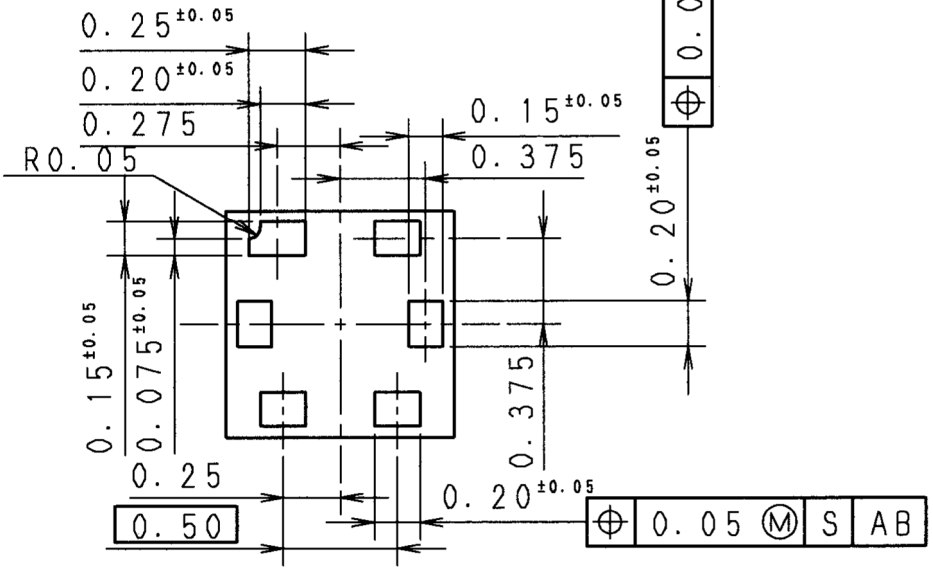

Cautions on using this product

This product contains Gallium-Arsenide (GaAs) which is a harmful material.

- Do NOT eat or put into mouth.
- Do NOT dispose in fire or break up this product.
- Do NOT chemically make gas or powder with this product.
- To waste this product, please obey the relating law of your country.

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions.
The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

NJG1697EM1 NJG1697EM1-TE1

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А