

TLE75620-EST

SPIDER+ 12V

SPI Driver for Enhanced Relay Control




Package	PG-TSDSO-24-21
Marking	TLE75620EST

1 Overview

Applications

- Low-side and High-side switches for 12 V in automotive or industrial applications such as lighting, heating, motor driving, energy and power distribution
- Especially designed for driving relays, LEDs and motors.



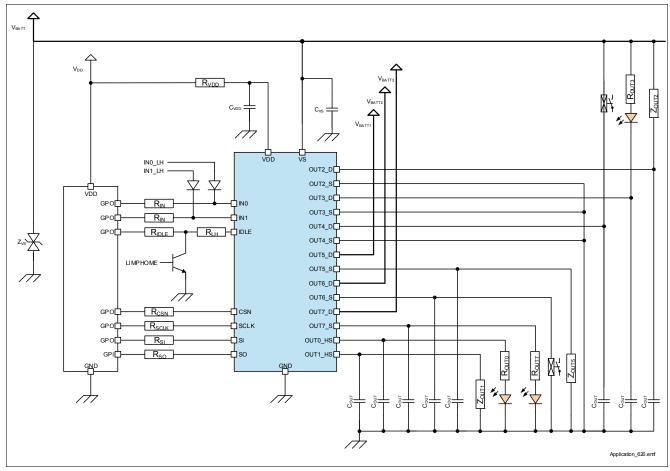


Figure 1 TLE75620-EST Application Diagram

infineon

Overview

Basic Features

- 16-bit serial peripheral interface for control and diagnosis
- Daisy Chain capability SPI also compatible with 8-bit SPI devices
- 2 CMOS compatible parallel input pins with Input Mapping functionality
- Cranking capability down to $V_s = 3.0 \text{ V}$ (supports LV124)
- Digital supply voltage range compatible with 3.3 V and 5 V microcontrollers
- Bulb Inrush Mode (BIM) to drive 2 W lamps and electronic loads
- Two internal PWM Generators for μC offload
- Very low quiescent current (with usage of IDLE pin)
- Limp Home mode (with usage of IDLE and IN pins)
- Green Product (RoHS compliant)
- AEC Qualified

Protection Features

- Reverse battery protection on V_s without external components
- Short circuit to ground and battery protection
- Stable behavior at under voltage conditions ("Lower Supply Voltage Range for Extended Operation")
- Over Current latch OFF
- Thermal shutdown latch OFF
- Overvoltage protection
- · Loss of ground protection
- · Loss of battery protection
- · Electrostatic discharge (ESD) protection

Diagnostic Features

- · Latched diagnostic information via SPI register
- · Over Load detection at ON state
- Open Load detection at OFF state using Output Status Monitor function
- · Output Status Monitor
- Input Status Monitor
- · Open Load detection at ON state

Application Specific Features

- · Fail-safe activation via Input pins in Limp-Home Mode
- · SPI with Daisy Chain capability
- Safe operation at low battery voltage (cranking)
- 2 W lamps, 5 W lamps with two channels in parallel mode and enhanced capacitive loads driving capability (Bulb Inrush Mode)
- Two independent internal PWM generators to drive e.g. LEDs



Overview

Description

The TLE75620-EST is an eight channel configurable and high-side power switch in PG-TSDSO-24-21 package providing embedded protective functions. It is specially designed to control relays and LEDs in automotive and industrial applications.

A serial peripheral interface (SPI) is utilized for control and diagnosis of the loads as well as of the device. For direct control and PWM there are two input pins available connected to two outputs by default. Additional or different outputs can be controlled by the same input pins (programmable via SPI).

Table 1 Product Summary

Parameter	Symbol	Values
Analog supply voltage	V _S	3.0 V 28 V
Digital supply voltage	V_{DD}	3.0 V 5.5 V
Minimum overvoltage protection	$V_{S(AZ)}$	42 V (see Chapter 8.5 for details)
Maximum on-state resistance at $T_J = 150 ^{\circ}\text{C}$	R _{DS(ON)}	2.2 Ω
Nominal load current ($T_A = 85$ °C, all channels)	I _{L(NOM)}	330 mA
Maximum Energy dissipation - repetitive	E_{AR}	10 mJ @ I _{L(EAR)} = 220 mA
Minimum Drain to Source clamping voltage	V _{DS(CL)}	42 V (when used as low-side switches)
Maximum Source to Ground clamping voltage	$V_{\text{OUT_S(CL)}}V_{\text{OUT(CL)}}$	-16 V
Maximum overload switch OFF threshold	I _{L(OVL0)}	2.3 A
Maximum total quiescent current at $T_J \le 85$ °C	I _{SLEEP}	5 μΑ
Maximum SPI clock frequency	$f_{\sf SCLK}$	5 MHz

Detailed Description

The TLE75620-EST is an eight channel configurable and high-side switch providing embedded protective functions. The output stages incorporate two high-side and and six auto-configurable high-side or low side switches (typical $R_{\rm DS(ON)}$ at $T_{\rm J}$ = 25°C is 1 Ω). The auto-configurable switches can be utilized in high-side or low-side configuration just by connecting the load accordingly. Protection and diagnosis functions adjust automatically to the hardware configuration. Driving a load from high-side offers the possibility to perform Open Load at ON diagnosis.

The 16-bit serial peripheral interface (SPI) is utilized to control and diagnose the device and the loads. The SPI interface provides daisy chain capability in order to assemble multiple devices (also devices with 8 bit SPI) in one SPI chain by using the same number of microcontroller pins.

This device is designed for low supply voltage operation, therefore being able to keep its state at low battery voltage ($V_S \ge 3.0 \text{ V}$). The SPI functionality, including the possibility to program the device, is available only when the digital power supply is present (see **Chapter 6** for more details).

The TLE75620-EST is equipped with two input pins that are connected to two configurable outputs, making them controllable even when the digital supply voltage is not available. With the Input Mapping functionality it is possible to connect the input pins to different outputs, or assign more outputs to the same input pin. In this case more channels can be controlled with one signal applied to one input pin.

In Limp Home mode (Fail-Safe mode) the input pins are directly routed to channels 2 and 3. When IDLE pin is "low", it is possible to activate the two channels using the input pins independently from the presence of the digital supply voltage.

The device provides diagnosis of the load via Open Load at ON state, Open Load at OFF state (with **DIAG_OSM.OUTn** bits) and short circuit detection. For Open Load at OFF state detection, a internal current source I_{OL} can be activated via SPI.



Overview

Each output stage is protected against short circuit. In case of Overload, the affected channel switches OFF when the Overload Detection Current $I_{L(OVLn)}$ is reached and can be reactivated via SPI. In Limp Home mode operation, the channels connected to an input pin set to "high" restart automatically after Output Restart time $t_{RETRY(LH)}$ is elapsed. Temperature sensors are available for each channel to protect the device against Over Temperature.

The power transistors are built by N-channel power MOSFET with one central chargepump for auto-configurable and high-side channels. The inputs are ground referenced TTL compatible. The device is monolithically integrated in Smart Power Technology.

Block Diagram and Terms



Block Diagram and Terms 2

Block Diagram 2.1

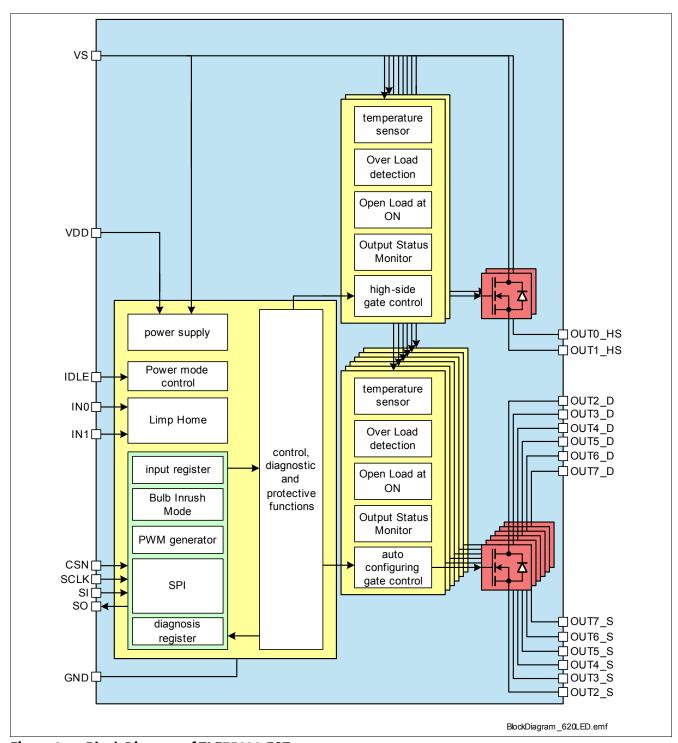


Figure 2 **Block Diagram of TLE75620-EST**



Block Diagram and Terms

2.2 Terms

Figure 3 shows all terms used in this data sheet, with associated convention for positive values.

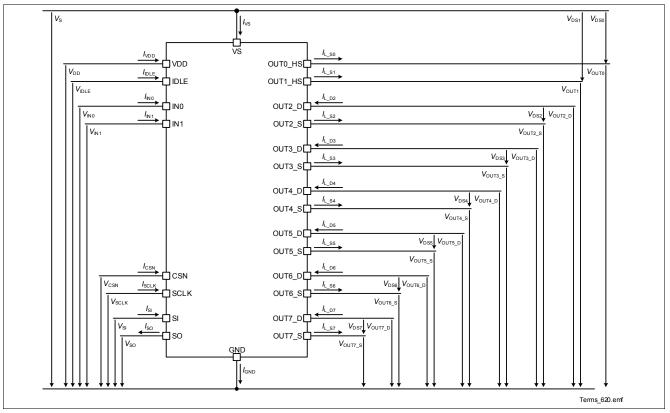


Figure 3 Voltage and Current definition

In all tables of electrical characteristics the channel related symbols without channel numbers are valid for each channel separately (e.g. V_{DS} specification is valid for V_{DS0} ... V_{DS7}).

Furthermore, parameters relative to output current can be indicated without specifying whether the current is going into the Drain pin or going out of the Source pin, unless otherwise specified. For instance, nominal output current can be indicated in the following ways: $I_{L(NOM)}$ $I_{L_L(NOM)}$ $I_{L_L(NOM)}$

All SPI registers bits are marked as follows: ADDR.PARAMETER (e.g. HWCR.RST) with the exception of the bits in the Diagnosis frames which are marked only with PARAMETER (e.g. UVRVS).

Pin Configuration



3 Pin Configuration

3.1 Pin Assignment

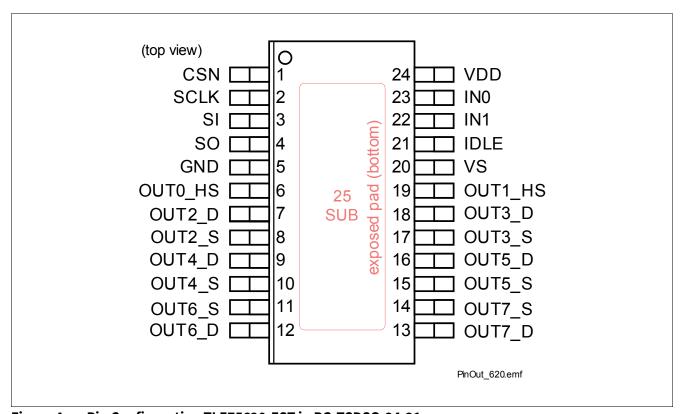


Figure 4 Pin Configuration TLE75620-EST in PG-TSDSO-24-21

Pin Configuration



3.2 Pin Definitions and Functions

Pin	Symbol	I/O	Function
Power Su	pply Pins		
20	VS	-	Analog supply V_s Positive supply voltage for power switches gate control (incl. protections)
24	VDD	_	Digital supply V_{DD} Supply voltage for SPI with support function to V_{S}
5	GND	-	Ground connection
SPI Pins			
1	CSN	I	Chip Select "low" active, integrated pull-up to $V_{\rm DD}$
2	SCLK	I	Serial Clock "high" active, integrated pull-down to ground
3	SI	I	Serial Input "high" active, integrated pull-down to ground
4	SO	0	Serial Output "Z" (tri-state) when CSN is "high"
Input and	Stand-by Pins		
21	IDLE	I	Idle mode power mode control, "high" activates Idle mode, integrated pull-down to ground
23	INO	I	Input pin 0 connected to channel 2 by default and in Limp Home mode, "high" active, integrated pull-down to ground
22	IN1	I	Input pin 1 connected to channel 3 by default and in Limp Home mode, "high" active, integrated pull-down to ground
Power Ou	put Pins		
6	OUT0_HS	0	Source of high-side power transistor (channel 0)
7	OUT2_D	0	Drain of auto configurable power transistor (channel 2)
8	OUT2_S	0	Source of auto configurable power transistor (channel 2)
9	OUT4_D	0	Drain of auto configurable power transistor (channel 4)
10	OUT4_S	0	Source of auto configurable power transistor (channel 4)
11	OUT6_S	0	Source of auto configurable power transistor (channel 6)
12	OUT6_D	0	Drain of auto configurable power transistor (channel 6)
13	OUT7_D	0	Drain of auto configurable power transistor (channel 7)
14	OUT7_S	0	Source of auto configurable power transistor (channel 7)
15	OUT5_S	0	Source of auto configurable power transistor (channel 5)
16	OUT5_D	0	Drain of auto configurable power transistor (channel 5)



Pin Configuration

Pin	Symbol	I/O	Function				
17	OUT3_S	0	Source of auto configurable power transistor (channel 3)				
18	OUT3_D	0	Drain of auto configurable power transistor (channel 3)				
19	OUT1_HS	0	Source of high-side power transistor (channel 1)				
Cooling Tab	"	•					
25	GND	_	Exposed pad It is recommended to connect it to PCB ground for cooling and EMC - not usable as electrical GND pin. Electrical ground must be provided by pin 5.				

General Product Characteristics 4

Absolute Maximum Ratings 4.1

Absolute Maximum Ratings 1) Table 2

 $T_{\rm J}$ = -40 °C to +150 °C

all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Supply Voltages							•
Analog Supply voltage	V_{S}	-0.3	_	28	V	-	P_4.1.1
Digital Supply voltage	V_{DD}	-0.3	-	5.5	V	-	P_4.1.2
Supply voltage for load dump protection	$V_{S(LD)}$	-	-	42	V	2)	P_4.1.3
Supply voltage for short circuit protection (single pulse)	$V_{S(SC)}$	0	-	28	V	-	P_4.1.4
Reverse polarity voltage	-V _{S(REV)}	-	-	16	V	$T_{J(0)}$ = 25 °C t ≤ 2 min See Chapter 11 for general setup. R_L = 70 Ω on all channels	P_4.1.5
Current through VS pin	I _{VS}	-10	_	10	mA	t ≤ 2 min	P_4.1.7
Current through VDD pin	I _{VDD}	-50	-	10	mA	t ≤ 2 min	P_4.1.8
Power Stages	ı	,					
Load current	/ _L	_	_	I _{L(OVL0)}	Α	single channel	P_4.1.9
Voltage at power transistor	$V_{\rm DS}$	-0.3	_	42	V	-	P_4.1.10
Power transistor source voltage	V _{OUT_S}	-16	-	V _{OUT_D} +0.3	V	-	P_4.1.11
Power transistor drain voltage $(V_{OUT_{-}S} \ge 0 \text{ V})$	V_{OUT_D}	V _{OUT_S} - 0.3	-	42	V	-	P_4.1.12
Power transistor drain voltage $(V_{OUT_S} < 0 \text{ V})$	V _{OUT_D}	-0.3	_	42	V	-	P_4.1.59
Maximum energy dissipation single pulse	E _{AS}	-	_	50	mJ	$T_{J(0)} = 25 ^{\circ}\text{C}$ $I_{L(0)} = 2^{*}I_{L(EAR)}$	P_4.1.13
Maximum energy dissipation single pulse	E _{AS}	-	_	25	mJ	⁴⁾ $T_{J(0)} = 150 ^{\circ}\text{C}$ $I_{L(0)} = 400 \text{mA}$	P_4.1.14



General Product Characteristics

Table 2 Absolute Maximum Ratings (cont'd)¹⁾

 $T_{\rm J}$ = -40 °C to +150 °C

all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Maximum energy dissipation repetitive pulses - $I_{L(EAR)}$	E _{AR}	-	-	10	mJ	4) $T_{J(0)} = 85 ^{\circ}\text{C}$ $I_{L(0)} = I_{L(EAR)}$ $2*10^6 \text{ cycles}$	P_4.1.15
IDLE pin							
Voltage at IDLE pin	V _{IDLE}	-0.3		5.5	V	_	P_4.1.23
Current through IDLE pin	I _{IDLE}	-0.75		0.75	mA	-	P_4.1.25
Current through IDLE pin	I _{IDLE}	-10.0		2.0	mA	t≤2 min.	P_4.1.26
Input Pins							
Voltage at input pins	V _{IN}	-0.3		5.5	V	-	P_4.1.28
Current through input pins	I _{IN}	-0.75		0.75	mA	-	P_4.1.30
Current through input pins	I _{IN}	-10.0		2.0	mA	t≤2 min.	P_4.1.31
SPI Pins							
Voltage at chip select pin	$V_{\rm CSN}$	-0.3		5.5	V	_	P_4.1.33
Current through chip select pin	I _{CSN}	-0.75		0.75	mA	-	P_4.1.34
Current through chip select pin	I _{CSN}	-10.0		2.0	mA	<i>t</i> ≤ 2 min.	P_4.1.35
Voltage at serial clock pin	$V_{\rm SCLK}$	-0.3		5.5	V		P_4.1.37
Current through serial clock pin		-0.75		0.75	mA	_	P_4.1.38
Current through serial clock pin	I _{SCLK}	-10.0		2.0	mA	t≤2 min.	P_4.1.39
Voltage at serial input pin	$V_{\rm SI}$	-0.3		5.5	V		P_4.1.41
Current through serial input pin	I _{SI}	-0.75		0.75	mA	_	P_4.1.42
Current through serial input pin	I _{SI}	-10.0		2.0	mA	<i>t</i> ≤ 2 min.	P_4.1.43
Voltage at serial output pin SO	V_{SO}	-0.3		V _{DD} +0.3	V		P_4.1.58
Current through serial output pin SO	I _{so}	-0.75		0.75	mA		P_4.1.45
Current through serial output pin SO	I _{so}	-2.0		10.0	mA	<i>t</i> ≤ 2 min.	P_4.1.46
Temperatures			•				
Junction Temperature	T_{J}	-40	-	150	°C	-	P_4.1.48
Storage Temperature	$T_{\rm stg}$	-55	_	150	°C	_	P_4.1.49
ESD Susceptibility		•	<u> </u>	•	•		·
ESD Susceptibility HBM OUT pins vs. V _S or GND	V _{ESD}	-4	-	4	kV	5) HBM	P_4.1.50
ESD Susceptibility HBM other pins	V _{ESD}	-2	-	2	kV	5) HBM	P_4.1.51



General Product Characteristics

Table 2 Absolute Maximum Ratings (cont'd)¹⁾

 $T_1 = -40 \,^{\circ}\text{C} \text{ to } +150 \,^{\circ}\text{C}$

all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Symbol Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
ESD Susceptibility CDM Pin 1, 12, 13, 24 (corner pins)	V _{ESD}	-750	_	750	V	6) CDM	P_4.1.52
ESD Susceptibility CDM	V _{ESD}	-500	-	500	V	6) CDM	P_4.1.54

- 1) Not subject to production test, specified by design.
- 2) For a duration of t_{on} = 400 ms; t_{on}/t_{off} = 10%; limited to 100 pulses
- 3) Device is mounted on a FR4 2s2p board according to Jedec JESD51-2,-5,-7 at natural convection; the Product (Chip+Package) was simulated on a 76.2 *114.3 *1.5 mm board with 2 inner copper layers (2 * 70 μ m Cu, 2 * 35 μ m Cu). Where applicable a thermal via array under the exposed pad contacted the first inner copper layer.
- 4) Pulse shape represents inductive switch off: $I_L(t) = I_L(0) \times (1 t / t_{pulse})$; $0 < t < t_{pulse}$
- 5) ESD susceptibility, HBM according to ANSI/ESDA/JEDEC JS001 (1.5k Ω , 100 pF)
- 6) ESD susceptibility, Charged Device Model "CDM" ESDA STM5.3.1 or ANSI/ESD S.5.3.1

Notes

- 1. Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
- 2. Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.

4.2 Functional Range

Table 3 Functional range

Parameter	Symbol	Values			Unit	Note or	Number	
		Min.	Тур.	Max.		Test Condition		
Supply Voltage Range for Normal Operation	$V_{S(NOR)}$	7	-	18	V	-	P_4.2.1	
Upper Supply Voltage Range for Extended Operation	$V_{\text{S(EXT,UP)}}$	18	-	28	V	Parameter deviation possible	P_4.2.2	
Lower Supply Voltage Range for Extended Operation	V _{S(EXT,LOW)}	3	-	7	V	Parameter deviation possible	P_4.2.3	
Junction Temperature	T_{J}	-40	_	150	°C	_	P_4.2.4	
Logic supply voltage	V_{DD}	3	_	5.5	V	-	P_4.2.5	

Note:

Within the functional or operating range, the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the Electrical Characteristics table.



Thermal Resistance 4.3

Note:

This thermal data was generated in accordance with JEDEC JESD51 standards. For more information, go to www.jedec.org.

Table 4 **Thermal Resistance**

Parameter	Symbol	Values			Unit	Note or	Numbe	
		Min.	Тур.	Max.		Test Condition	r	
Junction to Soldering Point	R _{thJSP}	-	3	5	K/W	measured to exposed pad (pin 25)	P_4.3.4	
Junction to Ambient	R_{thJA}	_	28	_	K/W	1)2)	P_4.3.5	

¹⁾ not subject to production test, specified by design

4.3.1 PCB set up

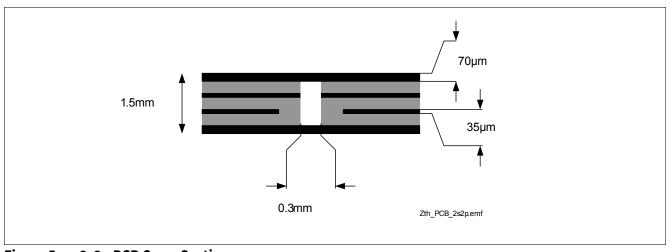


Figure 5 2s2p PCB Cross Section

²⁾ Specified $R_{th,IA}$ value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board; the Product (Chip+Package) was simulated on a 76.2 * 114.3 * 1.5 mm board with 2 inner copper layers (2 * 70 μ m Cu, 2 * 35 μ m Cu). Where applicable a thermal via array under the exposed pad contacted the first inner copper layer.




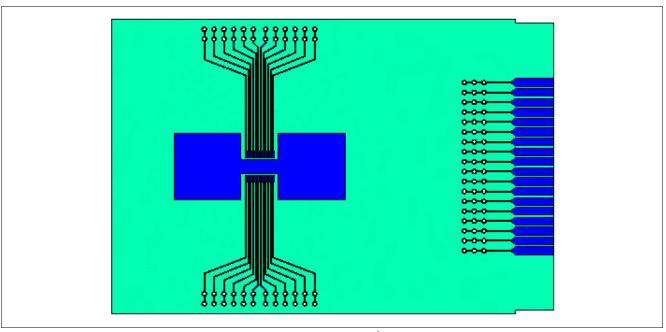


Figure 6 PC Board for Thermal Simulation with 600 mm² Cooling Area



14

Figure 7 PC Board for Thermal Simulation with 2s2p Cooling Area

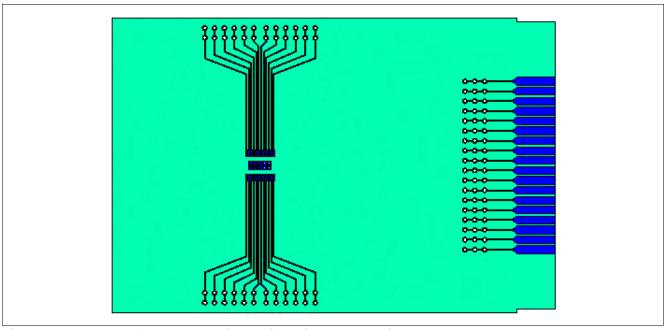

4.3.2 Thermal Impedance

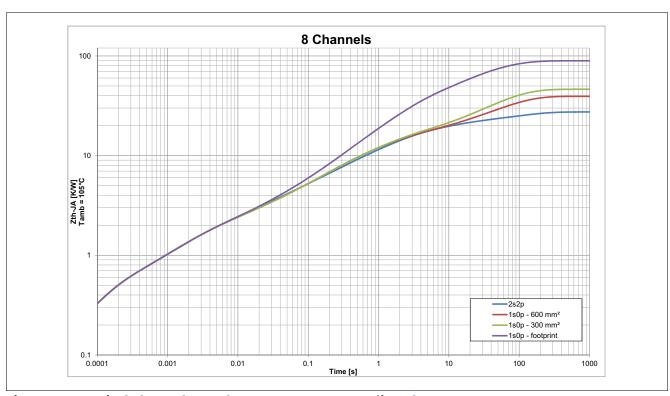


Figure 8 Typical Thermal Impedance. PCB setup according Chapter 4.3.1

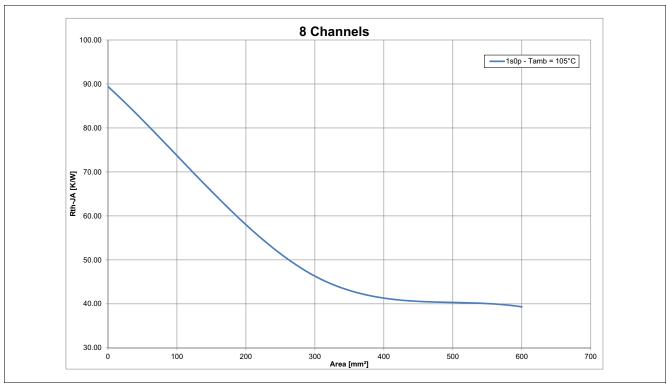


Figure 9 Typical Thermal Resistance. PCB setup 1s0p

Control Pins



5 Control Pins

The device has three pins (INO, IN1 and IDLE) to control directly the device without using SPI.

5.1 Input pins

TLE75620-EST has two input pins available. Each input pin is connected by default to one channel (IN0 to channel 2, IN1 to channel 3). Input Mapping Registers **MAPINO** and **MAPIN1** can be programmed to connect additional or different channels to each input pin, as shown in **Figure 10**. The signals driving the channels are an OR combination between **OUT** register status, PWM Generators (according to PWM Generator Output Mapping status), INO and IN1 (according to Input Mapping registers status). See **Chapter 7.5** for further details.

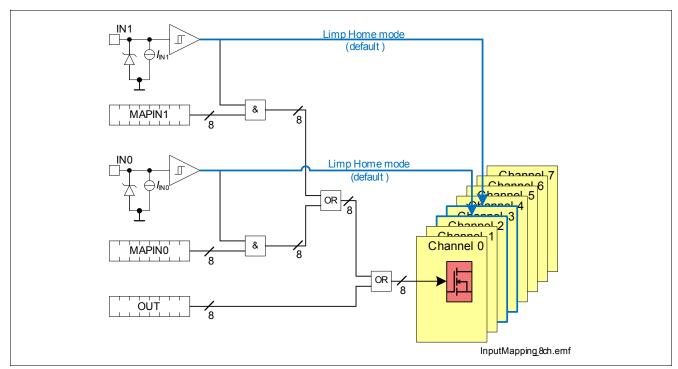


Figure 10 Input Mapping

The logic level of the input pins can be monitored via the Input Status Monitor Register (INST). The Input Status Monitor is operative also when TLE75620-EST is in Limp Home mode. If one of the Input pins is set to "high" and the IDLE pin is set to "low", the device switches into Limp Home mode and activates the channel mapped by default to the input pins. See **Chapter 6.1.5** for further details.

5.2 IDLE pin

The IDLE pin is used to bring the device into Sleep mode operation when is set to "low" and all input pins are set to "low". When IDLE pin is set to "low" while one of the input pins is set to "high" the device enters Limp Home mode.

To ensure a proper mode transition, IDLE pin must be set for at least $t_{\text{IDLE2SLEEP}}$ (P_6.3.54, transition from "high" to "low") or $t_{\text{SLEEP2IDLE}}$ (P_6.3.53, transition from "low" to "high").

Setting the IDLE pin to "low" has the following consequences:

• All registers in the SPI are reset to default values



Control Pins

- V_{DD} and V_S Undervoltage detection circuits are disabled to decrease current consumption (if both inputs are set to "low")
- No SPI communication is allowed (SO pin remains in high impedance state also when CSN pin is set to "low") if both input pins are set to "low"

infineon

Control Pins

5.3 Electrical Characteristics Control Pins

Table 5 Electrical Characteristics: Control Pins

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified) Typical values: $V_{\rm DD}$ = 5 V, $V_{\rm S}$ = 13.5 V, $T_{\rm J}$ = 25 °C

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
IDLE pin	,	<u>, </u>		-			-
L-input level	$V_{IDLE(L)}$	0		0.8	V	_	P_5.3.1
H-input level	$V_{IDLE(H)}$	2.0		5.5	٧	_	P_5.3.2
L-input current	I _{IDLE(L)}	5	12	20	μΑ	V _{IDLE} = 0.8 V	P_5.3.3
H-input current	I _{IDLE(H)}	14	28	45	μΑ	V _{IDLE} = 2.0 V	P_5.3.4
Input Pins							
L-input level	$V_{IN(L)}$	0		0.8	٧	-	P_5.3.5
H-input level	$V_{IN(H)}$	2.0		5.5	٧	_	P_5.3.6
L-input current	I _{IN(L)}	5	12	20	μΑ	V _{IN} = 0.8 V	P_5.3.7
H-input current	I _{IN(H)}	14	28	45	μΑ	V _{IN} = 2.0 V	P_5.3.8



6 Power Supply

The TLE75620-EST is supplied by two supply voltages:

- $V_{\rm S}$ (analog supply voltage used also for the logic and as drain for channels 0 and 1)
- V_{DD} (digital supply voltage)

The V_S supply line is connected to a battery feed and used, in combination with V_{DD} supply, for the driving circuitry of the power stages. In situations where V_S voltage drops below V_{DD} voltage (for instance during cranking events down to 3.0 V), an increased current consumption may be observed at VDD pin.

 $V_{\rm S}$ and $V_{\rm DD}$ supply voltages have an undervoltage detection circuit, which prevents the activation of the associated function in case the measured voltage is below the undervoltage threshold. More in detail:

- An undervoltage on both V_S and V_{DD} supply voltages prevents the activation of the power stages and any SPI communication (the SPI registers are reset)
- An undervoltage on V_{DD} supply prevents any SPI communication. SPI read/write registers are reset to default values.
- An undervoltage on V_S supply forces the TLE75620-EST to drain all needed current for the logic from V_{DD} supply. All channels are disabled, and are enabled again as soon as $V_S \ge V_{S(OP)}$.

Figure 11 shows a basic concept drawing of the interaction between supply pins VS and VDD, the output stage drivers and SO supply line.

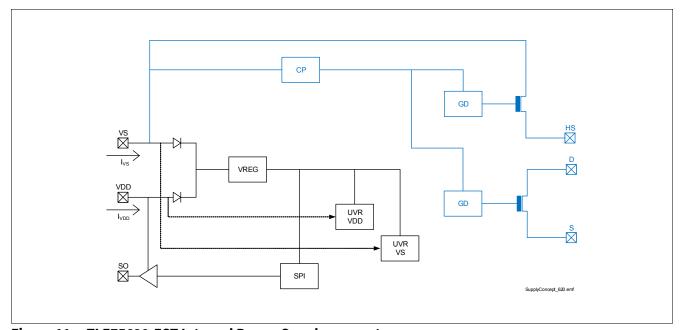


Figure 11 TLE75620-EST Internal Power Supply concept

When $3.0 \text{ V} \le V_{\text{SDIFF}}$ TLE75620-EST operates in "Cranking Operative Range" (COR). In this condition the current consumption from VDD pin increases while it decreases from VS pin where the total current consumption remains within the specified limits. **Figure 12** shows the voltage levels at VS pin where the device goes in and out of COR. During the transition to and from COR operative region, I_{VS} and I_{VDD} change between values defined for normal operation and for COR operation. The sum of both current remains within limits specified in "Overall current consumption" section (see **Table 8**).

infineon

Power Supply

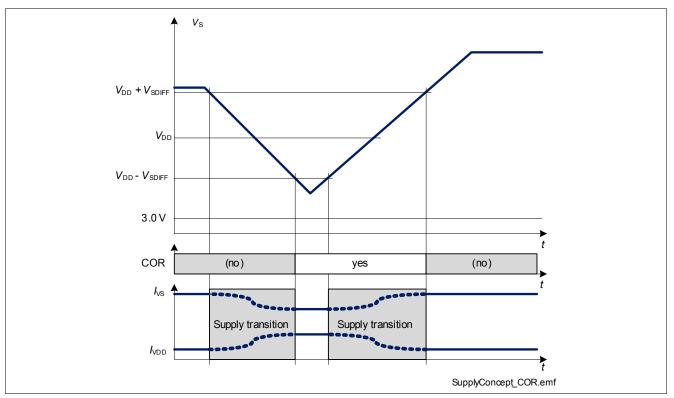


Figure 12 "Cranking Operative Range"

Furthermore, when $V_{S(UV)} \le V_S \le V_{S(OP)}$ it may be not possible to switch ON a channel that was previously OFF. All channels that are already ON keep their state unless they are switched OFF via SPI or via INn pins. An overview of channel behavior according to different V_S and V_{DD} supply voltages is shown in **Table 6** (the table is valid after a successful power-up, see **Chapter 6.1.1** for more details).



Table 6 Device capability as function of V_S and V_{DD}

	$V_{\rm DD} \le V_{\rm DD(UV)}$ $(V_{\rm DD(UV)} = P_6.3.25)$	$V_{DD} = V_{DD(LOP)}$ $(V_{DD(LOP)} = P_6.3.24)$	$V_{\rm DD} > V_{\rm DD(LOP)}$	
$V_{\rm S} \le 3.0 \text{ V}$	channels cannot be controlled	channels cannot be controlled	channels cannot be controlled	
$3.0 \text{ V} = V_{\text{S(UV),max}}$	SPI registers reset	SPI registers available	SPI registers available	
(P_6.3.1)	SPI communication not available ($f_{SCLK} = 0 \text{ MHz}$)	SPI communication possible ($f_{SCLK} = 1 \text{ MHz}$) (P_10.4.34)	SPI communication possible ($f_{SCLK} = 5 \text{ MHz}$) (P_10.4.22)	
	Limp Home mode not available	Limp Home mode available (channels are OFF)	Limp Home mode available (channels are OFF)	
$ \frac{1}{3.0 \text{ V} < V_{\text{S}} \le V_{\text{S(OP)}}} (V_{\text{S(OP)}} = P_{6.3.2}) $	channels cannot be controlled by SPI	channels can be switched ON and OFF (SPI control) ¹⁾ ($R_{\rm DS(ON)}$ deviations possible)	channels can be switched ON and OFF (SPI control) ¹⁾ (R _{DS(ON)} deviations possible)	
	SPI registers reset	SPI registers available	SPI registers available	
	SPI communication not available ($f_{SCLK} = 0 \text{ MHz}$)	SPI communication possible ($f_{SCLK} = 1 \text{ MHz}$) (P_10.4.34)	SPI communication possible ($f_{SCLK} = 5 \text{ MHz}$) (P_10.4.22)	
	Limp Home mode available ¹⁾ (R _{DS(ON)} deviations possible)	Limp Home mode available ¹⁾ (R _{DS(ON)} deviations possible)	Limp Home mode available ¹⁾ (R _{DS(ON)} deviations possible)	
$\overline{V_{\rm S}} \ge V_{\rm S(OP)}$	channels cannot be controlled by SPI	channels can be switched ON and OFF (small $R_{\rm DS(ON)}$ dev. possible when $V_{\rm S} = V_{\rm S(EXT,LOW)}$)	channels can be switched ON and OFF (small $R_{\rm DS(ON)}$ dev. possible when $V_{\rm S} = V_{\rm S(EXT,LOW)}$)	
	SPI registers reset	SPI registers available	SPI registers available	
	SPI communication not available ($f_{SCLK} = 0 \text{ MHz}$)	SPI communication possible ($f_{SCLK} = 5 \text{ MHz}$) (P_10.4.22)	SPI communication possible ($f_{SCLK} = 5 \text{ MHz}$) (P_10.4.22)	
	Limp Home mode available (small $R_{DS(ON)}$ dev. possible when $V_S = V_{S(EXT,LOW)}$)	Limp Home mode available (small $R_{DS(ON)}$ dev. possible when $V_S = V_{S(EXT,LOW)}$)	(small $R_{DS(ON)}$ dev. possible when $V_S = V_{S(EXT,LOW)}$)	

¹⁾ undervoltage condition on V_s must be considered - see **Chapter 6.2.1** for more details

Power Supply



6.1 Operation Modes

TLE75620-EST has the following operation modes:

- Sleep mode
- · Idle mode
- Active mode
- Limp Home mode

The transition between operation modes is determined according to following levels and states:

- · logic level at IDLE pin
- · logic level at INn pins
- OUT.OUTn bits state
- HWCR.ACT bit state
- HWCR_PWM.PWM0 and HWCR_PWM.PWM1 bits state

The state diagram including the possible transitions is shown in **Figure 13**. The behaviour of TLE75620-EST as well as some parameters may change in dependence from the operation mode of the device. Furthermore, due to the undervoltage detection circuitry which monitors V_S and V_{DD} supply voltages, some changes within the same operation mode can be seen accordingly.

The operation mode of the TLE75620-EST can be observed by:

- status of output channels
- · status of SPI registers
- current consumption at VDD pin (I_{VDD})
- current consumption at VS pin (I_{VS})

The default operation mode to switch ON the loads is Active mode. If the device is not in Active mode and a request to switch ON one or more outputs comes (via SPI or via Input pins), it will switch into Active or Limp Home mode, according to IDLE pin status. Due to the time needed for such transitions, output turn-on time $t_{\rm ON}$ will be extended due to the mode transition latency.

infineon

Power Supply

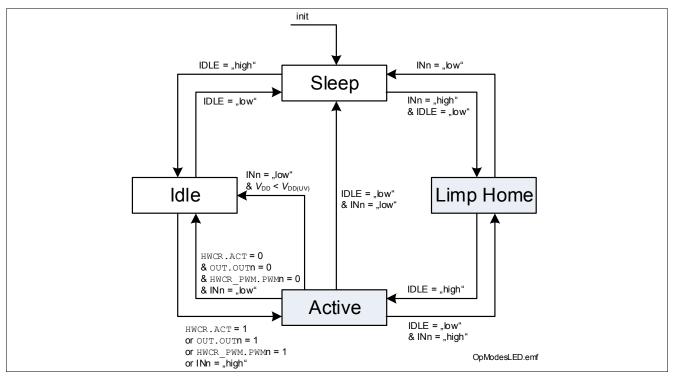


Figure 13 Operation Mode state diagram

Table 7 shows the correlation between device operation modes, V_S and V_{DD} supply voltages, and state of the most important functions (channels operativity, SPI communication and SPI registers).

Table 7 Device function in relation to operation modes, V_s and V_{DD} voltages

Operation Mode	Function	Undervoltage condition on $V_s^{1)}$	Undervoltage condition on <i>V</i> _s	<i>V</i> _S not in undervoltage	V _s not in undervoltage	
		$V_{\rm DD} \leq V_{\rm DD(UV)}$	$V_{\rm DD} > V_{\rm DD(UV)}$	$V_{\rm DD} \leq V_{\rm DD(UV)}$	$V_{\rm DD} > V_{\rm DD(UV)}$	
Sleep	Channels	not available	not available	not available	not available	
	SPI comm.	not available	not available	not available	not available	
	SPI registers	reset	reset	reset	reset	
Idle	Channels	not available	not available	not available	not available	
	SPI comm.	not available	✓	not available	✓	
	SPI registers	reset	1	reset	✓	
Active	Channels	not available	not available	✓ (IN pins only)	✓	
	SPI comm.	not available	1	not available	✓	
	SPI registers	reset	1	reset	✓	
Limp Home	Channels	not available	not available	✓ (IN pins only)	✓ (IN pins only)	
	SPI comm.	not available	√ (read-only)	not available	√ (read-only)	
	SPI registers	reset	√ (read-only) ²⁾	reset	√ (read-only) ²⁾	

¹⁾ see Chapter 6.2.1 for more details

²⁾ see Chapter 6.1.5 for a detailed overview

Power Supply



6.1.1 Power-up

The Power-up condition is satisfied when one of the supply voltages (V_S or V_{DD}) is applied to the device and the INn or IDLE pins are set to "high". If V_S is above the threshold $V_{S(OP)}$ or if V_{DD} is above the threshold $V_{DD(LOP)}$ the internal power-on signal is set.

6.1.2 Sleep mode

When TLE75620-EST is in Sleep mode, all outputs are OFF and the SPI registers are reset, independently from the supply voltages. The current consumption is minimum. See parameters $I_{\text{VDD(SLEEP)}}$ and $I_{\text{VS(SLEEP)}}$, or parameter I_{SLFEP} for the whole device.

6.1.3 Idle mode

In Idle mode, the current consumption of the device can reach the limits given by parameters $I_{\text{VDD(IDLE)}}$ and $I_{\text{VS(IDLE)}}$, or by parameter I_{IDLE} for the whole device. The internal voltage regulator is working. Diagnosis functions are not available. The output channels are switched OFF, independently from the supply voltages. When V_{DD} is available, the SPI registers are working and SPI communication is possible. In Idle mode the **ERRn** bits are not cleared for functional safety reasons.

6.1.4 Active mode

Active mode is the normal operation mode of TLE75620-EST when no Limp Home condition is set and it is necessary to drive some or all loads. Voltage levels of $V_{\rm DD}$ and $V_{\rm S}$ influence the behavior as described at the beginning of **Chapter 6**. Device current consumption is specified with $I_{\rm VDD(ACTIVE)}$ and $I_{\rm VS(ACTIVE)}$ ($I_{\rm ACTIVE}$ for the whole device). The device enters Active mode when IDLE pin is set to "high" and one of the input pins is set to "high" or one **OUT.OUTn** bit is set to "1". If **HWCR.ACT** is set to "0", the device returns to Idle mode as soon as all inputs pins are set to "low" and **OUT.OUTn** bits are set to "0". If **HWCR.ACT** is set to "1", the device remains in Active mode independently of the status of input pins and **OUT.OUTn** bits. An undervoltage condition on $V_{\rm DD}$ supply brings the device into Idle mode, if all input pins are set to "low". Even if the registers **MAPINO** and **MAPIN1** are both set to "00_H" but one of the input pins INn is set to "high", the device goes into Active mode.

6.1.5 Limp Home mode

TLE75620-EST enters Limp Home mode when IDLE pin is "low" and one of the input pins is set to "high", switching ON the channel connected to it. SPI communication is possible but only in read-only mode (SPI registers can be read but cannot be written). More in detail:

- UVRVS and LOPVDD are set to "1"
- MODE bits are set to "01_B" (Limp Home mode)
- TER bit is set to "1" on the first SPI command after entering Limp Home mode. Afterwards it works normally
- OLON and OLOFF bits is set to "0"
- **ERRn** bits work normally
- DIAG_OSM.OUTn bits can be read and work normally
- All other registers are set to their default value and cannot be programmed as long as the device is in Limp Home mode

See **Table 6** for a detailed overview of supply voltage conditions required to switch ON channels 2 and 3 during Limp Home. All other channels are OFF.



A transmission of SPI commands during transition from Active to Limp Home mode or Limp Home to Active mode may result in undefined SPI responses.

6.1.6 Definition of Power Supply modes transition times

The channel turn-ON time is as defined by parameter $t_{\rm ON}$ when TLE75620-EST is in Active mode or in Limp Home mode. In all other cases, it is necessary to add the transition time required to reach one of the two aforementioned Power Supply modes (as shown in **Figure 14**).

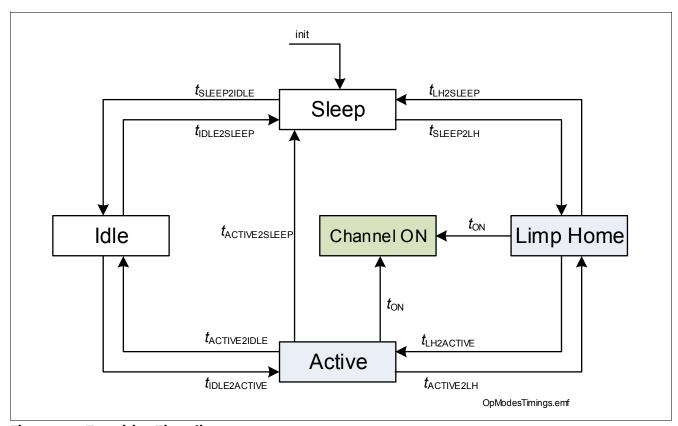


Figure 14 Transition Time diagram

6.2 Reset condition

One of the following 3 conditions resets the SPI registers to the default value:

- $V_{\rm DD}$ is not present or below the undervoltage threshold $V_{\rm DD(UV)}$
- IDLE pin is set to "low"
- a reset command (HWCR.RST set to "1") is executed
 - **ERRn** bits are not cleared by a reset command (for functional safety)
 - UVRVS and LOPVDD bits are cleared by a reset command

In particular, all channels are switched OFF (if there are no input pin set to "high") and the Input Mapping configuration is reset.

6.2.1 Undervoltage on V_s

Between $V_{S(UV)}$ and $V_{S(OP)}$ the undervoltage mechanism is triggered. If the device is operative and the supply voltage drops below the undervoltage threshold $V_{S(UV)}$, the logic set the bit **UVRVS** to "1". As soon as the supply voltage VS is above the minimum voltage operative threshold $V_{S(OP)}$, the bit **UVRVS** is set to "0" after the first Standard Diagnosis readout. Undervoltage condition on VS influences the status of the channels, as described



in **Table 6**. **Figure 15** sketches the undervoltage behavior (the " $V_S - V_{DS}$ " line refers to a channel which is programmed to be ON).

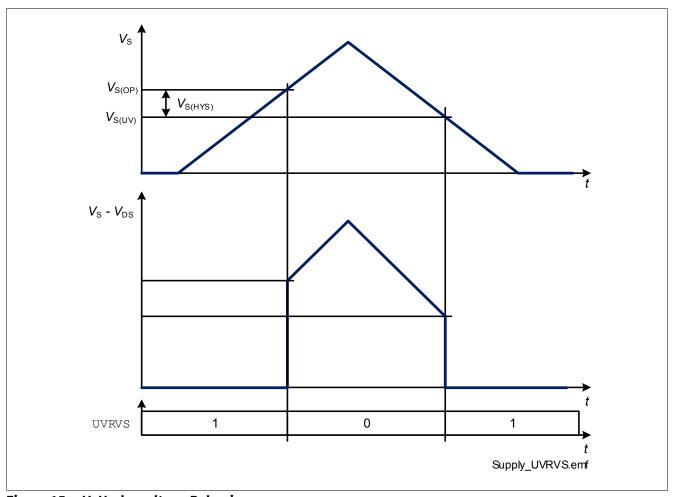


Figure 15 V_S Undervoltage Behavior

6.2.2 Low Operating Power on V_{DD}

When $V_{\rm DD}$ supply voltage is in the range indicated by $V_{\rm DD(LOP)}$, the bit **LOPVDD** is set to "1". As soon as $V_{\rm DD} > V_{\rm DD(LOP)}$ the bit **LOPVDD** is set to "0" after the first Standard Diagnosis readout.

If $V_{\rm DD}$ supply voltage is not present, a voltage applied to pins CSN or SO can supply the internal logic (not recommended in normal operation due to internal design limitations).



Electrical Characteristics Power Supply 6.3

Table 8 **Electrical Characteristics Power Supply**

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C, all voltages with respect to ground, positive currents flowing as described in **Figure 3** (unless otherwise specified)

Typical values: $V_{DD} = 5 \text{ V}$, $V_{S} = 13.5 \text{ V}$, $T_{J} = 25 \text{ °C}$

Parameter	Symbol		Value	s	Unit	Note or Test Condition	Number
		Min.	Тур.	Max.			
VS pin							
Analog supply undervoltage shutdown	V _{S(UV)}	1.5	-	3.0	V	OUTn = ON from $V_{DS} \le 1 \text{ V}$ to UVRVS = 1_{B} $R_{L} = 50 \Omega$	P_6.3.1
Analog supply minimum operative voltage	$V_{S(OP)}$	_	_	4.0	V	OUT.OUTn = 1_B from UVRVS = 1_B to $V_{DS} \le 1 \text{ V}$ $R_L = 50 \Omega$	P_6.3.2
Undervoltage shutdown hysteresis	$V_{\rm S(HYS)}$	-	1	_	V	1)	P_6.3.3
Analog supply current consumption in Sleep mode with loads	I _{VS(SLEEP)}	-	0.1	3	μΑ	V_{IDLE} floating V_{INn} floating $V_{\text{CSN}} = V_{\text{DD}}$ $T_{\text{J}} \leq 85 ^{\circ}\text{C}$	P_6.3.4
Analog supply current consumption in Sleep mode with loads	I _{VS(SLEEP)}	-	0.1	_	μА	$V_{\rm IDLE}$ floating $V_{\rm INn}$ floating $V_{\rm CSN} = V_{\rm DD}$ $T_{\rm J} \le 85 ^{\circ}{\rm C}$ VS = 13.5 V	P_6.3.63
Analog supply current consumption in Sleep mode with loads	I _{VS(SLEEP)}	-	0.1	20	μА	$V_{\rm IDLE}$ floating $V_{\rm INn}$ floating $V_{\rm CSN} = V_{\rm DD}$ $T_{\rm J} = 150 ^{\circ}{\rm C}$	P_6.3.5
Analog supply current consumption in Idle mode with loads	I _{VS(IDLE)}	-	-	2.2	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 0_{\text{B}}$ $OUT.OUTn = 0_{\text{B}}$ $DIAG_IOL.OUTn = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$	P_6.3.6



Power Supply

Table 8 Electrical Characteristics Power Supply (cont'd)

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C, all voltages with respect to ground, positive currents flowing as described in **Figure 3** (unless otherwise specified)

Typical values: $V_{DD} = 5 \text{ V}$, $V_S = 13.5 \text{ V}$, $T_J = 25 ^{\circ}\text{C}$

Parameter	Symbol		Value	s Unit			Number
		Min.	Тур.	Max.		Test Condition	
Analog supply current consumption in Idle mode with loads (COR)	I _{VS(IDLE)}	-	-	0.3	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 0_{\text{B}}$ $OUT.OUTn = 0_{\text{B}}$ $DIAG_IOL.OUTn = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$ $V_{\text{S}} \leq V_{\text{DD}} - 1 \text{ V}$	P_6.3.7
Analog supply current consumption in Active mode with loads - channels OFF	I _{VS(ACTIVE)}	-	-	7.7	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 1_{\text{B}}$ $OUT.OUTn = 0_{\text{B}}$ $DIAG_IOL.OUTn = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$	P_6.3.10
Analog supply current consumption in Active mode with loads - channels OFF (COR)	I _{VS} (ACTIVE)	-	-	5.0	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $\text{HWCR.ACT} = 1_{\text{B}}$ $\text{OUT.OUTn} = 0_{\text{B}}$ $\text{DIAG_IOL.OUTn} = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$ $V_{\text{S}} \leq V_{\text{DD}} - 1 \text{ V}$	P_6.3.14
Analog supply current consumption in Active mode with loads - channels 2-7 ON	I _{VS(ACTIVE)}	-	-	8.7	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 1_{\text{B}}$ $OUT.OUTn = 1_{\text{B}}$ $(n = 27)$ $DIAG_{\text{IOL.OUTn}} = 0_{\text{B}}$ $DIAG_{\text{OLONEN.M}}$ $UX = 0100_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$	P_6.3.18



Power Supply

Table 8 Electrical Characteristics Power Supply (cont'd)

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C, all voltages with respect to ground, positive currents flowing as described in **Figure 3** (unless otherwise specified)

Typical values: $V_{DD} = 5 \text{ V}$, $V_S = 13.5 \text{ V}$, $T_J = 25 ^{\circ}\text{C}$

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Analog supply current consumption in Active mode with loads - channels 2-7 ON (COR)	I _{VS(ACTIVE)}	-	2.3	5.0	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $\text{HWCR.ACT} = 1_{\text{B}}$ $\text{OUT.OUTn} = 1_{\text{B}}$ $(n = 27)$ $\text{DIAG_IOL.OUTn} = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$ $V_{\text{S}} \leq V_{\text{DD}} - 1 \text{ V}$	P_6.3.22
VDD pin	•			•	•	•	•
Logic Supply Operating voltage	$V_{\rm DD(OP)}$	3.0	-	5.5	V	$f_{\text{SCLK}} = 5 \text{ MHz}$	P_6.3.23
Logic Supply Lower Operating Voltage	$V_{\rm DD(LOP)}$	3.0	-	4.5	V	-	P_6.3.24
Undervoltage shutdown	$V_{\rm DD(UV)}$	1	-	3.0	V	$V_{SI} = 0 \text{ V}$ $V_{SCLK} = 0 \text{ V}$ $V_{CSN} = 0 \text{ V}$ SO from "low" to high impedance	P_6.3.25
Logic supply current in Sleep mode	I _{VDD(SLEEP)}	-	0.1	2.5	μΑ	V_{IDLE} floating V_{INn} floating $V_{\text{CSN}} = V_{\text{DD}}$ $T_{\text{J}} \le 85 ^{\circ}\text{C}$	P_6.3.26
Logic supply current in Sleep mode	I _{VDD(SLEEP)}	-	-	10	μА	V_{IDLE} floating V_{INn} floating $V_{\text{CSN}} = V_{\text{DD}}$ $T_{\text{J}} = 150 ^{\circ}\text{C}$	P_6.3.27
Logic supply current in Idle mode	I _{VDD(IDLE)}	-	-	0.3	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 0_{\text{B}}$ $OUT.OUTn = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$	P_6.3.28



Power Supply

Table 8 Electrical Characteristics Power Supply (cont'd)

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C, all voltages with respect to ground, positive currents flowing as described in **Figure 3** (unless otherwise specified)

Typical values: $V_{DD} = 5 \text{ V}$, $V_S = 13.5 \text{ V}$, $T_I = 25 ^{\circ}\text{C}$

Parameter	Symbol		Value	s	Unit	Note or Test Condition	Number
		Min.	Тур.	Max.			
Logic supply current in Idle mode (COR)	I _{VDD(IDLE)}	-	-	2.2	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 0_{\text{B}}$ $OUT.OUTn = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$ $V_{\text{S}} \le V_{\text{DD}} - 1 \text{ V}$	P_6.3.29
Logic supply current in Active mode - channels OFF	I _{VDD(ACTIVE)}	-	-	0.3	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 1_{\text{B}}$ $OUT.OUTn = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$	P_6.3.30
Logic supply current in Active mode - channels OFF (COR)	I _{VDD(ACTIVE)}	-	-	2.7	mA	IDLE = "high" $V_{INn} \text{ floating}$ $f_{SCLK} = 0 \text{ MHz}$ $HWCR.ACT = 1_{B}$ $OUT.OUTn = 0_{B}$ $V_{CSN} = V_{DD}$ $V_{S} \le V_{DD} - 1 \text{ V}$	P_6.3.33
Logic supply current in Active mode - channels ON	I _{VDD(ACTIVE)}	-	-	0.3	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 1_{\text{B}}$ $OUT.OUTn = 1$ $V_{\text{CSN}} = V_{\text{DD}}$	P_6.3.35
Logic supply current in Active mode - channels ON (COR)	I _{VDD(ACTIVE)}	-	-	3.5	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 1_{\text{B}}$ $OUT.OUTn = 1_{\text{B}}$ $DIAG_IOL.OUTn = 0_{\text{B}}$ $DIAG_OLONEN.M$ $UX = 0100_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$ $V_{\text{S}} \le V_{\text{DD}} - 1 \text{ V}$	P_6.3.66

Overall current consumption



Power Supply

Table 8 **Electrical Characteristics Power Supply (cont'd)**

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C, all voltages with respect to ground, positive currents flowing as described in **Figure 3** (unless otherwise specified)

Typical values: $V_{DD} = 5 \text{ V}$, $V_S = 13.5 \text{ V}$, $T_L = 25 ^{\circ}\text{C}$

Parameter	Symbol		Value	s	Unit	Note or Test Condition	Number
		Min.	Тур.	Max.			
Overall current consumption in Sleep mode $I_{VS(SLEEP)} + I_{VDD(SLEEP)}$	I _{SLEEP}	-	-	5	μА	$V_{\rm IDLE}$ floating $V_{\rm INn}$ floating $V_{\rm CSN} = V_{\rm DD}$ $T_{\rm J} \le 85 ^{\circ}{\rm C}$	P_6.3.40
Overall current consumption in Sleep mode $I_{VS(SLEEP)} + I_{VDD(SLEEP)}$	I _{SLEEP}	-	_	5	μА	V_{IDLE} floating V_{INn} floating $V_{\text{CSN}} = V_{\text{DD}}$ $T_{\text{J}} \le 85 ^{\circ}\text{C}$ $V_{\text{S}} = 13.5 \text{V}$	P_6.3.64
Overall current consumption in Sleep mode $I_{VS(SLEEP)} + I_{VDD(SLEEP)}$	I _{SLEEP}	_	_	30	μΑ	V_{IDLE} floating V_{INn} floating $V_{\text{CSN}} = V_{\text{DD}}$ $T_{\text{J}} = 150 ^{\circ}\text{C}$	P_6.3.41
Overall current consumption in Idle mode $I_{VS(IDLE)} + I_{VDD(IDLE)}$	I _{IDLE}	-	-	2.5	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $\text{HWCR.ACT} = 0_{\text{B}}$ $\text{OUT.OUTn} = 0_{\text{B}}$ $\text{DIAG_IOL.OUTn} = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$	P_6.3.42
Overall current consumption in Active mode - channels OFF $I_{VS(ACTIVE)} + I_{VDD(ACTIVE)}$	I _{ACTIVE}	-	-	8	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $HWCR.ACT = 1_{\text{B}}$ $OUT.OUTn = 0_{\text{B}}$ $DIAG_IOL.OUTn = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$	P_6.3.45
Overall current consumption in Active mode - channels 2-7 ON $I_{VS(ACTIVE)} + I_{VDD(ACTIVE)}$	I _{ACTIVE}	-	-	9	mA	IDLE = "high" $V_{\text{INn}} \text{ floating}$ $f_{\text{SCLK}} = 0 \text{ MHz}$ $\text{HWCR.ACT} = 1_{\text{B}}$ $\text{OUT.OUTn} = 1_{\text{B}}$ $(n = 27)$ $\text{DIAG_IOL.OUTn} = 0_{\text{B}}$ $V_{\text{CSN}} = V_{\text{DD}}$	P_6.3.62



Power Supply

Table 8 Electrical Characteristics Power Supply (cont'd)

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C, all voltages with respect to ground, positive currents flowing as described in **Figure 3** (unless otherwise specified)

Typical values: $V_{DD} = 5 \text{ V}$, $V_S = 13.5 \text{ V}$, $T_J = 25 ^{\circ}\text{C}$

Parameter	Symbol		Value	s	Unit	Note or Test Condition	Number
		Min.	Тур.	Max.			
Voltage difference between $V_{\rm S}$ and $V_{\rm DD}$ supply lines	V _{SDIFF}	_	200	_	mV	1)	P_6.3.52
Timings							
Sleep to Idle delay	t _{SLEEP2IDLE}	-	200	400	μs	from IDLE pin to TER + INST register = 8680 _H (see Chapter 10.6.1 for details)	P_6.3.53
Idle to Sleep delay	t _{IDLE2SLEEP}	-	100	200	μs	from IDLE pin to Standard Diagnosis = 0000 _H (see Chapter 10.5 for details) external pull-down SO to GND required	P_6.3.54
Idle to Active delay	t _{IDLE2ACTIVE}	-	100	200	μs	from INn or CSN pins to MODE = 10 _B	P_6.3.55
Active to Idle delay	t _{ACTIVE2IDLE}	-	100	200	μs	from INn or CSN pins to MODE = 11 _B	P_6.3.56
Sleep to Limp Home delay	t _{SLEEP2LH}	-	300 +t _{ON}	600 +t _{ON}	μs	from INn pins to $V_{DS} = 10\% V_{S}$	P_6.3.57
Limp Home to Sleep delay	t _{lh2sleep}	-	200 +t _{OFF}	400 +t _{OFF}	μs	from INn pins to Standard Diagnosis = 0000 _H (see Chapter 10.6.1 for details). External pull-down SO to GND required	P_6.3.58
Limp Home to Active delay	t _{LH2ACTIVE}	-	50	100	μs	from IDLE pin to MODE = 10_B	P_6.3.59



Power Supply

Electrical Characteristics Power Supply (cont'd) Table 8

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C, all voltages with respect to ground, positive currents flowing as described in Figure 3 (unless otherwise specified)

Typical values: $V_{DD} = 5 \text{ V}$, $V_S = 13.5 \text{ V}$, $T_J = 25 ^{\circ}\text{C}$

Parameter	Symbol	Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Active to Limp Home delay	t _{ACTIVE2LH}	-	50	100	μs	from IDLE pin to TER + INST register = 8683 _H (IN0 = IN1 = "high") or 8682 _H (IN1 = "high", IN0 = "low") or 8681 _H (IN1 = "low", IN0 = "high") (see Chapter 10.5 for details)	P_6.3.60
Active to Sleep delay	t _{ACTIVE2SLEEP}	-	50	100	μs	from IDLE pin to Standard Diagnosis = 0000 _H (see Chapter 10.6.1 for details). External pull-down SO to GND required.	P_6.3.61

¹⁾ Not subject to production test - specified by design

Power Stages



7 Power Stages

The TLE75620-EST is an eight channels configurable and high-side relay switch. The power stages are built by N-channel lateral power MOSFET transistors.

There are six auto-configurable channels which can be used either as low-side or as high-side switches. They adjust the diagnostic and protective functions according their potential at drain and source automatically. For these channels a charge pump is connected to the output MOSFET gate.

In high-side configuration, the load is connected between ground and source of the power transistor (pins OUTn_S, n = 2...7). The drains of the power transistors (OUTn_D, with "n" equal to the configurable channel number) can be connected to any potential between ground and V_S . When the drain is connected to V_S , the channel behave like an high-side switch.

In low-side configuration, the source of the power transistors must be connected to GND pin potential (either directly or through a reverse current blocking diode).

The configuration can be chosen for each of these channels individually, therefore it is feasible to connect one or more channels in low-side configuration, while the remaining auto-configurable are used as high-side switches.

7.1 Output ON-state resistance

The ON-state resistance $R_{DS(ON)}$ depends on the supply voltage as well as the junction temperature T_{J} .

7.1.1 Switching Resistive Loads

When switching resistive loads the following switching times and slew rates can be considered.

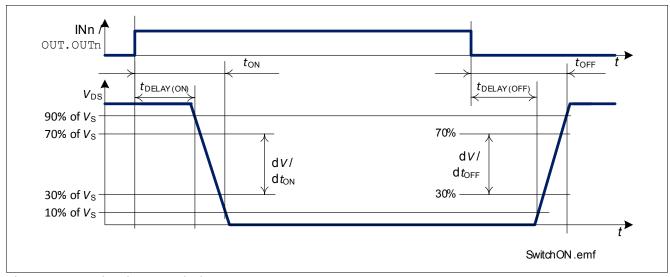


Figure 16 Switching a Resistive Load

7.1.2 Inductive Output Clamp

When switching off inductive loads, the voltage across the power switch rises to $V_{\rm DS(CL)}$ potential, because the inductance intends to continue driving the current. The potential at Output pin is not allowed to go below $V_{\rm OUT\ S(CL)}$ or $V_{\rm OUT(CL)}$. The voltage clamping is necessary to prevent device destruction.



Power Stages

Figure 17, Figure 18 show a concept drawing of the implementation. Nevertheless, the maximum allowed load inductance is limited. The clamping structure protects the device in all operative modes (Sleep, Idle, Active, Limp Home).

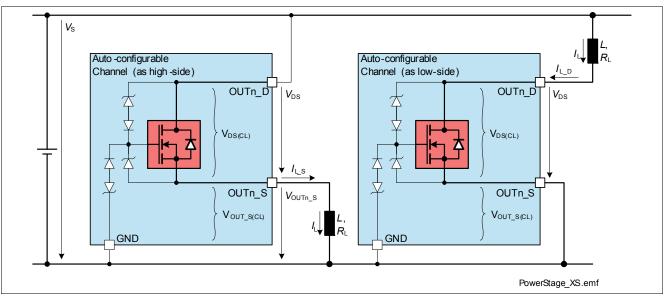


Figure 17 **Output Clamp concept**

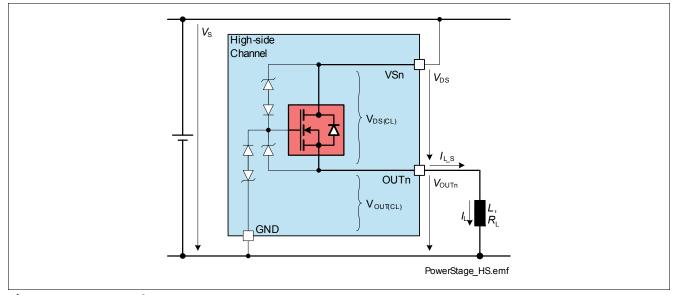


Figure 18 **Output Clamp concept**

Power Stages



7.1.3 Maximum Load Inductance

During demagnetization of inductive loads, energy has to be dissipated in the TLE75620-EST. **Equation (7.1)** and **Equation (7.2)** can be used for high-side switches (auto-configurable switches can use all equations, depending on the load position):

$$E = (V_S - V_{OUTS(CL)}) \cdot \left[\frac{V_{OUTS(CL)}}{R_L} \cdot \ln \left(1 - \frac{R_L \cdot I_L}{V_{OUTS(CL)}} \right) + I_L \right] \cdot \frac{L}{R_L}$$
(7.1)

$$E = (V_{S} - V_{OUT(CL)}) \cdot \left[\frac{V_{OUT(CL)}}{R_{L}} \cdot ln \left(1 - \frac{R_{L} \cdot I_{L}}{V_{OUT(CL)}} \right) + I_{L} \right] \cdot \frac{L}{R_{L}}$$
(7.2)

The maximum energy, which is converted into heat, is limited by the thermal design of the component. The E_{AR} value provided in **Table 2** assumes that all channels can dissipate the same energy when the inductances connected to the outputs are demagnetized at the same time.

7.2 Inverse Current Behavior

During inverse current $(V_{\text{OUTn_S}} > V_{\text{OUTn_D}})$ in high-side configuration or $(V_{\text{OUTn}} > V_{\text{Sn}})$ the affected channels stays in ON- or in OFF- state. Furthermore, during applied inverse currents the **ERRn** bit can be set if the channel is in ON-state and the over temperature threshold is reached.

The general functionality (switch ON and OFF, protection, diagnostic) of unaffected channels is not influenced by inverse currents applied to other channels. Parameter deviations are possible especially for the following ones (Over Temperature protection is not influenced):

- Switching capability: t_{ON} , t_{OFF} , dV/dt_{ON} , $-dV/dt_{OFF}$
- Protection: I_{L(OVL0)}, I_{L(OVL1)}
- Diagnostic: V_{DS(OL)}, V_{OUT_S(OL)}, I_{L(OL)}

Reliability in Limp Home condition for the unaffected channels is unchanged.

Note:

No protection mechanism like temperature protection or over load protection is active during applied inverse currents. Inverse currents cause power losses inside the DMOS, which increase the overall device temperature. This could lead to a switch OFF of unaffected channels due to Over Temperature

7.3 Switching Channels in parallel

In case of appearance of a short circuit with channels in parallel, it may happen that the two channels switch OFF asynchronously, therefore bringing an additional thermal stress to the channel that switches OFF last. In order to avoid this condition, it is possible to parametrize in the SPI registers the parallel operation of two neighbour channels (bits HWCR.PAR). When operating in this mode, the fastest channel to react to an Over Load or Over Temperature condition will deactivate also the other. The inductive energy that two channels can handle once set in parallel is lower than twice the single channel energy (see P_7.6.11). It is possible to synchronize the following couples of channels:

- channel 0 and channel 2 → HWCR.PAR (0) set to "1"
- channel 1 and channel 3 → HWCR.PAR (1) set to "1"
- channel 4 and channel 6 → HWCR.PAR (2) set to "1"
- channel 5 and channel 7 → HWCR.PAR (3) set to "1"



Power Stages

The synchronization bits influence only how the channels react to Over Load or Over Temperature conditions. Synchronized channels have to be switched ON and OFF individually by the micro-controller.

7.4 "Bulb Inrush Mode" (BIM)

Although TLE75620-EST is optimized for relays and LED, it may be necessary to use one or more of the outputs as high-side switches to drive small lamps (typically 2 W) or electronic loads with a big input capacitor. In such operative conditions, at the switch ON an inrush current may appear, reaching the overload current threshold which latches the channel OFF (see **Chapter 8.1** for further details). In normal operation the device waits until the microcontroller sends an SPI command to clear the latches (register **HWCR_OCL**) allowing the channel to turn ON again. Usually this delay is too long to transfer enough energy to the load.

If the corresponding bit **BIM.OUTn** is set to "1", in case the channel reaches the overload current threshold or the overtemperature threshold and latches OFF, it restarts automatically after a time t_{INRUSH} , allowing the load to go out of the inrush phase. A time diagram is shown in **Figure 19**. As shown, the counter starts when the channel is switched ON. Every channel switch OFF (independently from the entity controlling the channel - see **Figure 20** for further details) resets the bit **BIM.OUTn** to "0".

While BIM.OUTn bits are set to "1", ERRn bits may be also set to "1" but this doesn't latch the channel OFF.

An internal timer set the bit **BIM.OUTn** back to "0" after 40 ms (parameter t_{BIM}) to prevent an excessive thermal stress to the channel, especially in case of short circuit at the output.

TLE75620-EST allows a per-channel selection of Bulb Inrush Mode (BIM) in order to be fully flexible without any additional reliability risk.

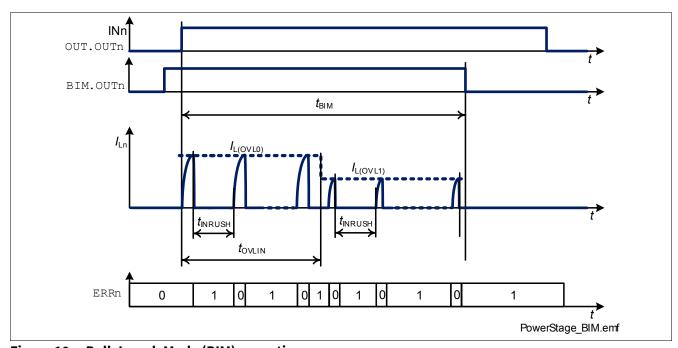


Figure 19 Bulb Inrush Mode (BIM) operation

7.5 Automatic PWM Generator

The TLE75620-EST has two independent automatic PWM generator implemented. Each PWM generator can be assigned to one or more channels, and can be programmed with a different duty cycle and frequency.

Both PWM generator refer to a base frequency f_{INT} generated by an internal oscillator. This base frequency can be adjusted using **HWCR_PWM.ADJ** bits as described in **Table 9**.

infineon

Power Stages

Table 9 HWCR_PWM.ADJ coefficients overview

bit content	absolute delta to $f_{\rm INT}$	relative delta between steps
0000 _B	(reserved)	(reserved)
0001 _B	-37.2%	-5.2%
0010 _B	-31.9%	-5.1%
0011 _B	-26.9%	-5.9%
0100 _B	-21.0%	-5.5%
0101 _B	-15.5%	-4.6%
0110 _B	-10.9%	-5.1%
0111 _B	-5.8%	-5.8%
1000 _B	-	_
1001 _B	+4.3%	+4.3%
1010 _B	+8.9%	+4.6%
1011 _B	+14.0%	+5.1%
1100 _B	+19.5%	+5.6%
1101 _B	+25.6%	+6.1%
1110 _B	+32.4%	+6.8%
1111 _B	+40.0%	+7.6%

For each PWM generator 4 parameters can be set:

- duty cycle (bits PWM_CR0.DC for PWM Generator 0)
 - 8 bits are available to achieve 0.39% duty cycle resolution
 - when the micro-controller programs a new duty cycle, the PWM generator waits until the previous cycle is completed before using the new duty cycle (this happens also when the duty cycle is either 0% or 100% the new duty cycle is taken with the next PWM cycle)
 - the maximum duty cycle achievable is 99.61% (PWM_CR0.DC set to "111111111_B"). It is possible to achieve 100% by setting PWM_CR0.FREQ to "11_B"
- frequency (bits PWM_CR0.FREQ for PWM Generator 0)
 - with 2 bits is possible to select the divider for f_{INT} to achieve the needed duty cycle
 - 00_B = f_{INT} / 1024 (when f_{INT} = 102.4 kHz the corresponding PWM frequency is 100 Hz)
 - $01_B = f_{INT} / 512$ (corresponding to 200 Hz)
 - $-10_B = f_{INT} / 256$ (corresponding to 400 Hz)
- channel output control and mapping registers PWM_OUT and PWM_MAP)
 - any channel can be mapped to each PWM Generator
 - together with 2 parallel input it is possible to have 4 independent PWM groups of channels with low effort from the point of view of micro-controller resources and SPI data traffic

Figure 20 expands the concept shown in Figure 10 adding the PWM Generators.



Power Stages

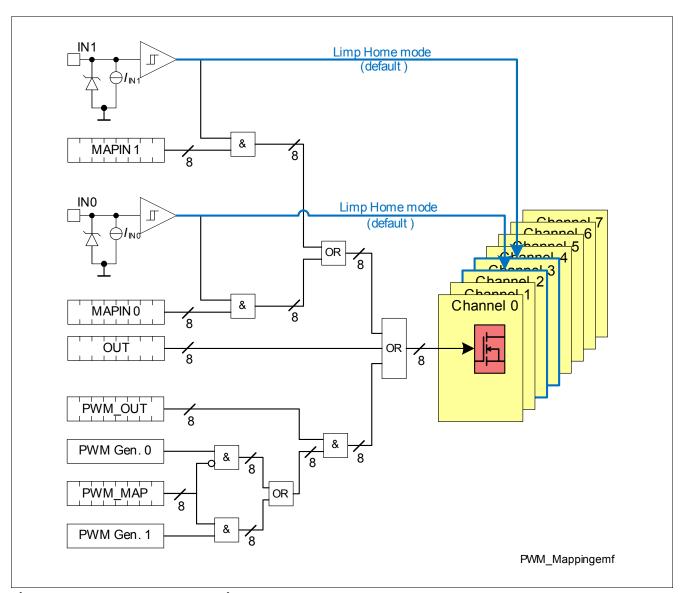


Figure 20 PWM Generator Mappings

39

Power Stages



7.6 Electrical Characteristics Power Stages

Table 10 Electrical Characteristics: Power Stage

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified) Typical values: $V_{\rm DD}$ = 5 V, $V_{\rm S}$ = 13.5 V, $T_{\rm J}$ = 25 °C

Parameter	Symbol		Value	S	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Output Characteristics							
On-State Resistance	R _{DS(ON)}	_	1.0	_	Ω	1)	P_7.6.1
						T _J = 25 °C	
On-State Resistance	$R_{\rm DS(ON)}$	-	1.8	2.2	Ω	T _J = 150 °C	P_7.6.2
				->->		$I_{\rm L} = I_{\rm L(EAR)} = 220 \text{ mA}$	
Nominal load current	$I_{L(NOM)}$	_	330	500 ²⁾³⁾	mA	1)	P_7.6.3
(all channels active)						$T_{\rm A} = 85 ^{\circ}{\rm C}$	
			0.00	E003/3/		T _J ≤ 150 °C	D 7 6 4
Nominal load current (all channels active)	$I_{L(NOM)}$	_	260	500 ²⁾³⁾	mA		P_7.6.4
(all chainless active)						$T_A = 105 ^{\circ}\text{C}$ $T_J \le 150 ^{\circ}\text{C}$	
Nominal load current	1		470	500 ²⁾³⁾	mA	1)	P_7.6.5
(half of channels active)	I _{L(NOM)}		470	300	111/	T _A = 85 °C	1_1.0.5
,						T _J ≤ 150 °C	
Load current for maximum	I _{L(EAR)}	_	220	_	mA	1)	P_7.6.8
energy dissipation -	2(2/111)					T _A = 85 °C	
repetitive						<i>T</i> _J ≤ 150 °C	
(all channels active)							
Inverse current capability	-/ _{L(IC)}	_	_	$I_{L(EAR)}$	mA	1)	P_7.6.9
per channel (in High-Side						No influences on	
operation)						switching functionality of	
						unaffected	
						channels -	
						parameter	
						deviations	
						possible	
Maximum energy	E_{AR}	_	_	15	mJ	1)	P_7.6.11
dissipation repetitive pulses - 2*I _{L(EAR)}						$T_{J(0)} = 85 ^{\circ}\text{C}$	
(two channels in parallel)						$I_{L(0)} = 2*I_{L(EAR)}$ 2*10 ⁶ cycles	
(sile on a mile in paramet)						HWCR.PAR = "1"	
						for affected	
						channels	



Power Stages

Table 10 Electrical Characteristics: Power Stage (cont'd)

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified) Typical values: $V_{\rm DD}$ = 5 V, $V_{\rm S}$ = 13.5 V, $T_{\rm J}$ = 25 °C

Parameter	Symbol		Value	S	Unit	nit Note or	Number
		Min.	Тур.	Max.		Test Condition	
Power stage voltage drop at low battery Auto-configurable channels	$V_{\mathrm{DS(OP)}}$	_	_	1	V	$R_{L} = 50 \Omega$ connected to V_{S} or ground $V_{S} = V_{S(OP),max}$ $V_{Dn} = V_{S(OP),max}$ refer to Figure 17	P_7.6.13
Power stage voltage drop at low battery High-side channels	$V_{\mathrm{DS(OP)}}$	_	_	1	V	$R_{L} = 50 \Omega$ $V_{S} = V_{S(OP),max}$ refer to Figure 18	P_7.6.15
Drain to Source Output clamping voltage	$V_{DS(CL)}$	42	46	55	V	I_L = 20 mA for High-Side Configuration V_S = V_{OUT_Dn} = 36 V	P_7.6.16
Source to Ground Output clamping voltage Auto-configurable channels	V _{OUT_S(CL)}	-25	-	-16	V	I _L = 20 mA	P_7.6.17
Source to Ground Output clamping voltage High-side channels	V _{OUT(CL)}	-25	-	-16	V	I _L = 20 mA	P_7.6.18
Output leakage current (each channel) T _J ≤ 85 °C (Auto-configurable and High-Side channels)	I _{L(OFF)}	-	0.01	0.5	μΑ	$V_{IN} = 0 \text{ V or floating}$ $V_{DS} = 28 \text{ V}$ $V_{OUT_S} = 1.5 \text{ V}$ OUT.OUTn = 0 $T_J \le 85 \text{ °C}$	P_7.6.47
Output leakage current (each channel) $T_J = 150 ^{\circ}\text{C}$ (Auto-configurable and High-Side channels)	I _{L(OFF)}	_	0.1	5	μА	$V_{IN} = 0 \text{ V or floating}$ $V_{DS} = 28 \text{ V}$ $V_{OUT_S} = 1.5 \text{ V}$ OUT.OUTn = 0 $T_{J} = 150 \text{ °C}$	P_7.6.49
Timings					1		
Turn-ON delay (from INn pin or bit to $V_{\rm OUT}$ = 90% $V_{\rm S}$) (auto-configurable channels used as Low-Side switches)	t _{DELAY(ON)}	1	4	8	μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.28



Power Stages

Electrical Characteristics: Power Stage (cont'd) Table 10

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified) Typical values: $V_{\rm DD}$ = 5 V, $V_{\rm S}$ = 13.5 V, $T_{\rm J}$ = 25 °C

Parameter	Symbol		Value	s	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Turn-OFF delay (from INn pin or bit to $V_{\text{OUT}} = 10\% V_{\text{S}}$) (auto-configurable channels used as Low-Side switches)	t _{DELAY(OFF)}	1	6	12	μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.29
Turn-ON time (from INn pin or bit to $V_{\rm OUT}$ = 10% $V_{\rm S}$) (auto-configurable channel used as Low-Side switches)	t _{ON}	6	15	35	μs	$R_{L} = 50 \Omega$ $V_{S} = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.30
Turn-OFF time (from INn pin or bit to $V_{\text{OUT}} = 90\% V_{\text{S}}$) (auto-configurable channel used as Low-Side switches)	t _{OFF}	6	15	35	μs	$R_L = 50 \Omega$ $V_S = 13.5 V$ Active mode or Limp Home mode	P_7.6.31
Turn-ON/OFF matching (auto-configurable channel used as Low-Side switches)	t _{ON} - t _{OFF}	-10	0	10	μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.32
Turn-ON slew rate V _{DS} = 70% to 30% V _S (auto-configurable channel used as Low-Side switches)	dV/dt _{ON}	0.7	1.3	1.9	V/µs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.33
Turn-OFF slew rate V _{DS} = 30% to 70% V _S (auto-configurable channels used as Low-Side switches)	-dV/dt _{OFF}	0.7	1.3	1.9	V/μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.34
Turn-ON delay (from INn pin or bit to $V_{\text{OUT}} = 10\% V_{\text{S}}$) (Auto-configurable channels used as High-Side and High- Side switches)	$t_{ m DELAY(ON)}$	1	4	8	μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.35
Turn-OFF delay (from INn pin or bit to $V_{\rm OUT}$ = 90% $V_{\rm S}$) (Auto-configurable channels used as High-Side and High- Side switches)	t _{DELAY(OFF)}	1	6	12	μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.36



Power Stages

Table 10 Electrical Characteristics: Power Stage (cont'd)

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified) Typical values: $V_{\rm DD}$ = 5 V, $V_{\rm S}$ = 13.5 V, $T_{\rm J}$ = 25 °C

Parameter	Symbol		Values			Note or	Number
		Min.	Тур.	Max.		Test Condition	
Turn-ON time (from INn pin or bit to $V_{\rm OUT}$ = 90% $V_{\rm S}$) (Auto-configurable channels used as High-Side and High-Side switches)	t _{ON}	6	15	35	μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.37
Turn-OFF time (from INn pin or bit to $V_{\rm OUT}$ = $10\%V_{\rm S}$) (Auto-configurable channels used as High-Side and High-Side switches)	t _{OFF}	6	15	35	μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.38
Turn-ON/OFF matching (Auto-configurable used as High-Side and High-Side switches)	t _{ON} - t _{OFF}	-10	0	10	μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.39
Turn-ON slew rate $V_{\rm DS}$ = 30% to 70% $V_{\rm S}$ (Auto-configurable used as High-Side and High-Side switches)	dV/dt _{ON}	0.7	1.3	1.9	V/μs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.40
Turn-OFF slew rate V_{DS} = 70% to 30% V_{S} (Auto-configurable used as High-Side and High-Side switches)	-dV/dt _{OFF}	0.7	1.3	1.9	V/µs	$R_L = 50 \Omega$ $V_S = 13.5 \text{ V}$ Active mode or Limp Home mode	P_7.6.41
Bulb Inrush Mode restart time	t _{INRUSH}	-	-	40	μs	1) Active mode	P_7.6.42
Bulb Inrush Mode reset time	$t_{\sf BIM}$	-	40	_	ms	1) Active mode	P_7.6.43
PWM Generator							
Internal reference frequency	f_{INT}	80	102	125	kHz	HWCR_PWM.ADJ = 1000 _B	P_7.6.44
Internal reference frequency variation	$f_{INT(VAR)}$	-15	-	15	%	1)	P_7.6.56
Internal reference frequency synchronization time	t _{SYNC}	-	5	10	μs	HWCR_PWM.ADJ = 1000 _B	P_7.6.45

- 1) Not subject to production test specified by design
- 2) If one channel has $I_{L(NOM),max}$ applied, the remaining channels must be underloaded accordingly so that $T_J < 150^{\circ}$ C
- 3) $I_{L(NOM),max}$ can reach $I_{L(OVL1),min}$

Protection Functions



8 Protection Functions

8.1 Over Load Protection

The TLE75620-EST is protected in case of over load or short circuit of the load. There are two over load current thresholds (see **Figure 21**):

- $I_{L(OVLO)}$ between channel switch ON and t_{OVLIN}
- I_{L(OVL1)} after t_{OVLIN}

Every time the channel is switched OFF for a time longer than 2 * t_{SYNC} the over load current threshold is set back to $I_{L(OVL0)}$.

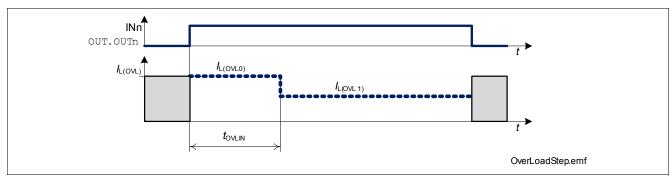


Figure 21 Over Load current thresholds

In case the load current is higher than $I_{L(OVL0)}$ or $I_{L(OVL1)}$, after time $t_{OFF(OVL)}$ the over loaded channel is switched OFF and the according diagnosis bit **ERRn** is set. The channel can be switched ON after clearing the protection latch by setting the corresponding **HWCR_OCL.OUTn** bit to "1". This bit is set back to "0" internally after delatching the channel. Please refer to **Figure 22** for details.

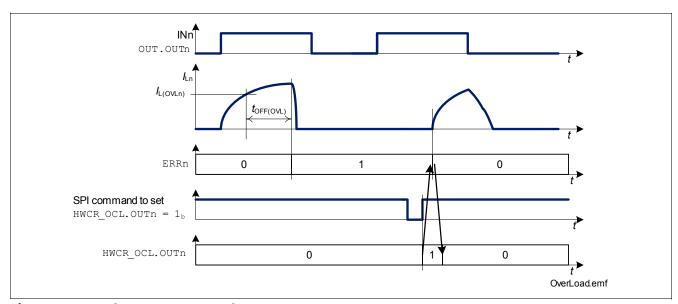


Figure 22 Latch OFF at Over Load

8.2 Over Temperature Protection

A temperature sensor is integrated for each channel, causing an overheated channel to switch OFF to prevent destruction. The according diagnosis bit **ERRn** is set (combined with Over Load protection). The channel can



Protection Functions

be switched ON after clearing the protection latch by setting the corresponding **HWCR_OCL.OUTn** bit to "1". This bit is set back to "0" internally after de-latching the channel.

8.3 Over Temperature and Over Load Protection in Limp Home mode

When TLE75620-EST is in Limp Home mode, channels 2 and 3 can be switched ON using the input pins. In case of Over Load, Short Circuit or Over Temperature the channels switch OFF. If the input pins remain "high", the channels restart with the following timings:

- 10 ms (first 8 retries)
- 20 ms (following 8 retries)
- 40 ms (following 8 retries)
- 80 ms (as long as the input pin remains "high" and the error is still present)

If at any time the input pin is set to "low" for longer than 2^*t_{SYNC} , the restart timer is reset. At the next channel activation while in Limp Home mode the timer starts from 10 ms again. See **Figure 23** for details. Over Load current thresholds behave as described in **Chapter 8.1**.

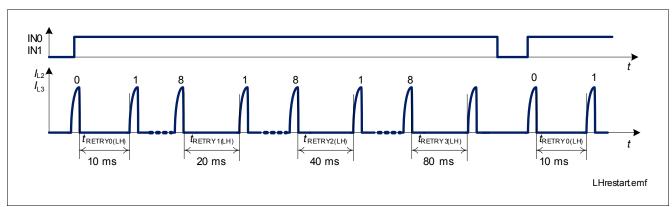


Figure 23 Restart timer in Limp Home mode

8.4 Reverse Polarity Protection

In Reverse Polarity (also known as Reverse Battery) condition, power dissipation is caused by the intrinsic body diode of each DMOS channel (for auto-configurable channels used as Low-Side switches), while High-Side channels and auto-configurable channels used as High-Side switches have ReversaveTM functionality. Each ESD diode of the logic and supply pins contributes to total power dissipation. Channels with ReversaveTM functionality are switched ON almost with the same $R_{DS(ON)}$ (see parameter $R_{DS(REV)}$). The reverse current through the channels has to be limited by the connected loads. The current through digital power supply V_{DD} and input pins has to be limited as well (please refer to the Absolute Maximum Ratings listed on Chapter 4.1).

Note: No protection mechanism like temperature protection or current limitation is active during reverse polarity.

8.5 Over Voltage Protection

In the case of supply voltages between $V_{S(SC)}$ and $V_{S(LD)}$ the output transistors are still operational and follow the input pins or the **OUT** register.

In addition to the output clamp for inductive loads as described in **Chapter 7.1.2**, there is a clamp mechanism available for over voltage protection for the logic and all channels, monitoring the voltage between VS and GND pins $(V_{S(AZ)})$.

infineon

Protection Functions

8.6 Electrical Characteristics Protection

Table 11 Electrical Characteristics Protection

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified)

Typical values: $V_{\rm DD}$ = 5 V, $V_{\rm S}$ = 13.5 V, $T_{\rm J}$ = 25 °C

Parameter	Symbol		Value	S	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Over Load				<u> </u>			
Over Load detection current	I _{L(OVL0)}	1.3	1.7	2.3	Α	T _J = -40 °C	P_8.8.19
Over Load detection current	I _{L(OVL0)}	1.25	1.55	2.3	А	1) T _J = 25 °C	P_8.8.20
Over Load detection current	I _{L(OVL0)}	1	1.45	2	Α	T _J = 150 °C	P_8.8.21
Over Load detection current	I _{L(OVL1)}	0.7	0.95	1.3	Α	T _J = -40 °C	P_8.8.22
Over Load detection current	I _{L(OVL1)}	0.65	0.85	1.3	A	1) T _J = 25 °C	P_8.8.23
Over Load detection current	I _{L(OVL1)}	0.5	0.8	1.25	Α	T _J = 150 °C	P_8.8.24
Over Load threshold switch delay time	t _{OVLIN}	110	170	260	μs	1)	P_8.8.5
Over Load shut-down delay time	t _{OFF(OVL)}	4	7	11	μs	BIM.OUTn=HWCR .PAR=0 _B	P_8.8.26
Over Temperature and Ove	r Voltage	-					
Thermal shut-down temperature	$T_{J(SC)}$	150	175 ¹⁾	220 ¹⁾	°C		P_8.8.7
Over voltage protection	$V_{S(AZ)}$	42	50	60	V	I _{VS} = 10 mA Sleep mode	P_8.8.8
Reverse Polarity	1			- "	<u> </u>		
Drain Source diode during reverse polarity (auto-configurable channels used as Low-Side switches)	$V_{DS(REV)}$	-	800	-	mV	$I_L = -10 \text{ mA}$ $T_J = 25 \text{ °C}$ Sleep mode	P_8.8.9
Drain Source diode during reverse polarity (auto-configurable channels used as Low-Side switches)	$V_{DS(REV)}$	-	650	-	mV	$I_L = -10 \text{ mA}$ $T_J = 150 \text{ °C}$ Sleep mode	P_8.8.10
On-State Resistance during Reverse Polarity (High-Side channels and auto-configurable channels used as High-Side switches)	R _{DS(REV)}	-	1.0	-	Ω	1) $V_{S} = -V_{S(REV)}$ $I_{L} = I_{L(EAR)}$ $T_{J} = 25 \text{ °C}$	P_8.8.11



Protection Functions

Table 11 Electrical Characteristics Protection (cont'd)

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified) Typical values: $V_{\rm DD}$ = 5 V, $V_{\rm S}$ = 13.5 V, $T_{\rm J}$ = 25 °C

Parameter	Symbol		Value	s	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
On-State Resistance during Reverse Polarity (High-Side channels and auto-configurable channels used as High-Side switches)	$R_{DS(REV)}$	-	1.8	-	Ω	$V_{S} = -V_{S(REV)}$ $I_{L} = I_{L(EAR)}$ $T_{J} = 150 \text{ °C}$	P_8.8.12
Timings	1			"	l .		
Restart time in Limp Home mode	$t_{RETRYO(LH)}$	7	10	13	ms	1)	P_8.8.13
Restart time in Limp Home mode	$t_{\text{RETRY1(LH)}}$	14	20	26	ms	1)	P_8.8.14
Restart time in Limp Home mode	$t_{RETRY2(LH)}$	28	40	52	ms	1)	P_8.8.15
Restart time in Limp Home mode	t _{RETRY3(LH)}	56	80	104	ms	1)	P_8.8.16

¹⁾ Not subject to production test - specified by design



9 Diagnosis

The SPI of TLE75620-EST provides diagnosis information about the device and the load status. Each channel diagnosis information is independent from other channels. An error condition on one channel has no influence on the diagnostic of other channels in the device (unless configured to work in parallel, see **Chapter 7.3** for more details).

9.1 Over Load and Over Temperature

When either an Over Load or an Over Temperature occurs on one channel, the diagnosis bit **ERRn** is set accordingly. As described in **Chapter 8.1** and **Chapter 8.2**, the channel latches OFF and must be reactivated setting corresponding **HWCR_OCL.OUTn** bit to "1".

9.2 Output Status Monitor

The device compares each channel $V_{\rm DS}$ with $V_{\rm DS(OL)}$ (auto-configurable channels used as Low-Side switches), $V_{\rm OUT_S}$ with $V_{\rm OUT_S(OL)}$ (auto-configurable channels used as High-Side), $V_{\rm OUT}$ with $V_{\rm OUT(OL)}$ (High-Side channels) and sets the corresponding **DIAG_OSM.OUTn** bits accordingly. The bits are updated every time **DIAG_OSM** register is read.

• $V_{\text{OUT_S}} > V_{\text{OUT_S(OL)}} \rightarrow \text{DIAG_OSM.OUTn} = "1" (auto-configurable channels as High-Side)$

A diagnosis current I_{OL} in parallel to the power switch can be enabled by programming the **DIAG_IOL.OUTn** bit, which can be used for Open Load at OFF detection. Each channel has its dedicated diagnosis current source. If the diagnosis current I_{OL} is enabled or if the channel changes state (ON \rightarrow OFF or OFF \rightarrow ON) it is necessary to wait a time t_{OSM} for a reliable diagnosis. Enabling I_{OL} current sources increases the current consumption of the device. Even if an Open Load is detected, the channel is not latched OFF.

See **Figure 24** for a timing overview (the values of **DIAG_IOL.OUTn** refer to a channel in normal operation properly connected to the load).

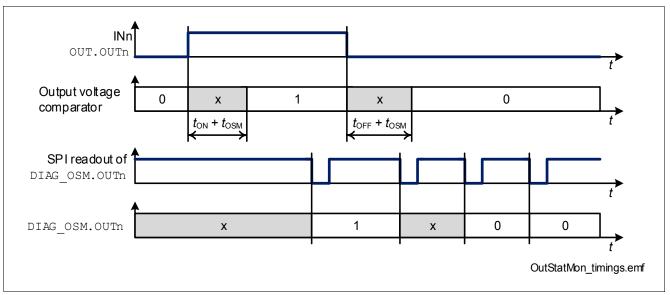


Figure 24 Output Status Monitor timing

Output Status Monitor diagnostic is available when $V_S = V_{S(NOR)}$ and $V_{DD} \ge V_{DD(UV)}$.



Due to the fact that Output Status Monitor checks the voltage level at the outputs in real time, for Open Load in OFF diagnostic it is necessary to synchronize the reading of **DIAG_OSM** register with the OFF state of the channels.

Figure 25, Figure 26 and Figure 27 shows how Output Status Monitor is implemented at concept level.

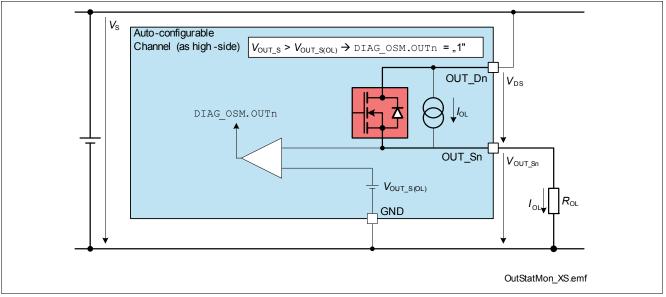


Figure 25 Output Status Monitor - concept (auto-configurable channel as High-Side)

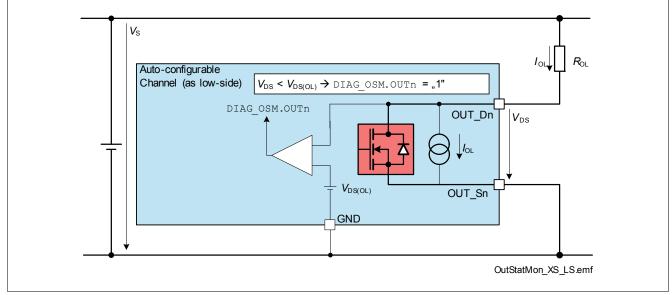


Figure 26 Output Status Monitor - concept (Auto-configurable channel as Low-Side)



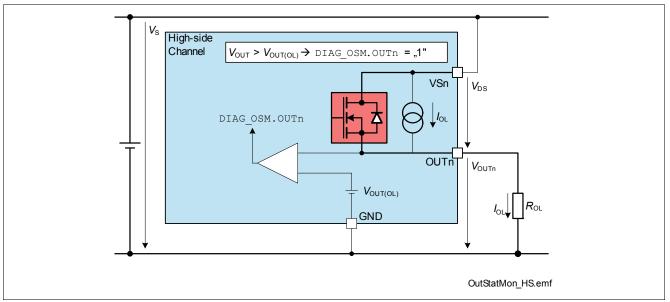


Figure 27 Output Status Monitor - concept (High-Side channels)

In Standard Diagnosis the bit **OLOFF** represents the OR combination of all **DIAG_OSM.OUTn** bits for all channels in OFF state which have the corresponding current source I_{OI} activated.

9.3 Open Load at ON

Each auto-configurable channel (when used as high-side switch) and each high-side channel has the possibility of Open Load at ON diagnosis, which can be controlled programming **DIAG_OLONEN.MUX** bits. By default after a reset Open Load at ON diagnosis is not active. The device compares I_{L_Sn} with $I_{L(OL)}$ and sets the **DIAG_OLON.OUTn** accordingly:

•
$$I_{L Sn} < I_{L(OL)} \rightarrow DIAG_OLON.OUTn = "1" if $V_{OUTn S} > V_{OUT S(OL)}$$$

9.3.1 Open Load at ON - direct channel diagnosis

When **DIAG_OLONEN.MUX** bits are programmed with a value corresponding to a channel $(0000_B \rightarrow 0111_B)$, the internal multiplexer checks for Open Load at ON condition on the selected channel. It is recommended that the channel is ON for at least t_{ON} before activating the diagnosis. After a time t_{OLONSET} the corresponding **DIAG_OLON.OUTn** bit for the selected channel is available. All the other bits in the **DIAG_OLON** register are set to default ("0_B"). The bits are updated every time the register is read.

When a channel is selected, the corresponding **DIAG_OLON.OUTn** bit content is mirrored also in the Standard Diagnosis (bit **OLON**). In case of several register readouts in sequence the register content is updated at every read request from micro-controller. See **Figure 28** for further details.



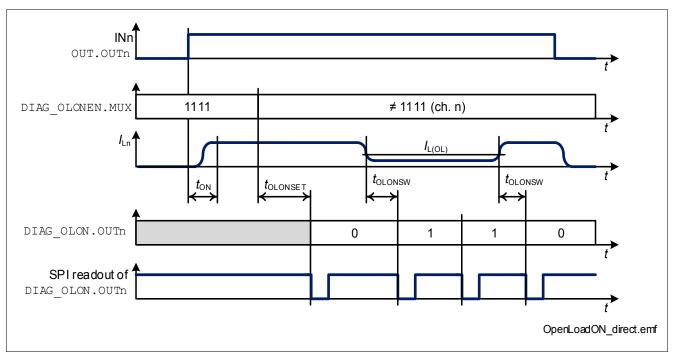


Figure 28 Open Load at ON timings (direct channels diagnosis)

9.3.2 Open Load at ON - diagnosis loop

When **DIAG_OLONEN.MUX** bits are programmed with the value 1010_B , the device starts a diagnosis loop where all auto-configurable (when used as high-side switches) and high-side channels are checked for Open Load at ON. The internal multiplexer is controlled by the internal logic, therefore there is no need for the micro-controller to send any additional command.

First the internal logic checks all channels which are directly driven by the micro-controller and not configured to be driven by the internal PWM generator, then the internal logic checks all channels which are configured to be driven by the internal PWM generator.

- Diagnosis sequence for channels driven directly by the micro-controller
 - First channel checked: channel 0. It is recommended that the channels are ON at least $t_{\rm ON}$ before activating the diagnosis loop.
 - After a time $t_{OLONSET} + t_{SYNC}$ the diagnosis for the first channel is completed (**DIAG_OLON.OUTn** bit is updated)
 - The internal multiplexer is set to the next channel. After a time $t_{\text{OLONSW}} + t_{\text{SYNC}}$ the diagnosis is completed (**DIAG_OLON.OUTn** bit is updated) for the currently selected channel. This step is repeated for all remaining directly driven channels.
 - If one channel is OFF when the diagnosis is performed, the corresponding DIAG_OLON.OUTn is set to "0_R"
- Diagnosis sequence for channels driven by the internal PWM Generators (see Chapter 7.5)
 - These channels are diagnosed only after all channels directly driven by micro-controller are checked
 - Channels mapped to PWM Generator 0 are diagnosed first
 - After a time t_{OLONSET} the channel activation (switch ON) is the trigger event to perform Open Load at ON diagnosis for the first channel
 - After a time $t_{\text{ONMAX}} + t_{\text{OLONSW}}$ the diagnosis for the first channel is completed (**DIAG_OLON.OUTn** bit is updated)



- The internal multiplexer is set to the next channel. After a time t_{OLONSW} the diagnosis is completed (DIAG_OLON.OUTn bit is updated) for the currently selected channel. This step is repeated for all remaining PWM generator driven channels.
 - If the channel is in OFF state during the PWM period, the internal logic waits for the ON state to perform the diagnosis. After a time $t_{\text{ONMAX}} + t_{\text{OLONSW}}$ the diagnosis for that channel is completed.
- The minimum ON time for a reliable diagnosis is $> t_{\rm ONMAX} + t_{\rm OLONSW}$. If the ON time is $< t_{\rm ONMAX} + t_{\rm OLONSW}$ the corresponding **DIAG_OLON.OUTn** is set to "0_B".

When the loop finishes, $DIAG_OLONEN.MUX$ bits are set back to 1111_B (default value) and $DIAG_OLON.OUTn$ bits store the last diagnosis loop result. It is necessary to start another diagnosis loop to update the register content.

Figure 29 shows the timing in case of channels driven directly by micro-controller, while **Figure 30** represents the case with channels driven by internal PWM Generators.

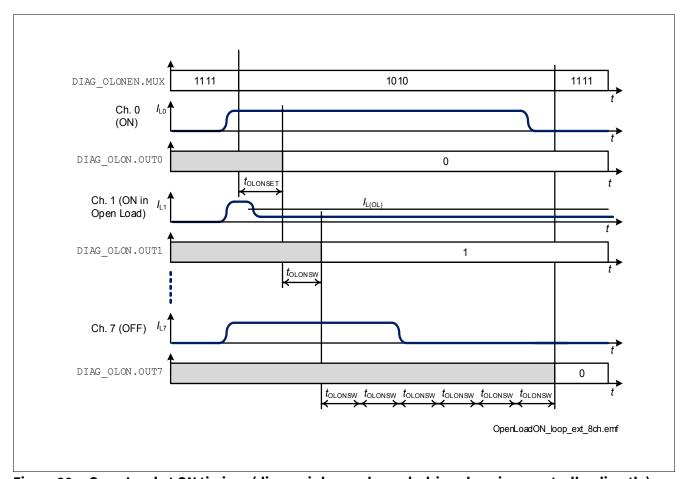


Figure 29 Open Load at ON timings (diagnosis loop - channels driven by micro-controller directly)



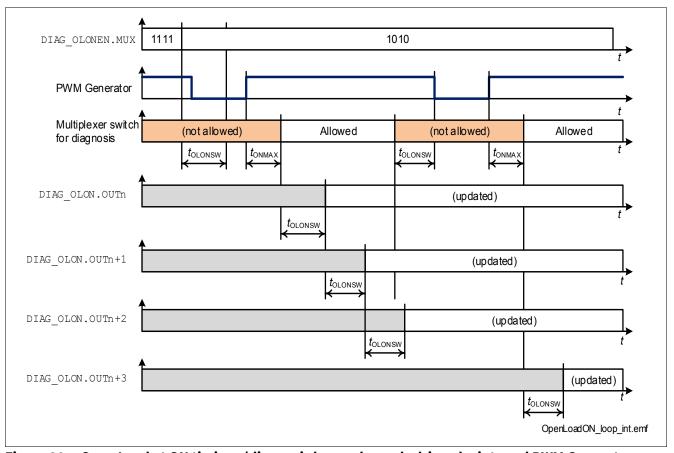


Figure 30 Open Load at ON timings (diagnosis loop - channels driven by internal PWM Generators

9.3.3 **OLON** bit

The **OLON** bit can assume the following values:

- "0" = no Open Load at ON state detected, or the channel is OFF when the diagnosis is performed
- "1" = Open Load at ON state detected

According to the setting of **DIAG_OLONEN.MUX** different information are reported in the Standard Diagnosis.

- **DIAG_OLONEN.MUX** set to $0000_B \rightarrow 0111_B$: The **OLON** bit shows the Open Load at ON state diagnosis performed on the selected channel. The information is updated at every Standard Diagnosis readout.
- DIAG_OLONEN.MUX set to 1010_B: the OLON bit shows the "OR" combination of all bits in DIAG_OLON register. The information is updated while the diagnosis loop is running.
- **DIAG_OLONEN.MUX** set to 1111_B: the **OLON** bit shows the result of the latest diagnosis loop performed. It is necessary to start another diagnosis loop to update the information.
- **DIAG_OLONEN.MUX** set to any other value: The **OLON** bit is set to "0". These values of **DIAG_OLONEN.MUX** bits are reserved and should not be used in the application.



Electrical Characteristics Diagnosis 9.4

Table 12 **Electrical Characteristics Diagnosis**

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified)

Typical values: $V_{\rm DD}$ = 5 V, $V_{\rm S}$ = 13.5 V, $T_{\rm J}$ = 25 °C

Parameter	Symbol		Value	S	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Output Status Monitor			<u> </u>				
Output Status Monitor comparator settling time	t _{OSM}	_	-	20	μs	1)	P_9.5.1
Output Status Monitor threshold voltage (auto-configurable channels used as Low-Side switches)	$V_{\mathrm{DS(OL)}}$	3	3.3	3.6	V		P_9.5.2
Output Status Monitor threshold voltage (High-Side channels)	V _{OUT(OL)}	3	3.3	3.6	V	2)	P_9.5.3
Output Status Monitor threshold voltage (auto-configurable channels used as High-Side switches)	V _{OUT_S(OL)}	3	3.3	3.6	V	3)	P_9.5.4
Output diagnosis current	I _{OL}	70	85	100	μΑ	V_{DS} = 3.3 V (auto-configurable channels used as Low-Side switches) V_{OUT} = 3.3 V (High- Side channels) V_{OUT_S} = 3.3 V (auto-configurable channels used as High-Side switches)	P_9.5.5
Open Load equivalent resistance	R _{OL}	30	_	300	kΩ	1)	P_9.5.6
Open Load at ON							
Open Load at ON Diagnosis waiting time before mux activation	t _{ONMAX}	40	58	76	μs	1)	P_9.5.7
Open Load at ON Diagnosis settling time	t _{OLONSET}	-	20	40	μs	1)	P_9.5.8
Open Load at ON Diagnosis channel switching time	t _{OLONSW}	-	10	20	μs	1)	P_9.5.9



Diagnosis

Electrical Characteristics Diagnosis (cont'd) Table 12

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified) Typical values: $V_{DD} = 5 \text{ V}$, $V_{S} = 13.5 \text{ V}$, $T_{J} = 25 \text{ °C}$

Parameter	Symbol	ymbol Values			Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Open Load detection threshold current	I _{L(OL)}	1	3	6	mA	T _J = -40 °C	P_9.5.10
Open Load detection threshold current	I _{L(OL)}	-	3	-	mA	1) T _J = 25 °C	P_9.5.11
Open Load detection threshold current	I _{L(OL)}	1	3	6	mA	T _J = 150 °C	P_9.5.12

- 1) Not subject to production test specified by design
- 2) Output status detection voltages are referenced to ground (GND pin)
- 3) Output status detection voltages are referenced to ground (GND pin)



10 Serial Peripheral Interface (SPI)

The serial peripheral interface (SPI) is a full duplex synchronous serial slave interface, which uses four lines: SO, SI, SCLK and CSN. Data is transferred by the lines SI and SO at the rate given by SCLK. The falling edge of CSN indicates the beginning of an access. Data is sampled in on line SI at the falling edge of SCLK and shifted out on line SO at the rising edge of SCLK. Each access must be terminated by a rising edge of CSN. A modulo 8/16 counter ensures that data is taken only when a multiple of 8 bit has been transferred after the first 16 bits. Otherwise a TER bit is asserted. In this way the interface provides daisy chain capability with 16 bit as well as with 8 bit SPI devices.

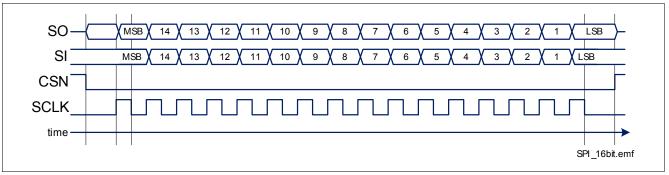


Figure 31 Serial Peripheral Interface

10.1 SPI Signal Description

CSN - Chip Select

The system microcontroller selects the TLE75620-EST by means of the CSN pin. Whenever the pin is in "low" state, data transfer can take place. When CSN is in "high" state, any signals at the SCLK and SI pins are ignored and SO is forced into a high impedance state.

CSN "high" to "low" Transition

- The requested information is transferred into the shift register.
- SO changes from high impedance state to "high" or "low" state depending on the logic OR combination between the transmission error flag (TER) and the signal level at pin SI. This allows to detect a faulty transmission even in daisy chain configuration.
- If the device is in Sleep mode, SO pin remains in high impedance state and no SPI transmission occurs.

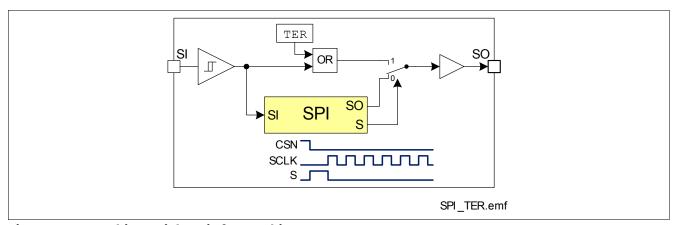


Figure 32 Combinatorial Logic for TER bit



CSN "low" to "high" Transition

- Command decoding is only done, when after the falling edge of CSN exactly a multiple (1, 2, 3, ...) of eight SCLK signals have been detected after the first 16 SCLK pulses. In case of faulty transmission, the transmission error bit (TER) is set and the command is ignored.
- Data from shift register is transferred into the addressed register.

SCLK - Serial Clock

This input pin clocks the internal shift register. The serial input (SI) transfers data into the shift register on the falling edge of SCLK while the serial output (SO) shifts diagnostic information out on the rising edge of the serial clock. It is essential that the SCLK pin is in "low" state whenever chip select CSN makes any transition, otherwise the command may be not accepted.

SI - Serial Input

Serial input data bits are shift-in at this pin, the most significant bit first. SI information is read on the falling edge of SCLK. The input data consists of two parts, control bits followed by data bits. Please refer to **Chapter 10.5** for further information.

SO Serial Output

Data is shifted out serially at this pin, the most significant bit first. SO is in high impedance state until the CSN pin goes to "low" state. New data appears at the SO pin following the rising edge of SCLK.

Please refer to **Chapter 10.5** for further information.

10.2 Daisy Chain Capability

The SPI of TLE75620-EST provides daisy chain capability. In this configuration several devices are activated by the same CSN signal MCSN. The SI line of one device is connected with the SO line of another device (see **Figure 33**), in order to build a chain. The end of the chain is connected to the output and input of the master device, MO and MI respectively. The master device provides the master clock MCLK which is connected to the SCLK line of each device in the chain.


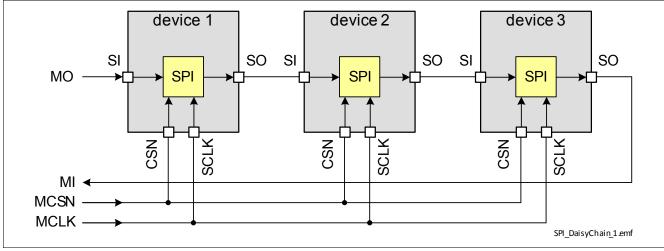


Figure 33 Daisy Chain Configuration

In the SPI block of each device, there is one shift register where each bit from SI line is shifted in each SCLK. The bit shifted out occurs at the SO pin. After sixteen SCLK cycles, the data transfer for one device is finished.



In single chip configuration, the CSN line must turn "high" to make the device acknowledge the transferred data. In daisy chain configuration, the data shifted out at device 1 has been shifted in to device 2. When using three devices in daisy chain, several multiples of 8 bits have to be shifted through the devices (depending on how many devices with 8 bit SPI and how many with 16 bit SPI). After that, the MCSN line must turn "high" (see Figure 34).

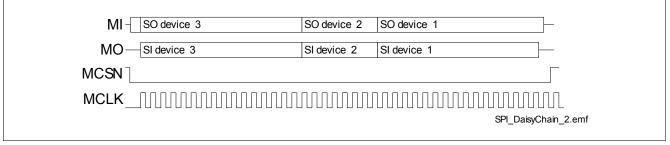

Data Transfer in Daisy Chain Configuration Figure 34

10.3 **Timing Diagrams**

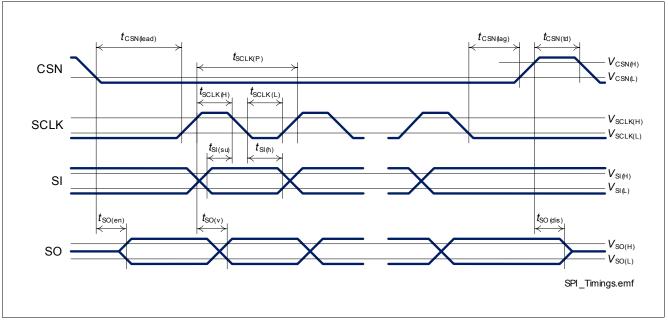


Figure 35 **Timing Diagram SPI Access**



10.4 Electrical Characteristics

 $V_{\rm DD}$ = 3 V to 5.5 V, $V_{\rm S}$ = 7 V to 18 V, $T_{\rm J}$ = -40 °C to +150 °C (unless otherwise specified) Typical values: $V_{\rm DD}$ = 5 V, $V_{\rm S}$ = 13.5 V, $T_{\rm J}$ = 25 °C

Table 13 Electrical Characteristics Serial Peripheral Interface (SPI)

Parameter	Symbol		Value	s	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Input Characteristics (CSN, SCLK	(, SI) - "lov	w" level o	f pin				•
CSN	V _{CSN(L)}	0	-	0.8	٧	_	P_10.4.1
SCLK	$V_{\rm SCLK(L)}$	0	-	0.8	V	_	P_10.4.2
SI	$V_{\rm SI(L)}$	0	-	0.8	V	_	P_10.4.3
Input Characteristics (CSN, SCLK		gh" level o	of pin				
CSN	V _{CSN(H)}	2	-	V_{DD}	V	_	P_10.4.4
SCLK	V _{SCLK(H)}	2	-	V_{DD}	٧	_	P_10.4.5
SI	V _{SI(H)}	2	_	V_{DD}	٧	_	P_10.4.6
Input Pull-Up Current at Pin CSN		1		<u>'</u>			
L-input pull-up current at CSN pin	-/ _{CSN(L)}	30	60	90	μΑ	$V_{DD} = 5 \text{ V}$ $V_{CSN} = 0.8 \text{ V}$	P_10.4.7
H-input pull-up current at CSN pin	-/ _{CSN(H)}	20	40	65	μΑ	$V_{\text{DD}} = 5 \text{ V}$ $V_{\text{CSN}} = 2 \text{ V}$	P_10.4.8
L-Input Pull-Down Current at Pin	1	1		<u>'</u>	,		
SCLK	I _{SCLK(L)}	5	12	20	μΑ	V _{SCLK} = 0.8 V	P_10.4.9
SI	I _{SI(L)}	5	12	20	μΑ	$V_{\rm SI} = 0.8 \rm V$	P_10.4.10
H-Input Pull-Down Current at Pi			1	- 1		·	
SCLK	I _{SCLK(H)}	14	28	45	μΑ	<i>V</i> _{SCLK} = 2 V	P_10.4.11
SI	I _{SI(H)}	14	28	45	μΑ	V _{SI} = 2 V	P_10.4.12
Output Characteristics (SO)		1		<u>'</u>	,		
L level output voltage	$V_{SO(L)}$	0	-	0.4	٧	$I_{SO} = -1.5 \text{ mA}$	P_10.4.13
H level output voltage	V _{SO(H)}	V _{DD} - 0.4	_	V_{DD}	V	I _{SO} = 1.5 mA	P_10.4.14
Output tristate leakage current	I _{SO(OFF)}	-1	-	1	μΑ	$V_{\text{CSN}} = V_{\text{DD}}$ $V_{\text{SO}} = 0 \text{ V}$	P_10.4.15
Output tristate leakage current	I _{SO(OFF)}	-1	_	1	μΑ	$V_{CSN} = V_{DD}$ $V_{SO} = V_{DD}$	P_10.4.16
Timings							
Enable lead time (falling CSN to rising SCLK)	t _{CSN(lead)}	200	_	_	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V	P_10.4.17
Enable lag time (falling SCLK to rising CSN)	t _{CSN(lag)}	200	-	-	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V	P_10.4.18



 Table 13
 Electrical Characteristics Serial Peripheral Interface (SPI) (cont'd)

Parameter	Symbol		Value	s	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Transfer delay time (rising CSN to falling CSN)	$t_{CSN(td)}$	250	-	-	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V	P_10.4.19
Output enable time (falling CSN to SO valid)	t _{SO(en)}	-	-	200	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V $C_{L} = 20 \text{ pF at SO}$ pin	P_10.4.20
Output disable time (rising CSN to SO tristate)	t _{SO(dis)}	-	-	200	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V $C_{L} = 20 \text{ pF at SO}$ pin	P_10.4.21
Serial clock frequency	$f_{\sf SCLK}$	_	-	5	MHz	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V	P_10.4.22
Serial clock period	t _{SCLK(P)}	200	-	-	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V	P_10.4.23
Serial clock "high" time	t _{SCLK(H)}	75	-	-	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V	P_10.4.24
Serial clock "low" time	t _{SCLK(L)}	75	-	-	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V	P_10.4.25
Data setup time (required time SI to falling SCLK)	$t_{SI(su)}$	20	-	-	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V	P_10.4.26
Data hold time (falling SCLK to SI)	t _{SI(h)}	20	-	-	ns	1) $V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V	P_10.4.27
Output data valid time with capacitive load	t _{SO(v)}	-	-	100	ns	$V_{DD} = 4.5 \text{ V or } V_{S}$ > 7 V $C_{L} = 20 \text{ pF at SO}$ pin	P_10.4.28
Enable lead time (falling CSN to rising SCLK)	$t_{CSN(lead)}$	1	-	_	μs	$V_{DD} = V_{S} = 3.0 \text{ V}$	P_10.4.29
Enable lag time (falling SCLK to rising CSN)	$t_{CSN(lag)}$	1	-	-	μs	$V_{\rm DD} = V_{\rm S} = 3.0 \rm V$	P_10.4.30
Transfer delay time (rising CSN to falling CSN)	t _{CSN(td)}	1.25	-	_	μs	$V_{\rm DD} = V_{\rm S} = 3.0 \rm V$	P_10.4.31



 Table 13
 Electrical Characteristics Serial Peripheral Interface (SPI) (cont'd)

Parameter	Symbol		Value	S	Unit	Note or	Number
		Min.	Тур.	Max.		Test Condition	
Output enable time (falling CSN to SO valid)	t _{SO(en)}	-	-	1	μs	$V_{\rm DD} = V_{\rm S} = 3.0 \text{ V}$ $C_{\rm L} = 20 \text{ pF at SO}$ pin	P_10.4.32
Output disable time (rising CSN to SO tristate)	t _{SO(dis)}	-	-	1	μs	$V_{\rm DD} = V_{\rm S} = 3.0 \text{ V}$ $C_{\rm L} = 20 \text{ pF at SO}$ pin	P_10.4.33
Serial clock frequency	$f_{\sf SCLK}$	-	-	1	MHz	$V_{DD} = V_{S} = 3.0 \text{ V}$	P_10.4.34
Serial clock period	$t_{SCLK(P)}$	1	-	-	μs	$V_{DD} = V_{S} = 3.0 \text{ V}$	P_10.4.35
Serial clock "high" time	$t_{\rm SCLK(H)}$	375	-	-	ns	$V_{DD} = V_{S} = 3.0 \text{ V}$	P_10.4.36
Serial clock "low" time	$t_{SCLK(L)}$	375	-	-	ns	$V_{DD} = V_{S} = 3.0 \text{ V}$	P_10.4.37
Data setup time (required time SI to falling SCLK)	t _{SI(su)}	100	-	-	ns	$V_{DD} = V_{S} = 3.0 \text{ V}$	P_10.4.38
Data hold time (falling SCLK to SI)	t _{SI(h)}	100	-	-	ns	$V_{DD} = V_{S} = 3.0 \text{ V}$	P_10.4.39
Output data valid time with capacitive load	t _{SO(v)}	-	-	500	ns	$V_{\rm DD} = V_{\rm S} = 3.0 \rm V$ $C_{\rm L} = 20 \rm pF at SO$ pin	P_10.4.40

¹⁾ Not subject to production test, specified by design



10.5 SPI Protocol

The relationship between SI and SO content during SPI communication is shown in **Figure 36**. SI line represents the frame sent from the μ C and SO line is the answer provided by TLE75620-EST.

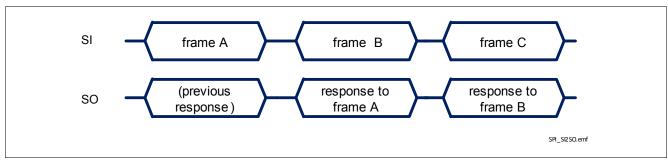


Figure 36 Relationship between SI and SO during SPI communication

The SPI protocol provides the answer to a command frame only with the next transmission triggered by the μ C. Although the biggest majority of commands and frames implemented in TLE75620-EST can be decoded without the knowledge of what happened before, it is advisable to consider what the μ C sent in the previous transmission to decode TLE75620-EST response frame completely.

More in detail, the sequence of commands to "read" and "write" the content of a register looks as follows:

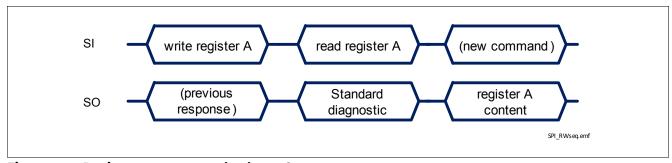


Figure 37 Register content sent back to μC

There are 3 special situations where the frame sent back to the μC is not related directly to the previous received frame:

- in case an error in transmission happened during the previous frame (for instance, the clock pulses were not multiple of 8 with a minimum of 16 bits), shown in **Figure 38**
- when TLE75620-EST logic supply comes out of Power-On reset condition or after a Software Reset, as shown in Figure 39
- in case of command syntax errors
 - "write" command starting with "11" instead of "10"
 - "read" command starting with "00" instead of "01"
 - "read" or "write" commands on registers which are "reserved" or "not used"



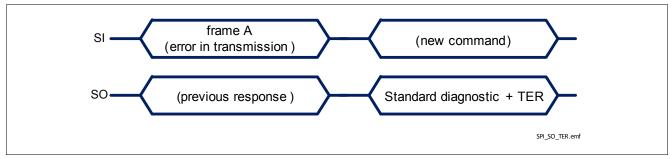


Figure 38 TLE75620-EST response after a error in transmission

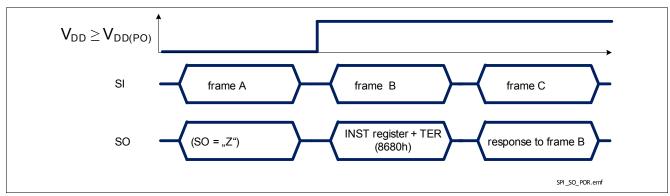


Figure 39 TLE75620-EST response after coming out of Power-On reset at $V_{\rm DD}$

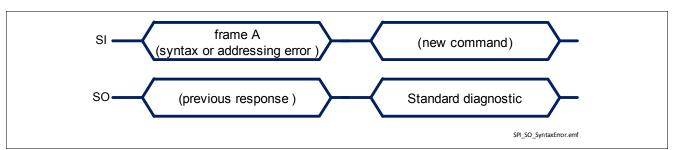


Figure 40 TLE75620-EST response after a command syntax error

A summary of all possible SPI commands is presented in **Table 14**, including the answer that TLE75620-EST sends back at the next transmission.

infineon

Serial Peripheral Interface (SPI)

Table 14 SPI Command summary¹⁾

Frame sent to SPIDER+ (SI pin)	Frame received from SPIDER+ (SO pin) with the next command
0xxxxxxxxxxxxx01 _B ("xxxxxxxxxxxxx _B " = don't care)	0ddddddddddddd _B (Standard Diagnosis)
10aaaaccccccccB where: "aaaa _B " = register address ADDR0 "cccccccc _B " = new register content	0 ddddddddddddd _B (Standard Diagnosis)
<pre>01aaaaxxxxxxxxx10_B where: "aaaa_B" = register address ADDR0 "xxxxxxxx_B" = don't care</pre>	10aaaacccccccccB where: "aaaa _B " = register address ADDR0 "ccccccccc _B " = register content
10aaaabbccccccc _B where: "aaaa _B " = register address ADDR0 "bb _B " = register address ADDR1 "ccccccc _B " = new register content	0 ddddddddddddd _B (Standard Diagnosis)
01aaaabbxxxxxx10 _B where: "aaaa _B " = register address ADDR0 "bb _B " = register address ADDR1 "yyyyyyy" = don't care	10aaaabbccccccc _B where: "aaaa _B " = register address ADDR0 "bb _B " = register address ADDR1 "ccccccc _B " = register content
	0xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

^{1) &}quot;a" = address bits for ADDR0 field, "b" = address bit for ADDR1 field, "c" = register content, "d" = diagnostic bit

(infineon

Serial Peripheral Interface (SPI)

10.6 SPI Registers Overview

10.6.1 Standard Diagnosis

Table 15 Standard Diagnosis

				8												
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	Default
0	UVR	LOP	MODE	E	TER	OL	OL	ERR								7800 _H
	VS	VDD				ON	OFF									

Field	Bits	Type	Description
UVRVS	14	r	 V_S Undervoltage Monitor 0_B No undervoltage condition on V_S detected (see Chapter 6.2.1 for more details) 1_B (default) There was at least one V_S Undervoltage condition since last Standard Diagnosis readout
LOPVDD	13	r	$V_{\rm DD}$ Lower Operating Range Monitor $0_{\rm B}$ $V_{\rm DD}$ is above $V_{\rm DD(LOP)}$ $1_{\rm B}$ (default) There was at least one " $V_{\rm DD} = V_{\rm DD(LOP)}$ " condition since last Standard Diagnosis readout
MODE	12:11	r	Operative Mode Monitor 00 _B (reserved) 01 _B Limp Home Mode 10 _B Active Mode 11 _B (default) Idle Mode
TER	10	r	Transmission Error 0 _B Previous transmission was successful (modulo 16 + n*8 clocks received, where n = 0, 1, 2) 1 _B (default) Previous transmission failed The first frame after a reset is TER set to "high" and the INST register. The second frame is the Standard Diagnosis with TER set to "low" (if there was no fail in the previous transmission).
OLON	9	r	Open Load at ON state Diagnosis 0 _B (default) No Open Load at ON detected 1 _B Open Load at ON detected See Chapter 9.3.3 for a detailed explanation



Field	Bits	Туре	Description
OLOFF	8	r	 Open Load in OFF Diagnosis 0_B (default) All channels in OFF state (which have DIAG_IOL.OUTn bit set to "1") have V_{DS} > V_{DS(OL)} (Autoconfigurable used as Low-Side switches) or V_{OUT_S} < V_{OUT_S(OL)} (High-Side channels and Auto-configurable used as High-Side switches) 1_B At least one channel in OFF state (with DIAG_IOL.OUTn bit set to "1") has V_{DS} < V_{DS(OL)} (Auto-configurable used as Low-Side switches) or V_{OUT_S} > V_{OUT_S(OL)} (High-Side channels and Autoconfigurable used as High-Side switches) Channels in ON state are not considered
ERRn n = 7 to 0	n:0	r	Over Load / Over Temperature Diagnosis of channel n 0 _B (default) No failure detected 1 _B Over Temperature or Over Load

SPIDER+ 12V



Serial Peripheral Interface (SPI)

Register structure 10.6.2

The register banks the digital part have following structure:

Register structure - all registers (with the exclusion of PWM_CR0 and PWM_CR1) Table 16

	_	- 6				- 6	- •				_	_		_	,	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	Default
r = 0	r = 1	ADDR	10			ADDR	1	DATA								XXXX _H
w = 1	w = 0															

Table 17 Register structure - PWM_CR0 and PWM_CR1

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	Default
r = 0	r = 1	ADDR	0			DATA										$XXXX_H$
w = 1	w = 0															

Table 18 summarizes the available registers with their addresing space and size

Register addressing space Table 18

Register name	ADDR0	ADDR1	Size	Туре	Purpose
OUT n = 7 to 0	0000 _B	00 _B	n	r/w	Power output control register bits OUT.OUTn 0 _B (default) Output is OFF 1 _B Output is ON
вім	0000 _B	01 _B	8	r/w	Bulb Inrush Mode bits BIM.OUTn 0 _B (default) Output latches OFF in case of errors 1 _B Output restarts automatically in case of errors
MAPINO n = 7 to 0	0001 _B	00 _B	n	r/w	Input Mapping (Input Pin 0) bits MAPINO.OUTn OB (default) The output is not connected to the input pin 1B The output is connected to the input pin Note: Channel 2 has the corresponding bit set to "1" by default

infineon

 Table 18
 Register addressing space (cont'd)

Register name	ADDR0	ADDR1	Size	Туре	Purpose
MAPIN1 n = 7 to 0	0001 _B	01 _B	n	r/w	Input Mapping (Input Pin 1) bits MAPIN1.OUTn 0 _B (default) The output is not connected to the input pin 1 _B The output is connected to the input pin Note: Channel 3 has the corresponding bit set to "1" by default
INST	0001 _B	10 _B	8	r	Input Status Monitor bit TER 0 _B Previous transmission was successful
DIAG_IOL n = 7 to 0	0010 _B	00 _B	n	r/w	Open Load diagnostic current control bits DIAG_IOL.OUTn 0 _B (default) Diagnosis current not enabled 1 _B Diagnosis current enabled
DIAG_OSM n=7 to 0	0010 _B	01 _B	n	r	Output Status Monitor bits DIAG_OSM.OUTn 0 _B (default) V _{DS} > V _{DS(OL)} (Auto-configurable used as Low-Side switches) or V _{OUT_S} < V _{OUT_S(OL)} (High-Side channels and Auto-configurable used as High-Side switches) 1 _B V _{DS} < V _{DS(OL)} (Auto-configurable used as Low-Side switches) or V _{OUT_S} > V _{OUT_S(OL)} (High-Side channels and Auto-configurable used as High-Side switches)
DIAG_OLON	0010 _B	10 _B	8	r	Open Load at ON monitor bits DIAG_OLON.OUTn 0 _B (default) normal operation or diagnosis performed on channel OFF 1 _B Open Load at ON detected This feature is active only on High-Side channels and autoconfigurable channels used as High-Side switches

infineon

 Table 18
 Register addressing space (cont'd)

Register name	ADDR0	ADDR1	Size	Туре	Purpose
DIAG_OLONEN	0010 _B	11 _B	8	r/w	Open Load at ON diagnostic control bits (7:4) - reserved bits DIAG_OLONEN. MUX (3:0) 0000 _B Open Load at ON diagnostic active on channel 0 0001 _B Open Load at ON diagnostic active on channel 1 0010 _B Open Load at ON diagnostic active on channel 2 0011 _B Open Load at ON diagnostic active on channel 3 0100 _B Open Load at ON diagnostic active on channel 4 0101 _B Open Load at ON diagnostic active on channel 5 0110 _B Open Load at ON diagnostic active on channel 6 0111 _B Open Load at ON diagnostic active on channel 7 1000 _B (reserved) 1001 _B (reserved) 1101 _B (reserved) 1101 _B (reserved) 1110 _B (reserved) 1110 _B (reserved) 1111 _B (default) Open Load at ON diagnostic not active
HWCR	0011 _B	00 _B	8	r/w	Hardware Configuration Register bit HWCR.ACT (7) (Active Mode) 0 _B (default) Normal operation or device leaves Active Mode 1 _B Device enters Active Mode (see Chapter 6.1 for a description of the possible operative mode transitions) bit HWCR.RST (6) (Reset) 0 _B (default) Normal operation 1 _B Execute Reset command (self clearing) bits HWCR.PAR (3:0) (channels operating in parallel) 0 _B (default) Normal operation 1 _B two neighbour channels have Over Load and Over Temperature synchronized (see Chapter 7.3 for more details) bits 5:4 - reserved (default: 0 _B)
HWCR_OCL n = 7 to 0	0011 _B	01 _B	n	w	Output Clear Latch bits HWCR_OCL.OUTn 0 _B (default) Normal operation 1 _B Clear the error latch for the selected output

infineon

 Table 18
 Register addressing space (cont'd)

Register name	ADDR0	ADDR1	Size	Type	Purpose
HWCR PWM	0011 _B	10 _B	8	r/w	PWM Configuration Register
_					bits HWCR PWM.ADJ (7:4)
					0000 _B (reserved)
					$0001_{\rm B}$ base frequency $f_{\rm INT}$ - 37.2%
					$0010_{\rm B}$ base frequency $f_{\rm INT}$ - 31.9%
					$0011_{\rm B}$ base frequency $f_{\rm INT}$ - 26.9%
					$0100_{\rm B}$ base frequency $f_{\rm INT}$ - 21.0%
					$0101_{\rm B}$ base frequency $f_{\rm INT}$ - 15.5%
					$0110_{\rm B}$ base frequency $f_{\rm INT}$ - 10.9%
					$0111_{\rm B}$ base frequency $f_{\rm INT}$ - 5.8%
					$1000_{\rm B}$ (default) base frequency $f_{\rm INT}$
					$1001_{\rm B}$ base frequency $f_{\rm INT}$ + 4.3%
					$1010_{\rm B}$ base frequency $f_{\rm INT}$ + 8.9%
					$1011_{\rm B}$ base frequency $f_{\rm INT}$ + 14.0%
					$1100_{\rm B}$ base frequency $f_{\rm INT}$ + 19.5%
					$1101_{\rm B}$ base frequency $f_{\rm INT}$ + 25.6%
					$1110_{\rm B}$ base frequency $f_{\rm INT}$ + 32.4%
					$1111_{\rm B}$ base frequency $f_{\rm INT}$ + 40.0%
					bits HWCR_PWM.PWM1 (1)
					0 _B (default) PWM Generator 1 not active
					1 _B PWM Generator 1 active
					bits HWCR_PWM.PWM0 (0)
					0 _B (default) PWM Generator 0 not active
					1 _B PWM Generator 0 active
					bits HWCR_PWM.RES (3:2) - reserved
PWM_CR0	0100 _B	_	10	r/w	PMW Generator Configuration 0
					bits PWM_CRO.FREQ (9:8)
					00 _B (default) internal clock divided by 1024
					01 _B internal clock divided by 512
					10 _B internal clock divided by 256
					11 _B 100% duty cycle
					bits PWM_CR0.DC (7:0) (resolution: 0.39%)
					00000000 _B , PWM generator is OFF
					11111111 _B , PWM generator is ON (99.61% duty cycle)
PWM CR1	0101 _B	-	10	r/w	PMW Generator Configuration 1
_					bits PWM CR1.FREQ (9:8)
					00 _B (default) internal clock divided by 1024
					01 _B internal clock divided by 512
					10 _B internal clock divided by 256
					11 _B 100% duty cycle
					bits PWM CR1.DC (7:0) (resolution: 0.39%)
					00000000 _B , PWM generator is OFF
					11111111 _B , PWM generator is ON (99.61% duty cycle)



Table 18 Register addressing space (cont'd)

Register name	ADDR0	ADDR1	Size	Туре	Purpose
PWM_OUT	1001 _B	00 _B	8	r/w	PWM Generator Output Control bits PWM_OUT.OUTn 0 _B (default) The selected output is not driven by one of the two PWM Generators 1 _B The selected output is connected to a PWM Generator
PWM_MAP	1001 _B	01 _B	8	r/w	PWM Generator Output Mapping bits PWM_MAP.OUTn 0 _B (default) The selected output is connected to PWM Generator 0 1 _B The selected output is connected to PWM Generator 1 It is necessary to set the PWM_OUT register to activate the PWM Generator control for the outputs.

10.6.3 Register summary

All registers with addresses not mentioned in **Table 19** and **Table 20** have to be considered as "reserved". "Read" operations performed on those registers return the Standard Diagnosis. The column "Default" indicates the content of the register (8 or 10 bits) after a reset.

Table 19 Addressable registers (basic functions)

15	14	13-10	9	8	7	6	5	4	3	2	1	0	Default			
r = 0	r=1	0000	00		OUT.O	UTn							00 _H			
w = 1	w = 0															
r = 0	r = 1	0001	00		MAPIN	IAPINO.OUTn										
w = 1	w = 0															
r = 0	r = 1	0001	01		MAPIN	IAPIN1.OUTn										
w = 1	w = 0										+					
0	1	0001	10		TER	(reserv	red)				INST.II	l n	00 _H			
r = 0	r = 1	0010	00		DIAG_	IOL.OU	Γn						00 _H			
w = 1	w = 0															
0	1	0010	01		DIAG_	OSM.OL	JTn						00 _H			
r = 0	r = 1	0011	00		HWC	HWC	(reserve	ed)	HWCR.	PAR			00 _H			
w = 1	w = 0				R.ACT	R.RST										
r = 0	r = 1	0011	01		HWCR	HWCR_OCL.OUTn										
w = 1	w = 0															

Table 20 Addressable registers (advanced functions)

15 14 13-10 9 8 7 6 5 4 3 2 1 0 De	efault
------------------------------------	--------

r = 0	r = 1	0000	01	BIM.OUTn	00 _H
w = 1	w = 0				

Table 20 Addressable registers (advanced functions)

15	14	13-10	9	8	7	6	5	4	3	2	1	0	Default
r = 0	r = 1	0010	10		DIAG_	OLON.O	UTn						00 _H
w = 1	w = 0												
r = 0	r = 1	0010	11		(reserv	ed)			DIAG_	DLONE	N.MUX		0F _H
w = 1	w = 0												
r = 0	r = 1	0011	10		HWCR	_PWM.A	D J		(reserv	ed)	HWC	HWC	80 _H
w = 1	w = 0										R_PW	R_PW	
											M.PW	M.PW	
											M1	MO	
r = 0	r = 1	0100	_	CRO.FR	PWM_	CRO.DC							000 _H
w = 1	W = 0		EQ										
r = 0	r = 1	0101	PWM_0	CR1.FR	PWM_	CR1.DC							000 _H
w = 1	w = 0		EQ										
r = 0	r = 1	1001	00		PWM_	OUT.OU	Tn						00 _H
w = 1	w = 0												
r = 0	r = 1	1001	01		PWM_	MAP.OU	Tn						00 _H
w = 1	w = 0												

SPI command quick list 10.6.4

A summary of the most used SPI commands (read and write operations on all registers) is shown in Table 21

Table 21 SPI command quick list

Register	"read" command"	"write" command	content written
OUT	4002 _H	80XX _H	$XX_H = xxxxxxxxx_B$
BIM	4102 _H	81XX _H	$XX_H = xxxxxxxxx_B$
MAPINO	4402 _H	84XX _H	$XX_H = xxxxxxxxx_B$
MAPIN1	4502 _H	85XX _H	$XX_H = xxxxxxxxx_B$
INST	4602 _H	n.a. (read-only)	_
DIAG_IOL	4802 _H	88XX _H	$XX_H = xxxxxxxxx_B$
DIAG_OSM	4902 _H	n.a. (read-only)	_
DIAG_OLON	4A02 _H	8AXX _H	$XX_H = xxxxxxxxx_B$
DIAG_OLONEN	4B02 _H	8BXX _H	$XX_H = xxxxxxxxx_B$
HWCR	4C02 _H	8CXX _H	$XX_H = xxxxxxxxx_B$
HWCR_OCL	4D02 _H	8DXX _H	$XX_H = xxxxxxxxx_B$
HWCR_PWM	4E02 _H	8EXX _H	$XX_H = xxxxxxxxx_B$
PWM_CR0	5002 _H	90XX _H	$0XX_H = 00xxxxxxxx$
		91XX _H	1XX _H = 01xxxxxxxx
		92XX _H	2XX _H = 10xxxxxxxx
		93XX _H	3XX _H = 11xxxxxxxxx



Serial Peripheral Interface (SPI)

SPI command quick list (cont'd) Table 21

Register	"read" command"	"write" command	content written
PWM_CR1	5402 _H	94XX _H	$0XX_H = 00xxxxxxxxx_B$
		95XX _H	$1XX_{H} = 01xxxxxxxxx_{B}$
		96XX _H	$2XX_H = 10xxxxxxxxx_B$
		97XX _H	$3XX_H = 11xxxxxxxxx_B$
PWM_OUT	6402 _H	A4XX _H	$XX_H = xxxxxxxxx_B$
PWM_MAP	6502 _H	A5XX _H	$XX_H = xxxxxxxxx_B$

Application Information



11 Application Information

Note:

The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.

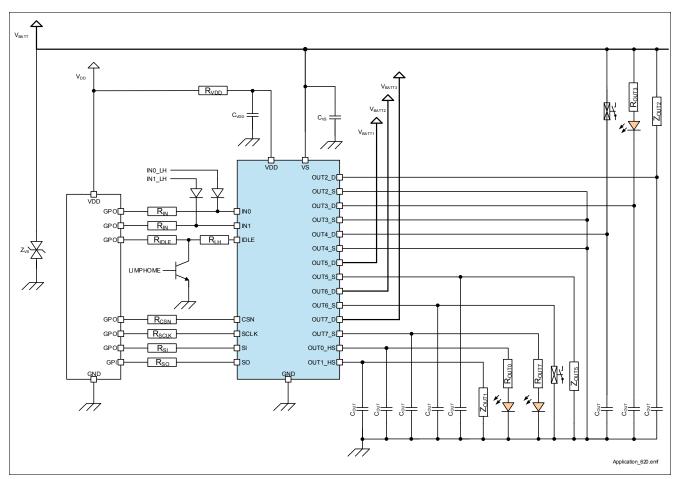


Figure 41 TLE75620-EST Application Diagram

Note:

This is a very simplified example of an application circuit. The function must be verified in the real application.

Table 22 Suggested Component values

Reference	Value	Purpose
R _{IN}	4.7 kΩ	Protection of the micro-controller during Over Voltage and Reverse Polarity Guarantee TLE75620-EST channels OFF during Loss of Ground
R_{IDLE}	4.7 kΩ	Protection of the micro-controller during Over Voltage and Reverse Polarity Guarantee TLE75620-EST channels OFF during Loss of Ground
R_{CSN}	500 Ω	Protection of the micro-controller during Over Voltage and Reverse Polarity
R_{SCLK}	500 Ω	Protection of the micro-controller during Over Voltage and Reverse Polarity
R_{SI}	500 Ω	Protection of the micro-controller during Over Voltage and Reverse Polarity
R_{SO}	500 Ω	Protection of the micro-controller during Over Voltage and Reverse Polarity



Application Information

Table 22 **Suggested Component values (cont'd)**

Reference	Value	Purpose
R_{VDD}	100 Ω	Logic supply voltage spikes filtering
$\overline{C_{\text{VDD}}}$	100 nF	Logic supply voltage spikes filtering
$\overline{C_{\text{VS}}}$	68 nF	Analog supply voltage spikes filtering
$\overline{Z_{VS}}$	P6SMB30	Protection of device during Over Voltage. Zener diode
C _{OUT}	10 nF	Protection of TLE75620-EST against ESD and BCI


Further Application Information 11.1

- Please contact us for information regarding the Pin FMEA
- For further information you may contact http://www.infineon.com/

Package Outlines



Package Outlines 12

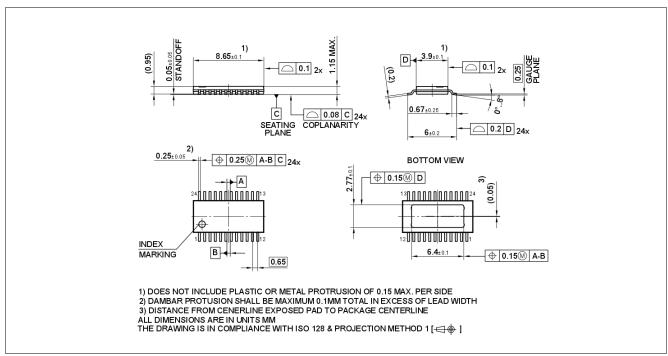

PG-TSDSO-24-21 Package drawing Figure 42

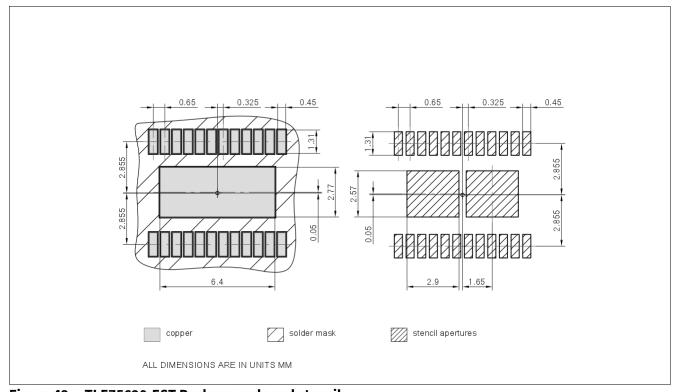


Figure 43 TLE75620-EST Package pads and stencil



Package Outlines

Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

infineon

Revision History

13 Revision History

Page or Item	Changes since previous revision				
Rev. 1.0, 2017-11-23					
All	Datasheet released				
TLE75620-EST					
LED package					



Table of Contents

1	Overview	1
2	Block Diagram and Terms	5
2.1	Block Diagram	5
2.2	Terms	6
3	Pin Configuration	7
3.1	Pin Assignment	
3.2	Pin Definitions and Functions	
4	General Product Characteristics	10
4.1	Absolute Maximum Ratings	
4.2	Functional Range	
4.3	Thermal Resistance	
4.3.1	PCB set up	13
4.3.2	Thermal Impedance	15
5	Control Pins	16
5.1	Input pins	
5.2	IDLE pin	16
5.3	Electrical Characteristics Control Pins	18
6	Power Supply	19
6.1	Operation Modes	
6.1.1	Power-up	24
6.1.2	Sleep mode	24
6.1.3	Idle mode	24
6.1.4	Active mode	24
6.1.5	Limp Home mode	
6.1.6	Definition of Power Supply modes transition times	
6.2	Reset condition	
6.2.1	Undervoltage on V _S	
6.2.2	Low Operating Power on V _{DD}	
6.3	Electrical Characteristics Power Supply	
7	Power Stages	
7.1	Output ON-state resistance	
7.1.1	Switching Resistive Loads	
7.1.2	Inductive Output Clamp	
7.1.3	Maximum Load Inductance	
7.2	Inverse Current Behavior	
7.3	Switching Channels in parallel	
7.4	"Bulb Inrush Mode" (BIM)	
7.5	Automatic PWM Generator	
7.6	Electrical Characteristics Power Stages	
8	Protection Functions	
8.1	Over Load Protection	
8.2	Over Temperature Protection	
8.3	Over Temperature and Over Load Protection in Limp Home mode	
8.4 8.5	Reverse Polarity Protection	
8.5 8.6	Over Voltage Protection Electrical Characteristics Protection	
0.0	LIECUTOR CHATACLETISTICS FIOLECTION	4 6



Diagnosis	48
Open Load at ON	50
Open Load at ON - direct channel diagnosis	50
Open Load at ON - diagnosis loop	51
OLON bit	53
Electrical Characteristics Diagnosis	54
Serial Peripheral Interface (SPI)	56
SPI Signal Description	56
Daisy Chain Capability	57
Timing Diagrams	58
Electrical Characteristics	59
SPI Protocol	62
SPI Registers Overview	65
Standard Diagnosis	65
Register structure	67
Register summary	71
SPI command quick list	72
Application Information	74
Further Application Information	75
Package Outlines	76
Revision History	78
	Diagnosis Over Load and Over Temperature Output Status Monitor Open Load at ON Open Load at ON - direct channel diagnosis Open Load at ON - diagnosis loop OLON bit Electrical Characteristics Diagnosis Serial Peripheral Interface (SPI) SPI Signal Description Daisy Chain Capability Timing Diagrams Electrical Characteristics SPI Protocol SPI Registers Overview Standard Diagnosis Register structure Register structure Register summary SPI command quick list Application Information Further Application Information Package Outlines Revision History

Trademarks of Infineon Technologies AG

HHVIC™, μIPM™, μPFC™, AU-ConvertIR™, AURIX™, C166™, Canpak™, CIPOS™, CIPURSE™, CoolDp™, CoolGan™, COOLIR™, CoolMos™, CoolSiC™, DAVE™, DI-POL™, DirectFET™, DrBlade™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, GanpowiR™, HEXFET™, HITFET™, HybridPACK™, iMOTION™, IRAM™, ISOFACE™, IsoPACK™, LEDrivIR™, LITIX™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OPTIGA™, OptiMOS™, ORIGA™, PowiRaudio™, PowiRstage™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SIL™, RASIC™, REAL3™, SmartLEWIS™, SOLID FLASH™, SPOC™, StrongIRFET™, SupIRBuck™, TEMPFET™, TRENCHSTOP™, TriCore™, UHVIC™, XHP™, XMC™.

Trademarks updated November 2015

Other Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2017-11-23 Published by Infineon Technologies AG 81726 Munich, Germany

© 2017 Infineon Technologies AG. All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Infineon:

TLE75620ESTXUMA1



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: http://oceanchips.ru/

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А