

S5U1S65K01H4100
Camera Board
Technical Manual


NOTICE

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of Economy, Trade and Industry or other approval from another government agency.

All other product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

Configuration of product number

●DEVICES

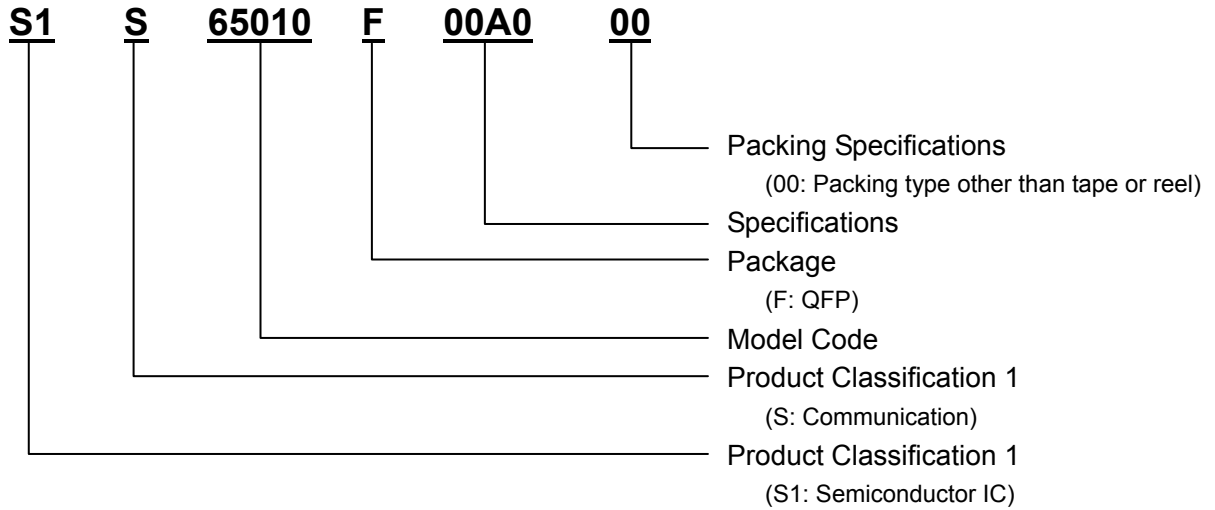

●Evaluation Board

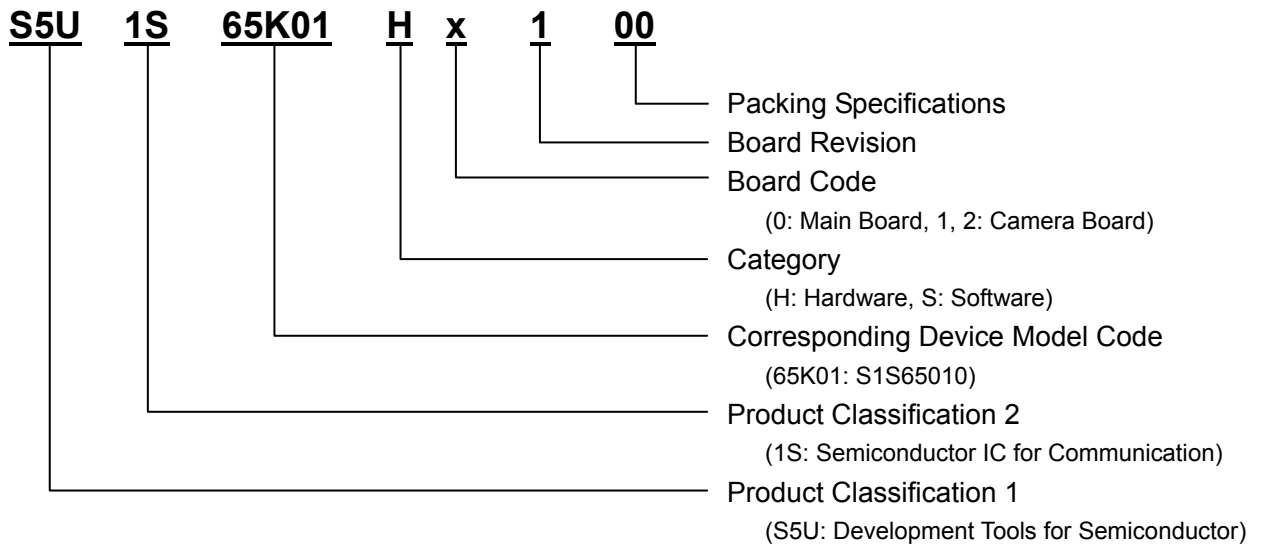


Table of Contents

1. OVERVIEW	1
2. COMPONENTS	1
2.1 Main Parts	1
2.2 Block Diagram	1
3. MECHANICAL SPECIFICATIONS	2
4. EXTERNAL PINS	3
4.1 Interface Connectors	3
4.1.1 Main Board Interfaces	3
4.1.2 Serial (RS232-C) Interface (CN6: XG8W-1031).....	6
4.1.3 Audio Interface Connectors (CN7 to CN10: A2PA-3PGG)	6
4.1.4 Camera Module Connectors (CN1 CN2, and CN5).....	6
5. FUNCTIONAL DESCRIPTION	7
5.1 GPIOB DIP Switches (SW1)	7
5.2 UART DIP Switches (SW2).....	8
5.3 AUDIO CODEC DIP Switches (SW3).....	9
5.4 Camera's I ² C address DIP Switches (SW4)	10
5.5 AUDIO CODEC clock input (J3).....	10
6. PARTS LISTS	11
REVISION HISTORY	12

1. OVERVIEW

This product is an evaluation board used when it connects with the S65K series evaluation board and the network camera and the drive recorder are constructed.

It connects with the board that mounts SEIKO EPSON S1S65010 or S2S65A00 and it uses it.

2. COMPONENTS

2.1 Main Parts

CAMERA	CMOS Camera Module (TOKO TMV1320)
Audio CODEC	Monaural CODEC (ASAHIKASEI AK4631)
Main Board I/F	Preparation of the connector of 40/16pin for S65K series evaluation board joint
Audio I/F	Speaker, MIC, Line Input, Line Output

2.2 Block Diagram

The following figure gives block diagram for camera board. This board provides three (mutually exclusive) connectors for connecting a CMOS camera module.

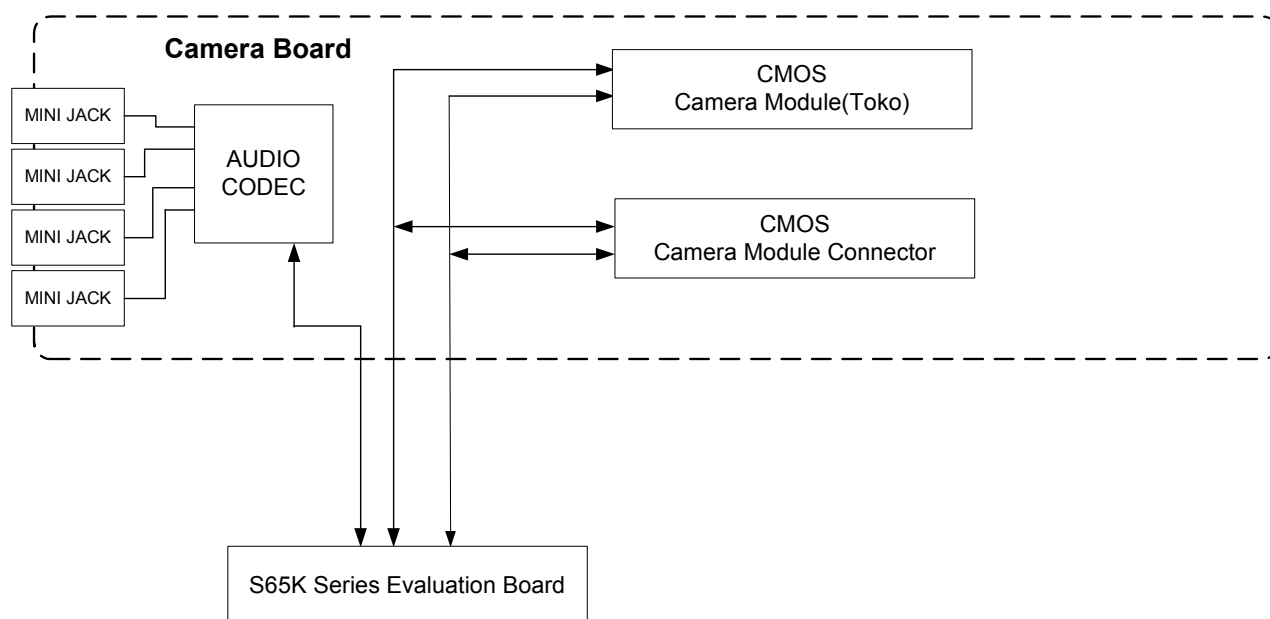


Fig.2.1 Block Diagram

3. MECHANICAL SPECIFICATIONS

3. MECHANICAL SPECIFICATIONS

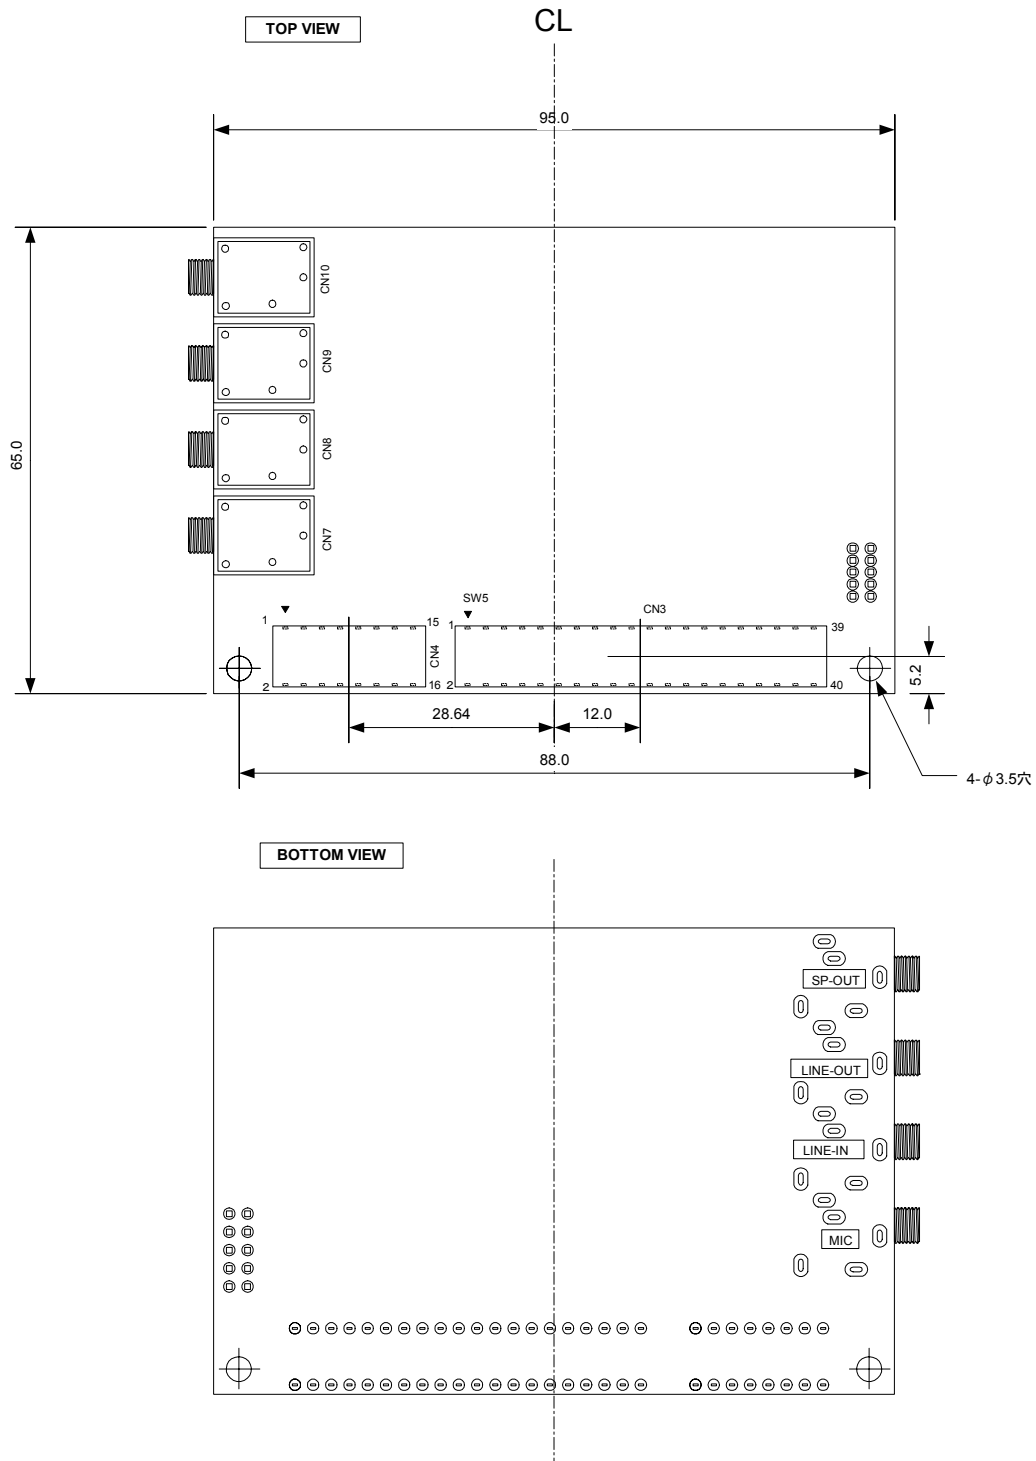


Fig.3.1 Camera Board Dimensions

4. EXTERNAL PINS

4.1 Interface Connectors

The following Figure shows the locations of the external interface connectors on the camera board. The Tables in the following four subsections list their pin assignments.

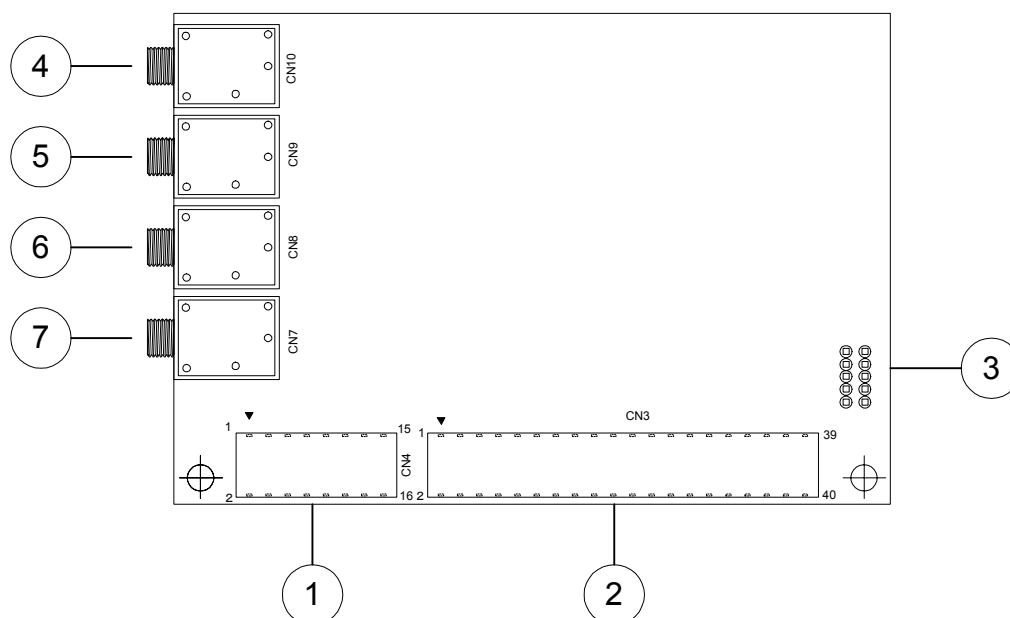


Fig.4.1 Camera Board Interface Connector Layout

4.1.1 Main Board Interfaces

① 5V, Reset (CN3 : HIF3H-16DB-2.54S)

① in Fig.4.1

Pin Number	Function	Pin Number	Function
1	5V	2	5V
3	NC	4	NC
5	NC	6	NC
7	NC	8	NC
9	NC	10	NC
11	NC	12	NC
13	RESET#	14	GND
15	GND	16	GND

4. EXTERNAL PINS

② Camera interface and expansion connector (CN1: HIF3H-40DB-2.54DS)

② in Fig.4.1

②-1 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

Pin Number	Function	Pin Number	Function
1	GND	2	GND
3	CAMDATA0	4	CAMDATA1
5	CAMDATA2	6	CAMDATA3
7	CAMDATA4	8	CAMDATA5
9	CAMDATA6	10	CAMDATA7
11	CMCLKOUT	12	CMCLKIN
13	CMVREF	14	CMHREF
15	CAMVDD	16	CAMVDD
17	I2C_SDA	18	I2C_SCL
19	3.3V	20	3.3V
21	GPIOA0	22	GPIOA1
23	GPIOA2 (TXD1/SPI_SS)	24	GPIOA3 (RXD1/SPI_SCLK)
25	GPIOA4 (SPI_MISO)	26	GPIOA5 (SPI_MOSI)
27	GPIOA6	28	GPIOA7
29	GPIOB0 (I2S0_WS)	30	GPIOB1 (I2S0_SCK)
31	GPIOB2 (I2S0_SD)	32	GPIOB3 (I2S1_SD)
33	GPIOB4 (Timer1out)	34	GPIOB5
35	GPIOB6	36	GPIOB7
37	GIOD0	38	GIOD1
39	GND	40	GND

②-2 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

Pin Number	Function	Pin Number	Function
1	GND	2	GND
3	CAMDATA0	4	CAMDATA1
5	CAMDATA2	6	CAMDATA3
7	CAMDATA4	8	CAMDATA5
9	CAMDATA6	10	CAMDATA7
11	CMCLKOUT	12	CMCLKIN
13	CMVREF	14	CMHREF
15	CAMVDD	16	CAMVDD
17	I2C_SDA	18	I2C_SCL
19	3.3V	20	3.3V
21	NC	22	NC
23	GPIOC4 (TXD3/SPI_SS)	24	GPIOC5 (RXD3/SPI_SCLK)
25	NC	26	SPI_MOSI
27	NC	28	NC
29	GPIOB0 (I2S0_WS)	30	GPIOB1 (I2S_SCK)
31	GPIOB2 (I2S_SDO)	32	GPIOB3 (I2S_SDI)
33	GPIOB4 (TimerA0out)	34	NC
35	NC	36	NC
37	NC	38	NC
39	GND	40	GND

②-3 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

Pin Number	Function	Pin Number	Function
1	GND	2	GND
3	CAMDATA0	4	CAMDATA1
5	CAMDATA2	6	CAMDATA3
7	CAMDATA4	8	CAMDATA5
9	CAMDATA6	10	CAMDATA7
11	CMCLKOUT	12	CMCLKIN
13	CMVREF	14	CMHREF
15	CAMVDD	16	CAMVDD
17	I2C_SDA	18	I2C_SCL
19	3.3V	20	3.3V
21	NC	22	NC
23	NC	24	NC
25	NC	26	NC
27	NC	28	NC
29	NC	30	NC
31	NC	32	NC
33	NC	34	NC
35	NC	36	NC
37	NC	38	NC
39	GND	40	GND

4. EXTERNAL PINS

4.1.2 Serial (RS232-C) Interface (CN6: XG8W-1031)

③ in Fig.4.1

Pin Number	Function	Pin Number	Function
1	NC	2	RXD
3	TXD	4	NC
5	GND	6	NC
7	NC	8	NC
9	NC	10	NC

4.1.3 Audio Interface Connectors (CN7 to CN10: A2PA-3PGG)

These are for a microphone, a speaker, and line I/O.

④ to ⑦ in Fig.4.1

Connector	Function	Note
CN7	Microphone input	⑦
CN8	Line input	⑥
CN9	Line output	⑤
CN10	Speaker output	④

4.1.4 Camera Module Connectors (CN1 CN2, and CN5)

This board provides three (mutually exclusive) connectors for connecting a CMOS camera module.

Connector	Function	Product Number
CN1	TMV1320	086262022340829+ (Kyocera-elco)
CN2	TMV1303	AXK730127G (MATSUSHITA)
CN5	General purpose	8526-4500PL (3M)

5. FUNCTIONAL DESCRIPTION

Fig.5.1 show component locations on the board. The following nine subsections describe their functions.

- Please do not turn on SW1 and SW3 together.
- Please do not turn on SW1[2:1] and SW2 together.

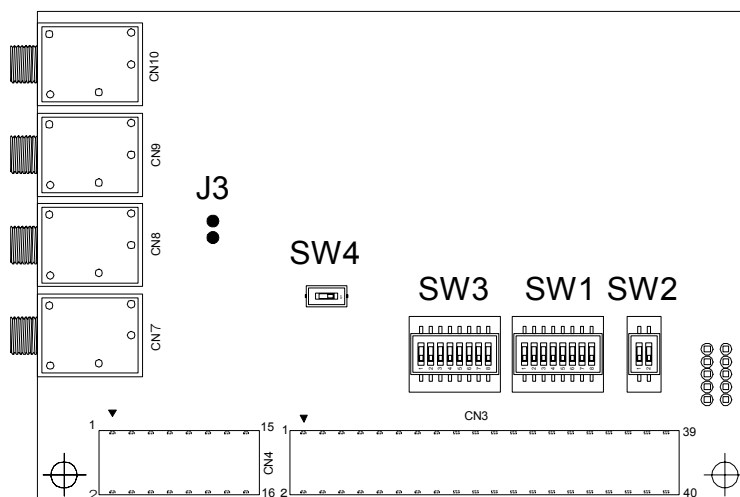


Fig.5.1 Camera Board (Top View)

5.1 GPIOB DIP Switches (SW1)

It is possible to control the LED by GPIOB from S1S65010, S2S65A00 evaluation board. It is the switch that joints the LED and GPIOB.

Table 5.1 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

Pin Number	Abbreviation	Function		Notes
		0 (OFF)	1 (ON)	
1	LED7	No connecting	GPIOB7	
2	LED6	No connecting	GPIOB6	
3	LED5	No connecting	GPIOB5	
4	LED4	No connecting	GPIOB4	
5	LED3	No connecting	GPIOB3	
6	LED2	No connecting	GPIOB2	
7	LED1	No connecting	GPIOB1	
8	LED0	No connecting	GPIOB0	

5. FUNCTIONAL DESCRIPTION

Table 5.2 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

Pin Number	Abbreviation	Function		Note
		0 (OFF)	1 (ON)	
1	LED7	No Connecting		
2	LED6	No Connecting		
3	LED5	No Connecting		
4	LED4	No Connecting	GPIOB4	
5	LED3	No Connecting	GPIOB3	
6	LED2	No Connecting	GPIOB2	
7	LED1	No Connecting	GPIOB1	
8	LED0	No Connecting	GPIOB0	

Table 5.3 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

Pin Number	Abbreviation	Function		Note
		0 (OFF)	1 (ON)	
1	LED7	No Connecting		
2	LED6			
3	LED5			
4	LED4			
5	LED3			
6	LED2			
7	LED1			
8	LED0			

It is not possible the control of the LED on the camera board from CN8 of the S2S65A00 evaluation board.

5.2 UART DIP Switches (SW2)

It is the switch that joints RS232C IC on the camera board and UART of the S1S65010/S2S6500 evaluation board.

Table 5.4 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting	UART Lite TXD	
2	No Connecting	UART Lite RXD	

Table 5.5 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting	UART TXD3	
2	No Connecting	UART RXD3	

Table 5.6 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting		
2			

5.3 AUDIO CODEC DIP Switches (SW3)

It is the switch that joints Audio CODEC IC on the camera board and I2S,SPI of the S1S65010/S2S6500 evaluation board.

Table 5.7 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting	SPI_SS	
2	No Connecting	SPI_SCLK	
3	No Connecting	SPI_MOSI	
4	No Connecting	TIMER1OUT	
5	No Connecting	I2S0_SD	
6	No Connecting	I2S1_SD	
7	No Connecting	I2S0_WS	
8	No Connecting	I2S0_SCK	

Table 5.8 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting	SPI_SS	
2	No Connecting	SPI_SCLK	
3	No Connecting	SPI_MOSI	
4	No Connecting	TIMERA0OUT	
5	No Connecting	I2S_SDO	
6	No Connecting	I2S_SDI	
7	No Connecting	I2S_WS	
8	No Connecting	I2S_SCLK	

Table 5.9 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting		
2			
3			
4			
5			
6			
7			
8			

5. FUNCTIONAL DESCRIPTION

5.4 Camera's I²C address DIP Switches (SW4)

It is the switch of the I2 C address binding of a camera module. Sample software is using address 0x90.
ON:0x90
OFF:0xB8

5.5 AUDIO CODEC clock input (J3)

J3 selects of the clock source of AUDIO CODEC AK4631. Sample software is using Timer Out of the main board for the clock. In the case that the crystal oscillator on the board is used it does J3 the short and please make bit4 of SW3 the open. The frequency of the crystal oscillator is 12.288MHz.

6. PARTS LISTS

The following Table lists the major parts on the camera board—that is, all parts except resistors and capacitors.

Table 6.1 Camera Board Parts

PARTS NO	PARTS NAME	STANDARD		QTY
	PCB			1
U1	IC	TC74VHC05FT	TOHSHIBA	1
U2		ADM3222ARUZ	Analog Devices	1
U3		AK4631VN	Asahi-Kasei	1
SW1,SW3	SWITCH	CHS-08B	COPAL	2
SW2		CHS-02B	COPAL	1
SW4		CHS-01B	COPAL	1
CN1	CONNECTOR	086262022340829+	KYOCERA-elco	1
CN2		AXK730127G	Matsushita	1
CN3		HIF3H-40DB-2.54DS	HIROSE	1
CN4		HIF3H-16DB-2.54DS	HIROSE	1
CN7, CN8, CN9, CN10	Mini JACK	A2PA-3PGG		4
FL1	FILTER	NFM18PC105R0J3	MURATA	1
LED1, LED2, LED3, LED4, LED5, LED6, LED7, LED8	LED	SML-310MTT86	ROHM	8
X1	OSC	SG-310SCF 12.288MHz	EPSON TOYOCOM	1

REVISION HISTORY

REVISION HISTORY

Rev	Date	Description	Person
1.0	2007/07/18	First Edition	T.Suzuki

AMERICA

EPSON ELECTRONICS AMERICA, INC.

HEADQUARTERS

2580 Orchard Parkway
San Jose , CA 95131,USA
Phone: +1-800-228-3964 FAX: +1-408-922-0238

SALES OFFICES

Northeast

301 Edgewater Place, Suite 210
Wakefield, MA 01880, U.S.A.
Phone: +1-800-922-7667 FAX: +1-781-246-5443

EUROPE

EPSON EUROPE ELECTRONICS GmbH

HEADQUARTERS

Riesstrasse 15
80992 Munich, GERMANY
Phone: +49-89-14005-0 FAX: +49-89-14005-110

ASIA

EPSON (CHINA) CO., LTD.

23F, Beijing Silver Tower 2# North RD DongSanHuan
ChaoYang District, Beijing, CHINA
Phone: +86-10-6410-6655 FAX: +86-10-6410-7320

SHANGHAI BRANCH

7F, High-Tech Bldg., 900, Yishan Road,
Shanghai 200233, CHINA
Phone: +86-21-5423-5522 FAX: +86-21-5423-5512

EPSON HONG KONG LTD.

20/F., Harbour Centre, 25 Harbour Road
Wanchai, Hong Kong
Phone: +852-2585-4600 FAX: +852-2827-4346
Telex: 65542 EPSCO HX

EPSON Electronic Technology Development (Shenzhen) LTD.

12/F, Dawning Mansion, Keji South 12th Road,
Hi- Tech Park, Shenzhen
Phone: +86-755-2699-3828 FAX: +86-755-2699-3838

EPSON TAIWAN TECHNOLOGY & TRADING LTD.

14F, No. 7, Song Ren Road,
Taipei 110
Phone: +886-2-8786-6688 FAX: +886-2-8786-6660

EPSON SINGAPORE PTE., LTD.

1 HarbourFront Place,
#03-02 HarbourFront Tower One, Singapore 098633
Phone: +65-6586-5500 FAX: +65-6271-3182

SEIKO EPSON CORPORATION

KOREA OFFICE

50F, KLI 63 Bldg., 60 Yoido-dong
Youngdeungpo-Ku, Seoul, 150-763, KOREA
Phone: +82-2-784-6027 FAX: +82-2-767-3677

GUMI OFFICE

2F, Grand B/D, 457-4 Songjeong-dong,
Gumi-City, KOREA
Phone: +82-54-454-6027 FAX: +82-54-454-6093

SEIKO EPSON CORPORATION

SEMICONDUCTOR OPERATIONS DIVISION

IC Sales Dept.

IC International Sales Group

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone: +81-42-587-5814 FAX: +81-42-587-5117

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Epson:

[S5U1S65K01H0400](#) [S5U1S65K01H4100](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А