

## 2A, 50V - 1400V Surface Mount Rectifier

### FEATURES

- AEC-Q101 qualified
- Glass passivated junction chip
- Ideal for automated placement
- Low forward voltage drop
- High surge current capability
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- Converter

### MECHANICAL DATA

- Case: DO-214AA (SMB)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 0.09 g (approximately)

| KEY PARAMETERS |                |      |
|----------------|----------------|------|
| PARAMETER      | VALUE          | UNIT |
| $I_{F(AV)}$    | 2              | A    |
| $V_{RRM}$      | 50 - 1400      | V    |
| $I_{FSM}$      | 50             | A    |
| $T_{JMAX}$     | 150            | °C   |
| Package        | DO-214AA (SMB) |      |
| Configuration  | Single Die     |      |



**DO-214AA (SMB)**

| ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)                   |              |              |     |     |     |     |     |      |      |      |      |
|---|--------------|--------------|-----|-----|-----|-----|-----|------|------|------|------|
| PARAMETER   | SYMBOL       | S2A          | S2B | S2D | S2G | S2J | S2K | S2M  | S2Q  | S2V  | UNIT |
| Marking code on the device  |              | S2A          | S2B | S2D | S2G | S2J | S2K | S2M  | S2Q  | S2V  |      |
| Repetitive peak reverse voltage   | $V_{RRM}$    | 50           | 100 | 200 | 400 | 600 | 800 | 1000 | 1200 | 1400 | V    |
| Reverse voltage, total rms value  | $V_{R(RMS)}$ | 30           | 70  | 140 | 280 | 420 | 560 | 700  | 840  | 980  | V    |
| Maximum DC blocking voltage   | $V_{DC}$     | 50           | 100 | 200 | 400 | 600 | 800 | 1000 | 1200 | 1400 | V    |
| Forward current   | $I_{F(AV)}$  | 2            |     |     |     |     |     |      |      |      | A    |
| Surge peak forward current, 8.3 ms single half sine-wave superimposed on rated load per diode | $I_{FSM}$    | 50           |     |     |     |     |     |      |      |      | A    |
| Junction temperature  | $T_J$        | - 55 to +150 |     |     |     |     |     |      |      |      | °C   |
| Storage temperature   | $T_{STG}$    | - 55 to +150 |     |     |     |     |     |      |      |      | °C   |

| <b>THERMAL PERFORMANCE</b>             |                 |             |             |
|--|-----------------|-------------|-------------|
| <b>PARAMETER</b>                       | <b>SYMBOL</b>   | <b>TYP.</b> | <b>UNIT</b> |
| Junction to Lead Thermal Resistance    | $R_{\theta JL}$ | 16          | °C/W        |
| Junction to Ambient Thermal Resistance | $R_{\theta JA}$ | 53          | °C/W        |

| <b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted) |   |               |             |             |               |
|---|---|---------------|-------------|-------------|---------------|
| <b>PARAMETER</b>  | <b>CONDITIONS</b>   | <b>SYMBOL</b> | <b>TYP.</b> | <b>MAX.</b> | <b>UNIT</b>   |
| Forward voltage per diode <sup>(1)</sup>  | $I_F = 2\text{A}, T_J = 25^\circ\text{C}$                         | $V_F$         | -           | 1.15        | V             |
| Reverse current @ rated $V_R$ per diode <sup>(2)</sup>                              | $T_J = 25^\circ\text{C}$  | $I_R$         | -           | 1           | $\mu\text{A}$ |
|   | $T_J = 125^\circ\text{C}$   |               | -           | 125         | $\mu\text{A}$ |
| Junction capacitance  | 1 MHz, $V_R = 4.0\text{V}$  | $C_J$         | 30          | -           | pF            |
| Reverse recovery time   | $I_F = 0.5\text{A}, I_R = 1.0\text{A}$<br>$I_{RR} = 0.25\text{A}$ | $t_{rr}$      | 1.5         | -           | $\mu\text{s}$ |

**Notes:**

1. Pulse test with  $PW = 0.3\text{ ms}$
2. Pulse test with  $PW = 30\text{ ms}$

| <b>EXAMPLE P/N</b>   |                |                          |
|----------------------|----------------|--------------------------|
| <b>ORDERING CODE</b> | <b>PACKAGE</b> | <b>PACKING</b>           |
| S2AHR5G              | SMB            | 850 / 7" Plastic reel    |
| S2AHR4G              | SMB            | 3,000 / 13" Paper reel   |
| S2AHM4G              | SMB            | 3,000 / 13" Plastic reel |
| S2BHR5G              | SMB            | 850 / 7" Plastic reel    |
| S2BHR4G              | SMB            | 3,000 / 13" Paper reel   |
| S2BHM4G              | SMB            | 3,000 / 13" Plastic reel |
| S2DHR5G              | SMB            | 850 / 7" Plastic reel    |
| S2DHR4G              | SMB            | 3,000 / 13" Paper reel   |
| S2DHM4G              | SMB            | 3,000 / 13" Plastic reel |
| S2GHR5G              | SMB            | 850 / 7" Plastic reel    |
| S2GHR4G              | SMB            | 3,000 / 13" Paper reel   |
| S2GHM4G              | SMB            | 3,000 / 13" Plastic reel |
| S2JHR5G              | SMB            | 850 / 7" Plastic reel    |
| S2JHR4G              | SMB            | 3,000 / 13" Paper reel   |
| S2JHM4G              | SMB            | 3,000 / 13" Plastic reel |
| S2KHR5G              | SMB            | 850 / 7" Plastic reel    |
| S2KHR4G              | SMB            | 3,000 / 13" Paper reel   |
| S2KHM4G              | SMB            | 3,000 / 13" Plastic reel |
| S2MHR5G              | SMB            | 850 / 7" Plastic reel    |
| S2MHR4G              | SMB            | 3,000 / 13" Paper reel   |
| S2MHM4G              | SMB            | 3,000 / 13" Plastic reel |
| S2QHR5G              | SMB            | 850 / 7" Plastic reel    |

| <b>EXAMPLE P/N</b>   |                |                          |
|----------------------|----------------|--------------------------|
| <b>ORDERING CODE</b> | <b>PACKAGE</b> | <b>PACKING</b>           |
| S2QHR4G              | SMB            | 3,000 / 13" Paper reel   |
| S2QHM4G              | SMB            | 3,000 / 13" Plastic reel |
| S2VHR5G              | SMB            | 850 / 7" Plastic reel    |
| S2VHR4G              | SMB            | 3,000 / 13" Paper reel   |
| S2VHM4G              | SMB            | 3,000 / 13" Plastic reel |
| S2AHR5               | SMB            | 850 / 7" Plastic reel    |
| S2AHR4               | SMB            | 3,000 / 13" Paper reel   |
| S2AHM4               | SMB            | 3,000 / 13" Plastic reel |
| S2BHR5               | SMB            | 850 / 7" Plastic reel    |
| S2BHR4               | SMB            | 3,000 / 13" Paper reel   |
| S2BHM4               | SMB            | 3,000 / 13" Plastic reel |
| S2DHR5               | SMB            | 850 / 7" Plastic reel    |
| S2DHR4               | SMB            | 3,000 / 13" Paper reel   |
| S2DHM4               | SMB            | 3,000 / 13" Plastic reel |
| S2GHR5               | SMB            | 850 / 7" Plastic reel    |
| S2GHR4               | SMB            | 3,000 / 13" Paper reel   |
| S2GHM4               | SMB            | 3,000 / 13" Plastic reel |
| S2JHR5               | SMB            | 850 / 7" Plastic reel    |
| S2JHR4               | SMB            | 3,000 / 13" Paper reel   |
| S2JHM4               | SMB            | 3,000 / 13" Plastic reel |
| S2KHR5               | SMB            | 850 / 7" Plastic reel    |
| S2KHR4               | SMB            | 3,000 / 13" Paper reel   |
| S2KHM4               | SMB            | 3,000 / 13" Plastic reel |
| S2MHR5               | SMB            | 850 / 7" Plastic reel    |
| S2MHR4               | SMB            | 3,000 / 13" Paper reel   |
| S2MHM4               | SMB            | 3,000 / 13" Plastic reel |
| S2QHR5               | SMB            | 850 / 7" Plastic reel    |
| S2QHR4               | SMB            | 3,000 / 13" Paper reel   |
| S2QHM4               | SMB            | 3,000 / 13" Plastic reel |
| S2VHR5               | SMB            | 850 / 7" Plastic reel    |
| S2VHR4               | SMB            | 3,000 / 13" Paper reel   |
| S2VHM4               | SMB            | 3,000 / 13" Plastic reel |
| S2A R5G              | SMB            | 850 / 7" Plastic reel    |
| S2A R4G              | SMB            | 3,000 / 13" Paper reel   |
| S2A M4G              | SMB            | 3,000 / 13" Plastic reel |
| S2B R5G              | SMB            | 850 / 7" Plastic reel    |
| S2B R4G              | SMB            | 3,000 / 13" Paper reel   |
| S2B M4G              | SMB            | 3,000 / 13" Plastic reel |


| <b>EXAMPLE P/N</b>   |                |                          |
|----------------------|----------------|--------------------------|
| <b>ORDERING CODE</b> | <b>PACKAGE</b> | <b>PACKING</b>           |
| S2D R5G              | SMB            | 850 / 7" Plastic reel    |
| S2D R4G              | SMB            | 3,000 / 13" Paper reel   |
| S2D M4G              | SMB            | 3,000 / 13" Plastic reel |
| S2G R5G              | SMB            | 850 / 7" Plastic reel    |
| S2G R4G              | SMB            | 3,000 / 13" Paper reel   |
| S2G M4G              | SMB            | 3,000 / 13" Plastic reel |
| S2J R5G              | SMB            | 850 / 7" Plastic reel    |
| S2J R4G              | SMB            | 3,000 / 13" Paper reel   |
| S2J M4G              | SMB            | 3,000 / 13" Plastic reel |
| S2K R5G              | SMB            | 850 / 7" Plastic reel    |
| S2K R4G              | SMB            | 3,000 / 13" Paper reel   |
| S2K M4G              | SMB            | 3,000 / 13" Plastic reel |
| S2M R5G              | SMB            | 850 / 7" Plastic reel    |
| S2M R4G              | SMB            | 3,000 / 13" Paper reel   |
| S2M M4G              | SMB            | 3,000 / 13" Plastic reel |
| S2Q R5G              | SMB            | 850 / 7" Plastic reel    |
| S2Q R4G              | SMB            | 3,000 / 13" Paper reel   |
| S2Q M4G              | SMB            | 3,000 / 13" Plastic reel |
| S2V R5G              | SMB            | 850 / 7" Plastic reel    |
| S2V R4G              | SMB            | 3,000 / 13" Paper reel   |
| S2V M4G              | SMB            | 3,000 / 13" Plastic reel |
| S2A R5               | SMB            | 850 / 7" Plastic reel    |
| S2A R4               | SMB            | 3,000 / 13" Paper reel   |
| S2A M4               | SMB            | 3,000 / 13" Plastic reel |
| S2B R5               | SMB            | 850 / 7" Plastic reel    |
| S2B R4               | SMB            | 3,000 / 13" Paper reel   |
| S2B M4               | SMB            | 3,000 / 13" Plastic reel |
| S2D R5               | SMB            | 850 / 7" Plastic reel    |
| S2D R4               | SMB            | 3,000 / 13" Paper reel   |
| S2D M4               | SMB            | 3,000 / 13" Plastic reel |
| S2G R5               | SMB            | 850 / 7" Plastic reel    |
| S2G R4               | SMB            | 3,000 / 13" Paper reel   |
| S2G M4               | SMB            | 3,000 / 13" Plastic reel |
| S2J R5               | SMB            | 850 / 7" Plastic reel    |
| S2J R4               | SMB            | 3,000 / 13" Paper reel   |
| S2J M4               | SMB            | 3,000 / 13" Plastic reel |
| S2K R5               | SMB            | 850 / 7" Plastic reel    |
| S2K R4               | SMB            | 3,000 / 13" Paper reel   |

| <b>EXAMPLE P/N</b>   |                |                          |
|----------------------|----------------|--------------------------|
| <b>ORDERING CODE</b> | <b>PACKAGE</b> | <b>PACKING</b>           |
| S2K M4               | SMB            | 3,000 / 13" Plastic reel |
| S2M R5               | SMB            | 850 / 7" Plastic reel    |
| S2M R4               | SMB            | 3,000 / 13" Paper reel   |
| S2M M4               | SMB            | 3,000 / 13" Plastic reel |
| S2Q R5               | SMB            | 850 / 7" Plastic reel    |
| S2Q R4               | SMB            | 3,000 / 13" Paper reel   |
| S2Q M4               | SMB            | 3,000 / 13" Plastic reel |
| S2V R5               | SMB            | 850 / 7" Plastic reel    |
| S2V R4               | SMB            | 3,000 / 13" Paper reel   |
| S2V M4               | SMB            | 3,000 / 13" Plastic reel |


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

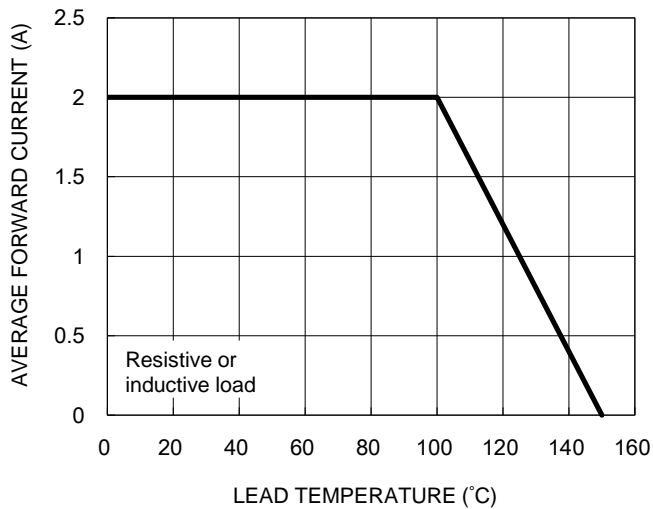


**Fig.2 Typical Junction Capacitance**

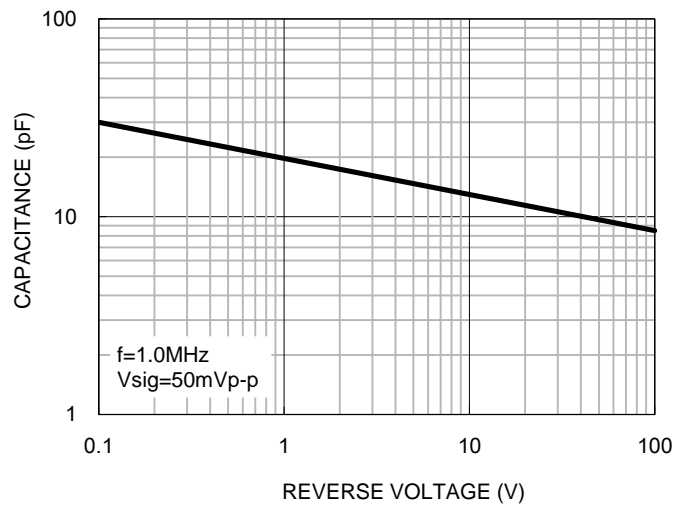

**Fig.3 Typical Reverse Characteristics**

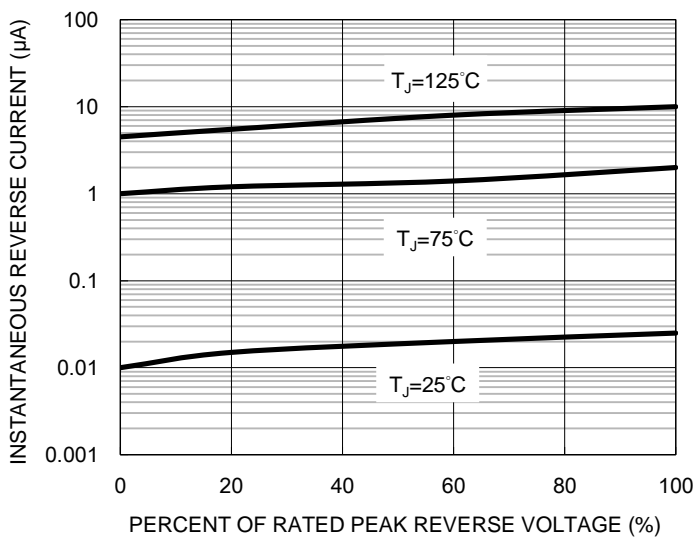


**Fig.4 Typical Forward Characteristics**

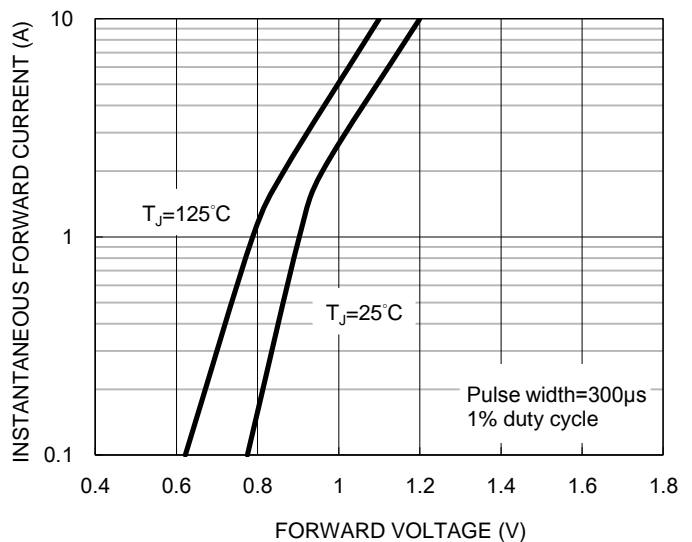


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.5 Maximum Non-repetitive Forward Surge Current**

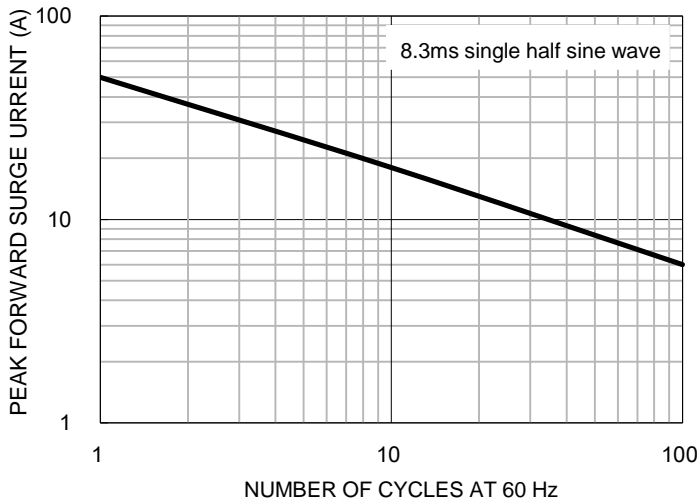


**Fig.6 Reverse Recovery Time Characteristic And Test Circuit Diagram**

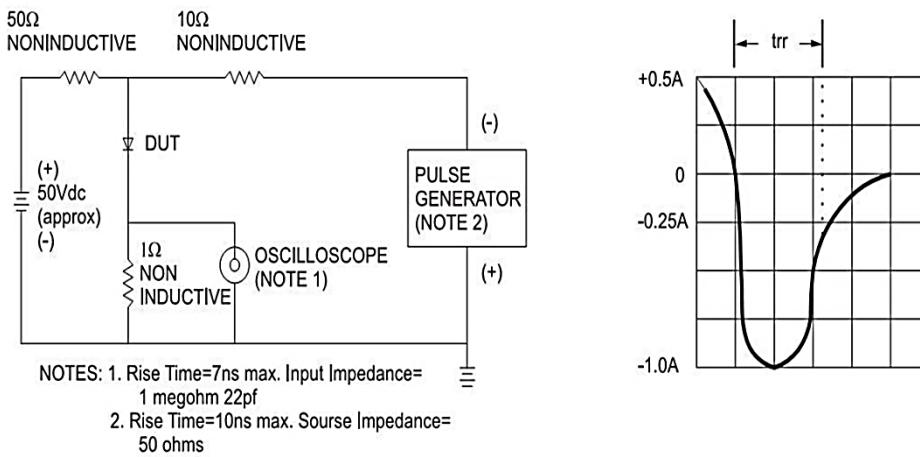


**PACKAGE OUTLINE DIMENSIONS**

DO-214AA (SMB)

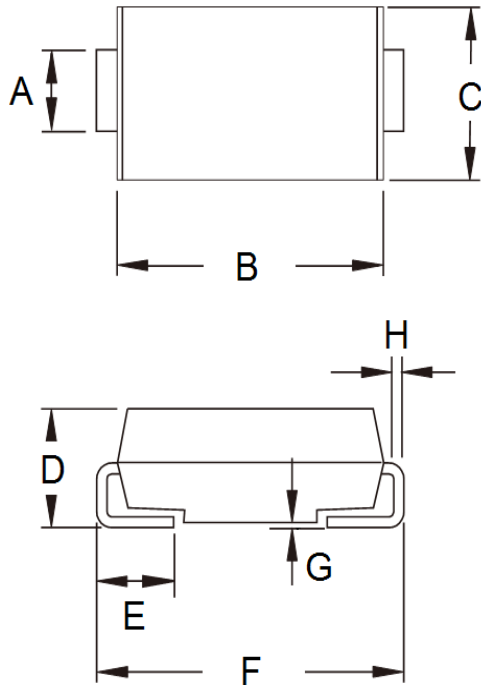

| DIM. | Unit (mm) |      | Unit (inch) |       |
|------|-----------|------|-------------|-------|
|      | Min       | Max  | Min         | Max   |
| A    | 1.95      | 2.20 | 0.077       | 0.087 |
| B    | 4.05      | 4.60 | 0.159       | 0.181 |
| C    | 3.30      | 3.95 | 0.130       | 0.156 |
| D    | 1.95      | 2.65 | 0.077       | 0.104 |
| E    | 0.75      | 1.60 | 0.030       | 0.063 |
| F    | 5.10      | 5.60 | 0.201       | 0.220 |
| G    | 0.05      | 0.20 | 0.002       | 0.008 |
| H    | 0.15      | 0.31 | 0.006       | 0.012 |

**SUGGESTED PAD LAYOUT**

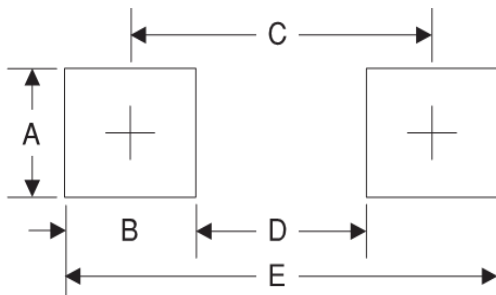

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A      | 2.3       | 0.091       |
| B      | 2.5       | 0.098       |
| C      | 4.3       | 0.169       |
| D      | 1.8       | 0.071       |
| E      | 6.8       | 0.268       |

**MARKING DIAGRAM**



- P/N = Marking Code
- G = Green Compound
- YW = Date Code
- F = Factory Code



## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А