


# IB IL 24 DO 8 ...

## Inline terminal with eight digital outputs

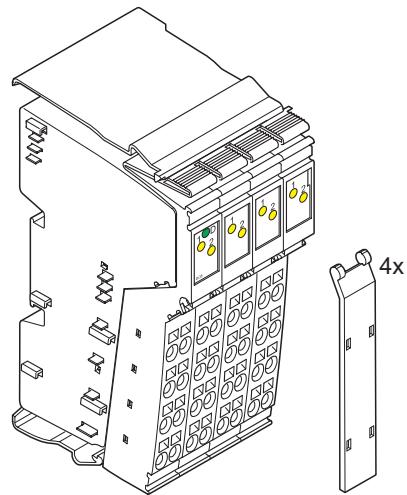

### AUTOMATION

Data sheet  
5558\_en\_08

© PHOENIX CONTACT 2010-11-23

### 1 Description

This terminal is designed for use within an Inline station. It is used to output digital signals.

#### Features

- Connections for eight digital actuators
- Connection of actuators in 2, 3, and 4-wire technology
- Nominal current of each output: 0.5 A
- Total current of the terminal: 4 A
- Short-circuit and overload protected outputs
- Diagnostic and status indicators
- Approved for use within a safety-related segment circuit  
(observe the notes on page 8)



This data sheet is only valid in association with the IL SYS INST UM E user manual.



Make sure you always use the latest documentation.  
It can be downloaded at [www.phoenixcontact.net/catalog](http://www.phoenixcontact.net/catalog).



This data sheet is valid for all products listed on the following page:

## 2 Ordering data

### Products

Description	Type	Order No.	Pcs./Pkt.
Terminal with eight digital outputs; complete with accessories (connectors consecutively numbered and labeling fields); transmission speed of 500 kbps	IB IL 24 DO 8-PAC	2861289	1
Terminal with eight digital outputs; complete with accessories (connectors not consecutively numbered and labeling fields); transmission speed of 500 kbps	IB IL 24 DO 8-PAC/SN	2862945	1
Terminal with eight digital outputs; without accessories; transmission speed of 500 kbps	IB IL 24 DO 8	2726269	1
Terminal with eight digital outputs; complete with accessories (connectors consecutively numbered and labeling fields); transmission speed of 2 Mbps	IB IL 24 DO 8-2MBD-PAC	2861687	1
Terminal with eight digital outputs; complete with accessories (connectors not consecutively numbered and labeling fields); transmission speed of 2 Mbps	IB IL 24 DO 8-2MBD-PAC/SN	2878227	1
Terminal with eight digital outputs; without accessories; transmission speed of 2 Mbps	IB IL 24 DO 8-2MBD	2819037	1



One of the listed connectors is needed for the complete fitting of the IB IL 24 DO 8 and IB IL 24 DO 8-2MBD terminals.

### Accessories

Description	Type	Order No.	Pcs./Pkt.
Connector with eight spring-cage connections (green, w/o color print)	IB IL SCN-8	2726337	10
Connector with eight spring-cage connections (green, with color print)	IB IL SCN-8-CP	2727608	10
Connector set with 32 spring-cage connections (green, w/o color print)	IB IL DI/DO 8-PLSET	2860950	1
Connector set with 32 spring-cage connections (green, with color print)	IB IL DI/DO 8-PLSET/CP	2860963	1

### Documentation

Description	Type	Order No.	Pcs./Pkt.
"Configuring and installing the INTERBUS Inline product range" user manual	IB IL SYS PRO UM E	2743048	1
"Automation terminals of the Inline product range" user manual	IL SYS INST UM E	2698737	1
"INTERBUS addressing" data sheet	DB GB IBS SYS ADDRESS	-	-
"Safety-related segment circuit" application note	AH EN IL SAFE	-	-

### 3 Technical data

#### General data

Housing dimensions (width x height x depth)	48.8 mm x 119.8 mm x 71.5 mm
Weight	130 g (without connectors)
Operating mode	Process data mode with 1 byte
Connection method for actuators	2, 3, and 4-wire technology
Permissible temperature (operation)	-25°C to +55°C
Permissible temperature (storage/transport)	-25°C to +85°C
Permissible humidity (operation)	75% on average, 85% occasionally
Permissible humidity (operation/storage/transport)	10% to 95% according to DIN EN 61131-2
Permissible air pressure (operation/storage/transport)	70 kPa to 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20 according to IEC 60529
Protection class	Class 3, according to EN 61131-2, IEC 61131-2
Connection data for connectors	
Connection method	Spring-cage terminals
Conductor cross-section	0.08 mm <sup>2</sup> to 1.5 mm <sup>2</sup> (solid or stranded), 28 - 16 AWG

#### Interface

Local bus	Via data routing
-----------	------------------

#### Transmission speed

IB IL 24 DO 8	500 kbps
IB IL 24 DO 8-PAC	500 kbps
IB IL 24 DO 8-PAC/SN	500 kbps
IB IL DO 8-2MBD	2 Mbps
IB IL 24 DO 8-2MBD-PAC	2 Mbps
IB IL 24 DO 8-2MBD-PAC/SN	2 Mbps

#### Supply of the module electronics and I/O through the bus terminal/power terminal

Connection method	Via potential routing
-------------------	-----------------------

#### Power consumption

	500 kbps	2 Mbps
Communications power	7.5 V	7.5 V
Current consumption from the local bus	60 mA, maximum	85 mA, maximum
Power consumption from the local bus	0.45 W, maximum	0.64 W, maximum
Segment supply voltage U <sub>S</sub>	24 V DC (nominal value)	24 V DC (nominal value)
Nominal current consumption at U <sub>S</sub>	4 A (8 x 0.5 A), maximum	4 A (8 x 0.5 A), maximum

#### Digital outputs

Number	8
Nominal output voltage U <sub>OUT</sub>	24 V DC
Differential voltage for I <sub>nom</sub>	≤ 1 V
Nominal current I <sub>nom</sub> per channel	0.5 A
Tolerance of the nominal current	+10%
Total current	4 A
Protection	Short circuit; overload



Channels are thermally coupled in groups of four, i.e., an error in one channel can affect the other channels.

Nominal load

Ohmic	48 Ω / 12 W
Lamp	12 W
Inductive	12 VA (1.2 H, 50 Ω)

**Digital outputs (continued)**

Signal delay upon power up of:

Nominal ohmic load	100 µs, typical
Nominal lamp load	100 ms, typical (with switching frequencies up to 8Hz; above this frequency the lamp load responds like an ohmic load)
Nominal inductive load	100 ms, typical (1.2 H, 50 Ω)

Signal delay upon power down of:

Nominal ohmic load	1 ms, typical
Nominal lamp load	1 ms, typical
Nominal inductive load	50 ms, typical (1.2 H, 50 Ω)

**Switching frequency with:**

Nominal ohmic load	300 Hz, maximum
--------------------	-----------------



This switching frequency is limited by the selected data rate, the number of bus devices, the bus structure, the software and the control or computer system used.

Nominal lamp load	300 Hz, maximum
-------------------	-----------------



This switching frequency is limited by the selected data rate, the number of bus devices, the bus structure, the software and the control or computer system used.

Nominal inductive load	0.5 Hz, maximum (1.2 H, 48 Ω)
------------------------	-------------------------------

Overload response:

Response time with ohmic overload (12 Ω)	3 s, approximately
--	--------------------

Restart frequency with ohmic overload

400 Hz, approximately

Restart frequency with lamp overload

400 Hz, approximately

Response with inductive overload

Output may be damaged

Response time in the event of a short circuit

400 ms, approximately

Reverse voltage protection against short pulses

Protected against reverse voltages

Resistance to permanently applied reverse voltages

Up to 2 A DC

Resistance to polarity reversal of the supply voltage

Protective elements in the bus terminal or power terminal

Resistance to permanently applied surge voltage

No

Validity of output data after connecting the 24 V voltage supply (power up)

5 ms, typical

Response upon power down

The output follows the supply voltage without delay.

Limitation of the voltage induced on circuit interruption

-15 V ≤ U<sub>demag</sub> ≤ -46 V (U<sub>demag</sub> = demagnetization voltage)

Single maximum energy in free running

400 mJ, maximum

Protective circuit type

Integrated 45 V Zener diode in the output chip

Overcurrent shutdown

0.7 A, minimum

Output current when switched off

300 µA, maximum

Output voltage when switched off

2 V, maximum

Output current with ground connection interrupt

25 mA, maximum

Switching power with ground connection interrupt

100 mW at 1 kΩ load resistance, typical

Inrush current with lamp load

1.5 A for 20 ms, maximum

**Output characteristic curve when switched on (typical)****Output current (A)****Differential output voltage (V)**

0	0
0.1	0.04
0.2	0.08
0.3	0.12
0.4	0.16
0.5	0.20

**Power dissipation****Formula to calculate the power dissipation of the electronics**

500 kbps

$$P_{EL} = 0.19 \text{ W} + \sum_{n=1}^8 (0.10 \text{ W} + I_{Ln}^2 \times 0.40 \Omega)$$

2 Mbps

$$P_{EL} = 0.46 \text{ W} + \sum_{n=1}^8 (0.10 \text{ W} + I_{Ln}^2 \times 0.40 \Omega)$$

Where:

$P_{EL}$  Total power dissipation in the terminal  
 $n$  Index of the number of set outputs  $n = 1$  to 8  
 $I_{Ln}$  load current of output n

**Power dissipation of the housing  $P_{HOU}$** 

2.7 W, maximum  
(within the permissible operating temperature)

**Limitation of simultaneity, derating**

Derating

No limitation of simultaneity, no derating

**Protective equipment**

Overload/short circuit in the segment circuit

Electronic; with two 4-channel drivers

Surge voltage

Protective elements of the power terminal

Protection up to 33 V DC

Polarity reversal of the supply voltage

Protective elements of the power terminal

The supply voltage must be protected. The power supply unit should be able to supply four times (400%) the nominal current of the fuse.

Reverse voltage

Protected against reverse voltages up to 2 A DC

**Electrical isolation/isolation of the voltage areas**

To provide electrical isolation between the logic level and the I/O area it is necessary to supply the station bus coupler and the digital output terminal described here via the bus coupler or a power terminal from separate power supply units. Interconnection of the power supply units in the 24 V area is not permitted. (See also user manual.)

**Common potentials**

The 24 V main voltage, 24 V segment voltage, and GND have the same potential. FE is a separate potential area.

**Separate potentials in the system consisting of bus terminal/power terminal and I/O terminal****Test distance**

5 V supply incoming remote bus/7.5 V supply (bus logic)

**Test voltage**

500 V AC, 50 Hz, 1 min.

5 V supply outgoing remote bus/7.5 V supply (bus logic)

500 V AC, 50 Hz, 1 min.

7.5 V supply (bus logic) / 24 V supply (I/O)

500 V AC, 50 Hz, 1 min.

24 V supply (I/O) / functional earth ground

500 V AC, 50 Hz, 1 min.

**Error messages to the higher-level control or computer system**

Short circuit/overload of an output

Yes



An error message is generated when an output is shorted and switched on. In addition, the diagnostic LED (D) flashes on the terminal at 2Hz (medium) under these conditions.

Operating voltage out of range

No

**Approvals**For the latest approvals, please visit [www.phoenixcontact.net/catalog](http://www.phoenixcontact.net/catalog).

## 4 Internal basic circuit diagram

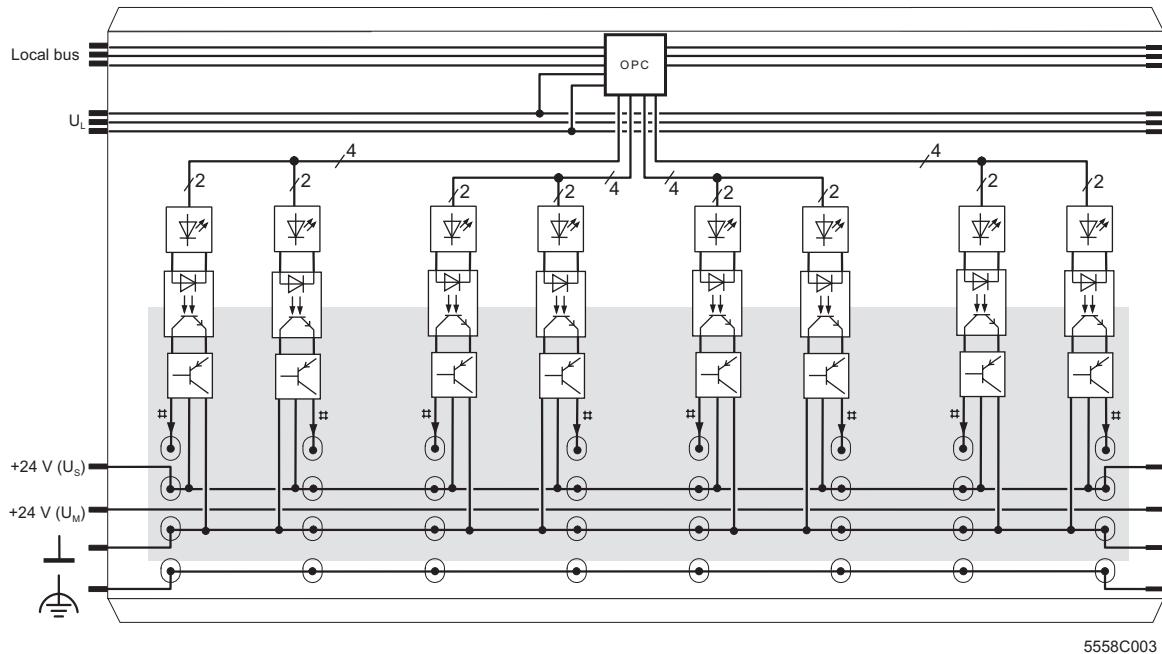


Figure 1 Internal wiring of the terminal points

Key:

OPC Protocol chip  
(bus logic including voltage conditioning)

LED

Optocoupler

Transistor

Digital output

Electrically isolated area



Other symbols used are explained in the  
IL SYS INST UM E user manual.

## 5 Local diagnostic and status indicators and terminal point assignment

### 5.1 Local diagnostic and status indicators

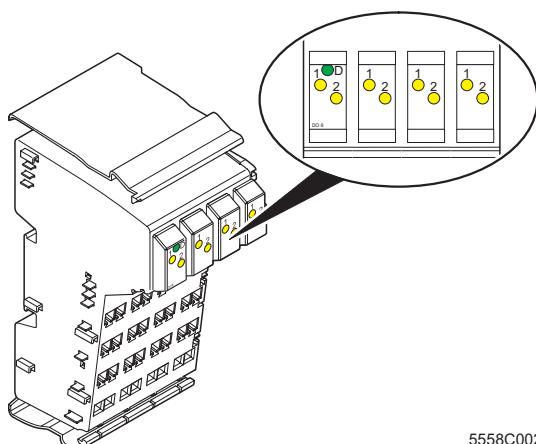


Figure 2 Local diagnostic and status indicators

Des.	Color	Meaning
D	Green	Diagnostics
1, 2	Yellow	Status indicators for the outputs

### 5.2 Function identification

Pink

2 Mbps: white stripe in the vicinity of the D LED

### 5.3 Terminal point assignment for each connector

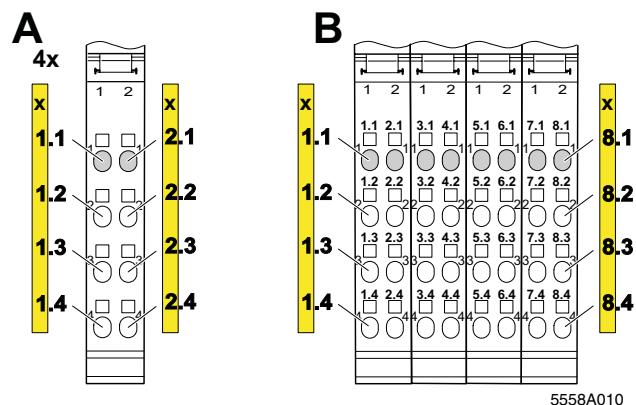


Figure 3 Terminal point numbering: individual connectors (A) and connector sets (B)

- A**
  - Using the IB IL 24 DO 8-PAC/SN or IB IL 24 DO 8-2MBD-PAC/SN with the supplied connectors
  - Using individual connectors (IB IL SCN-8 or IB IL SCN-8-CP)
- B**
  - Using the IB IL 24 DO 8-PAC or IB IL 24 DO 8-2MBD-PAC with the original connector set
  - Using a connector set (IB IL DI/DO 8-PLSET or IB IL DI/DO 8-PLSET/CP)

Terminal point	Assignment
x.1	Signal output (OUT)
x.2	Segment voltage $U_S$ for 4-wire termination Measuring points for the supply voltage
x.3	Ground contact (GND) for 2, 3, and 4-wire termination
x.4	FE connection for 3 and 4-wire termination

## 6 Connection example



When connecting the actuators observe the assignment of the terminal points to the process data (see page 9).

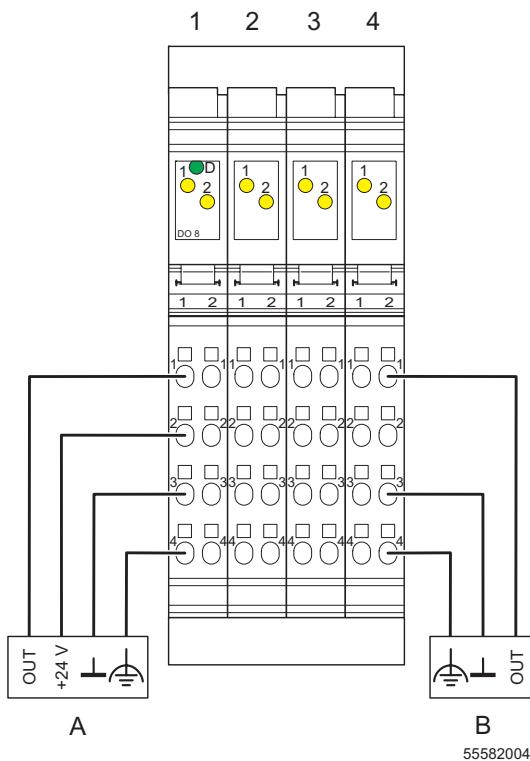


Figure 4 Typical connection of actuators

A 4-wire termination

B 3-wire termination

The numbers above the module illustration identify the connector slots.

## 7 Notes on using the terminals within a safety-related segment circuit

The terminals of the following hardware version and later (listed below) are approved for use within a safety-related segment circuit.

Order No.	Order designation	Hardware version
2861289	IB IL 24 DO 8-PAC	05
2862945	IB IL 24 DO 8-PAC/SN	07
2726269	IB IL 24 DO 8	05
2861687	IB IL 24 DO 8-2MBD-PAC	04
2878227	IB IL 24 DO 8-2MBD-PAC/SN	04
2819037	IB IL DO 8-2MBD	04



The hardware version is marked on the side of the housing of every terminal (1 in Figure 5).

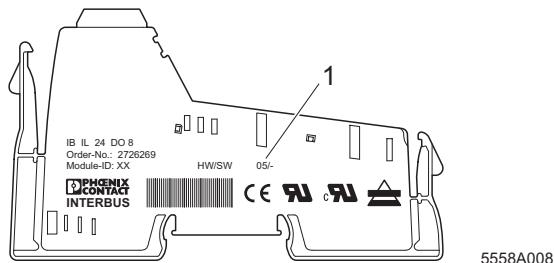


Figure 5 Labeling on an inline terminal



The instructions in the current documentation for the safety terminal used and from the AH EN IL SAFE application note must be observed to ensure that operation of the safety-related segment circuit is not adversely affected. The latest documentation can be downloaded at [www.phoenixcontact.net/catalog](http://www.phoenixcontact.net/catalog).

## 8 Programming data/ configuration data

### 8.1 Local bus (INTERBUS)

ID code	BD <sub>hex</sub> (189 <sub>dec</sub> )
Length code	81 <sub>hex</sub>
Process data channel	8 bits
Input address area	0 bytes
Output address area	1 byte
Parameter channel (PCP)	0 bytes
Register length (bus)	1 byte

### 8.2 Other bus systems



For the programming data/configuration data of other bus systems, please refer to the corresponding electronic device data sheet (GSD, EDS).

## 9 Process data



For the assignment of the illustrated (byte.bit) view to your **INTERBUS** control or computer system, please refer to the DB GB IBS SYS ADDRESS data sheet.

### Assignment of the terminal points to OUT process data

The following table applies to the IB IL 24 DO 8-PAC and IB IL 24 DO 8-2MBD-PAC terminals with the original connector set and when using the IB IL DI/DO 8-PLSET and IB IL DI/DO 8-PLSET/CP connector sets (see also Figure 3 on page 7, detail B).

(Byte.bit) view	Byte	Byte 0							
		7	6	5	4	3	2	1	0
Assignment	Slot		4		3		2		1
	Terminal point (signal)	8.1	7.1	6.1	5.1	4.1	3.1	2.1	1.1
	Terminal point (+24 V)	8.2	7.2	6.2	5.2	4.2	3.2	2.2	1.2
	Terminal point (GND)	8.3	7.3	6.3	5.3	4.3	3.3	2.3	1.3
	Terminal point (FE)	8.4	7.4	6.4	5.4	4.4	3.4	2.4	1.4
Status indicator	Slot		4		3		2		1
	LED	2	1	2	1	2	1	2	1

The following table applies to the IB IL 24 DO 8-PAC/SN and IB IL 24 DO 8-2MBD-PAC/SN terminals with the original connector set and when using the IB IL SCN-8 or IB IL SCN-8-CP connectors (see also Figure 3 on page 7, detail A).

(Byte.bit) view	Byte	Byte 0							
		7	6	5	4	3	2	1	0
Assignment	Slot		4		3		2		1
	Terminal point (signal)	2.1	1.1	2.1	1.1	2.1	1.1	2.1	1.1
	Terminal point (+24 V)	2.2	1.2	2.2	1.2	2.2	1.2	2.2	1.2
	Terminal point (GND)	2.3	1.3	2.3	1.3	2.3	1.3	2.3	1.3
	Terminal point (FE)	2.4	1.4	2.4	1.4	2.4	1.4	2.4	1.4
Status indicator	Slot		4		3		2		1
	LED	2	1	2	1	2	1	2	1



# OCEAN CHIPS

## Океан Электроники

### Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А