

# FETA2500BA

FET A 2500 B A -□□ -□

① ② ③ ④ ⑤ ⑥ ⑦



Example recommended EMI/EMC filter  
NAC-20-472



High voltage pulse noise type : NAP series  
Low leakage current type : NAM series  
\* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ 200/230V input
- ⑤ Version
- ⑥ Output voltage
- ⑦ Optional
- F2: Reverse air exhaust
- R: with Remote ON/OFF
- Positive logic control

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.


|                       |               |               |
|-----------------------|---------------|---------------|
| MODEL                 | FETA2500BA-36 | FETA2500BA-48 |
| MAX OUTPUT WATTAGE[W] | 1980          | 2496          |
| DC OUTPUT             | 36V 55A       | 48V 52A       |

## SPECIFICATIONS


|                                    | MODEL                              | FETA2500BA-36  | FETA2500BA-48  |                   |
|------------------------------------|------------------------------------|--|--|-------------------|
| INPUT                              | VOLTAGE[V]                         | AC170 - 264 1 φ (Output derating is required at AC170V - 180V. Refer to Derating)  |  |                   |
|                                    | CURRENT[A]                         | ACIN 200V  | 11.3typ  |                   |
|                                    | FREQUENCY[Hz]                      |  | 50 / 60 (47 - 63)  |                   |
|                                    | EFFICIENCY[%]                      | ACIN 230V  | 80typ (Io=10%)   | 83typ (Io=10%)    |
|                                    |                                    |  | 87typ (Io=20%)   | 89typ (Io=20%)    |
|                                    |                                    |  | 91typ (Io=50%)   | 92.5typ (Io=50%)  |
|                                    |                                    |  | 90typ (Io=100%)  | 91.5typ (Io=100%) |
| POWER FACTOR                       | ACIN 230V                          | 0.98typ (Io=100%)  |  |                   |
| INRUSH CURRENT[A]                  | ACIN 200V                          | 20max / 60max (Primary inrush current /Secondary inrush current) (More than 10 sec. to re-start)   |  |                   |
| LEAKAGE CURRENT[mA]                |                                    | 0.85max (ACIN 240V 60Hz, Io=100%, According to IEC62368-1)   |  |                   |
| OUTPUT                             | VOLTAGE[V]                         | 36   | 48   |                   |
|                                    | CURRENT[A]                         | ACIN 170V-180V   | Output derating is required at ACIN 180V or less (refer to Derating) |                   |
|                                    |                                    | ACIN 180V-264V   | 55   | 52                |
|                                    | LINE REGULATION[mV]                |  | 144max   |                   |
|                                    | LOAD REGULATION[mV]                |  | 360max   |                   |
|                                    | RIPPLE[mVp-p]                      | 0 to +50°C   | 300max   | 360max            |
|                                    |                                    | -10 to 0°C   | 360max   | 480max            |
|                                    | RIPPLE NOISE[mVp-p]                | 0 to +50°C   | 360max   | 480max            |
|                                    |                                    | -10 to 0°C   | 480max   | 600max            |
|                                    | TEMPERATURE REGULATION[mV]         | 0 to +50°C   | 360max   | 480max            |
|                                    |                                    | -10 to +50°C   | 440max   | 600max            |
|                                    | DRIFT[mV]                          |  | 144max   | 192max            |
|                                    | START-UP TIME[s]                   |  | 1.7max (ACIN 200V, Io=100%)  |                   |
|                                    | HOLD-UP TIME[ms]                   | ACIN 200V  | 10typ (Io=100%)  |                   |
| 20typ (Io=50%)                     |                                    |  |  |                   |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] |                                    | 28.80 - 39.60  | 38.40 - 52.80  |                   |
| OUTPUT VOLTAGE SETTING[V]          |                                    | 36.00 - 37.44  | 48.00 - 49.92  |                   |
| PROTECTION CIRCUIT AND OTHERS      | OVERCURRENT PROTECTION             | Activate over 105% - 120% of rated current and recovers automatically. (Output voltage shuts down when the output voltage continuously drops due to overcurrent protection.) |  |                   |
|                                    | OVERVOLTAGE PROTECTION[V]          | 42.00 - 45.00  | 56.00 - 60.00  |                   |
|                                    | DC_OK LAMP                         | LED (Green)  |  |                   |
|                                    | ALARM LAMP                         | LED (Amber)  |  |                   |
|                                    | REMOTE ON/OFF                      | Provided   |  |                   |
| ISOLATION                          | INPUT-OUTPUT·AUX·RC·WRN·PG         | AC3,000V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature)   |  |                   |
|                                    | INPUT-FG                           | AC2,000V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature)   |  |                   |
|                                    | OUTPUT·AUX·RC·WRN·PG-FG            | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)  |  |                   |
|                                    | OUTPUT-AUX·RC·WRN·PG               | AC100V 1minute, Cutoff current = 100mA, DC100V 50MΩ min (At room temperature)  |  |                   |
| ENVIRONMENT                        | OPERATING TEMP.,HUMID.AND ALTITUDE | -10 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max  |  |                   |
|                                    | STORAGE TEMP.,HUMID.AND ALTITUDE   | -20 to +85°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max  |  |                   |
|                                    | VIBRATION                          | 10 - 55Hz, 19.6m/s <sup>2</sup> (2G), 3minutes period, 60minutes each along X, Y and Z axis  |  |                   |
|                                    | IMPACT                             | 196.1m/s <sup>2</sup> (20G), 11ms, once each along X, Y and Z axis   |  |                   |
| SAFETY AND NOISE REGULATIONS       | AGENCY APPROVALS                   | UL62368-1, C-UL (CSA62368-1), EN62368-1  |  |                   |
|                                    | CONDUCTED NOISE                    | Complies with FCC Part 15-A, CISPR32-A, EN55032-A, VCCI-A  |  |                   |
|                                    | HARMONIC ATTENUATOR                | Complies with IEC61000-3-2 Class A   |  |                   |
| OTHERS                             | CASE SIZE/WEIGHT                   | 102 X 41 X 340mm [4.02 X 1.61 X 13.39 inches] (W X H X D) / 2.3kg max  |  |                   |
|                                    | COOLING METHOD                     | Forced cooling (internal fan)  |  |                   |

\*1 AUX output power is not included.  
 \*2 The current of input surge to a built-in noise filter (0.2ms or less) is excluded.  
 \*3 Measured by 500MHz oscilloscope.  
 Ripple and ripple noise is measured on measuring board with capacitor of 22μF within 150mm from the output terminal.  
 \*4 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.  
 \*5 Can't be used above the rated output current and the rated output power.  
 \*6 When the output voltage is adjusted to higher than 49.92V and the load factor is over 70% of the rated current, if the load current changes quickly (< 200msec), the output voltage drops approximately 5V below the setting voltage.  
 \*7 Output voltage recovers from protection by shutting down the input voltage and waiting more than 10 seconds then turning on AC input again, or turning off the output voltage by remote control.  
 \*8 Please contact us about another class.  
 \*9 Case size contains neither the terminal blocks, connector and screw.  
 \* To meet the specifications, do not operate over-loaded condition.  
 \* A sound may occur from power supply at peak loading.

## Block diagram

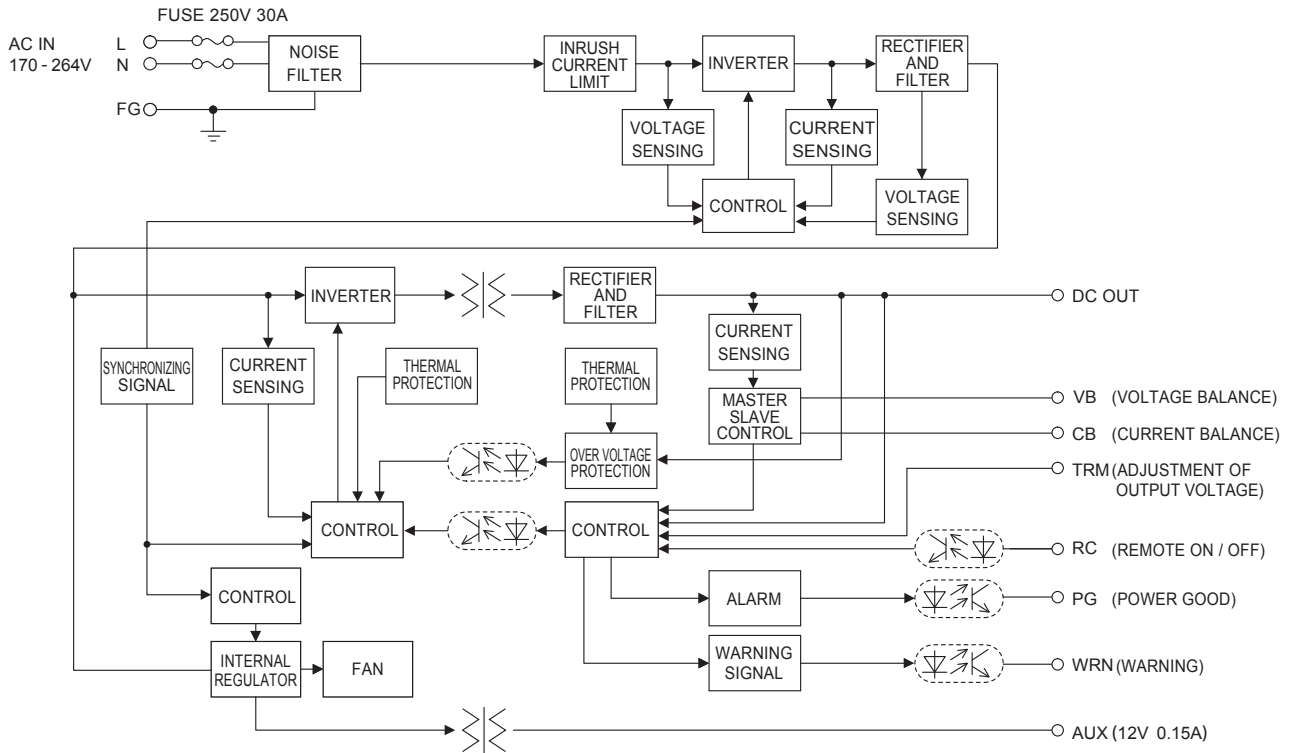

## External view

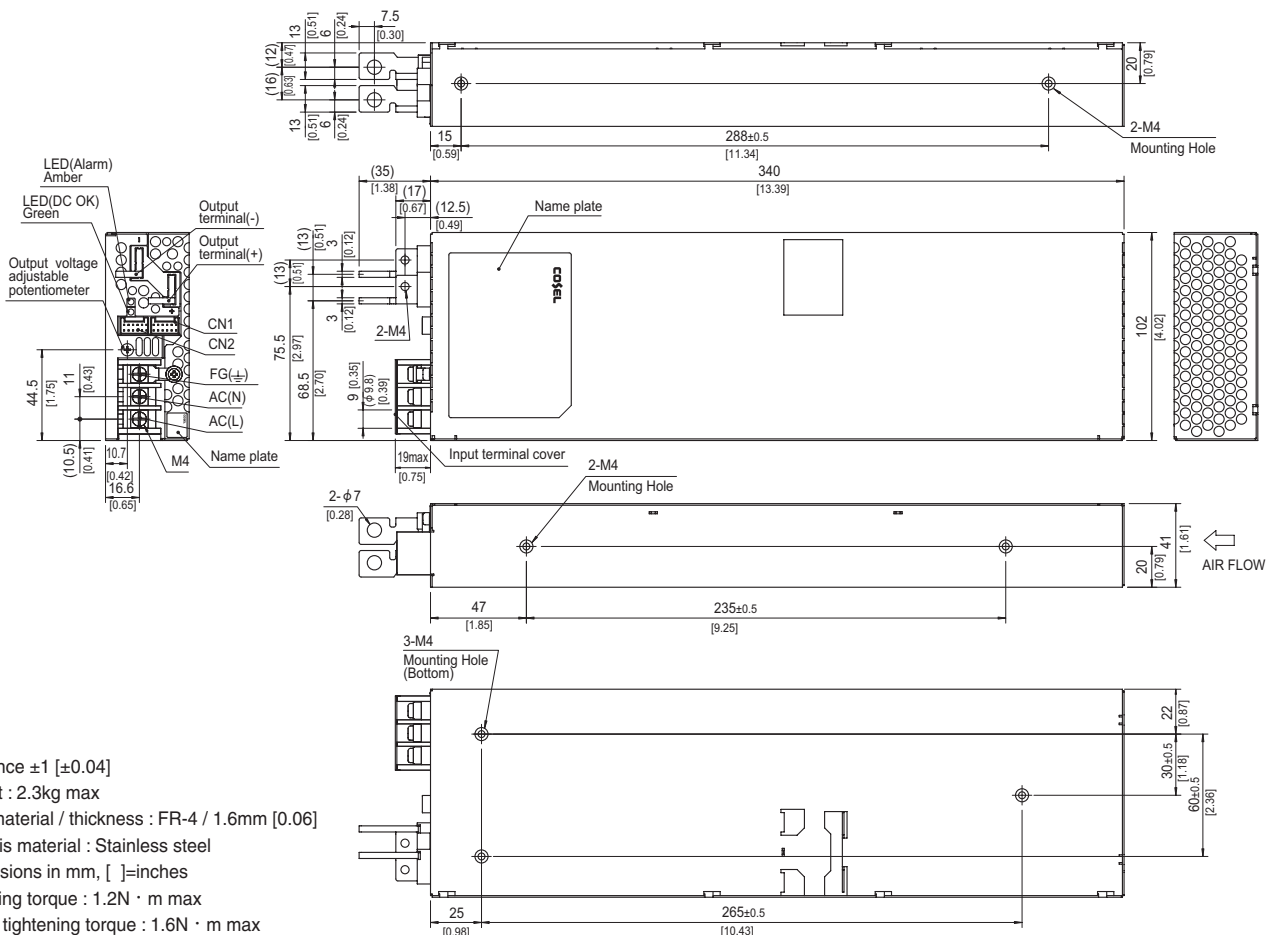

- \* Tolerance  $\pm 1$  [ $\pm 0.04$ ]
- \* Weight : 2.3kg max
- \* PCB material / thickness : FR-4 / 1.6mm [0.06]
- \* Chassis material : Stainless steel
- \* Dimensions in mm, [ ]=inches
- \* Mounting torque : 1.2N · m max
- \* Screw tightening torque : 1.6N · m max
- \* Please connect safety ground to FG terminal on the unit.

# FETA3000BA

FET A 3000 B A -□□ -□

① ② ③ ④ ⑤ ⑥ ⑦



Example recommended EMI/EMC filter  
NAC-20-472



High voltage pulse noise type : NAP series  
Low leakage current type : NAM series  
\* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
  - ② Single output
  - ③ Output wattage
  - ④ 200/230V input
  - ⑤ Version
  - ⑥ Output voltage
  - ⑦ Optional
- R: with Remote ON/OFF  
Positive logic control

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

|                       |               |
|-----------------------|---------------|
| MODEL                 | FETA3000BA-48 |
| MAX OUTPUT WATTAGE[W] | *1 2976       |
| DC OUTPUT             | 48V 62A       |


## SPECIFICATIONS

|                                       |   |   |  |
|---------------------------------------|---|---|--|
|                                       | MODEL   | FETA3000BA-48   |  |
| INPUT                                 | VOLTAGE[V]  | AC170 - 264 1 φ (Output derating is required at AC170V - 180V. Refer to Derating)   |  |
|                                       | CURRENT[A]  | ACIN 200V 16.6typ   |  |
|                                       | FREQUENCY[Hz]   | 50 / 60 (47 - 63)   |  |
|                                       | EFFICIENCY[%]   | ACIN 230V   | 82typ (Io=10%)   |
|                                       |   |   | 90typ (Io=20%)   |
|                                       |   |   | 93typ (Io=50%)   |
| POWER FACTOR                          | ACIN 230V 0.98typ (Io=100%)   |   |  |
| INRUSH CURRENT[A]                     | ACIN 200V *2 20max / 80max (Primary inrush current /Secondary inrush current) (More than 10 sec. to re-start) |   |  |
| LEAKAGE CURRENT[mA]                   | 0.85max (ACIN 240V 60Hz, Io=100%, According to IEC62368-1)  |   |  |
| OUTPUT                                | VOLTAGE[V]  | 48  |  |
|                                       | CURRENT[A]  | ACIN 170V-180V  | Output derating is required at ACIN 180V or less (refer to Derating) |
|                                       |   | ACIN 180V-264V  | 62   |
|                                       | LINE REGULATION[mV]   | 192max  |  |
|                                       | LOAD REGULATION[mV]   | 480max  |  |
|                                       | RIPPLE[mVp-p]   | 0 to +50°C *3   | 360max (Vo=15 - 52.8[V]) *4  |
|                                       |   | -10 to 0°C *3   | 480max (Vo=15 - 52.8[V]) *4  |
|                                       | RIPPLE NOISE[mVp-p]   | 0 to +50°C *3   | 600max (Vo=15 - 52.8[V]) *4  |
|                                       |   | -10 to 0°C *3   | 720max (Vo=15 - 52.8[V]) *4  |
|                                       | TEMPERATURE REGULATION[mV]  | 0 to +50°C  | 480max   |
|                                       |   | -10 to +50°C  | 600max   |
|                                       | DRIFT[mV]   | *4  | 192max   |
|                                       | START-UP TIME[s]  | *5  | 1.7max (ACIN 200V, Io=100%)  |
| HOLD-UP TIME[ms]                      | ACIN 200V   | 10typ (Io=100%)   |  |
|                                       |   | 20typ (Io=50%)  |  |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] *6 |   | 38.40 - 52.80   |  |
| OUTPUT VOLTAGE SETTING[V]             |   | 48.00 - 49.00   |  |
| PROTECTION CIRCUIT AND OTHERS         | OVERCURRENT PROTECTION  | Activate over 105% - 120% of rated current and recovers automatically. (Output voltage shuts down when the output voltage continuously drops due to overcurrent protection.) *7 |  |
|                                       | OVERVOLTAGE PROTECTION[V] *7  | 56.00 - 60.00   |  |
|                                       | DC_OK LAMP  | LED (Green)   |  |
|                                       | ALARM LAMP  | LED (Amber)   |  |
|                                       | REMOTE ON/OFF   | Provided  |  |
| ISOLATION                             | INPUT-OUTPUT·AUX·RC·WRN·PG  | AC3,000V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature)  |  |
|                                       | INPUT-FG  | AC2,000V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature)  |  |
|                                       | OUTPUT·AUX·RC·WRN·PG-FG   | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)   |  |
|                                       | OUTPUT-AUX·RC·WRN·PG  | AC100V 1minute, Cutoff current = 100mA, DC100V 50MΩ min (At room temperature)   |  |
| ENVIRONMENT                           | OPERATING TEMP.,HUMID.AND ALTITUDE  | -10 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max   |  |
|                                       | STORAGE TEMP.,HUMID.AND ALTITUDE  | -20 to +85°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max   |  |
|                                       | VIBRATION   | 10 - 55Hz, 19.6m/s <sup>2</sup> (2G), 3minutes period, 60minutes each along X, Y and Z axis   |  |
|                                       | IMPACT  | 196.1m/s <sup>2</sup> (20G), 11ms, once each along X, Y and Z axis  |  |
| SAFETY AND NOISE REGULATIONS          | AGENCY APPROVALS  | UL62368-1, C-UL (CSA62368-1), EN62368-1   |  |
|                                       | CONDUCTED NOISE   | Complies with FCC Part 15-A, CISPR32-A, EN55032-A, VCCI-A   |  |
|                                       | HARMONIC ATTENUATOR   | Complies with IEC61000-3-2 Class A *8   |  |
| OTHERS                                | CASE SIZE/WEIGHT *9   | 102 X 41 X 340mm [4.02 X 1.61 X 13.39 inches] (W X H X D) / 2.3kg max   |  |
|                                       | COOLING METHOD  | Forced cooling (internal fan)   |  |


\*1 AUX output power is not included.  
 \*2 The current of input surge to a built-in noise filter (0.2ms or less) is excluded.  
 \*3 Measured by 500MHz oscilloscope.  
 Ripple and ripple noise is measured on measuring board with capacitor of 22μF within 150mm from the output terminal.  
 \*4 The output voltage should not be adjusted to 15V or less because the ripple and ripple noise would be out of specs and the unit would make the audible noise.  
 \*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.  
 \*6 Can't be used above the rated output current and the rated output power.  
 \*7 Output voltage recovers from protection by shutting down the input voltage and waiting

more than 10 seconds then turning on AC input again, or turning off the output voltage by remote control.  
 \*8 Please contact us about another class.  
 \*9 Case size contains neither the terminal blocks, connector and screw.  
 \* To meet the specifications, do not operate over-loaded condition.  
 \* A sound may occur from power supply at peak loading.

## Block diagram

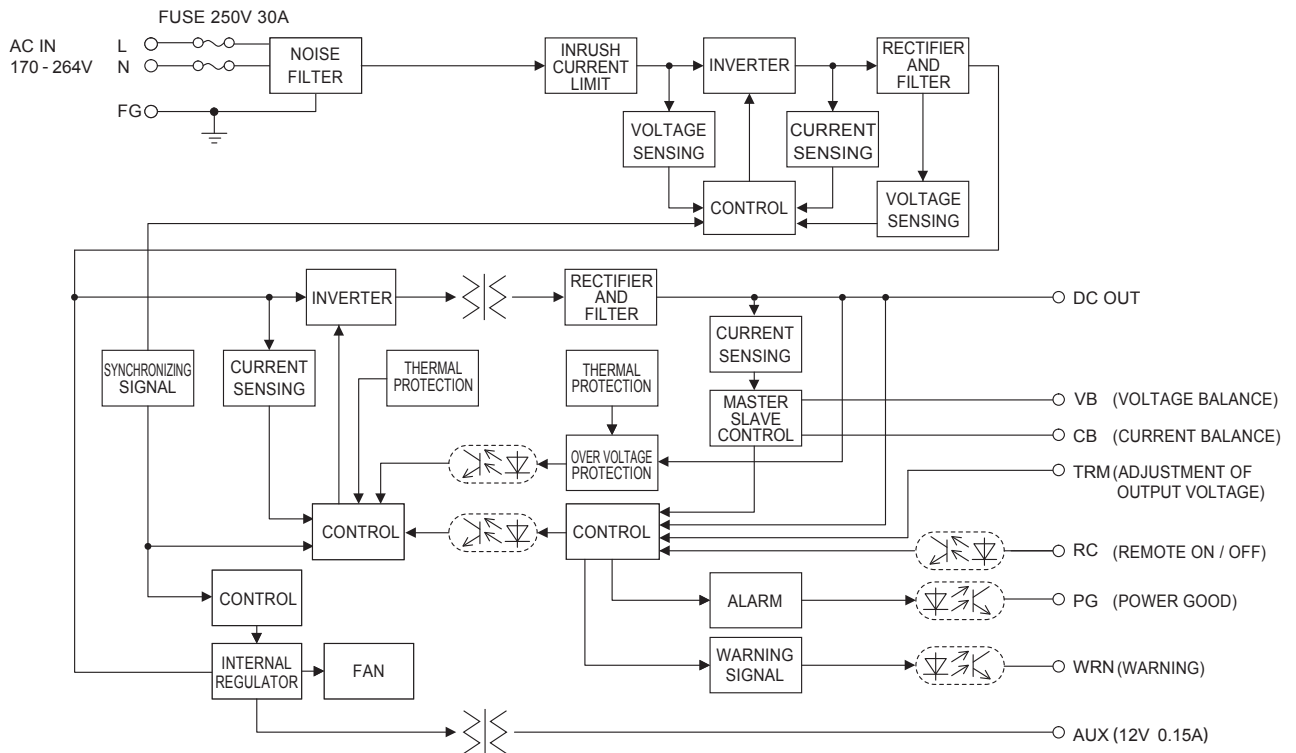

## External view

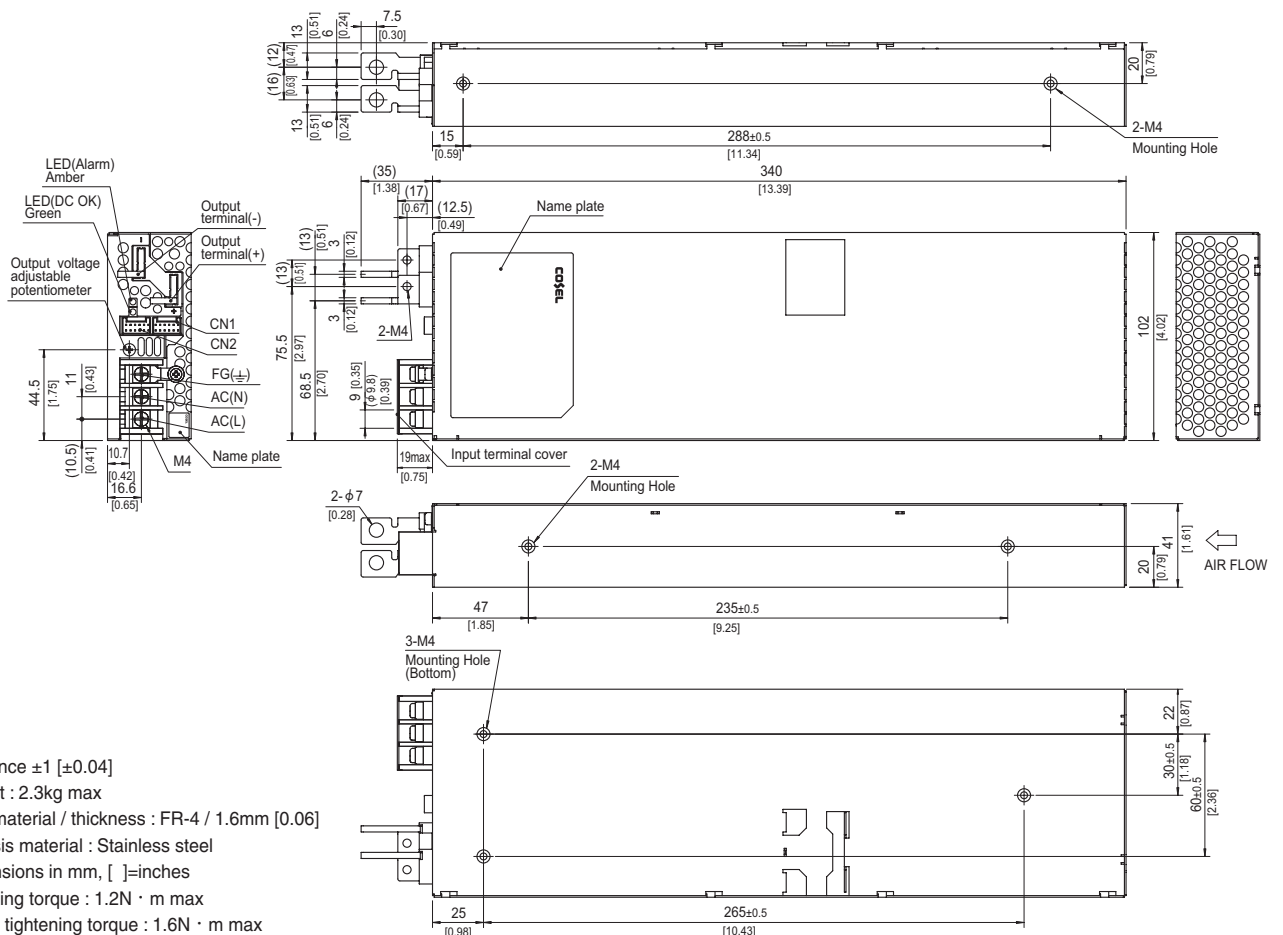


- \* Tolerance  $\pm 1$  [ $\pm 0.04$ ]
- \* Weight : 2.3kg max
- \* PCB material / thickness : FR-4 / 1.6mm [0.06]
- \* Chassis material : Stainless steel
- \* Dimensions in mm, [ ]=inches
- \* Mounting torque : 1.2N · m max
- \* Screw tightening torque : 1.6N · m max
- \* Please connect safety ground to FG terminal on the unit.

# FETA7000T

FET A 7000 T -

① ② ③ ④ ⑤

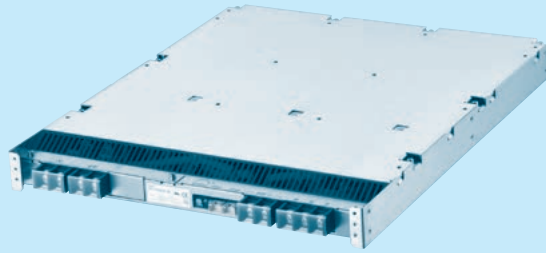

Example recommended EMI/EMC filter  
TAC-30-683



\*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Triple input phase
- ⑤ Output voltage

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

| MODEL                 | FETA7000T-48 | FETA7000T-144 |
|-----------------------|--------------|---------------|
| MAX OUTPUT WATTAGE[W] | *1 7113      | 7488          |
| DC OUTPUT             | 48V 148.2A   | 144V 52A      |


## SPECIFICATIONS

|                                       | MODEL                                | FETA7000T-48  | FETA7000T-144   |         |
|---------------------------------------|--------------------------------------|---|---|---------|
| INPUT                                 | VOLTAGE[V]                           | AC170 - 264 3 φ (Output derating is required at AC170V - 180V. Refer to Derating)   |   |         |
|                                       | CURRENT[A]                           | ACIN 200V   | 22.7typ   |         |
|                                       | FREQUENCY[Hz]                        |   | 50 / 60 (47 - 63)   |         |
|                                       | EFFICIENCY[%]                        | ACIN 230V   | 90.5% (Io=100%)   |         |
|                                       | POWER FACTOR                         | ACIN 230V   | 0.98typ (Io=100%)   |         |
|                                       | INRUSH CURRENT[A]                    | ACIN 200V *2  | 30max / 60max (Primary inrush current / Secondary inrush current) (More than 10 sec. to re-start) |         |
|                                       | LEAKAGE CURRENT[ma]                  |   | 3.0max (ACIN 240V 60Hz, Io=100%, According to IEC62368-1)   |         |
| OUTPUT                                | VOLTAGE[V]                           | 48  | 144   |         |
|                                       | CURRENT[A]                           | ACIN 170V-180V<br>ACIN 180V-264V  | Output derating is required at ACIN 180V or less (refer to Derating)                              |         |
|                                       | LINE REGULATION[mV]                  |   | 192max  | 360max  |
|                                       | LOAD REGULATION[mV]                  |   | 960max  | 1800max |
|                                       | RIPPLE[mVp-p]                        | 0 to +40°C *3   | 360max  | 720max  |
|                                       |                                      | -10 to 0°C *3   | 480max  | 960max  |
|                                       | RIPPLE NOISE[mVp-p]                  | 0 to +40°C *3   | 480max  | 960max  |
|                                       |                                      | -10 to 0°C *3   | 600max  | 1200max |
|                                       | TEMPERATURE REGULATION[mV]           | 0 to +40°C  | 480max  | 2200max |
|                                       |                                      | -10 to +40°C  | 600max  | 2800max |
|                                       | DRIFT[mV]                            | *4  | 192max  | 384max  |
|                                       | START-UP TIME[s]                     |   | 1.7max (ACIN 200V, Io=100%)   |         |
|                                       | HOLD-UP TIME[ms]                     | ACIN 200V   | 10typ (Io=100%)   |         |
|                                       |                                      | 20typ (Io=50%)  |   |         |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] *5 |                                      | 28.8 - 52.8 *6  | 86.4 - 158.4 *7   |         |
| OUTPUT VOLTAGE SETTING[V]             |                                      | 47 - 49   | 141 - 147   |         |
| PROTECTION CIRCUIT AND OTHERS         | OVERCURRENT PROTECTION               | Works over 105% of rating (Recovers automatically, Hiccup overcurrent) (Output voltage shuts down when the output voltage continuously drops due to overcurrent protection.) *8 |   |         |
|                                       | OVERVOLTAGE PROTECTION[V] *8         | 56 - 60   | 168 - 180   |         |
|                                       | DC_OK LAMP                           | LED (Green)   |   |         |
|                                       | ALARM LAMP                           | LED (Amber)   |   |         |
| REMOTE ON/OFF                         | Provided                             |   |   |         |
| ISOLATION                             | INPUT-OUTPUT-AUX-RC-WRN-PG           | AC3,000V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)   |   |         |
|                                       | INPUT-FG                             | AC2,000V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)   |   |         |
|                                       | OUTPUT-AUX-RC-WRN-PG-FG              | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)   |   |         |
|                                       | OUTPUT-AUX-RC-WRN-PG                 | AC100V 1minute, Cutoff current = 100mA, DC100V 50MΩ min (At room temperature)   |   |         |
| ENVIRONMENT                           | OPERATING TEMP., HUMID. AND ALTITUDE | -10 to +60°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max   |   |         |
|                                       | STORAGE TEMP., HUMID. AND ALTITUDE   | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max   |   |         |
|                                       | VIBRATION                            | 10 - 55Hz, 19.6m/s <sup>2</sup> (2G), 3minutes period, 60minutes each along X, Y and Z axis   |   |         |
|                                       | IMPACT                               | 196.1m/s <sup>2</sup> (20G), 11ms, once each along X, Y and Z axis  |   |         |
| SAFETY AND NOISE REGULATIONS          | AGENCY APPROVALS                     | UL62368-1, C-UL (CSA62368-1), EN62368-1   |   |         |
|                                       | CONDUCTED NOISE                      | Complies with FCC Part15-A, CISPR32-A, EN55032-A, VCCI-A  |   |         |
|                                       | HARMONIC ATTENUATOR                  | Complies with IEC61000-3-12   |   |         |
| OTHERS                                | CASE SIZE/WEIGHT *9                  | 388 X 43 X 475mm [15.28 X 1.69 X 18.70 inches] (W X H X D) / 11kg max   |   |         |
|                                       | COOLING METHOD                       | Forced cooling (internal fan)   |   |         |


- \*1 AUX output power is not included.
- \*2 The current of input surge to a built-in noise filter (0.2ms or less) is excluded.
- \*3 Measured by 500MHz oscilloscope. Ripple and ripple noise is measured on measuring board with capacitor of 22μF within 150mm from the output terminal.
- \*4 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- \*5 Can't be used above the rated output current and the rated output power.
- \*6 When the output voltage is adjusted to higher than 49.92V and the load factor is over 70% of the rated current, if the load current changes quickly (< 200msec), the output voltage drops approximately 5V below the setting voltage.
- \*7 When the output voltage is adjusted to higher than 149.82V and the load factor is over 70% of the rated current, if the load current changes quickly (<200msec), the output voltage drops approximately 15V below the setting voltage.
- \*8 Output voltage recovers from protection by shutting down the input voltage and waiting more than 10 seconds then turning on AC input again, or turning off the output voltage by remote control.
- \*9 Case size contains neither the terminal blocks, connector and screw.
- \* To meet the specifications, do not operate over-loaded condition.
- \* A sound may occur from power supply at peak loading.

## Block diagram


### ●FETA7000T-48

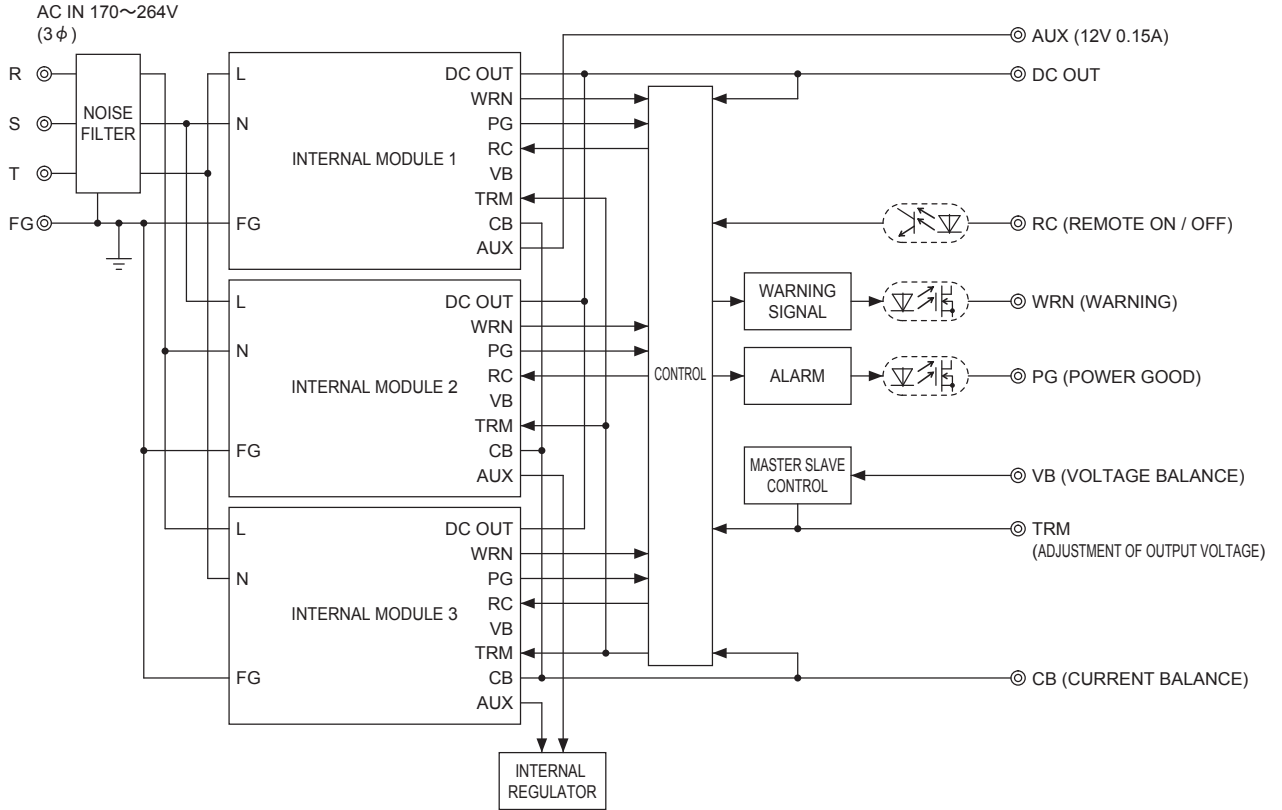


### ●FETA7000T-144

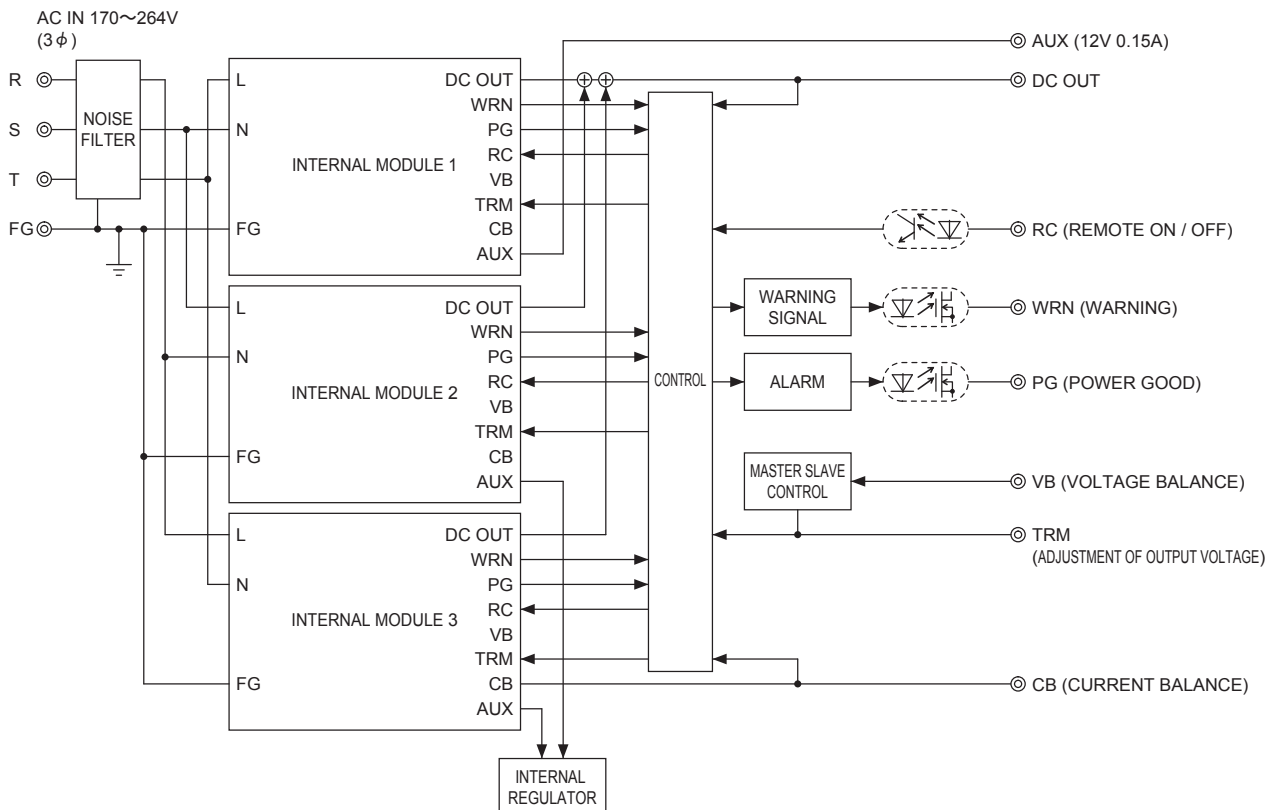

## Block diagram of internal module

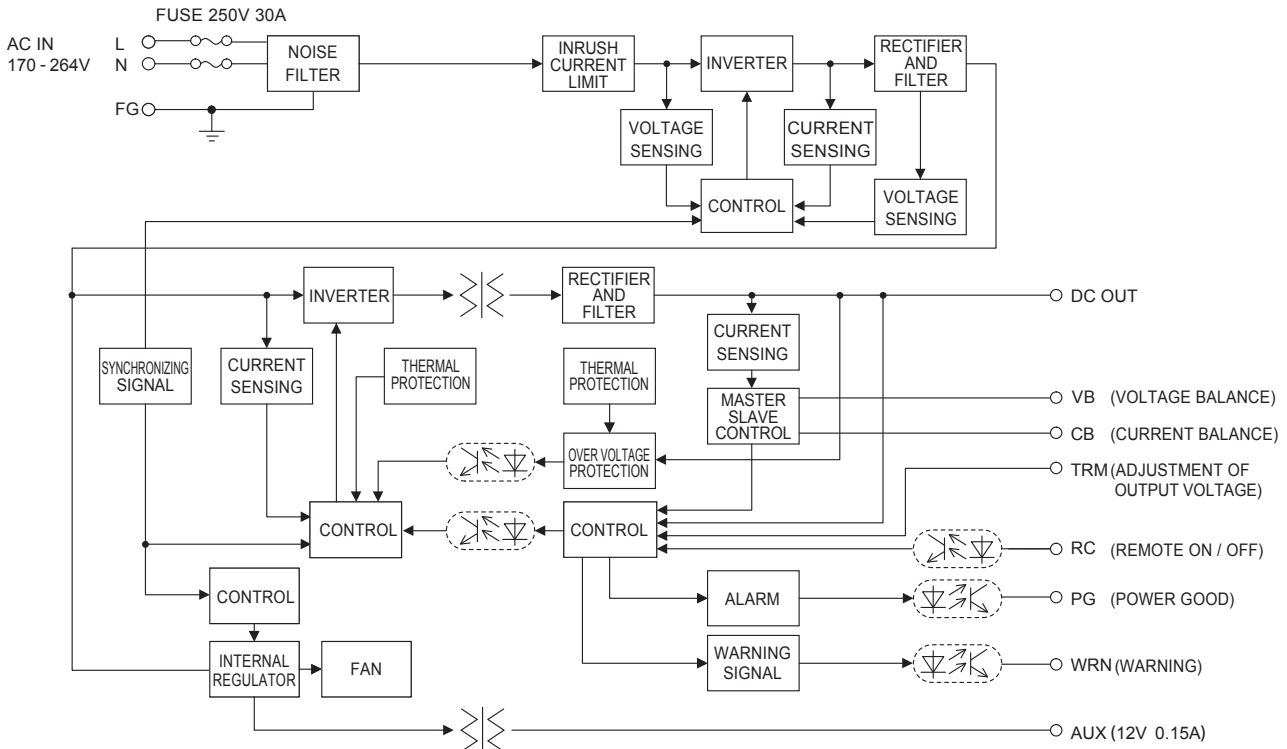

## External view

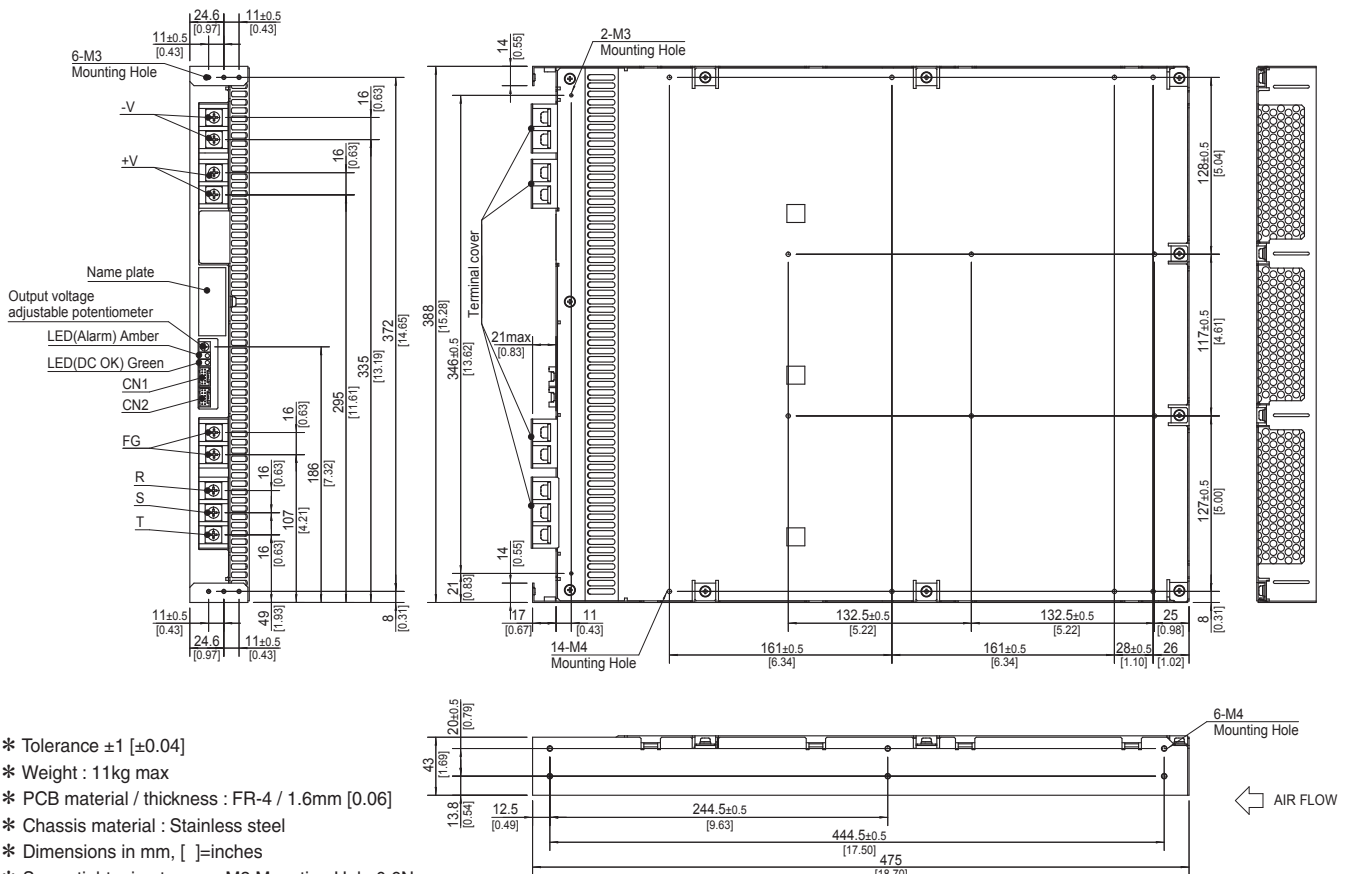

- \* Tolerance  $\pm 1$  [ $\pm 0.04$ ]
- \* Weight : 11kg max
- \* PCB material / thickness : FR-4 / 1.6mm [0.06]
- \* Chassis material : Stainless steel
- \* Dimensions in mm, [ ]=inches
- \* Screw tightening torque : M3 Mounting Hole 0.6N · m max  
M4 Mounting Hole 1.2N · m max  
M5 Input terminal 3.0N · m max
- \* Please connect safety ground to FG terminal on the unit.






# FETA7000ST

FET A 7000 ST -□□

① ② ③ ④ ⑤

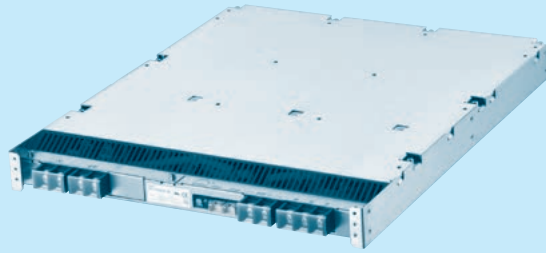

- ① Series name
- ② Single output
- ③ Output wattage
- ④ 3 φ 4-Wire
- ⑤ Output voltage

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

| MODEL                 | FETA7000ST-48 | FETA7000ST-144 |
|-----------------------|---------------|----------------|
| MAX OUTPUT WATTAGE[W] | *1 7113       | 7488           |
| DC OUTPUT             | 48V 148.2A    | 144V 52A       |

## SPECIFICATIONS

|                                       | MODEL                                | FETA7000ST-48   | FETA7000ST-144   |                 |
|---------------------------------------|--------------------------------------|---|--|-----------------|
| INPUT                                 | VOLTAGE[V]                           | AC300 - 480 3 φ 4-Wire (Output derating is required at AC300V - 320V. Refer to Derating)  |  |                 |
|                                       | CURRENT[A]                           | ACIN 400V *2  | 11.4typ  | 12.0typ         |
|                                       | FREQUENCY[Hz]                        |   | 50 / 60 (47 - 63)  |                 |
|                                       | EFFICIENCY[%]                        | ACIN 400V   | 90.5% (Io=100%)  | 90.5% (Io=100%) |
|                                       | POWER FACTOR                         | ACIN 400V   | 0.98typ (Io=100%)  |                 |
|                                       | INRUSH CURRENT[A]                    | ACIN 400V *3  | 40max / 80max (Primary inrush current /Secondary inrush current) (More than 10 sec. to re-start) |                 |
|                                       | LEAKAGE CURRENT[mA]                  |   | 5.0max (ACIN 480V 60Hz, Io=100%, According to IEC62368-1)  |                 |
| OUTPUT                                | VOLTAGE[V]                           |   | 48   | 144             |
|                                       | CURRENT[A]                           | ACIN 300V-320V<br>ACIN 320V-480V  | Output derating is required at ACIN 320V or less (refer to Derating)                             |                 |
|                                       | LINE REGULATION[mV]                  |   | 192max   | 360max          |
|                                       | LOAD REGULATION[mV]                  |   | 960max   | 1800max         |
|                                       | RIPPLE[mVp-p]                        | 0 to +40°C *4   | 360max   | 720max          |
|                                       |                                      | -10 to 0°C *4   | 480max   | 960max          |
|                                       | RIPPLE NOISE[mVp-p]                  | 0 to +40°C *4   | 480max   | 960max          |
|                                       |                                      | -10 to 0°C *4   | 600max   | 1200max         |
|                                       | TEMPERATURE REGULATION[mV]           | 0 to +40°C  | 480max   | 2200max         |
|                                       |                                      | -10 to +40°C  | 600max   | 2800max         |
|                                       | DRIFT[mV]                            | *5  | 192max   | 384max          |
|                                       | START-UP TIME[s]                     |   | 1.7max (ACIN 400V, Io=100%)  |                 |
|                                       | HOLD-UP TIME[ms]                     | ACIN 400V   | 10typ (Io=100%)  |                 |
|                                       |                                      | 20typ (Io=50%)  |  |                 |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] *6 |                                      | 28.8 - 52.8 *7  | 86.4 - 158.4 *8  |                 |
| OUTPUT VOLTAGE SETTING[V]             |                                      | 47 - 49   | 141 - 147  |                 |
| PROTECTION CIRCUIT AND OTHERS         | OVERCURRENT PROTECTION               | Works over 105% of rating (Recovers automatically, Hiccup overcurrent) (Output voltage shuts down when the output voltage continuously drops due to overcurrent protection.) *9 |  |                 |
|                                       | OVERVOLTAGE PROTECTION[V] *9         | 56 - 60   | 168 - 180  |                 |
|                                       | DC_OK LAMP                           | LED (Green)   |  |                 |
|                                       | ALARM LAMP                           | LED (Amber)   |  |                 |
| REMOTE ON/OFF                         | Provided                             |   |  |                 |
| ISOLATION                             | INPUT-OUTPUT-AUX-RC-WRN-PG           | AC3,000V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)   |  |                 |
|                                       | INPUT-FG                             | AC2,000V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)   |  |                 |
|                                       | OUTPUT-AUX-RC-WRN-PG-FG              | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)   |  |                 |
|                                       | OUTPUT-AUX-RC-WRN-PG                 | AC100V 1minute, Cutoff current = 100mA, DC100V 50MΩ min (At room temperature)   |  |                 |
| ENVIRONMENT                           | OPERATING TEMP., HUMID. AND ALTITUDE | -10 to +60°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max   |  |                 |
|                                       | STORAGE TEMP., HUMID. AND ALTITUDE   | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max   |  |                 |
|                                       | VIBRATION                            | 10 - 55Hz, 19.6m/s <sup>2</sup> (2G), 3minutes period, 60minutes each along X, Y and Z axis   |  |                 |
|                                       | IMPACT                               | 196.1m/s <sup>2</sup> (20G), 11ms, once each along X, Y and Z axis  |  |                 |
| SAFETY AND NOISE REGULATIONS          | AGENCY APPROVALS                     | UL62368-1, C-UL (CSA62368-1), EN62368-1   |  |                 |
|                                       | CONDUCTED NOISE                      | Complies with FCC Part15-A, CISPR32-A, EN55032-A, VCCI-A with an external EMI/EMC filter. (refer to Instruction manual)   |  |                 |
|                                       | HARMONIC ATTENUATOR                  | Complies with IEC61000-3-2 Class A *10  |  |                 |
| OTHERS                                | CASE SIZE/WEIGHT *11                 | 388 X 43 X 475mm [15.28 X 1.69 X 18.70 inches] (W X H X D) / 11kg max   |  |                 |
|                                       | COOLING METHOD                       | Forced cooling (internal fan)   |  |                 |


\*1 AUX output power is not included.  
 \*2 The current flowing through the neutral line increases when AC input voltage is over AC456V 3 φ 4-Wire. The flowing current will vary according to the input voltage and the load current. The maximum flowing current will be 18A.  
 \*3 The current of input surge to a built-in noise filter (0.2ms or less) is excluded.  
 \*4 Measured by 500MHz oscilloscope.  
 Ripple and ripple noise is measured on measuring board with capacitor of 22μF within 150mm from the output terminal.  
 \*5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.  
 \*6 Can't be used above the rated output current and the rated output power.  
 \*7 When the output voltage is adjusted to higher than 49.92V and the load factor is over 70%

of the rated current, if the load current changes quickly (< 200msec), the output voltage drops approximately 5V below the setting voltage.  
 \*8 When the output voltage is adjusted to higher than 149.82V and the load factor is over 70% of the rated current, if the load current changes quickly (<200msec), the output voltage drops approximately 15V below the setting voltage.  
 \*9 Output voltage recovers from protection by shutting down the input voltage and waiting more than 10 seconds then turning on AC input again, or turning off the output voltage by remote control.  
 \*10 Please contact us about another class.  
 \*11 Case size contains neither the terminal blocks, connector and screw.  
 \* To meet the specifications, do not operate over-loaded condition.  
 \* A sound may occur from power supply at peak loading.

Block diagram


●FETA7000ST-48

AC IN 300~480V (3 φ 4-Wire)

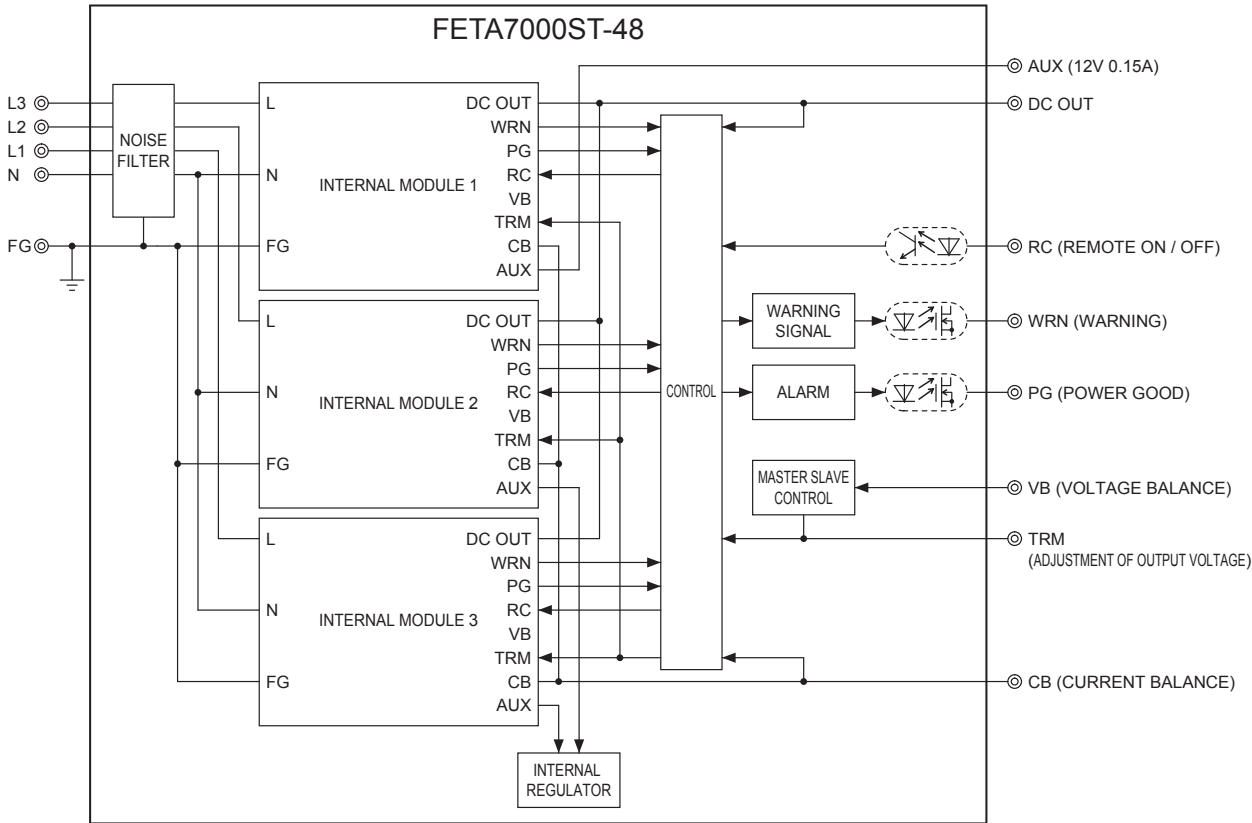


●FETA7000ST-144


AC IN 300~480V (3 φ 4-Wire)

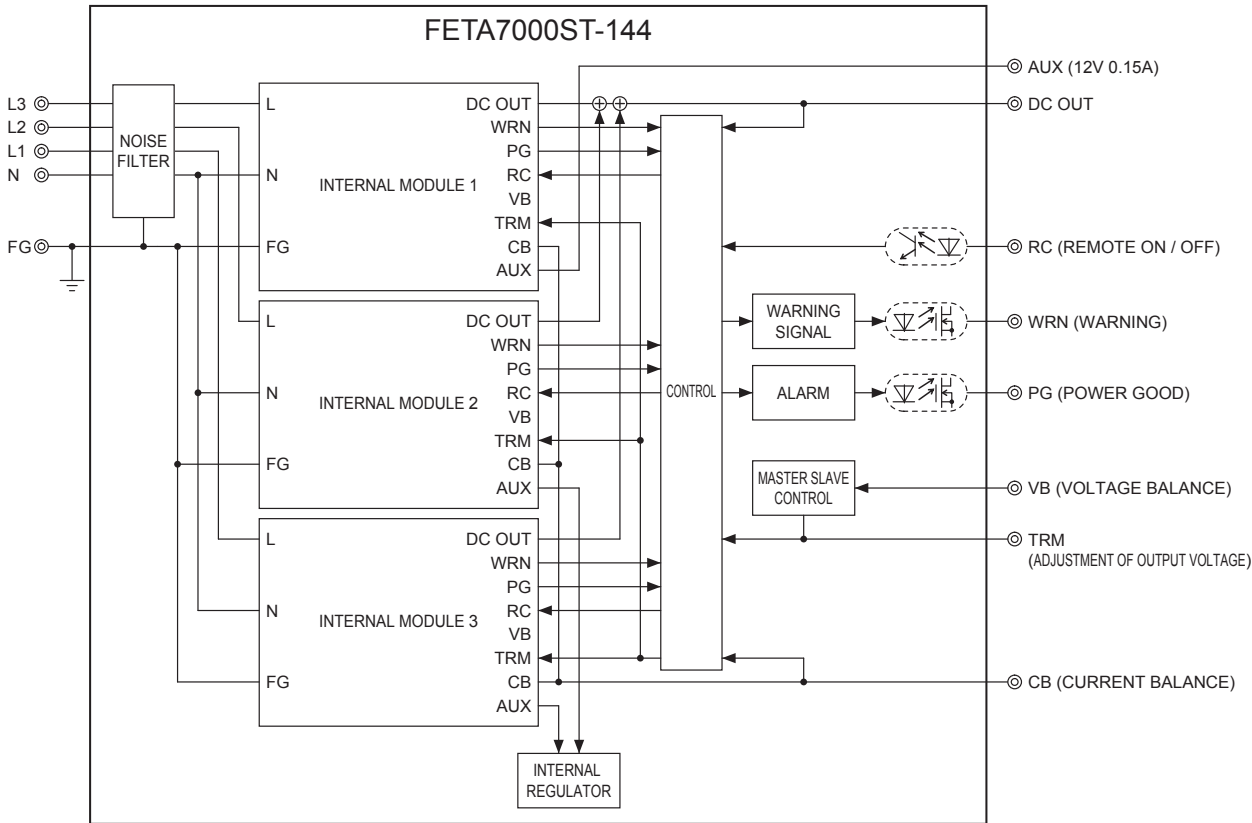

## Block diagram of internal module

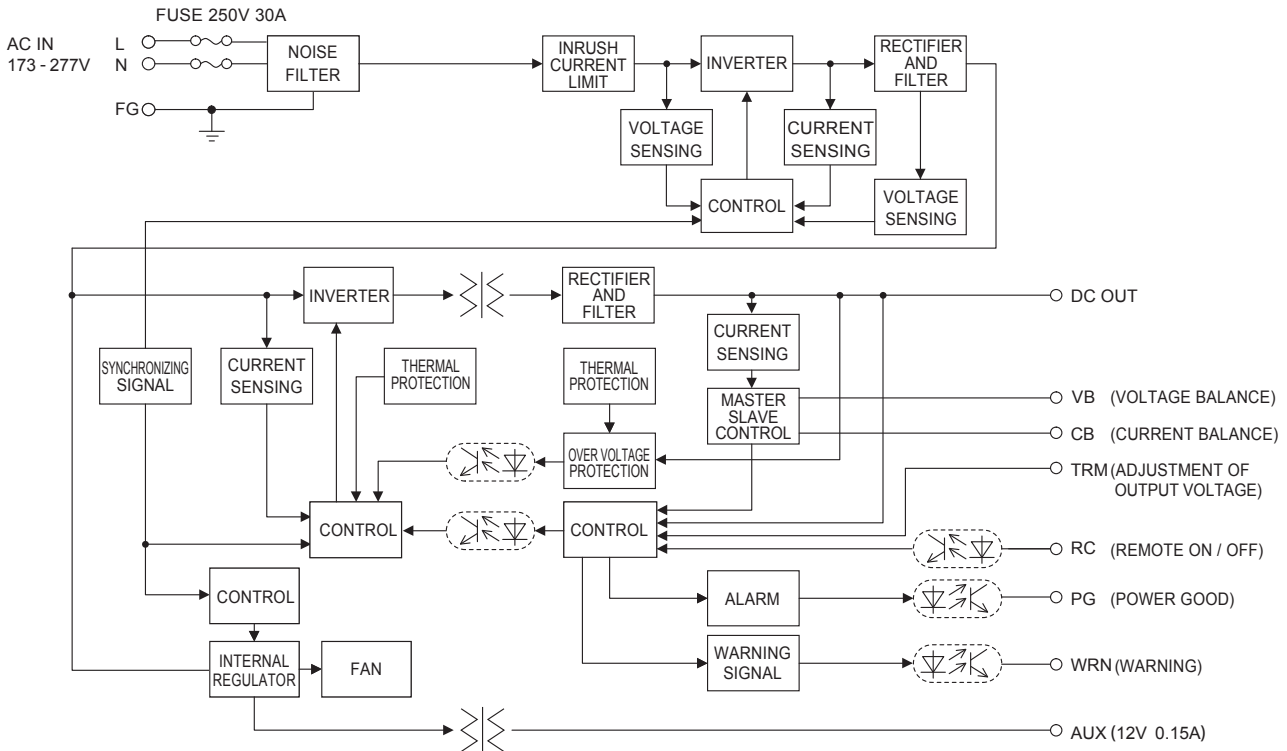


## External view

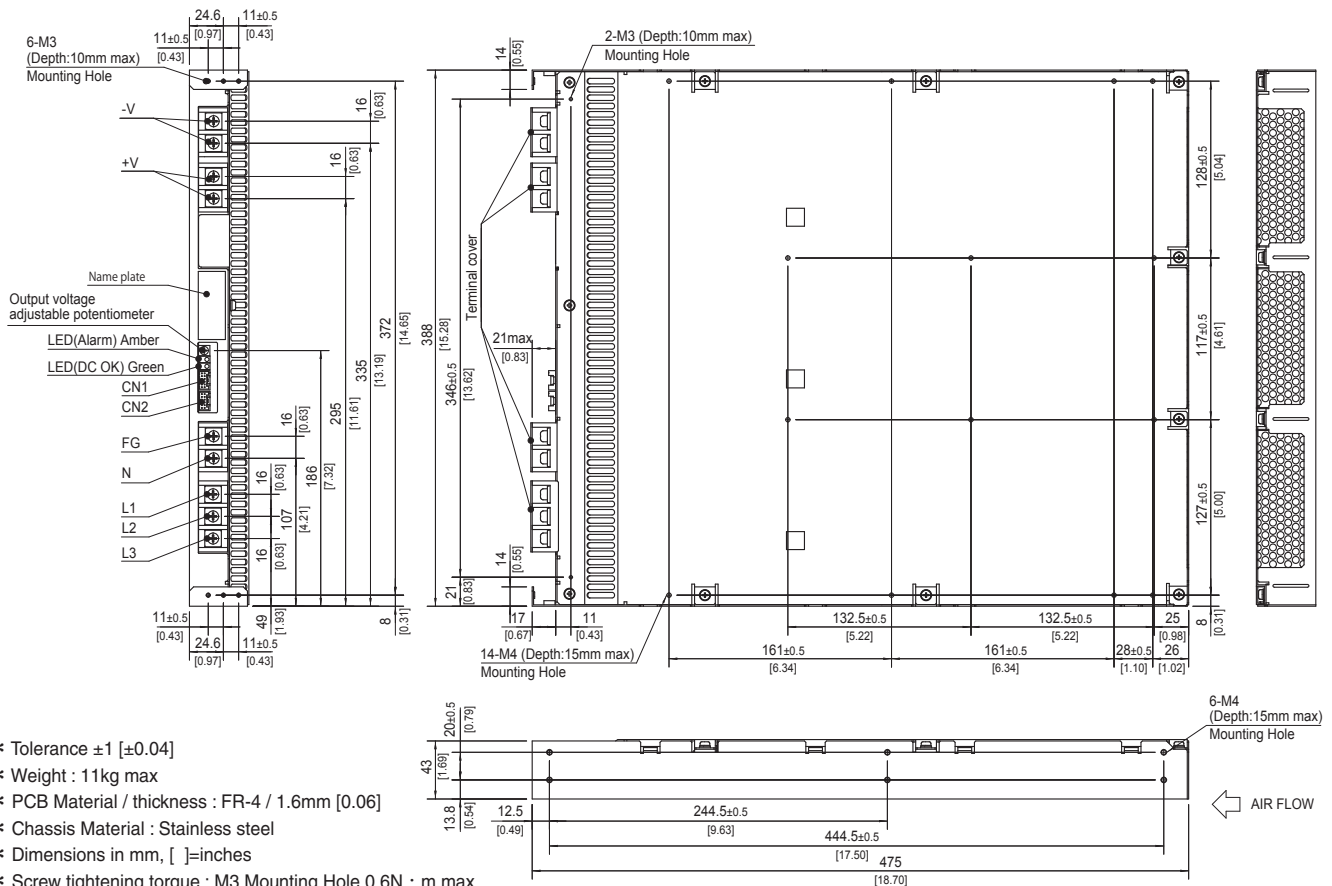

- \* Tolerance  $\pm 1$  [ $\pm 0.04$ ]
- \* Weight : 11kg max
- \* PCB Material / thickness : FR-4 / 1.6mm [0.06]
- \* Chassis Material : Stainless steel
- \* Dimensions in mm, [ ]=inches
- \* Screw tightening torque : M3 Mounting Hole 0.6N · m max  
M4 Mounting Hole 1.2N · m max  
M5 Terminal block 3.0N · m max
- \* Please connect safety ground to FG terminal on the unit.


## Terminal Blocks

### FETA2500BA, 3000BA

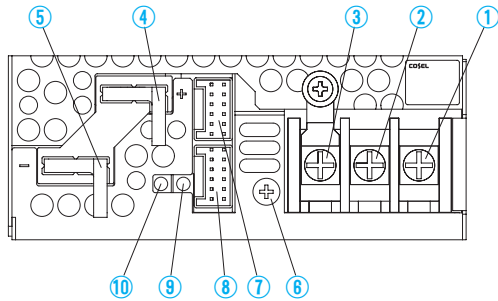

- ①AC (L) } Input Terminals AC170 - 264V 1 φ 47 - 63Hz
- ②AC (N) } (M4)
- ③Frame ground (M4 ±)
- ④+Output
- ⑤-Output
- ⑥Output voltage adjustable potentiometer
- ⑦CN1 } Connectors
- ⑧CN2 }
- ⑨LED for output voltage confirmation (DC\_OK)
- ⑩LED for fault condition detection (ALARM)


### FETA7000T

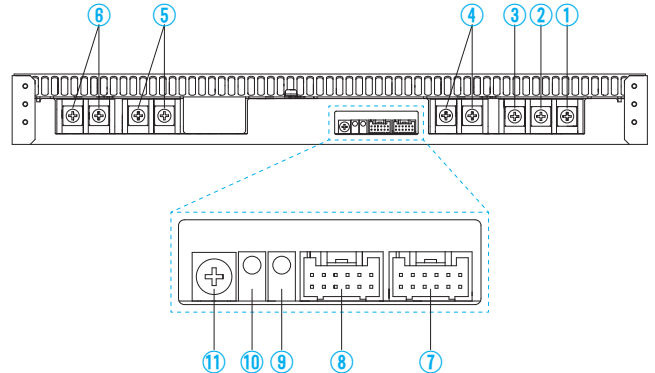

- ①AC (T) } Input Terminals AC170 - 264V 3 φ 47 - 63Hz
- ②AC (S) } (M5)
- ③AC (R) }
- ④Frame ground (M5 ±)
- ⑤+Output
- ⑥-Output
- ⑦CN2 } Connectors
- ⑧CN1 }
- ⑨LED for output voltage confirmation (DC\_OK)
- ⑩LED for fault condition detection (ALARM)
- ⑪Output voltage adjustable potentiometer

### FETA2500BA, 3000BA

#### Pin Configuration and Functions of CN1, CN2

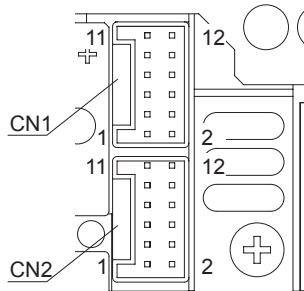


| Pin No. | Pin Name | Function                     |
|---------|----------|------------------------------|
| 1       | AUXG     | Auxiliary power output (GND) |
| 2       | AUX      | Auxiliary power output       |
| 3       | WRNG     | Warning signal (GND)         |
| 4       | WRN      | Warning signal               |
| 5       | PGG      | Alarm signal (GND)           |
| 6       | PG       | Alarm signal                 |
| 7       | RCG      | Remote ON/OFF (GND)          |
| 8       | RC       | Remote ON/OFF                |
| 9       | COM      | Signal ground                |
| 10      | TRM      | Adjustment of output voltage |
| 11      | VB       | Voltage Balance              |
| 12      | CB       | Current Balance              |

| Connector  | Housing                    | Terminal                                   | Mfr.  |
|------------|----------------------------|--|-------|
| CN1<br>CN2 | S12B-PUDSS-1<br>PUDP-12V-S | Reel : SPUD-001T-P0.5<br>or SPUD-002T-P0.5 | J.S.T |

### FETA7000T

#### Pin Configuration and Functions of CN1, CN2

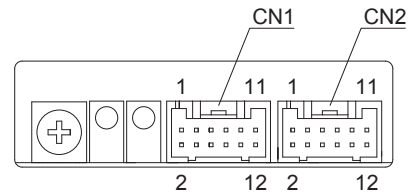


| Pin No. | Pin Name | Function                     |
|---------|----------|------------------------------|
| 1       | AUXG     | Auxiliary power output (GND) |
| 2       | AUX      | Auxiliary power output       |
| 3       | WRNG     | Warning signal (GND)         |
| 4       | WRN      | Warning signal               |
| 5       | PGG      | Alarm signal (GND)           |
| 6       | PG       | Alarm signal                 |
| 7       | RCG      | Remote ON/OFF (GND)          |
| 8       | RC       | Remote ON/OFF                |
| 9       | COM      | Signal ground                |
| 10      | TRM      | Adjustment of output voltage |
| 11      | VB       | Voltage Balance              |
| 12      | CB       | Current Balance              |

| Connector  | Housing                    | Terminal                                   | Mfr.  |
|------------|----------------------------|--|-------|
| CN1<br>CN2 | S12B-PUDSS-1<br>PUDP-12V-S | Reel : SPUD-001T-P0.5<br>or SPUD-002T-P0.5 | J.S.T |

## Terminal Blocks


### FETA7000ST

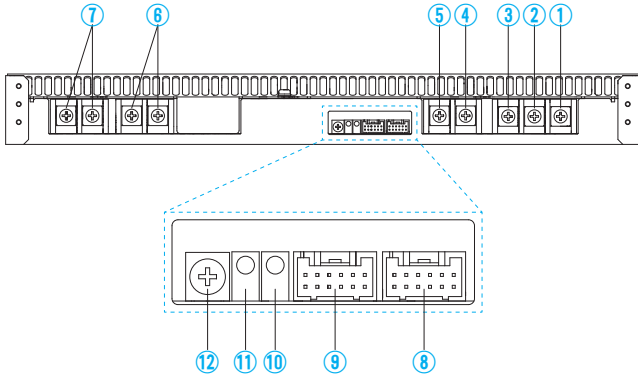

- ① AC (L3)
  - ② AC (L2)
  - ③ AC (L1)
  - ④ AC (N)
  - ⑤ Frame ground (M5  $\perp$ )
  - ⑥ +Output
  - ⑦ -Output
  - ⑧ CN2
  - ⑨ CN1
  - ⑩ LED for output voltage confirmation (DC\_OK)
  - ⑪ LED for fault condition detection (ALARM)
  - ⑫ Output voltage adjustable potentiometer
- Input Terminals AC170 - 264V 3  $\phi$  - 4 wire 47 - 63Hz (M5)
- Connectors

### FETA7000ST

#### Pin Configuration and Functions of CN1, CN2

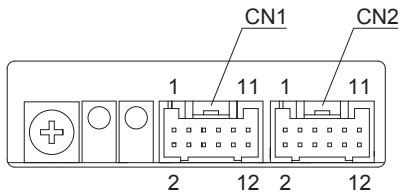


| Pin No. | Pin Name | Function                     |
|---------|----------|------------------------------|
| 1       | AUXG     | Auxiliary power output (GND) |
| 2       | AUX      | Auxiliary power output       |
| 3       | WRNG     | Warning signal (GND)         |
| 4       | WRN      | Warning signal               |
| 5       | PGG      | Alarm signal (GND)           |
| 6       | PG       | Alarm signal                 |
| 7       | RCG      | Remote ON/OFF (GND)          |
| 8       | RC       | Remote ON/OFF                |
| 9       | COM      | Signal ground                |
| 10      | TRM      | Adjustment of output voltage |
| 11      | VB       | Voltage Balance              |
| 12      | CB       | Current Balance              |

| Connector  | Housing                    | Terminal                                   | Mfr.  |
|------------|----------------------------|--|-------|
| CN1<br>CN2 | S12B-PUDSS-1<br>PUDP-12V-S | Reel : SPUD-001T-P0.5<br>or SPUD-002T-P0.5 | J.S.T |

## Assembling and Installation Method

### Installation Method



- Screw mounting requires considering the product weight for safety fixtures.
- To keep enough insulation distance between screws and internal components, length of the mounting screw should not exceed recommendation as shown in right figure.

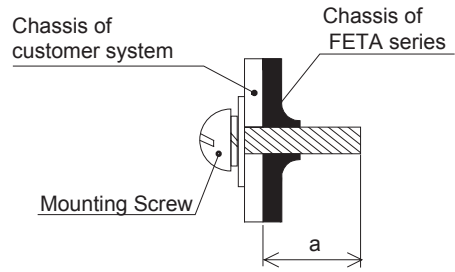



| Model              | Mounting hole | a (Max penetration length) |
|--------------------|---------------|----------------------------|
| FETA2500BA, 3000BA | Bottom        | 6mm max                    |
|                    | Side          | 4.5mm max                  |
| FETA7000T, 7000ST  | Side          | 15mm max                   |

- The power supplies have a built-in forced cooling fan. Do not block ventilation at the suction side and its opposite side.
- \* Reverse airflow option (-F2) is available for FETA2500BA. Refer to Instruction manual.
- If you use a power supply in a dusty environment, it can cause a failure. Please consider taking such countermeasures as installing an air filter near the suction area of the system to prevent a failure.

### ● FETA2500BA, 3000BA

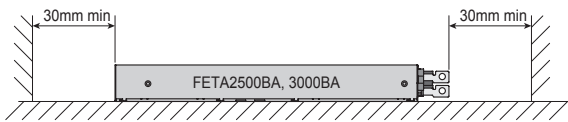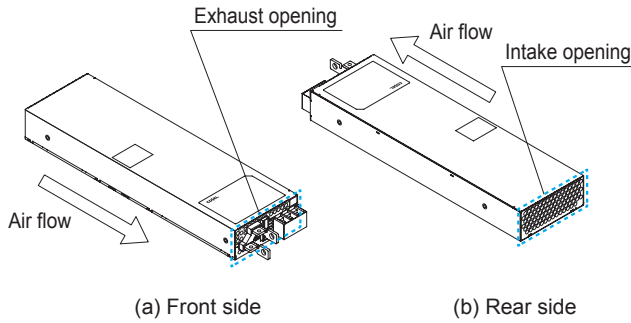


### ● FETA7000T, 7000ST

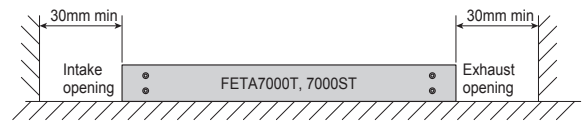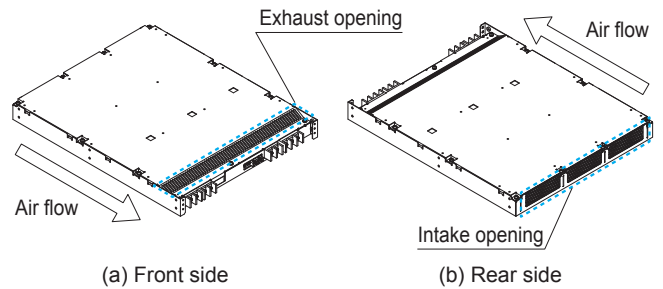


- When mounting the power supply with screws, it is recommended that this be done as shown in below figure. If other methods are used, be sure the weight of the power supply is taken into account.

### ● FETA2500BA, 3000BA

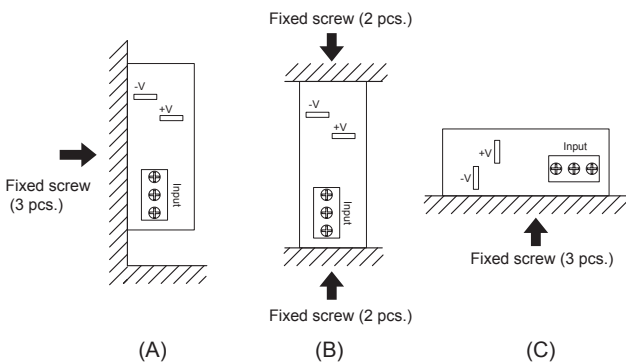


### ● FETA7000T, 7000ST

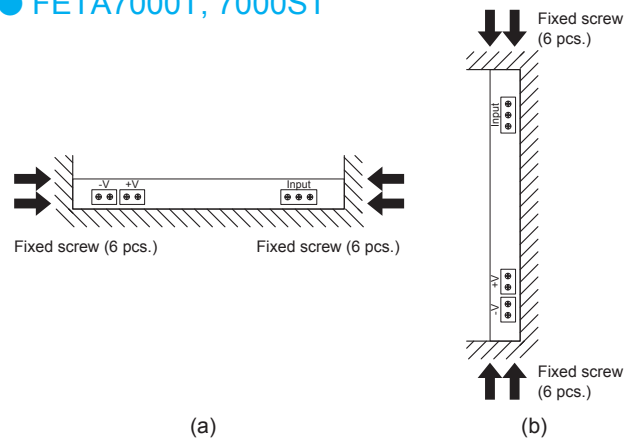


**Derating**

● **Input Voltage Derating Curve**

FETA2500BA, 3000BA, 7000T

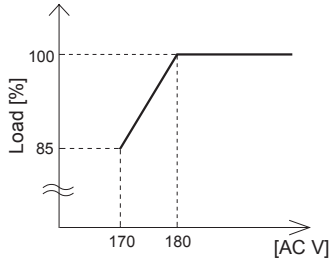


FETA7000ST

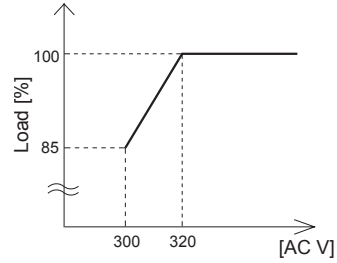


● **Ambient Temperature Derating Curve**

FETA2500BA, FETA3000BA

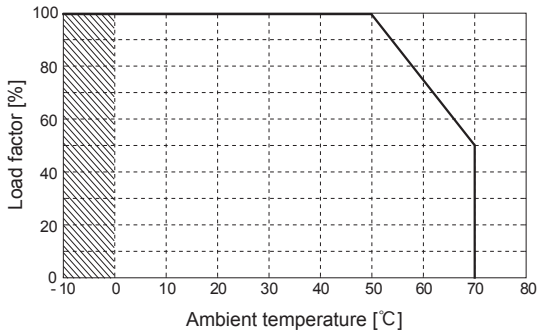

FETA7000T, FETA7000ST

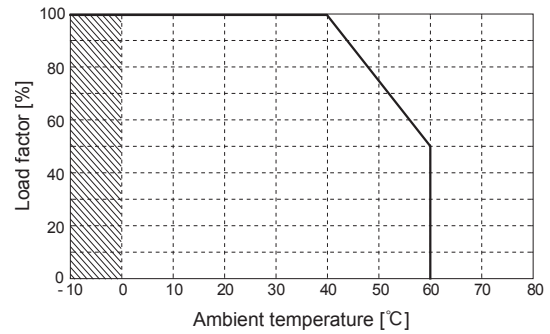

■ Specifications for ripple and ripple noise changes in the shaded area.

**Instruction Manuals**

◆ Please see catalog and instruction manual before you use.

Instruction Manuals <https://en.cosel.co.jp/product/powersupply/FETA/>  
 Before using our product <https://en.cosel.co.jp/technical/caution/index.html>

FETA



NOTICE



## Basic Characteristics Data

| Model      | Circuit method                    | Switching frequency [kHz] | Input current [A] | Rated input fuse | Inrush current protection circuit | PCB/Pattern |              |              | Series/Parallel operation availability |                    |
|------------|-----------------------------------|---------------------------|-------------------|------------------|-----------------------------------|-------------|--------------|--------------|--|--------------------|
|            |                                   |                           |                   |                  |                                   | Material    | Single sided | Double sided | Series operation                       | Parallel operation |
| FETA2500BA | Active filter                     | 47                        | 13.8              | 250V 30A         | Relay                             | FR-4        |              | Yes          | Yes                                    | Yes                |
|            | Phase-shift Full-bridge converter | 94                        |                   |                  |                                   |             |              |              |  |                    |
| FETA3000BA | Active filter                     | 47                        | 16.6              | 250V 30A         | Relay                             | FR-4        |              | Yes          | Yes                                    | Yes                |
|            | Phase-shift Full-bridge converter | 94                        |                   |                  |                                   |             |              |              |  |                    |
| FETA7000T  | Active filter                     | 47                        | 23.9              | 250V 30A         | Relay                             | FR-4        |              | Yes          | Yes                                    | Yes                |
|            | Phase-shift Full-bridge converter | 94                        |                   |                  |                                   |             |              |              |  |                    |

\* The value of input current is at ACIN 200V and rated load.

| Model      | Circuit method                    | Switching frequency [kHz] | Input current [A] | Rated input fuse | Inrush current protection circuit | PCB/Pattern |              |              | Series/Parallel operation availability |                    |
|------------|-----------------------------------|---------------------------|-------------------|------------------|-----------------------------------|-------------|--------------|--------------|--|--------------------|
|            |                                   |                           |                   |                  |                                   | Material    | Single sided | Double sided | Series operation                       | Parallel operation |
| FETA7000ST | Active filter                     | 47                        | 12.0              | 250V 30A         | Relay                             | FR-4        |              | Yes          | Yes                                    | Yes                |
|            | Phase-shift Full-bridge converter | 94                        |                   |                  |                                   |             |              |              |  |                    |

\* The value of input current is at ACIN 400V and rated load.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

[FETA2500BA-36](#) [FETA2500BA-48](#) [FETA7000T-144](#) [FETA7000T-48](#) [FETA3000BA-48](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А