

# Dual Matched Low Noise Precision Op Amp and Dual High Speed Low Noise Precision Op Amp

## FEATURES

- Guaranteed  $80\mu\text{V}$  Max.  $V_{OS}$
- Guaranteed  $6.0\text{nV}/\sqrt{\text{Hz}}$  10Hz Voltage Noise Density
- Guaranteed  $3.9\text{nV}/\sqrt{\text{Hz}}$  1kHz Voltage Noise Density
- Guaranteed  $1\mu\text{V}/^\circ\text{C}$  Max.  $V_{OS}$  Drift
- Guaranteed 1 Million Min. Voltage Gain
- Guaranteed Matching Characteristics
- Guaranteed  $10\text{V}/\mu\text{s}$  Min. Slew Rate (OP-237)

## APPLICATIONS


- Instrumentation Amplifiers
- Low Level Signal Processing
- Low Noise Audio Amplifiers
- Strain Gauge Amplifiers

## DESCRIPTION


The OP-227 is a dual matched precision op amp which combines low offset, low noise, and high gain with excellent matching characteristics. Typical individual amplifier specifications of  $20\mu\text{V}$   $V_{OS}$ ,  $0.2\mu\text{V}/^\circ\text{C}$  drift,  $10\text{nA}$   $I_B$  and  $2.8\text{nV}/\sqrt{\text{Hz}}$  10Hz noise voltage density make the OP-227 an impressive performer in terms of single amplifiers. Matching characteristics are specified with guaranteed limits on all critical parameters including  $V_{OS}$ ,  $V_{OS}$  drift,  $I_{BIAS}$  and CMRR (see the Features section), which make the OP-227 an ideal choice for two and three op amp instrumentation amplifier applications.

The OP-237 offers DC specifications identical to the OP-227 and is decompensated for higher speed operation at inverting gains greater than 5.

**Precision Amplifier Drives  $300\Omega$  Load to  $\pm 10\text{V}$   
with 0.05% Accuracy**

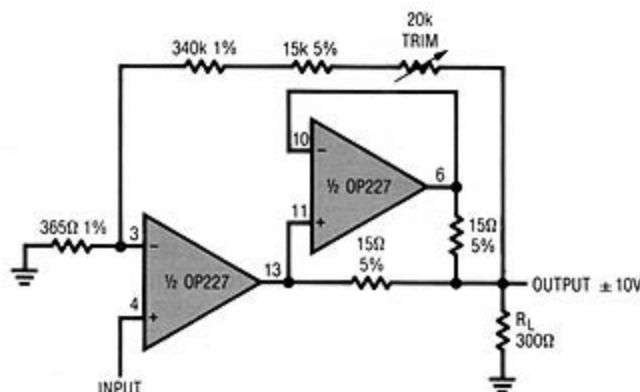

**Matching Characteristic;  
Drift of Offset Voltage Match  
of Representative Units**

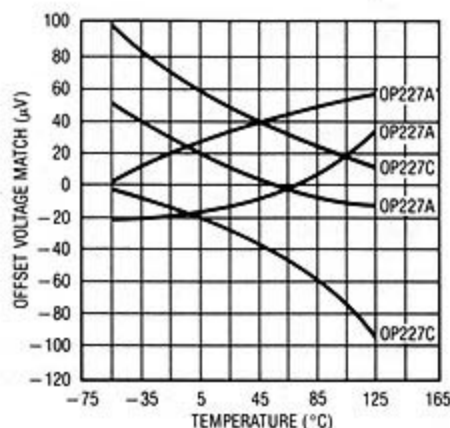


# OP-227/OP-237

## ABSOLUTE MAXIMUM RATINGS

|                                             |                                   |
|---------------------------------------------|-----------------------------------|
| Supply Voltage (Note 9)                     | $\pm 22V$                         |
| Internal Power Dissipation                  | 500mW                             |
| Input Voltage                               | Equal to Supply Voltage           |
| Output Short-Circuit Duration               | Indefinite                        |
| Differential Input Current (Note 8)         | $\pm 25mA$                        |
| Storage Temperature Range                   | $-65^{\circ}C$ to $+150^{\circ}C$ |
| Operating Temperature                       |                                   |
| OP-227A/237A/227C/237C                      | $-55^{\circ}C$ to $+125^{\circ}C$ |
| OP-227E/237E/227G/237G                      | $-25^{\circ}C$ to $+85^{\circ}C$  |
| Lead Temperature Range (Soldering, 10 sec.) | $300^{\circ}C$                    |

## PACKAGE/ORDER INFORMATION

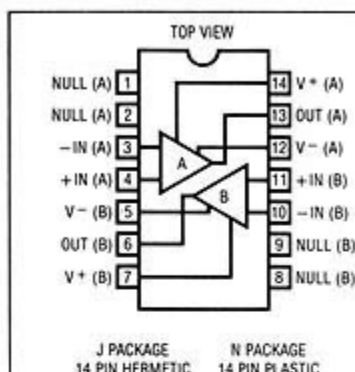

### ORDER PART NUMBER

OP-227AJ OP-237AJ  
OP-227CJ OP-237CJ  
OP-227EJ OP-237EJ  
OP-227GJ OP-237GJ  
OP-227EN OP-237EN  
OP-227GN OP-237GN

NOTE: DEVICE MAY BE OPERATED EVEN IF INSERTION IS REVERSED; THIS IS DUE TO INHERENT SYMMETRY OF PIN LOCATIONS OF AMPLIFIERS A AND B (NOTE 9).

## ELECTRICAL CHARACTERISTICS Individual Amplifiers

$V_S = \pm 15V$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted

| SYMBOL                              | PARAMETER                    | CONDITIONS                                                                                                  | OP-227A, E<br>OP-237A, E |                          |                   | OP-227C, G<br>OP-237C, G |                          |                   | UNITS                                              |
|-------------------------------------|------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------|-------------------|--------------------------|--------------------------|-------------------|----------------------------------------------------|
|                                     |                              |                                                                                                             | MIN                      | TYP                      | MAX               | MIN                      | TYP                      | MAX               |                                                    |
| $V_{OS}$                            | Input Offset Voltage         | (Note 1)                                                                                                    | —                        | 20                       | 80                | —                        | 60                       | 180               | $\mu V$                                            |
| $\frac{\Delta V_{OS}}{\Delta Time}$ | Long Term $V_{OS}$ Stability | (Notes 2, 3)                                                                                                | —                        | 0.2                      | 1.0               | —                        | 0.2                      | 2.0               | $\mu V/Mo$                                         |
| $I_{OS}$                            | Input Offset Current         |                                                                                                             | —                        | 7                        | 35                | —                        | 12                       | 75                | nA                                                 |
| $I_B$                               | Input Bias Current           |                                                                                                             | —                        | $\pm 10$                 | $\pm 40$          | —                        | $\pm 15$                 | $\pm 80$          | nA                                                 |
| $e_{np-p}$                          | Input Noise Voltage          | 0.1Hz to 10Hz<br>(Notes 3, 5)                                                                               | —                        | 0.06                     | 0.20              | —                        | 0.06                     | 0.28              | $\mu Vp-p$                                         |
| $e_n$                               | Input Noise Voltage Density  | $f_0 = 10Hz$ (Note 3)<br>$f_0 = 30Hz$ (Note 3)<br>$f_0 = 1000Hz$ (Note 3)                                   | —                        | 2.8<br>2.6<br>2.5        | 6.0<br>4.7<br>3.9 | —                        | 2.8<br>2.6<br>2.5        | 9.0<br>5.9<br>4.6 | $nV/\sqrt{Hz}$<br>$nV/\sqrt{Hz}$<br>$nV/\sqrt{Hz}$ |
| $i_n$                               | Input Noise Current Density  | $f_0 = 10Hz$ (Notes 3, 6)<br>$f_0 = 30Hz$ (Notes 3, 6)<br>$f_0 = 1000Hz$ (Notes 3, 6)                       | —                        | 1.5<br>1.0<br>0.4        | 4.5<br>2.5<br>0.7 | —                        | 1.5<br>1.0<br>0.4        | —<br>—<br>0.7     | $pA/\sqrt{Hz}$<br>$pA/\sqrt{Hz}$<br>$pA/\sqrt{Hz}$ |
|                                     | Input Resistance—Common Mode |                                                                                                             | —                        | 7                        | —                 | —                        | 5                        | —                 | G $\Omega$                                         |
|                                     | Input Voltage Range          |                                                                                                             | $\pm 11.0$               | $\pm 12.5$               | —                 | $\pm 11.0$               | $\pm 12.5$               | —                 | V                                                  |
| CMRR                                | Common Mode Rejection Ratio  | $V_{CM} = \pm 11V$                                                                                          | 114                      | 126                      | —                 | 100                      | 126                      | —                 | dB                                                 |
| PSRR                                | Power Supply Rejection Ratio | $V_S = \pm 4V$ to $\pm 18V$                                                                                 | —                        | 1                        | 10                | —                        | 2                        | 20                | $\mu V/V$                                          |
| $A_{VOL}$                           | Large-Signal Voltage Gain    | $R_L \geq 2k\Omega$ , $V_0 = \pm 12V$<br>$R_L \geq 600\Omega$ , $V_0 = \pm 10V$                             | 3<br>1                   | 20<br>12                 | —                 | 2<br>0.8                 | 20<br>12                 | —                 | $V/\mu V$<br>$V/\mu V$                             |
| $V_{OUT}$                           | Output Voltage Swing         | $R_L \geq 2k\Omega$<br>$R_L \geq 600\Omega$                                                                 | $\pm 12.0$<br>$\pm 10.0$ | $\pm 13.8$<br>$\pm 12.5$ | —                 | $\pm 11.5$<br>$\pm 10.0$ | $\pm 13.5$<br>$\pm 12.5$ | —                 | V<br>V                                             |
| SR                                  | Slew Rate                    | OP-227 $R_L \geq 2k\Omega$<br>OP-237 $A_{VCL} \geq 5$                                                       | 1.7<br>10                | 2.8<br>15                | —                 | 1.7<br>10                | 2.8<br>15                | —                 | $V/\mu s$<br>$V/\mu s$                             |
| GBW                                 | Gain Bandwidth Prod.         | OP-227 $f_0 = 100kHz$ (Note 4)<br>OP-237 $f_0 = 10kHz$ (Note 4)<br>OP-237 $f_0 = 1MHz$ ( $A_{VCL} \geq 5$ ) | 5<br>35<br>—             | 8<br>63<br>40            | —                 | 5<br>35<br>—             | 8<br>63<br>40            | —                 | MHz<br>MHz<br>MHz                                  |
| $Z_0$                               | Open-Loop Output Resistance  | $V_0 = 0$ , $I_0 = 0$                                                                                       | —                        | 70                       | —                 | —                        | 70                       | —                 | $\Omega$                                           |
| $P_d$                               | Power Consumption            | Each Amplifier                                                                                              | —                        | 80                       | 140               | —                        | 90                       | 170               | mW                                                 |
|                                     | Offset Adjustment Range      | $R_p = 10k\Omega$                                                                                           | —                        | $\pm 4$                  | —                 | —                        | $\pm 4$                  | —                 | mV                                                 |

**ELECTRICAL CHARACTERISTICS** Individual Amplifiers $V_S = \pm 15V$ ,  $-25^\circ C \leq T_A \leq 85^\circ C$ , unless otherwise noted

| SYMBOL                              | PARAMETER                    | CONDITIONS                            |   | OP-227E<br>OP-237E |            |          | OP-227G<br>OP-237G |            |           | UNITS            |
|-------------------------------------|------------------------------|---------------------------------------|---|--------------------|------------|----------|--------------------|------------|-----------|------------------|
|                                     |                              |                                       |   | MIN                | TYP        | MAX      | MIN                | TYP        | MAX       |                  |
| $V_{OS}$                            | Input Offset Voltage         | (Note 1)                              | ● | —                  | 40         | 140      | —                  | 85         | 280       | $\mu V$          |
| $\frac{\Delta V_{OS}}{\Delta Temp}$ | Average Input Offset Drift   | (Note 7)                              | ● | —                  | 0.2        | 1.0      | —                  | 0.3        | 1.8       | $\mu V/^\circ C$ |
| $I_{OS}$                            | Input Offset Current         |                                       | ● | —                  | 15         | 50       | —                  | 20         | 135       | nA               |
| $I_B$                               | Input Bias Current           |                                       | ● | —                  | $\pm 20$   | $\pm 60$ | —                  | $\pm 35$   | $\pm 150$ | nA               |
|                                     | Input Voltage Range          |                                       | ● | $\pm 10.5$         | $\pm 11.5$ | —        | $\pm 10.5$         | $\pm 11.5$ | —         | V                |
| CMRR                                | Common Mode Rejection Ratio  | $V_{CM} = \pm 10V$                    | ● | 110                | 124        | —        | 96                 | 118        | —         | dB               |
| PSRR                                | Power Supply Rejection Ratio | $V_S = \pm 4.5V$ to $\pm 18V$         | ● | —                  | 2          | 15       | —                  | 2          | 32        | $\mu V/V$        |
| $A_{VOL}$                           | Large Signal Voltage Gain    | $R_L \geq 2k\Omega$ , $V_O = \pm 10V$ | ● | 1                  | 14         | —        | 0.8                | 14         | —         | $V/\mu V$        |
| $V_{OUT}$                           | Output Voltage Swing         | $R_L \geq 2k\Omega$                   | ● | $\pm 11.7$         | $\pm 13.6$ | —        | $\pm 11.0$         | $\pm 13.3$ | —         | V                |

**ELECTRICAL CHARACTERISTICS** Individual Amplifiers $V_S = \pm 15V$ ,  $-55^\circ C \leq T_A \leq 125^\circ C$ , unless otherwise noted

| SYMBOL                              | PARAMETER                    | CONDITIONS                            |   | OP-227A<br>OP-237A |            |          | OP-227C<br>OP-237C |            |           | UNITS            |
|-------------------------------------|------------------------------|---------------------------------------|---|--------------------|------------|----------|--------------------|------------|-----------|------------------|
|                                     |                              |                                       |   | MIN                | TYP        | MAX      | MIN                | TYP        | MAX       |                  |
| $V_{OS}$                            | Input Offset Voltage         | (Note 1)                              | ● | —                  | 60         | 180      | —                  | 110        | 350       | $\mu V$          |
| $\frac{\Delta V_{OS}}{\Delta Temp}$ | Average Input Offset Drift   | (Note 7)                              | ● | —                  | 0.2        | 1.0      | —                  | 0.3        | 1.8       | $\mu V/^\circ C$ |
| $I_{OS}$                            | Input Offset Current         |                                       | ● | —                  | 15         | 50       | —                  | 30         | 135       | nA               |
| $I_B$                               | Input Bias Current           |                                       | ● | —                  | $\pm 20$   | $\pm 60$ | —                  | $\pm 35$   | $\pm 150$ | nA               |
|                                     | Input Voltage Range          |                                       | ● | $\pm 10.5$         | $\pm 11.8$ | —        | $\pm 10.2$         | $\pm 11.8$ | —         | V                |
| CMRR                                | Common Mode Rejection Ratio  | $V_{CM} = \pm 10V$                    | ● | 108                | 122        | —        | 94                 | 116        | —         | dB               |
| PSRR                                | Power Supply Rejection Ratio | $V_S = \pm 4.5V$ to $\pm 18V$         | ● | —                  | 2          | 16       | —                  | 4          | 51        | $\mu V/V$        |
| $A_{VOL}$                           | Large Signal Voltage Gain    | $R_L \geq 2k\Omega$ , $V_O = \pm 10V$ | ● | 1                  | 14         | —        | 0.8                | 14         | —         | V                |
| $V_{OUT}$                           | Output Voltage Swing         | $R_L \geq 2k\Omega$                   | ● | $\pm 11.5$         | $\pm 13.5$ | —        | $\pm 10.5$         | $\pm 13.0$ | —         | V                |

The ● denotes the specifications which apply over the full operating temperature range.

For MIL-STD components, please refer to LTC 883C data sheet for test listing and parameters.

**Note 1:** Input offset voltage measurements are performed by automated test equipment approximately 0.5 seconds after application of power.

**Note 2:** Long-Term Input Offset Voltage Stability refers to the average trend line of  $V_{OS}$  vs Time over extended periods after the first 30 days of operation.

**Note 3:** Sample tested.

**Note 4:** Parameter is guaranteed by design.

**Note 5:** See test circuit and frequency response curve for 0.1Hz to 10Hz tester.

**Note 6:** See test circuit for current noise measurement.

**Note 7:** The input offset drift performance is within the specifications un-nulled or when nulled with  $R_p = 8k\Omega$  to  $20k\Omega$ .

**Note 8:** The inputs are protected by back-to-back diodes. Current limiting resistors are not used in order to achieve low noise. If differential input voltage exceeds  $\pm 0.7V$ , the input current should be limited to 25mA.

**Note 9:** The  $V^+$  supply terminals are completely independent and may be powered by separate supplies if desired (this approach, however, would sacrifice the advantages of the power supply rejection ratio matching). The  $V^-$  supply terminals are both connected to the common substrate and must be tied to the same voltage. Both  $V^-$  pins should be used.

**MATCHING CHARACTERISTICS** See notes on page 3.at  $V_S = \pm 15V$ ,  $T_A = 25^\circ C$ , unless otherwise noted

| SYMBOL           | PARAMETER                          | CONDITIONS                                                       | OP-227A, E, OP-237A, E |          |          | OP-227C, G, OP-237C, G |          |           | UNITS     |
|------------------|------------------------------------|------------------------------------------------------------------|------------------------|----------|----------|------------------------|----------|-----------|-----------|
|                  |                                    |                                                                  | MIN                    | TYP      | MAX      | MIN                    | TYP      | MAX       |           |
| $\Delta V_{OS}$  | Input Offset Voltage Match         |                                                                  | —                      | 25       | 80       | —                      | 55       | 300       | $\mu V$   |
| $I_B^+$          | Average Non-Inverting Bias Current |                                                                  | —                      | $\pm 10$ | $\pm 40$ | —                      | $\pm 15$ | $\pm 90$  | nA        |
| $I_{OS}^+$       | Non-Inverting Offset Current       |                                                                  | —                      | $\pm 12$ | $\pm 60$ | —                      | $\pm 20$ | $\pm 130$ | nA        |
| $I_{OS}^-$       | Inverting Offset Current           |                                                                  | —                      | $\pm 12$ | $\pm 60$ | —                      | $\pm 20$ | $\pm 130$ | nA        |
| $\Delta CMRR$    | Common Mode Rejection Ratio Match  | $V_{CM} = \pm 11V$                                               | 110                    | 123      | —        | 97                     | 117      | —         | dB        |
| $\Delta PSRR$    | Power Supply Rejection Ratio Match | $V_S = \pm 4V$ to $\pm 18V$                                      | —                      | 2        | 10       | —                      | 2        | 20        | $\mu V/V$ |
|                  | Channel Separation                 | (Note 4)                                                         | 126                    | 154      | —        | 126                    | 154      | —         | dB        |
| $\Delta A_{VOL}$ | Gain Match                         | $f_0 = 100kHz$ (Note 4)<br>$R_L \geq 2k\Omega$ , $V_0 = \pm 10V$ | —                      | 1.5      | 6.0      | —                      | 2.0      | 9.0       | %         |

at  $V_S = \pm 15V$ ,  $-55^\circ C \leq T_A \leq 125^\circ C$ , unless otherwise noted


| SYMBOL                              | PARAMETER                                     | CONDITIONS                      | OP-227A, OP-237A |          |          | OP-227C, OP-237C |          |           | UNITS            |
|-------------------------------------|-----------------------------------------------|---------------------------------|------------------|----------|----------|------------------|----------|-----------|------------------|
|                                     |                                               |                                 | MIN              | TYP      | MAX      | MIN              | TYP      | MAX       |                  |
| $\Delta V_{OS}$                     | Input Offset Voltage Match                    | ●                               | —                | 55       | 180      | —                | 100      | 480       | $\mu V$          |
| $\frac{\Delta V_{OS}}{\Delta Temp}$ | Input Offset Voltage Tracking                 | (Note 7) ●                      | —                | 0.3      | 1.0      | —                | 0.5      | 1.8       | $\mu V/^\circ C$ |
| $I_B^+$                             | Average Non-Inverting Bias Current            | ●                               | —                | $\pm 20$ | $\pm 60$ | —                | $\pm 35$ | $\pm 170$ | nA               |
| $\frac{\Delta I_B^+}{\Delta Temp}$  | Average Drift of Non-Inverting Bias Current   | ●                               | —                | 100      | —        | —                | 200      | —         | $pA/^\circ C$    |
| $I_{OS}^+$                          | Non-Inverting Offset Current                  | ●                               | —                | $\pm 25$ | $\pm 90$ | —                | $\pm 45$ | $\pm 250$ | nA               |
| $\frac{I_{OS}^+}{\Delta Temp}$      | Average Drift of Non-Inverting Offset Current | ●                               | —                | 130      | —        | —                | 250      | —         | $pA/^\circ C$    |
| $I_{OS}^-$                          | Inverting Offset Current                      | ●                               | —                | $\pm 25$ | $\pm 90$ | —                | $\pm 45$ | $\pm 250$ | nA               |
| $\Delta CMRR$                       | Common Mode Rejection Ratio Match             | $V_{CM} = \pm 10V$ ●            | 105              | 118      | —        | 90               | 110      | —         | dB               |
| $\Delta PSRR$                       | Power Supply Rejection Ratio Match            | $V_S = \pm 4.5V$ to $\pm 18V$ ● | —                | 2        | 16       | —                | 4        | 51        | $\mu V/V$        |

at  $V_S = \pm 15V$ ,  $-25^\circ C \leq T_A \leq 85^\circ C$ , unless otherwise noted


| SYMBOL                                | PARAMETER                                     | CONDITIONS                      | OP-227E, OP-237E |          |          | OP-227G, OP-237G |          |           | UNITS            |
|---------------------------------------|-----------------------------------------------|---------------------------------|------------------|----------|----------|------------------|----------|-----------|------------------|
|                                       |                                               |                                 | MIN              | TYP      | MAX      | MIN              | TYP      | MAX       |                  |
| $\Delta V_{OS}$                       | Input Offset Voltage Match                    | ●                               | —                | 40       | 140      | —                | 90       | 400       | $\mu V$          |
| $TC\Delta V_{OS}$                     | Input Offset Voltage Tracking                 | (Note 7) ●                      | —                | 0.3      | 1.0      | —                | 0.5      | 1.8       | $\mu V/^\circ C$ |
| $I_B^+$                               | Average Non-Inverting Bias Current            | ●                               | —                | $\pm 14$ | $\pm 60$ | —                | $\pm 25$ | $\pm 170$ | nA               |
| $\frac{\Delta I_B^+}{\Delta Temp}$    | Average Drift of Non-Inverting Bias Current   | ●                               | —                | 80       | —        | —                | 180      | —         | $pA/^\circ C$    |
| $I_{OS}^+$                            | Non-Inverting Offset Current                  | ●                               | —                | $\pm 20$ | $\pm 90$ | —                | $\pm 35$ | $\pm 250$ | nA               |
| $\frac{\Delta I_{OS}^+}{\Delta Temp}$ | Average Drift of Non-Inverting Offset Current | ●                               | —                | 130      | —        | —                | 250      | —         | $pA/^\circ C$    |
| $I_{OS}^-$                            | Inverting Offset Current                      | ●                               | —                | $\pm 20$ | $\pm 90$ | —                | $\pm 35$ | $\pm 250$ | nA               |
| $\Delta CMRR$                         | Common Mode Rejection Ratio Match             | $V_{CM} = \pm 10V$ ●            | 106              | 120      | —        | 90               | 112      | —         | dB               |
| $\Delta PSRR$                         | Power Supply Rejection Ratio Match            | $V_S = \pm 4.5V$ to $\pm 18V$ ● | —                | 2        | 15       | —                | 3        | 32        | $\mu V/V$        |

## TYPICAL PERFORMANCE CHARACTERISTICS


Voltage Noise vs Frequency

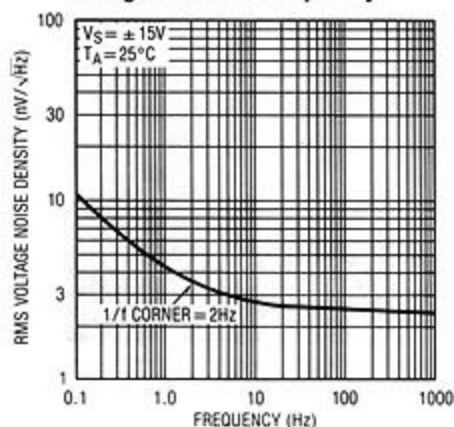


0.1Hz to 10Hz Noise

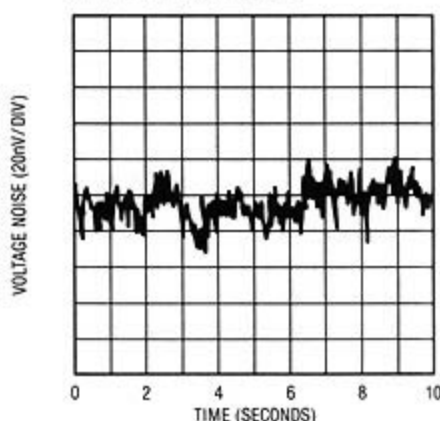


0.01Hz to 1Hz Peak-to-Peak Noise

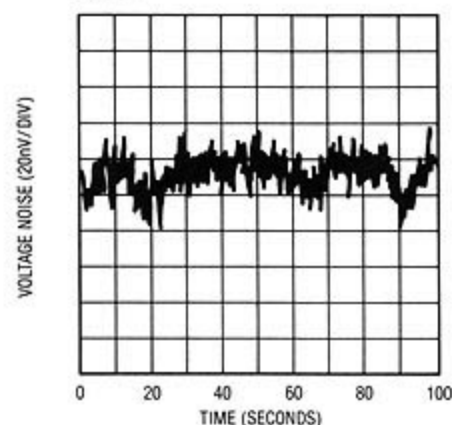


Current Noise vs Frequency

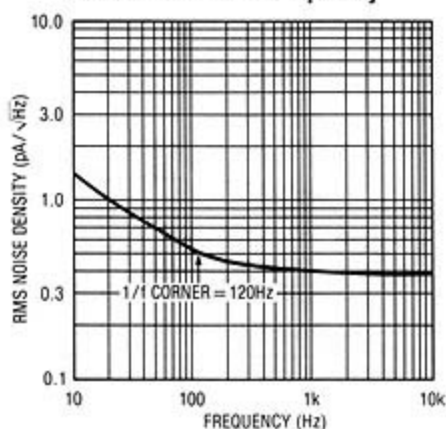


Total Noise vs Source Resistance

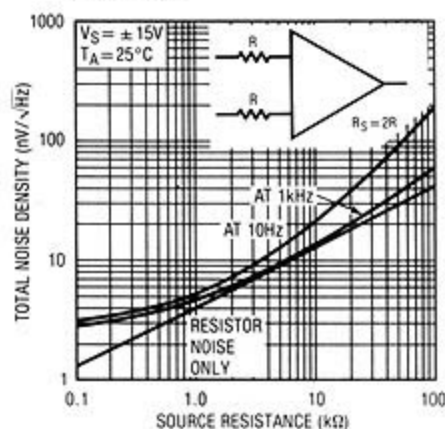



Wideband Voltage Noise (0.1Hz to Frequency Indicated)

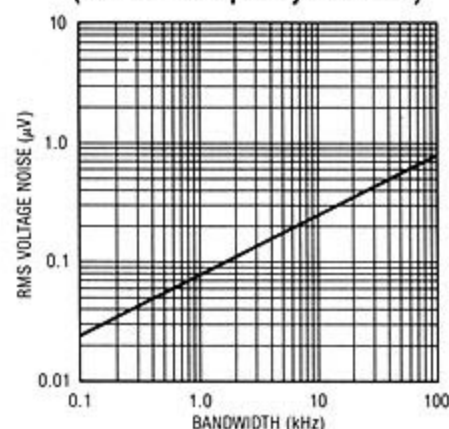

Voltage Noise vs Temperature

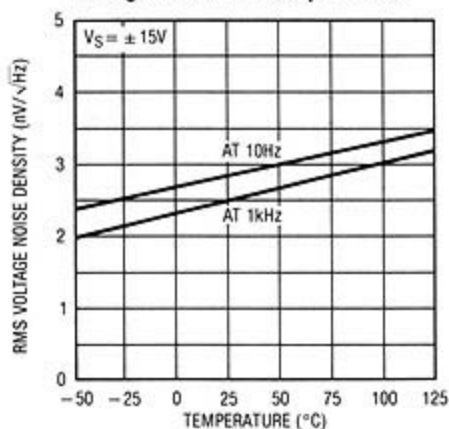

Voltage Noise vs Supply Voltage

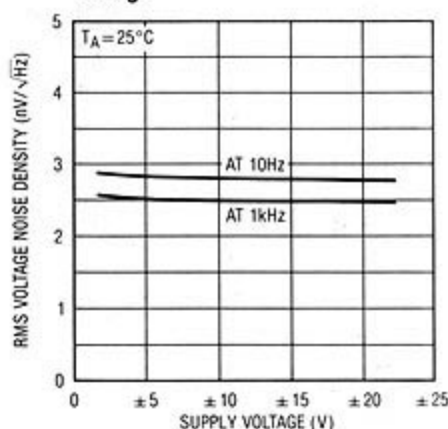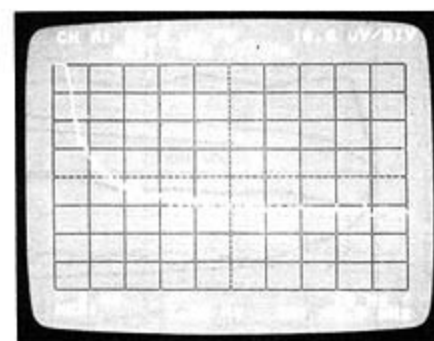
0.02Hz to 10Hz RMS Noise.  
Gain = 50,000 (Measured on  
HP3582 Spectrum Analyzer)

MARKER AT 2Hz (= 1/f CORNER) =



$$\frac{179 \mu\text{V}/\sqrt{\text{Hz}}}{50,000} = 3.59 \frac{\text{nV}}{\sqrt{\text{Hz}}}$$

## TYPICAL PERFORMANCE CHARACTERISTICS


Voltage Gain vs Frequency

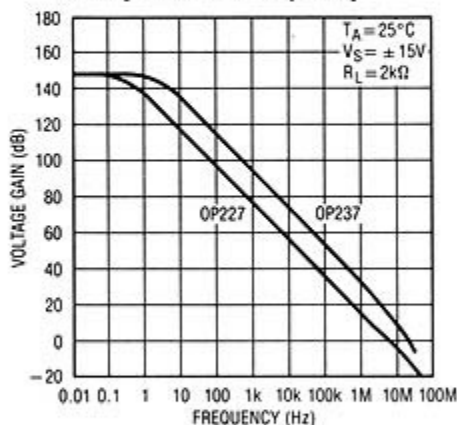


Voltage Gain vs Supply Voltage

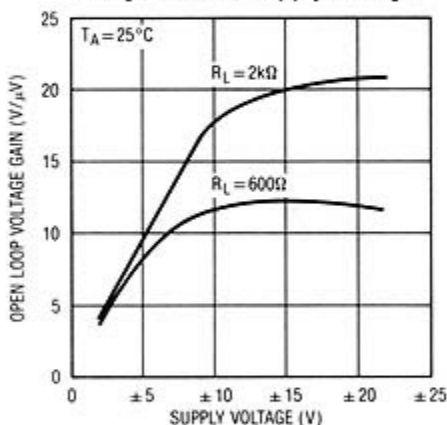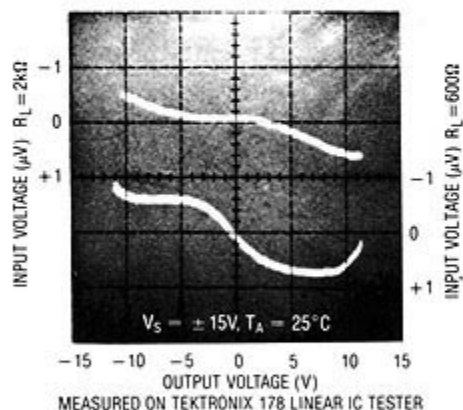Voltage Gain,  $R_L = 2\text{k}$  and  $600\Omega$ 


Voltage Gain vs Load Resistance

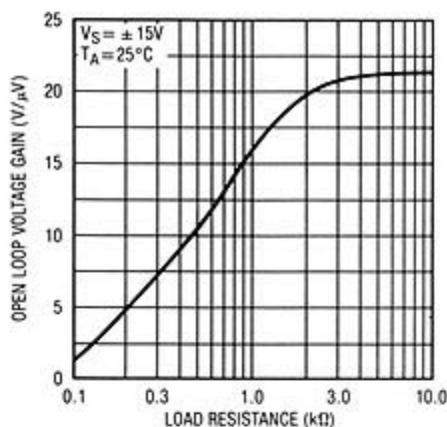


Voltage Gain vs Temperature

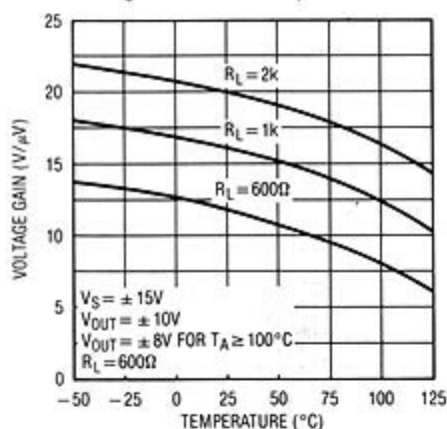


Warm-Up Drift

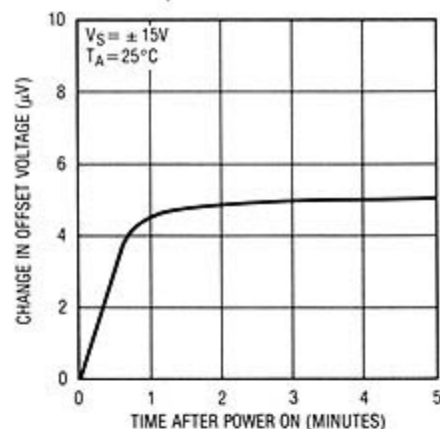


Long Term Stability of Four Representative Units

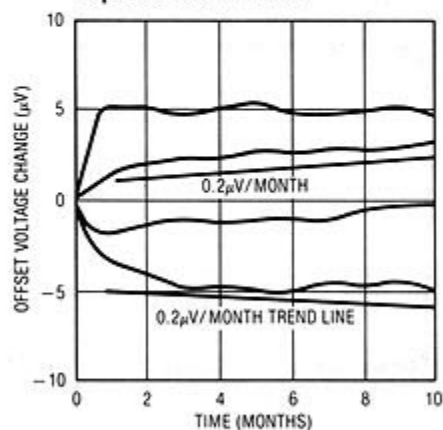

Offset Voltage Drift with Temperature of Representative Units

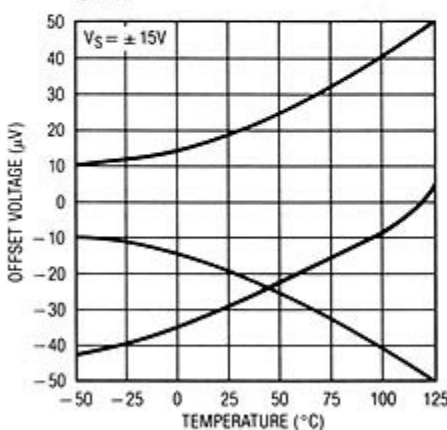


Supply Current vs Supply Voltage

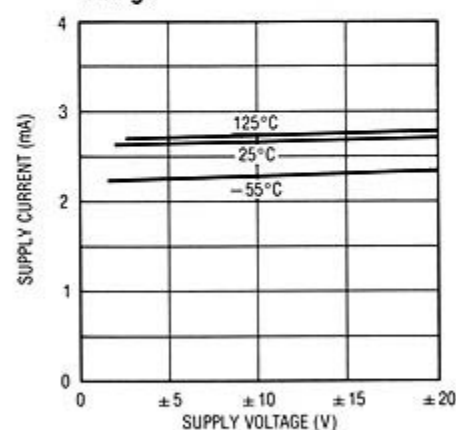


## TYPICAL PERFORMANCE CHARACTERISTICS


Common Mode Rejection vs Frequency

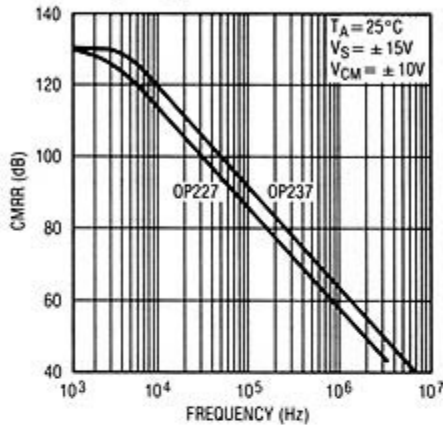


Common Mode Limit vs Temperature

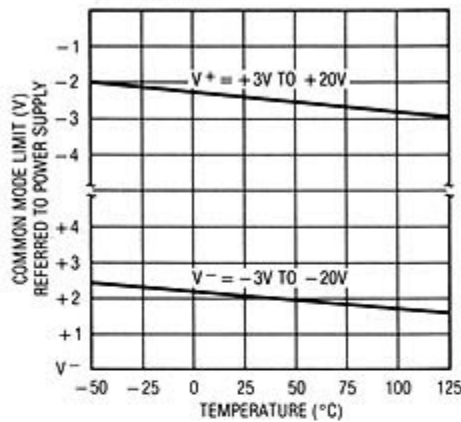


Input Bias Current Over the Common Mode Range

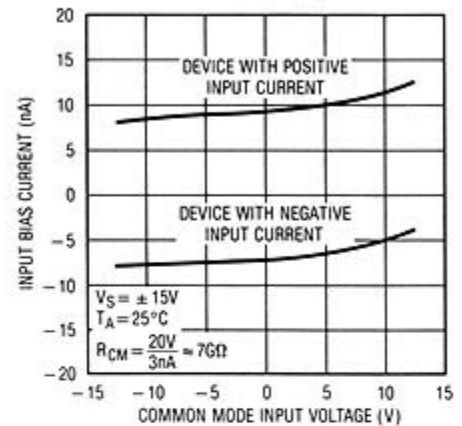


Input Bias Current vs Temperature

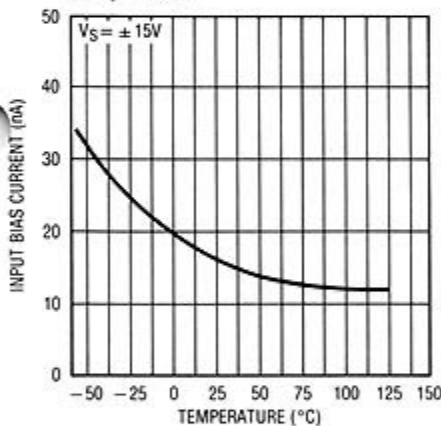


Input Offset Current vs Temperature

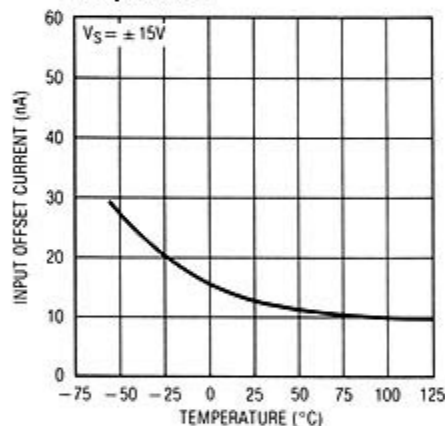


Output Swing vs Load Resistance

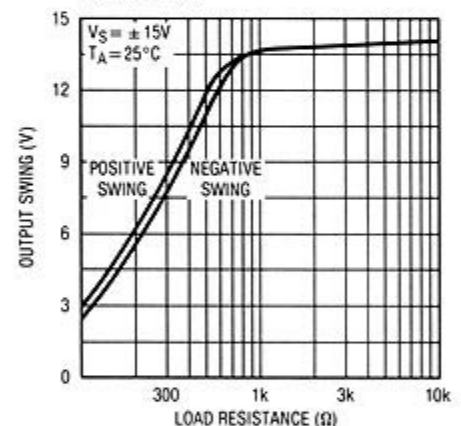


PSRR vs Frequency

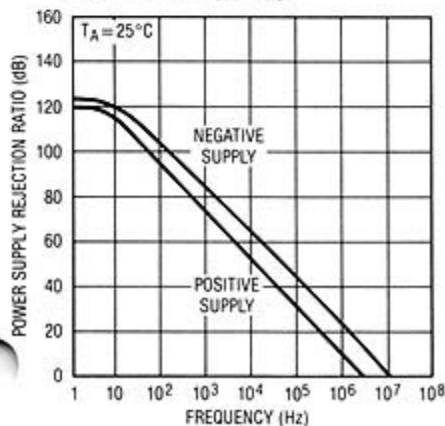

Closed Loop Output Impedance

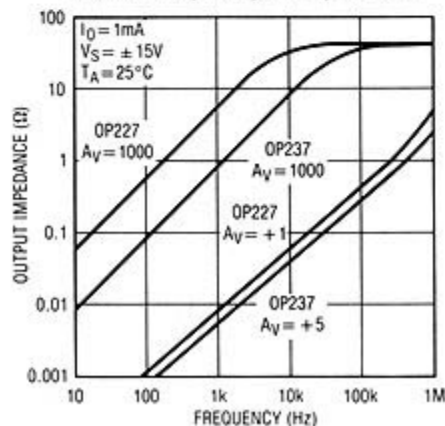


Output Short Circuit Current vs Time

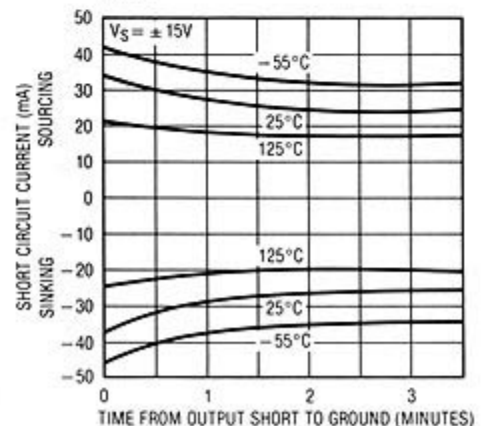


## TYPICAL PERFORMANCE CHARACTERISTICS


**OP-237 Small Signal Transient Response**

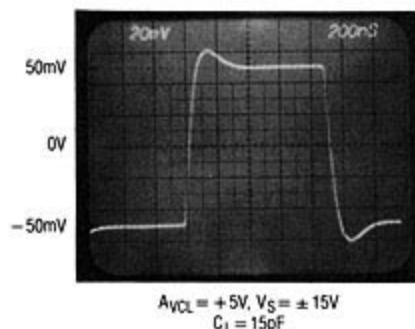


**OP-237 Large Signal Response**

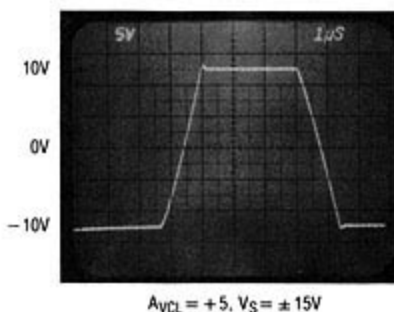


**OP-237 Phase Margin, Gain Bandwidth Product, Slew Rate vs Temperature**

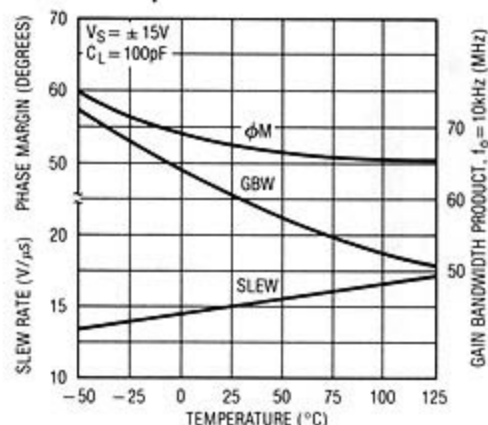


**OP-237 Gain, Phase Shift vs Frequency**

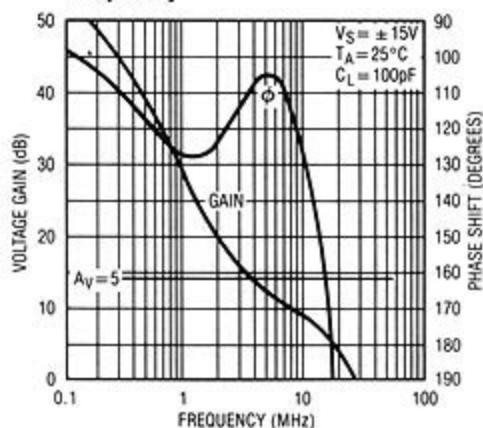


**OP-227 Gain, Phase Shift vs Frequency**

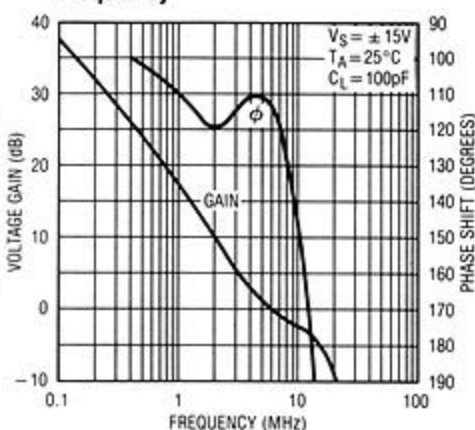


**Maximum Undistorted Output vs Frequency**

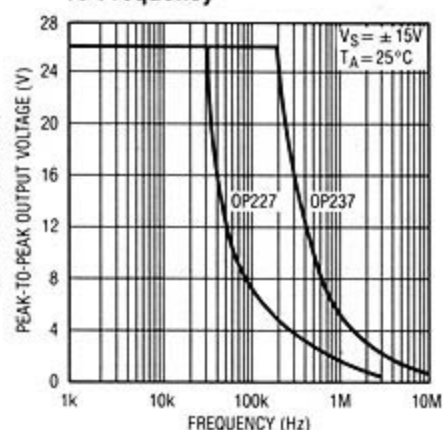


**OP-227 Small Signal Transient Response**

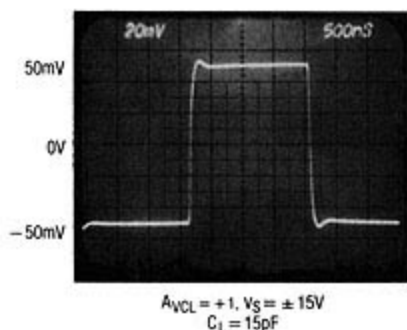

**OP-227 Large Signal Response**

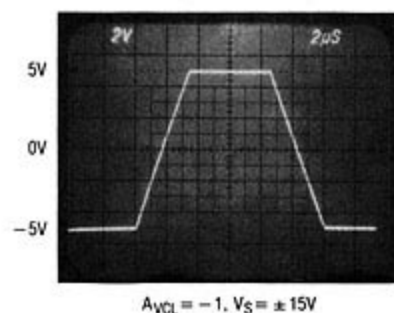

**OP-227 Phase Margin, Gain Bandwidth Product, Slew Rate vs Temperature**

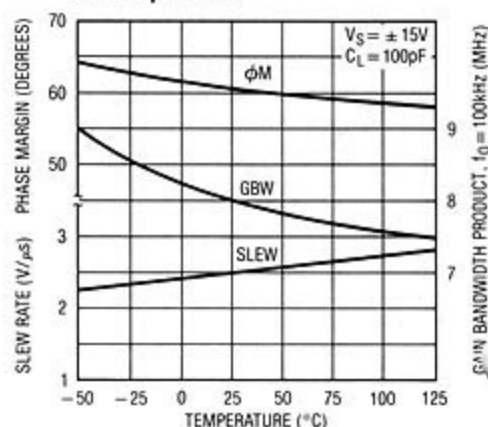

## APPLICATIONS INFORMATION

### Noise Testing

The 0.1Hz to 10Hz peak-to-peak noise of the OP-227/OP-237 is measured in the test circuit shown. The frequency response of this noise tester indicates that the 0.1Hz corner is defined by only one zero. The test time to measure 0.1Hz to 10Hz noise should not exceed 10 seconds, as this time limit acts as an additional zero to eliminate noise contributions from the frequency band below 0.1Hz.


Measuring the typical 60nV peak-to-peak noise performance of the OP-227/OP-237 requires special test precautions:

- The device should be warmed up for at least five minutes. As the op amp warms up, its offset voltage changes typically  $3\mu\text{V}$  due to its chip temperature increasing  $10^\circ\text{C}$  to  $20^\circ\text{C}$  from the moment the power supplies are turned on. In the 10 second measurement interval these temperature-induced effects can easily exceed tens of nanovolts.
- For similar reasons, the device must be well shielded from air currents to eliminate the possibility of thermoelectric effects in excess of a few nanovolts, which would invalidate the measurements.
- Sudden motion in the vicinity of the device can also "feed through" to increase the observed noise.

A noise-voltage density test is recommended when measuring noise on a large number of units. A 10Hz noise voltage density measurement will correlate well with a 0.1Hz to 10Hz peak-to-peak noise reading since both results are determined by the white noise and the location of the  $1/f$  corner frequency.


Current noise is measured in the circuit shown and calculated by the following formula:

$$i_n = \frac{[e_{no}^2 - (130\text{nV})^2]^{1/2}}{1\text{M}\Omega \times 100}$$

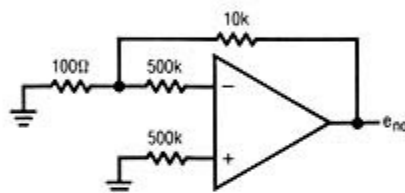


The OP-227/OP-237 achieves its low noise, in part, by operating the input stage at  $120\mu\text{A}$  versus the typical  $10\mu\text{A}$  of most other op amps. Voltage noise is inversely proportional, while current noise is directly proportional to the square root of the stage current. Therefore, the OP-227/OP-237 current noise will be relatively high. At low frequencies, the low  $1/f$  current noise corner frequency ( $\approx 120\text{Hz}$ ) minimizes current noise to some extent.

0.1Hz to 10Hz Noise Test Circuit

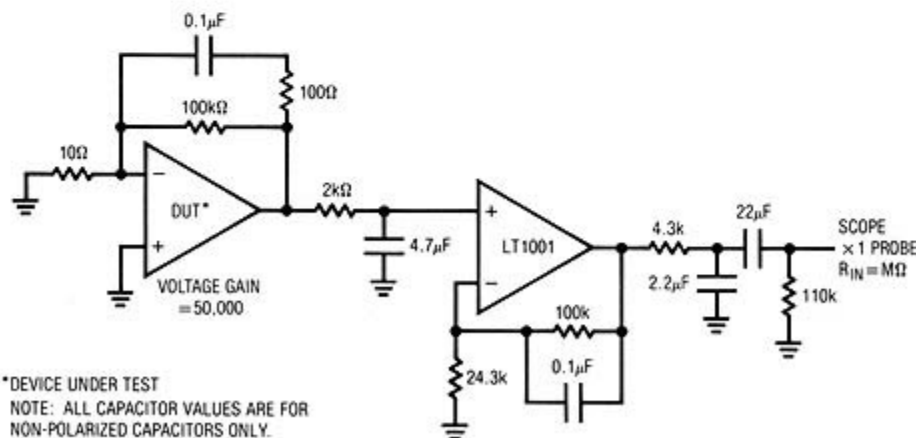

0.1Hz to 10Hz p-p Noise Tester Frequency Response

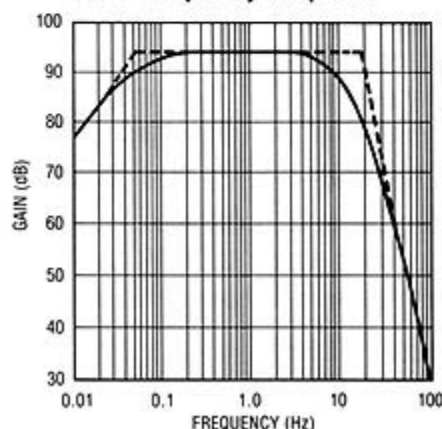

\*DEVICE UNDER TEST  
NOTE: ALL CAPACITOR VALUES ARE FOR  
NON-POLARIZED CAPACITORS ONLY.

## APPLICATIONS INFORMATION

In most practical applications, however, current noise will not limit system performance. This is illustrated in the total noise versus source resistance plot, where total noise =  $[(\text{voltage noise})^2 + (\text{current noise} \times R_S)^2 + (\text{resistor noise})^2]^{1/2}$ .

Three regions can be identified as a function of source resistance:

- (i)  $R_S \leq 400\Omega$  - Voltage noise dominates

- (ii)  $400\Omega \leq R_S \leq 50k\Omega$  at 1kHz Resistor noise dominates  
 $400\Omega \leq R_S \leq 8k\Omega$  at 10Hz

- (iii)  $R_S > 50k\Omega$  at 1kHz Current noise dominates  
 $R_S > 8k\Omega$  at 10Hz

Clearly the OP-227/OP-237 should not be used in region (iii), where total system noise is at least six times higher than the voltage noise of the op amp, i.e., the low voltage noise specification is completely wasted.

## APPLICATIONS INFORMATION

### OP AMP MATCHING

#### Advantages of Matched Dual Op Amps

In many applications the performance of a system depends on the matching between two operational amplifiers rather than the individual characteristics of the two op amps. Two or three op amp instrumentation amplifiers, tracking voltage references and low drift active filters are some of the circuits requiring matching between two op amps.


The well-known triple op amp configuration illustrates these concepts. Output offset is a function of the difference between the offsets of the two halves of the OP-227/OP-237. This error cancellation principle holds for a considerable number of input referred parameters in addition to offset voltage and its drift with temperature. Input bias current will be the average of the two non-inverting input currents ( $I_B^+$ ). The difference between these two currents ( $I_{OS}^+$ ) is the offset current of the instrumentation amplifier. The difference between the inverting input currents ( $I_{OS}^-$ ) will cause errors flowing through R1, R2, and R3. Common mode and power supply rejections will be dependent only on the match between the two amplifiers (assuming perfect resistor matching).

The concepts of common mode and power supply rejection ratio match ( $\Delta CMRR$  and  $\Delta PSRR$ ) are best demonstrated with a numerical example:

Assume  $CMRR_A = +1.0\mu V/V$  or 120dB,  
 and  $CMRR_B = +0.75\mu V/V$  or 122.5dB,  
 then  $\Delta CMRR = 0.25\mu V/V$  or 132dB;  
 if  $CMRR_B = -0.75\mu V/V$  which is still 122.5dB,  
 then  $\Delta CMRR = 1.75\mu V/V$  or 115dB.

Clearly, the OP-227/OP-237, by specifying and guaranteeing all of these matching parameters, can significantly improve the performance of matching dependent circuits.

#### Three Op Amp Instrumentation Amplifier

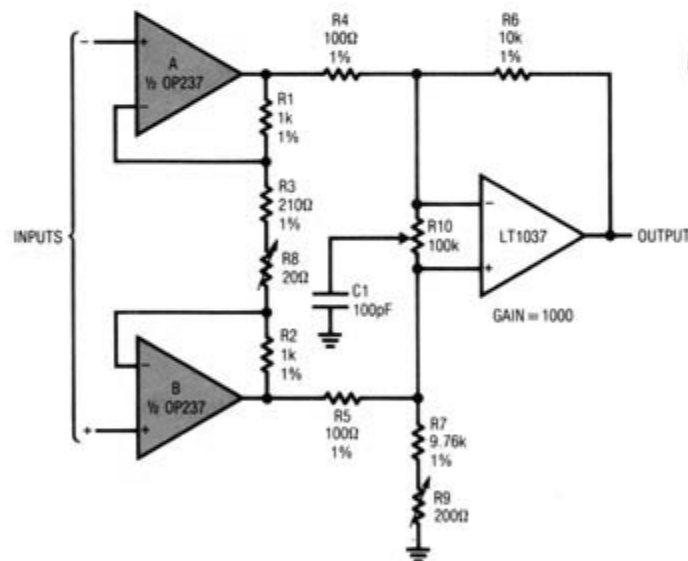

Trim R8 for gain

Trim R9 for DC common mode rejection

Trim R10 for AC common mode rejection

Typical performance of the instrumentation amplifier:

Input offset voltage =  $60\mu V$

Input bias current =  $\pm 15nA$


Input offset current =  $\pm 20nA$

Input noise =  $0.08\mu Vp-p$

Power bandwidth ( $V_O = \pm 10V$ ) = 250kHz

## APPLICATIONS INFORMATION

Two Op Amp Instrumentation Amplifier

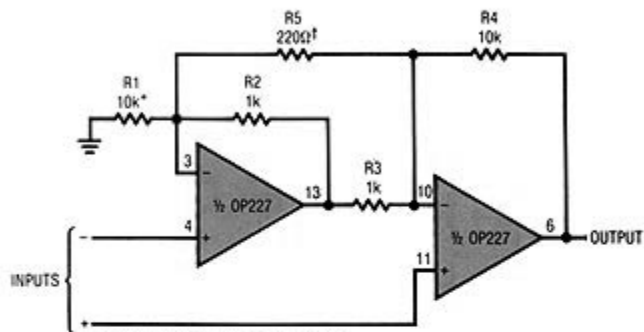


\*TRIM FOR COMMON MODE REJECTION


†TRIM FOR GAIN

$$\text{GAIN} = \frac{R_4}{R_3} \left[ 1 + \frac{1}{2} \left( \frac{R_2}{R_1} + \frac{R_3}{R_4} \right) + \frac{R_2 + R_3}{R_5} \right] \approx 100$$


Dual Limit Microvolt Comparator

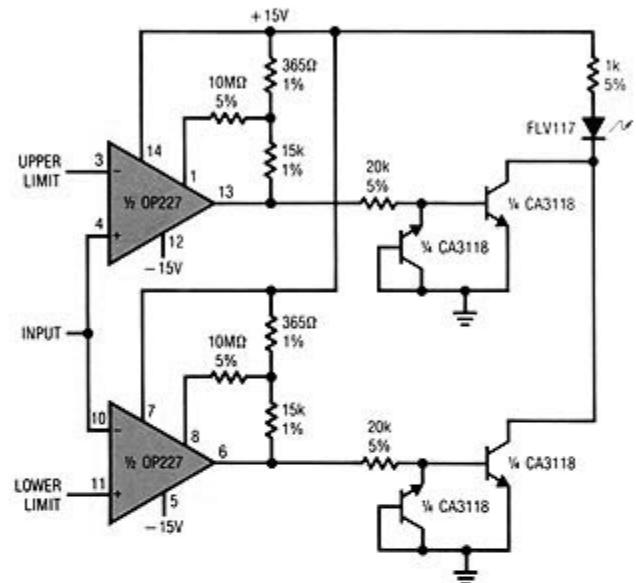

Strain Gauge Signal Conditioner with Bridge Excitation


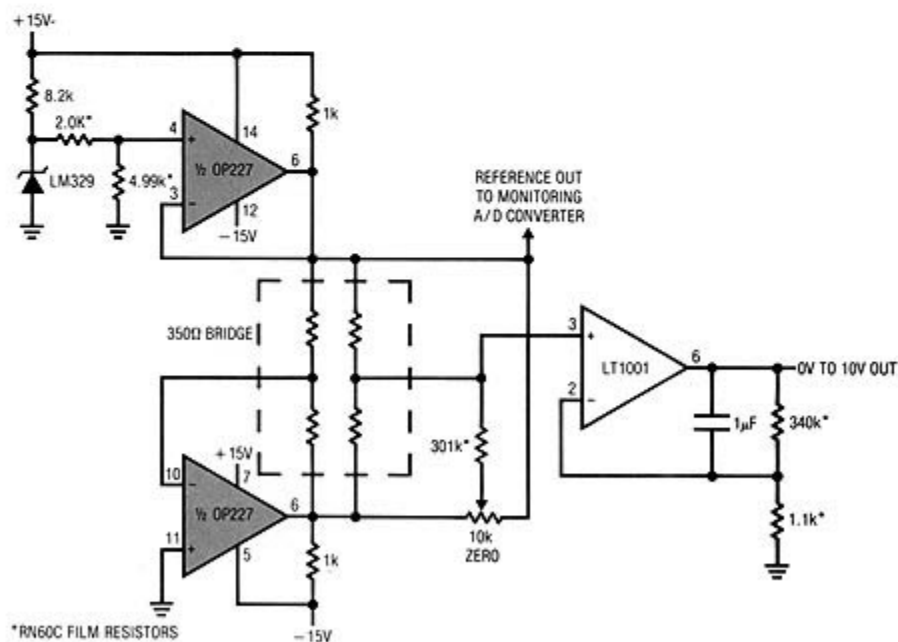


## SCHEMATIC DIAGRAM

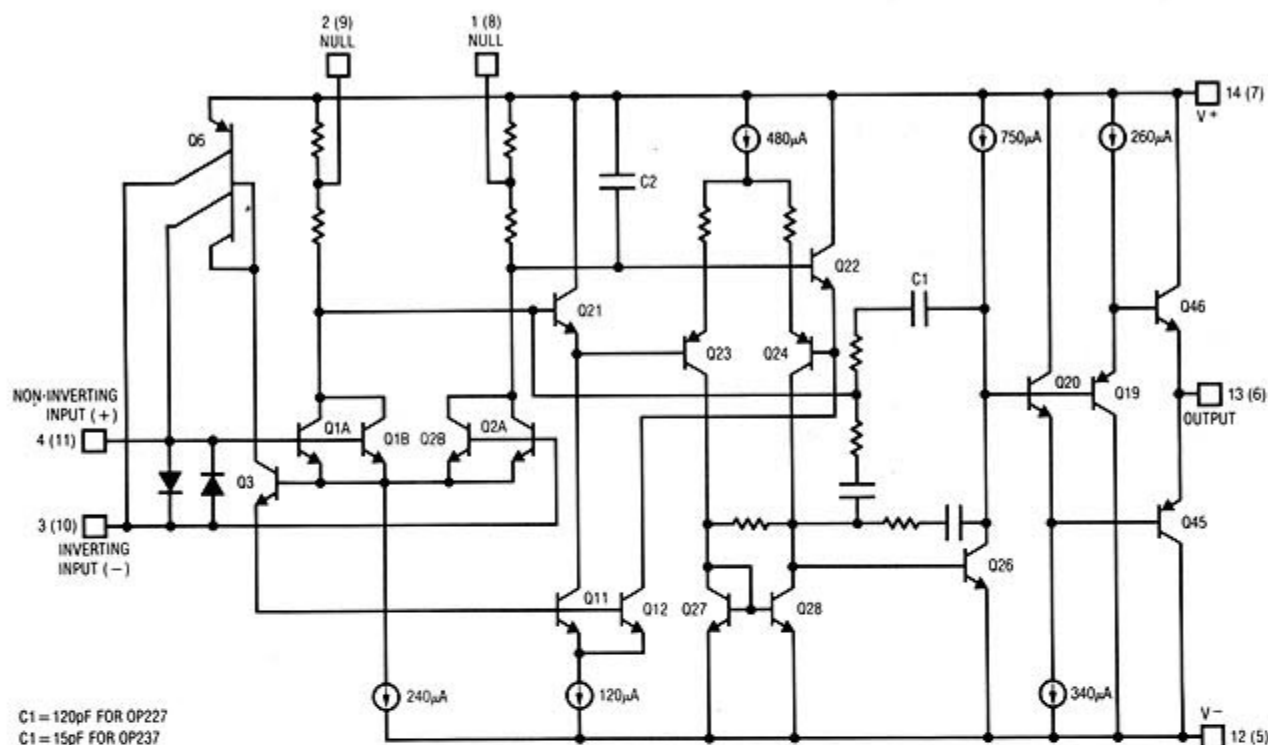



## PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

## 14-Lead Cavity DIP (J)

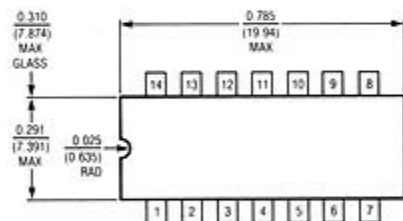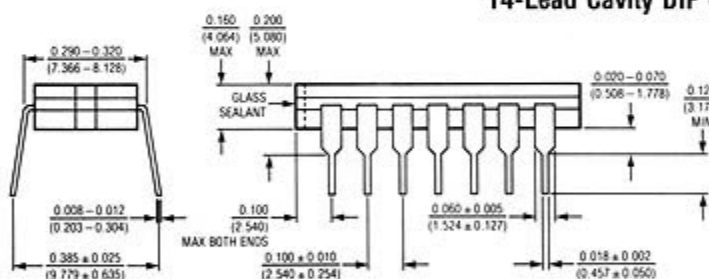

|                                        |                     |                          |
|----------------------------------------|---------------------|--------------------------|
| OP-227EJ OP-237EJ<br>OP-227GJ OP-237GJ | $T_{JMAX}$<br>125°C | $\theta_{JA}$<br>100°C/W |
| OP-227AJ OP-237AJ<br>OP-227CJ OP-237CJ | 150°C               | 100°C/W                  |

## 14-Lead Molded DIP (N)

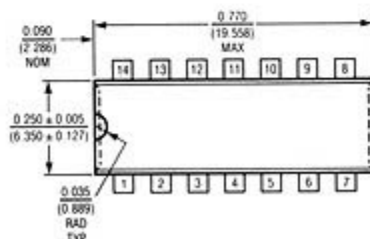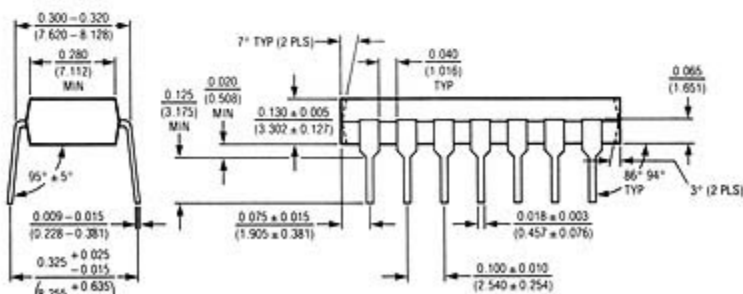

|                                        |                     |                          |
|----------------------------------------|---------------------|--------------------------|
| OP-227EN OP-237EN<br>OP-227GN OP-237GN | $T_{JMAX}$<br>125°C | $\theta_{JA}$<br>100°C/W |
|----------------------------------------|---------------------|--------------------------|

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А