

## Differential Clock Buffer/Driver

### Features


- Phase-locked loop (PLL) clock distribution for Double Data Rate Synchronous DRAM applications
- 1:5 differential outputs
- External feedback pins (FBINT, FBINC) are used to synchronize the outputs to the clock input
- SSCG: Spread Aware™ for electromagnetic interference (EMI) reduction
- 28-pin TSSOP package
- Conforms to JEDEC DDR specifications

### Functional Description

The CY2SSTV855 is a high-performance, very-low-skew, very-low-jitter zero-delay buffer that distributes a differential clock input pair (SSTL\_2) to four differential (SSTL\_2) pairs of clock outputs and one differential pair of feedback clock outputs. In support of low power requirements, when power-down is HIGH, the outputs switch in phase and frequency with the input clock. When power-down is LOW, all outputs are disabled to a high-impedance state and the PLL is shut down.

The device supports a low-frequency power-down mode. When the input is < 20 MHz, the PLL is disabled and the outputs are put in the Hi-Z state. When the input frequency is > 20 MHz, the PLL and outputs are enabled.

When AVDD is tied to ground, the PLL is turned off and bypassed with the input reference clock gated to the outputs. The Cypress CY2SSTV855 is Spread Aware and supports tracking of Spread Spectrum clock inputs to reduce EMI

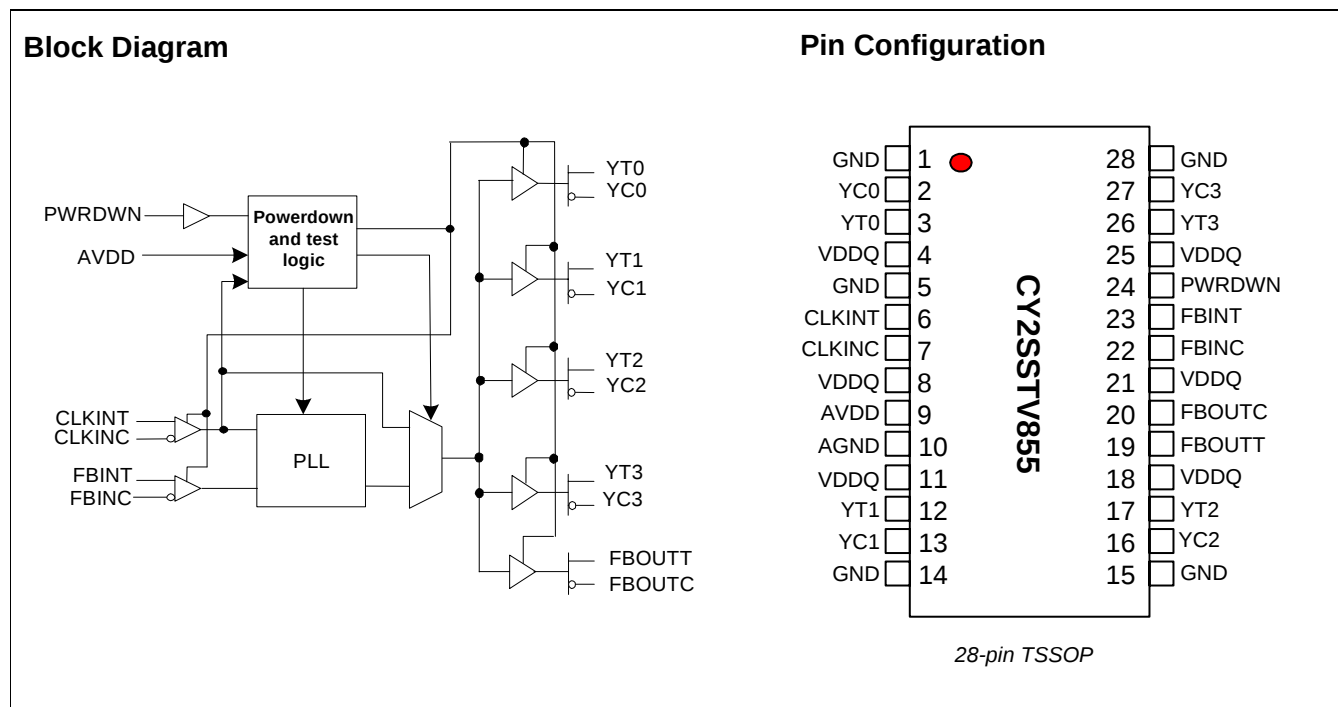

**Pin Definition**<sup>[1, 2]</sup>

| Pin             | Name    | I/O | Description                                                                                                                                                                                                      |
|-----------------|---------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6               | CLKINT  | I   | <b>True Clock Input.</b> Low Voltage Differential True Clock Input.                                                                                                                                              |
| 7               | CLKINC  | I   | <b>Complementary Clock Input.</b> Low Voltage Differential Complementary Clock Input.                                                                                                                            |
| 22              | FBINC   | I   | <b>Feedback Complementary Clock Input.</b> Differential Input Connect to FBOUTC for accessing the PLL.                                                                                                           |
| 23              | FBINT   | I   | <b>Feedback True Clock Input.</b> Differential Input Connect to FBOUTT for accessing the PLL.                                                                                                                    |
| 3,12,17,26      | YT(0:3) | O   | <b>True Clock Outputs.</b> Differential Outputs.                                                                                                                                                                 |
| 2,13,16,27      | YC(0:3) | O   | <b>Complementary Clock Outputs.</b> Differential Outputs.                                                                                                                                                        |
| 19              | FBOUTT  | O   | <b>Feedback True Clock Output.</b> Differential Outputs. Connect to FBINT for normal operation. A bypass delay capacitor at this output will control Input Reference/Output Clocks phase relationships.          |
| 20              | FBOUTC  | O   | <b>Feedback Complementary Clock Output.</b> Differential Outputs. Connect to FBINC for normal operation. A bypass delay capacitor at this output will control Input Reference/Output Clocks phase relationships. |
| 24              | PWRDWN  | I   | <b>Control input to turn device in the power-down mode.</b>                                                                                                                                                      |
| 4,8,11,18,21,25 | VDDQ    |     | <b>2.5V Power Supply for Output Clock Buffers.</b> 2.5V Nominal.                                                                                                                                                 |
| 9               | AVDD    |     | <b>2.5V Power Supply for PLL.</b> 2.5V Nominal.                                                                                                                                                                  |
| 1,5,14,15,28    | GND     |     | <b>Ground</b>                                                                                                                                                                                                    |
| 10              | AGND    |     | <b>Analog Ground.</b> 2.5V Analog Ground.                                                                                                                                                                        |

**Zero-delay Buffer**

When used as a zero-delay buffer the CY2SSTV855 will likely be in a nested clock tree application. For these applications the CY2SSTV855 offers a differential clock input pair as a PLL reference. The CY2SSTV855 then can lock onto the reference and translate with near zero delay to low-skew outputs. For normal operation, the external feedback differential input, FBINT/C, is connected to the feedback output, FBOUTT/C. By

connecting the feedback output to the feedback input the propagation delay through the device is eliminated. The PLL works to align the output edge with the input reference edge thus producing a near zero delay. The reference frequency affects the static phase offset of the PLL and thus the relative delay between the inputs and outputs.

When AVDD is strapped LOW, the PLL is turned off and bypassed for test purposes.


**Function Table**

| Inputs |        |          |          | Outputs |         |        |        | PLL          |
|--------|--------|----------|----------|---------|---------|--------|--------|--------------|
| AVDD   | PWRDWN | CLKINT   | CLKINC   | YT(0:3) | YC(0:3) | FBOUTT | FBOUTC |              |
| GND    | H      | L        | H        | L       | H       | L      | H      | BYPASSED/OFF |
| GND    | H      | H        | L        | H       | L       | H      | L      | BYPASSED/OFF |
| 2.5V   | H      | L        | H        | L       | H       | L      | H      | On           |
| 2.5V   | H      | H        | L        | H       | L       | H      | L      | On           |
| 2.5V   | X      | < 20 MHz | < 20 MHz | Hi-Z    | Hi-Z    | Hi-Z   | Hi-Z   | Off          |

**Notes:**


1. PU = internal pull-up.
2. A bypass capacitor (0.1μF) should be placed as close as possible to each positive power pin (< 0.2"). If these bypass capacitors are not close to the pins their high frequency filtering characteristic will be cancelled by the lead inductance of the traces.

## Differential Parameter Measurement Information

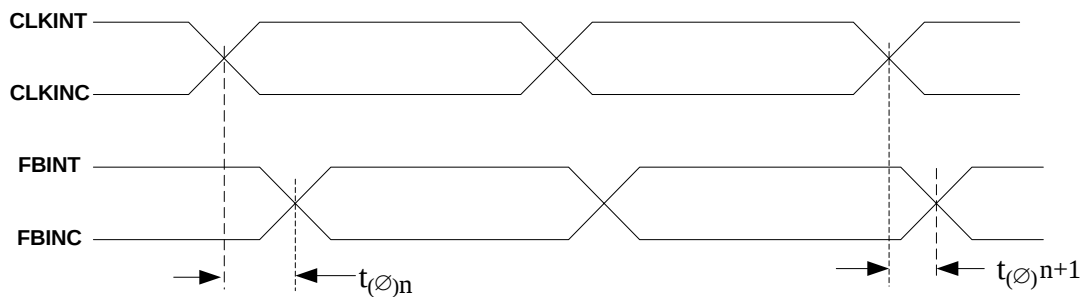


$$t_{(\varnothing)n} = \frac{\sum_{1}^{n=N} t_{(\varnothing)n}}{N} \quad N(\text{is large number of samples})$$

**Figure 1. Static Phase Offset**

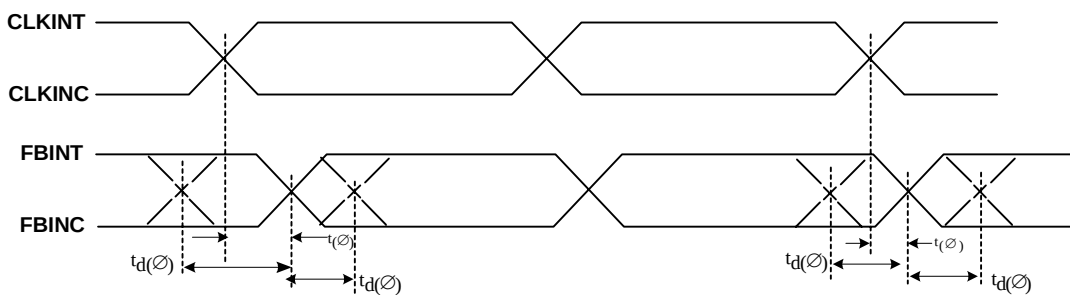


**Figure 2. Dynamic Phase Offset**

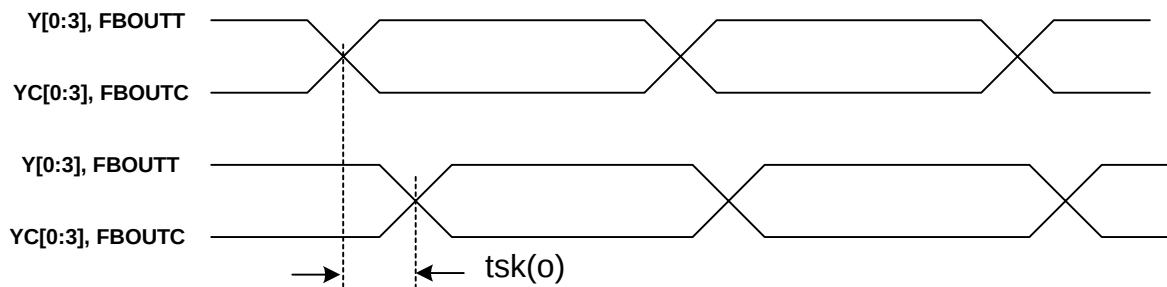


**Figure 3. Output Skew**

**Differential Parameter Measurement Information** (continued)

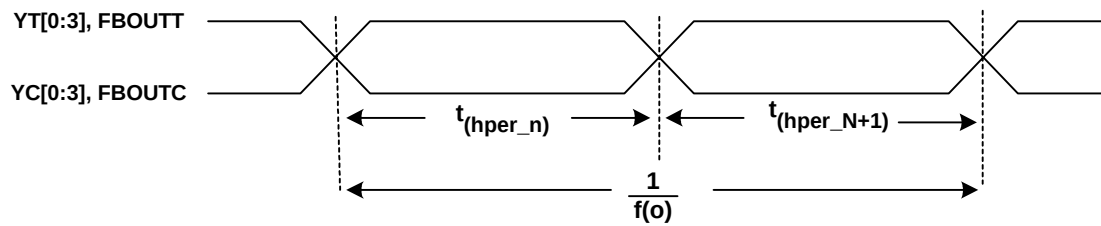


$$t_{jit(hper)} = t_{hper(n)} - \frac{1}{2 \times f_o}$$

**Figure 4. Half-period Jitter**

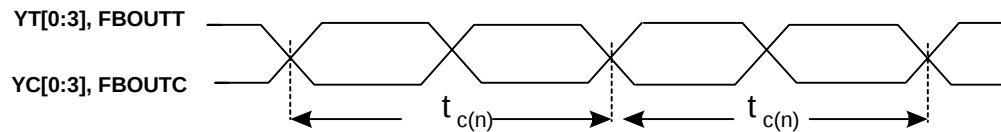

$$t_{jit(cc)} = t_{c(n)} - t_{c(n+1)}$$

**Figure 5. Cycle-to-cycle Jitter**

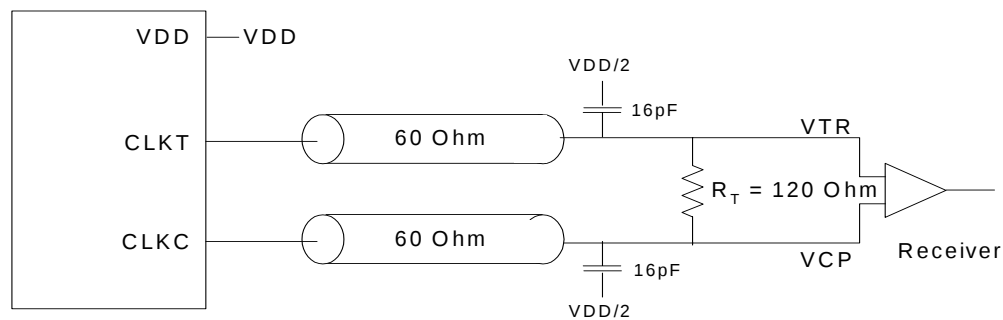

**Figure 6. Differential Signal Using Direct Termination Resistor**

### Absolute Maximum Conditions<sup>[3]</sup>

Input Voltage Relative to  $V_{SS}$ : .....  $V_{SS} - 0.3V$   
 Input Voltage Relative to  $V_{DDQ}$  or  $AV_{DD}$ : .....  $V_{DD} + 0.3V$   
 Storage Temperature: .....  $-65^{\circ}C$  to  $+150^{\circ}C$   
 Operating Temperature: .....  $-40^{\circ}C$  to  $+85^{\circ}C$   
 Maximum Power Supply: .....  $3.5V$

This device contains circuitry to protect the inputs against damage due to high static voltages or electric field; however, precautions should be taken to avoid application of any voltage higher than the maximum rated voltages to this circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range:

$$V_{SS} < (V_{in} \text{ or } V_{out}) < V_{DD}$$

Unused inputs must always be tied to an appropriate logic voltage level (either  $V_{SS}$  or  $V_{DD}$ ).

### DC Electrical Specifications ( $AV_{DD} = V_{DDQ} = 2.5V \pm 5\%$ , $T_A = -40^{\circ}C$ to $+85^{\circ}C$ )<sup>[4]</sup>

| Parameter | Description                                        | Conditions                                          | Min.                | Typ.        | Max.                | Unit    |
|-----------|----------------------------------------------------|-----------------------------------------------------|---------------------|-------------|---------------------|---------|
| $V_{ID}$  | Differential Input Voltage <sup>[5]</sup>          | CLKINT, FBINT                                       | 0.36                |             | $V_{DDQ} + 0.6$     | V       |
| $V_{IX}$  | Differential Input Crossing Voltage <sup>[6]</sup> | CLKTIN, FBINT                                       | $(V_{DDQ}/2) - 0.2$ | $V_{DDQ}/2$ | $(V_{DDQ}/2) + 0.2$ | V       |
| $I_{IN}$  | Input Current                                      | $V_{IN} = 0V$ or $V_{IN} = V_{DDQ}$ , CLKINT, FBINT | -10                 | -           | 10                  | $\mu A$ |
| $I_{OL}$  | Output Low Current                                 | $V_{DDQ} = 2.375V$ , $V_{OUT} = 1.2V$               | 26                  | 35          | -                   | mA      |
| $I_{OH}$  | Output High Current                                | $V_{DDQ} = 2.375V$ , $V_{OUT} = 1V$                 | -18                 | -32         | -                   | mA      |
| $V_{OL}$  | Output Low Voltage                                 | $V_{DDQ} = 2.375V$ , $I_{OL} = 12 \text{ mA}$       |                     | -           | 0.6                 | V       |
| $V_{OH}$  | Output High Voltage                                | $V_{DDQ} = 2.375V$ , $I_{OH} = -12 \text{ mA}$      | 1.7                 | -           | -                   | V       |
| $V_{OUT}$ | Output Voltage Swing <sup>[7]</sup>                |                                                     | 1.1                 | -           | $V_{DDQ} - 0.4$     | V       |
| $V_{OC}$  | Output Crossing Voltage <sup>[8]</sup>             |                                                     | $(V_{DDQ}/2) - 0.2$ | $V_{DDQ}/2$ | $(V_{DDQ}/2) + 0.2$ | V       |
| $I_{OZ}$  | High-Impedance Output Current                      | $V_O = GND$ or $V_O = V_{DDQ}$                      | -10                 |             | 10                  | $\mu A$ |
| $I_{DDQ}$ | Dynamic Supply Current <sup>[9]</sup>              | $V_{DDQ} = 170 \text{ MHz}$                         | -                   | 235         | 300                 | mA      |
| $I_{DD}$  | PLL Supply Current                                 | $AV_{DD}$ only                                      | -                   | 9           | 12                  | mA      |
| $C_{in}$  | Input Pin Capacitance                              |                                                     | -                   | 4           | -                   | pF      |

### AC Electrical Specifications ( $AV_{DD} = V_{DDQ} = 2.5V \pm 5\%$ , $T_A = -40^{\circ}C$ to $+85^{\circ}C$ )<sup>[10, 11]</sup>

| Parameter             | Description                                       | Conditions                | Min. | Typ. | Max. | Unit    |
|-----------------------|---------------------------------------------------|---------------------------|------|------|------|---------|
| $f_{CLK}$             | Operating Clock Frequency                         | $AV_{DD} = 2.5V \pm 0.2V$ | 60   |      | 170  | MHz     |
| $t_{DC}$              | Input Clock Duty Cycle <sup>[12]</sup>            |                           | 40   |      | 60   | %       |
| $t_{LOCK}$            | Maximum PLL lock Time                             |                           |      |      | 100  | $\mu s$ |
| $t_{SL(O)}$           | Output Clocks Slew Rate                           | 20% to 80% of VOD         | 1    |      | 2    | V/ns    |
| $t_{PZL}$ , $t_{PZH}$ | Output Enable Time (all outputs) <sup>[13]</sup>  |                           |      | 30   |      | ns      |
| $t_{PLZ}$ , $t_{PHZ}$ | Output Disable Time (all outputs) <sup>[13]</sup> |                           |      | 10   |      | ns      |
| $t_{CCJ}$             | Cycle to Cycle Jitter                             | $f > 66 \text{ MHz}$      | -100 |      | 100  | ps      |
| $t_{JIT(H-PER)}$      | Half-period jitter                                | $f > 66 \text{ MHz}$      | -100 |      | 100  | ps      |

#### Notes:

- Multiple Supplies:** The voltage on any input or I/O pin cannot exceed the power pin during power-up. Power supply sequencing is NOT required.
- Unused inputs must be held HIGH or LOW to prevent them from floating.
- Differential input signal voltage specifies the differential voltage  $|V_{TR} - V_{CP}|$  required for switching, where  $V_{TR}$  is the true input level and  $V_{CP}$  is the complementary input level.
- Differential cross-point input voltage is expected to track  $V_{DDQ}$  and is the voltage at which the differential signals must be crossing.
- For load conditions see Figure 6.
- The value of  $V_{OC}$  is expected to be  $|V_{TR} + V_{CP}|/2$ . In case of each clock directly terminated by a  $120\Omega$  resistor. See Figure 6.
- All outputs switching loaded with  $16 \text{ pF}$  in  $60\Omega$  environment. See Figure 6.
- Parameters are guaranteed by design and characterization. Not 100% tested in production.
- PLL is capable of meeting the specified parameters while supporting SSC synthesizers with modulation frequency between  $30 \text{ kHz}$  and  $33.3 \text{ kHz}$  with a downspread of  $-0.5\%$
- While the pulse skew is almost constant over frequency, the duty cycle error increases at higher frequencies. This is due to the formula: duty cycle =  $t_{WH}/t_C$ , where the cycle time ( $t_C$ ) decreases as the frequency goes up.
- Refers to transition of non-inverting output.
- All differential input and output terminals are terminated with  $120\Omega/16 \text{ pF}$  as shown in Figure 6.

**AC Electrical Specifications** ( $V_{DD} = V_{DDO} = 2.5V \pm 5\%$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ )<sup>[10, 11]</sup> (continued)


| Parameter          | Description                                         | Conditions | Min. | Typ. | Max. | Unit |
|--------------------|-----------------------------------------------------|------------|------|------|------|------|
| t <sub>PLH</sub>   | Low-to-High Propagation Delay,<br>CLKINT to YT[0:3] |            | 1.5  | 3.5  | 6    | ns   |
| t <sub>PHL</sub>   | High-to-Low Propagation Delay,<br>CLKINT to YT[0:3] |            | 1.5  | 3.5  | 6    | ns   |
| t <sub>SK(0)</sub> | Any Output to Any Output Skew <sup>[14]</sup>       |            | –    | –    | 100  | ps   |
| t <sub>(∅)</sub>   | Static Phase Offset <sup>[14]</sup>                 |            | –450 | –    | 450  | ps   |
| t <sub>D(∅)</sub>  | Dynamic Phase Offset                                | f > 66 MHz | –350 | –    | 350  | ps   |

## Ordering Information

| Part Number      | Package Type                 | Product Flow             |
|------------------|------------------------------|--------------------------|
| CY2SSTV855ZC     | 28-pin TSSOP                 | Commercial, 0° to 70°C   |
| CY2SSTV855ZCT    | 28-pin TSSOP – Tape and Reel | Commercial, 0° to 70°C   |
| CY2SSTV855ZI     | 28-pin TSSOP                 | Industrial, –40° to 85°C |
| CY2SSTV855ZIT    | 28-pin TSSOP – Tape and Reel | Industrial, –40° to 85°C |
| <b>Lead Free</b> |                              |                          |
| CY2SSTV855ZXC    | 28-pin TSSOP                 | Commercial, 0° to 70°C   |
| CY2SSTV855ZXCT   | 28-pin TSSOP – Tape and Reel | Commercial, 0° to 70°C   |
| CY2SSTV855ZXI    | 28-pin TSSOP                 | Industrial, –40° to 85°C |
| CY2SSTV855ZXIT   | 28-pin TSSOP – Tape and Reel | Industrial, –40° to 85°C |

## Package Drawing and Dimensions

### 28-Lead Thin Shrunk Small Outline Package (4.40-mm Body) Z28.173

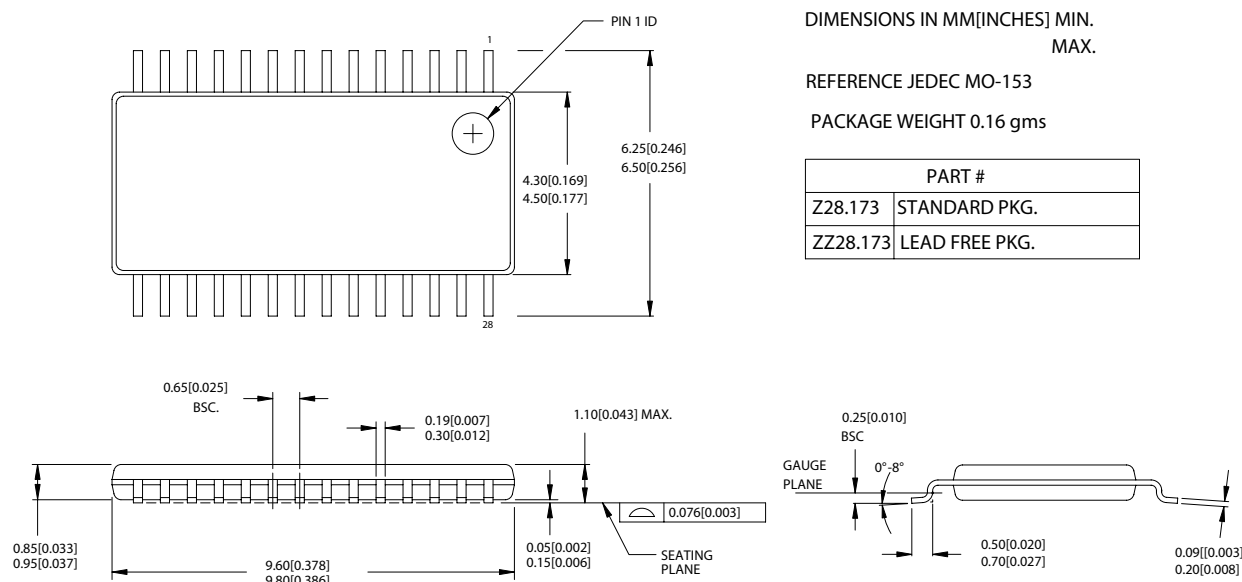

51-85120-\*A

Spread Aware is a trademark of Cypress Semiconductor. All product and company names mentioned in this document may be the trademarks of their respective holders.

**Document History Page**

| Document Title: CY2SSTV855 Differential Clock Buffer/Driver<br>Document #: 38-07459 |         |            |                 |                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------|---------|------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| REV.                                                                                | ECN NO. | Issue Date | Orig. of Change | Description of Change                                                                                                                                                                                                                                                  |
| **                                                                                  | 117544  | 09/09/02   | HWT             | New data sheet                                                                                                                                                                                                                                                         |
| *A                                                                                  | 122934  | 12/18/02   | RBI             | Add power up requirements to maximum ratings information                                                                                                                                                                                                               |
| *B                                                                                  | 124087  | 04/23/03   | RGL             | Changed the package drawing and dimension from Z28 to Z29<br>Corrected the block diagram<br>Changed the Output Enable/Disable time from 3/3 to 30/10 ns<br>Eliminated Dynamic Phase Offset spec.<br>Changed the Phase Error Jitter spec. from $\pm 50$ to $\pm 150$ ps |
| *C                                                                                  | 215389  | See ECN    | RGL             | Added an Industrial Grade Devices (temp from $-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ ).                                                                                                                                                                          |
| *D                                                                                  | 224444  | See ECN    | RGL             | Removed "PRELIMINARY"                                                                                                                                                                                                                                                  |
| *E                                                                                  | 401500  | See ECN    | RGL             | Added Lead Free Devices                                                                                                                                                                                                                                                |
| *F                                                                                  | 436956  | See ECN    | RGL             | Changed the static and dynamic offset numbers                                                                                                                                                                                                                          |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А