4-Channel/8-Channel Fault-Protected Analog Multiplexers

ADG508F/ADG509F/ADG528F

FEATURES

- Low on resistance (300 Ω typical)
- Fast switching times
  - t_{ON} 250 ns maximum
  - t_{OFF} 250 ns maximum
- Low power dissipation (3.3 mW maximum)
- Fault and overvoltage protection (−40 V to +55 V)
- All switches off with power supply off
- Analog output of on channel clamped within power supplies if an overvoltage occurs
- Latch-up proof construction
- Break-before-make construction
- TTL and CMOS compatible inputs

APPLICATIONS

- Existing multiplexer applications (both fault-protected and nonfault-protected)
- New designs requiring multiplexer functions

FUNCTIONAL BLOCK DIAGRAMS

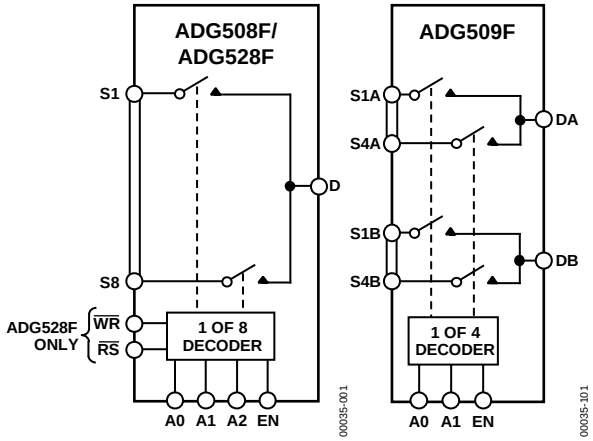

Figure 1.

GENERAL DESCRIPTION

The ADG508F, ADG509F, and ADG528F are CMOS analog multiplexers, with the ADG508F and ADG528F comprising eight single channels and the ADG509F comprising four differential channels. These multiplexers provide fault protection. Using a series n-channel, p-channel, n-channel MOSFET structure, both device and signal source protection is provided in the event of an overvoltage or power loss. The multiplexer can withstand continuous overvoltage inputs from −40 V to +55 V. During fault conditions, the multiplexer input (or output) appears as an open circuit and only a few nanoamperes of leakage current will flow. This protects not only the multiplexer and the circuitry driven by the multiplexer, but also protects the sensors or signal sources that drive the multiplexer.

The ADG508F and ADG528F switch one of eight inputs to a common output as determined by the 3-bit binary address lines A0, A1, and A2. The ADG509F switches one of four differential inputs to a common differential output as determined by the 2-bit binary address lines A0 and A1. The ADG528F has on-chip address and control latches that facilitate microprocessor interfacing. An EN input on each device is used to enable or disable the device. When disabled, all channels are switched off.

PRODUCT HIGHLIGHTS

1. Fault Protection.
   The ADG508F/ADG509F/ADG528F can withstand continuous voltage inputs from −40 V to +55 V. When a fault occurs due to the power supplies being turned off, all the channels are turned off and only a leakage current of a few nanoamperes flows.
2. On channel turns off while fault exists.
3. Low R_{ON}.
4. Fast switching times.
5. Break-before-make switching.
   Switches are guaranteed break-before-make so that input signals are protected against momentary shorting.
6. Trench isolation eliminates latch-up.
   A dielectric trench separates the p and n-channel MOSFETs thereby preventing latch-up.

Rev. E

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 www.analog.com
Fax: 781.461.3113 ©2001–2009 Analog Devices, Inc. All rights reserved.

TABLE OF CONTENTS

Features 1
Applications 1
Functional Block Diagrams 1
General Description 1
Product Highlights 1
Revision History 2
Specifications 3
Dual Supply 3
Truth Tables 4
Timing Diagrams 5
Absolute Maximum Ratings 6
ESD Caution 6
Pin Configuration and Function Descriptions 7
Typical Performance Characteristics 8
Terminology 10
Theory of Operation 11
Test Circuits 12
Outline Dimensions 15
Ordering Guide 18

REVISION HISTORY

7/09—Rev. D: Rev. E

Updated Format ..... Universal
Added TSSOP ..... Universal
Updated Outline Dimensions 15
Changes to Ordering Guide 18

4/01—Data Sheet Changed from Rev. C to Rev. D.

Changes to Ordering Guide 1
Changes to Specifications Table 2
Max Ratings Changed 4
Deleted 16-Lead Cerdip from Outline Dimensions 11
Deleted 18-Lead Cerdip from Outline Dimensions 12

SPECIFICATIONS

DUAL SUPPLY

V_{DD} = +15 V ± 10%, V_{SS} = −15 V ± 10%, GND = 0 V, unless otherwise noted.

Table 1.

Parameter	B Version +25°C	B Version −40°C to +85°C	Unit	Test Conditions/Comments
ANALOG SWITCH				
Analog Signal Range		V_{SS} + 3	V min	
		V_{DD} − 1.5	V max	
R_{ON}	300	350	Ω typ	−10 V ≤ V_S ≤ +10 V, I_S = 1 mA; V_{DD} = +15 V ± 10%, V_{SS} = −15 V ± 10%
		400	Ω max	−10 V ≤ V_S ≤ +10 V, I_S = 1 mA; V_{DD} = +15 V ± 5%, V_{SS} = −15 V ± 5%
R_{ON} Drift	0.6		%/°C typ	V_S = 0 V, I_S = 1 mA
R_{ON} Match	5		% max	V_S = 0 V, I_S = 1 mA
LEAKAGE CURRENTS				
Source OFF Leakage I_S (OFF)	±0.02		nA typ	V_D = ±10 V, V_S = ∓10 V;
	±1	±50	nA max	See Figure 22
Drain OFF Leakage I_D (OFF)	±0.04		nA typ	V_D = ±10 V, V_S = ∓10 V;
ADG508F/ADG528F	±1	±60	nA max	See Figure 23
ADG509F	±1	±30	nA max	
Channel ON Leakage I_D, I_S (ON)	±0.04		nA typ	V_S = V_D = ± 10 V;
ADG508F/ADG528F	±1	±60	nA max	See Figure 24
ADG509F	±1	±30	nA max	
FAULT				
Output Leakage Current	±0.02		nA typ	V_S = ±33 V, V_D = 0 V, see Figure 23
(With Overvoltage)	±2	±2	µA max	
Input Leakage Current	±0.005		µA typ	V_S = ±25 V, V_D = ∓10 V, see Figure 25
(With Overvoltage)	±2		µA max	
Input Leakage Current	±0.001		µA typ	V_S = ±25 V, V_D = V_{EN} = A0, A1, A2 = 0 V
(With Power Supplies OFF)	±2		µA max	See Figure 26
DIGITAL INPUTS				
Input High Voltage, V_{INH}		2.4	V min	
Input Low Voltage, V_{INL}		0.8	V max	
Input Current, I_{INL} or I_{INH}		±1	µA max	V_{IN} = 0 or V_{DD}
C_{IN}, Digital Input Capacitance	5		pF typ	
DYNAMIC CHARACTERISTICS[1]				
$t_{TRANSITION}$	200		ns typ	R_L = 1 MΩ, C_L = 35 pF;
	300	400	ns max	V_{S1} = ±10 V, V_{S8} = ∓10 V; see Figure 27
t_{OPEN}	50		ns typ	R_L = 1 kΩ, C_L = 35 pF;
	25	10	ns min	V_S = 5 V; see Figure 28
t_{ON} (EN, $\overline{WR}$)	200		ns typ	R_L = 1 kΩ, C_L = 35 pF;
	250	400	ns max	V_S = 5 V; see Figure 29
t_{OFF} (EN, $\overline{RS}$)	200		ns typ	R_L = 1 kΩ, C_L = 35 pF;
t_{SETT}, Settling Time	250	400	ns max	V_S = 5 V; see Figure 29
0.1%		1	µs typ	R_L = 1 kΩ, C_L = 35 pF;
0.01%		2.5	µs typ	V_S = 5 V
ADG528F Only				
t_W, Write Pulse Width	100	120	ns min	
t_S, Address, Enable Setup Time		100	ns min	
t_H, Address, Enable Hold Time		10	ns min	
t_{RS}, Reset Pulse Width		100	ns min	

Parameter	B Version +25°C	B Version −40°C to +85°C	Unit	Test Conditions/Comments
Charge Injection	4		pC typ	V_S = 0 V, R_S = 0 Ω, C_L = 1 nF; see Figure 32
OFF Isolation	68		dB typ	R_L = 1 kΩ, C_L = 15 pF, f = 100 kHz;
	50		dB min	V_S = 7 V rms; see Figure 33
C_S (OFF)	5		pF typ	
C_D (OFF)				
ADG508F/ADG528F	50		pF typ	
ADG509F	25		pF typ	
POWER REQUIREMENTS				
I_{DD}	0.1	0.2	mA max	V_{IN} = 0 V or 5 V
I_{SS}	0.1	0.1	mA max	

[1] Guaranteed by design, not subject to production test.

TRUTH TABLES

Table 2. ADG508F Truth Table

A2	A1	A0	EN	ON Switch
X	X	X	0	None
0	0	0	1	1
0	0	1	1	2
0	1	0	1	3
0	1	1	1	4
1	0	0	1	5
1	0	1	1	6
1	1	0	1	7
1	1	1	1	8

X = Don't Care

Table 3. ADG509F Truth Table

A1	A0	EN	ON Switch Pair
X	X	0	None
0	0	1	1
0	1	1	2
1	0	1	3
1	1	1	4

X = Don't Care

Table 4. ADG528F Truth Table

A2	A1	A0	EN	$\overline{WR}$	$\overline{RS}$	ON Switch
X	X	X	X	↑	1	Retains previous switch condition
X	X	X	X	X	0	None (address and enable latches cleared)
X	X	X	0	0	1	None
0	0	0	1	0	1	1
0	0	1	1	0	1	2
0	1	0	1	0	1	3
0	1	1	1	0	1	4
1	0	0	1	0	1	5
1	0	1	1	0	1	6
1	1	0	1	0	1	7
1	1	1	1	0	1	8

X = Don't Care

TIMING DIAGRAMS

Figure 2 shows the timing sequence for latching the switch address and enable inputs. The latches are level sensitive; therefore, while $\overline{WR}$ is held low, the latches are transparent and the switches respond to the address and enable inputs. This input data is latched on the rising edge of $\overline{WR}$.

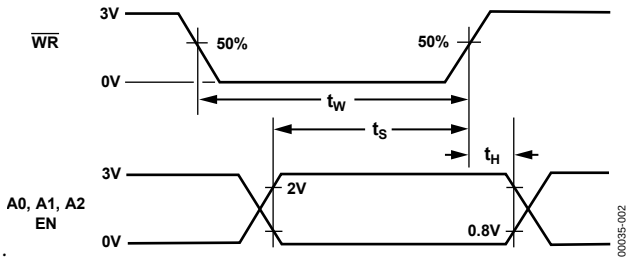

Figure 2. ADG528F Timing Sequence for Latching the Switch Address and Enable Inputs

Figure 3 shows the reset pulsewidth, t_{RS}, and the reset turnoff time, t_{OFF} ($\overline{RS}$). Note that all digital input signals rise and fall times are measured from 10% to 90% of 3 V. $t_R = t_F = 20$ ns.

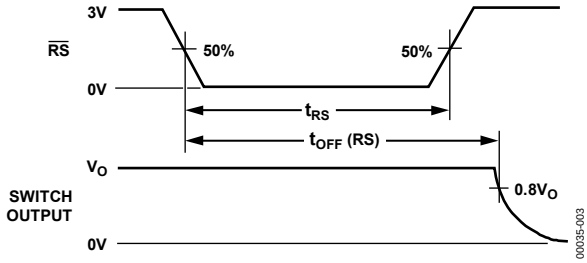

Figure 3. ADG528F Reset Pulse Width

ABSOLUTE MAXIMUM RATINGS

T_A = +25°C unless otherwise noted.

Table 5.

Parameter	Rating
V_{DD} to V_{SS}	44 V
V_{DD} to GND	−0.3 V to +25 V
V_{SS} to GND	+0.3 V to −25 V
Digital Input, EN, Ax	−0.3 V to V_{DD} + 2 V or 20 mA, whichever occurs first
V_S, Analog Input Overvoltage with Power On	V_{SS} − 25 V to V_{DD} + 40 V
V_S, Analog Input Overvoltage with Power Off	−40 V to +55 V
Continuous Current, S or D	20 mA
Peak Current, S or D	
(Pulsed at 1 ms, 10% Duty Cycle Max)	40 mA
Operating Temperature Range	
Industrial (B Version)	−40°C to +85°C
Storage Temperature Range	−65°C to +150°C
Junction Temperature	150°C
TSSOP	
θ_{JA}, Thermal Impedance	112°C/W
Plastic Package	
θ_{JA}, Thermal Impedance	
16-Lead	117°C/W
18-Lead	110°C/W
Lead Temperature, Soldering (10 sec)	260°C
SOIC Package	
θ_{JA}, Thermal Impedance	
Narrow Body	77°C/W
Wide Body	75°C/W
Lead Temperature, Soldering	
Vapor Phase (60 sec)	215°C
Infrared (15 sec)	220°C
PLCC Package	
θ_{JA}, Thermal Impedance	90°C/W
Lead Temperature, Soldering	
Vapor Phase (60 sec)	215°C
Infrared (15 sec)	220°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS



Figure 4. ADG508F Pin Configuration TSSOP/DIP/SOIC



Figure 5. ADG509F Pin Configuration TSSOP/DIP/SOIC



Figure 6. ADG528F Pin Configuration DIP



Figure 7. ADG528F Pin Configuration PLCC

TYPICAL PERFORMANCE CHARACTERISTICS

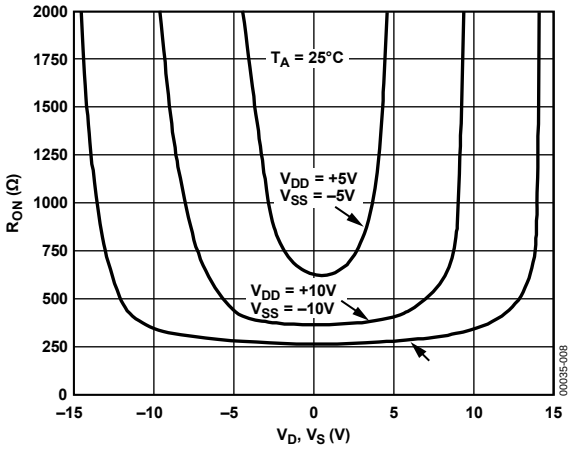

Figure 8. On Resistance as a Function of V_D (V_S)

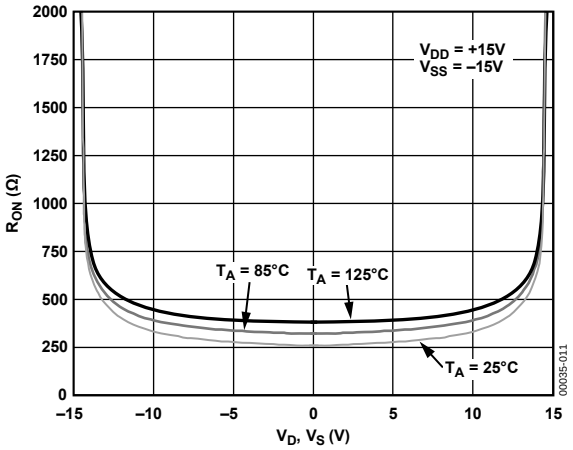

Figure 11. On Resistance as a Function of V_D (V_S) for Different Temperatures

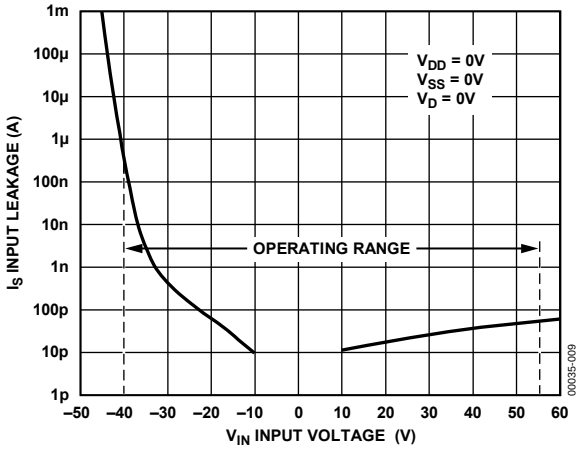

Figure 9. Input Leakage Current as a Function of V_S (Power Supplies Off) During Overvoltage Conditions

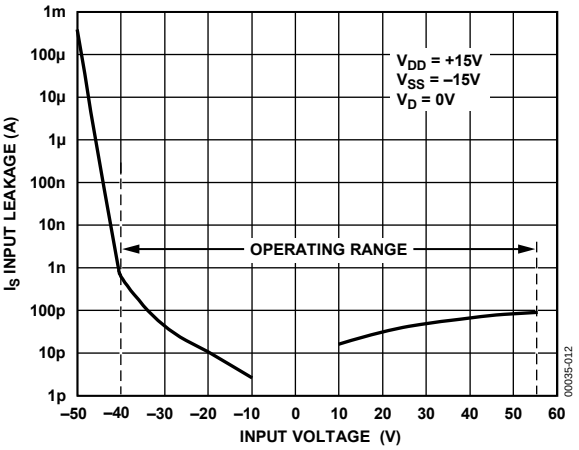

Figure 12. Input Leakage Current as a Function of V_S (Power Supplies On) During Overvoltage Conditions

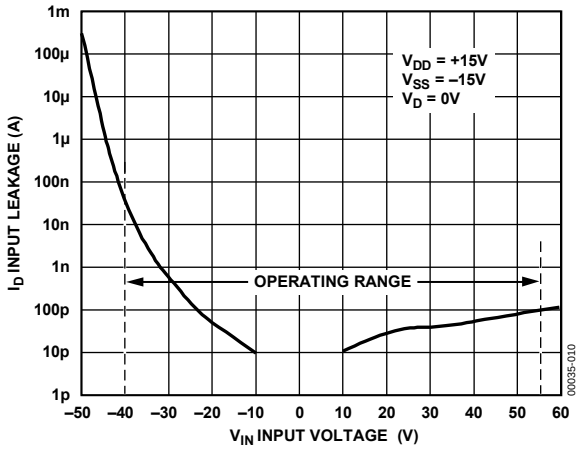

Figure 10. Output Leakage Current as a Function of V_S (Power Supplies On) During Overvoltage Conditions

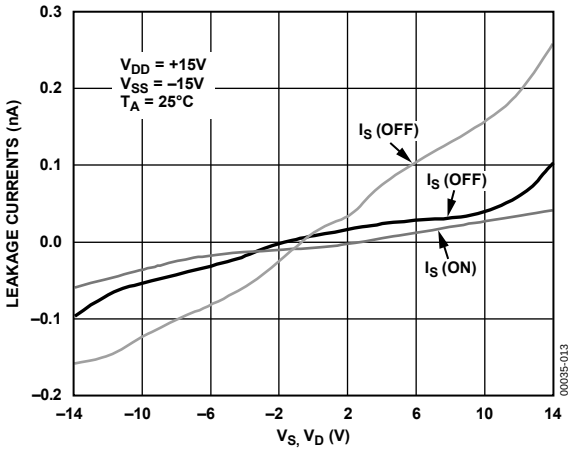

Figure 13. Leakage Currents as a Function of V_D (V_S)

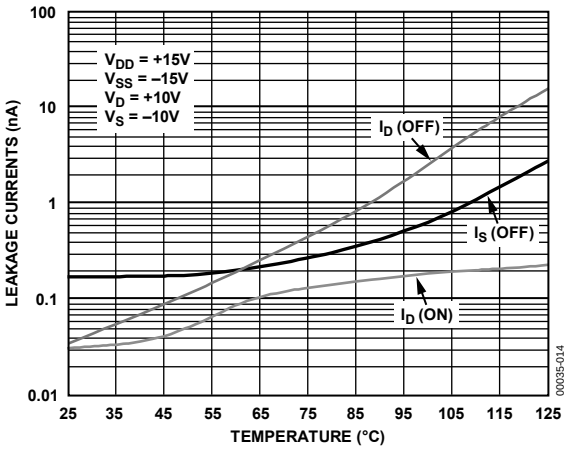

Figure 14. Leakage Currents as a Function of Temperature

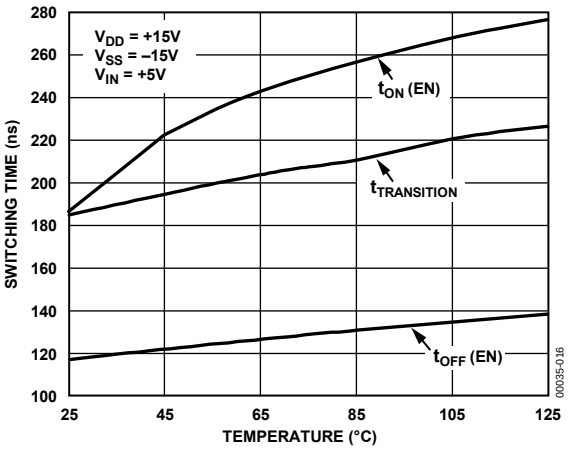

Figure 16. Switching Time vs. Temperature

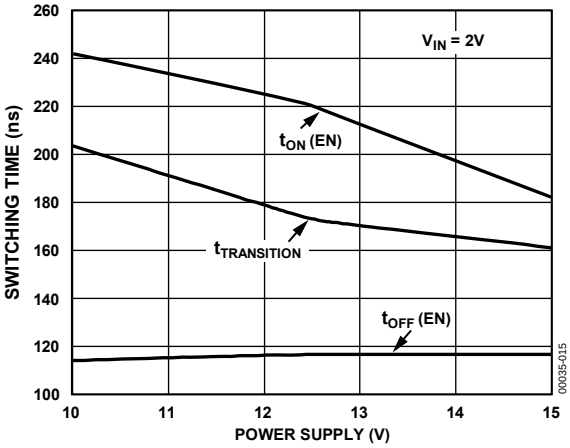

Figure 15. Switching Time vs. Power Supply

TERMINOLOGY

V_{DD}
Most Positive Power Supply Potential.

V_{SS}
Most Negative Power Supply Potential.

GND
Ground (0 V) Reference.

R_{ON}
Ohmic Resistance between D and S.

R_{ON} Drift
Change in R_{ON} when temperature changes by one degree Celsius.

R_{ON} Match
Difference between the R_{ON} of any two channels.

I_S (OFF)
Source leakage current when the switch is off.

I_D (OFF)
Drain leakage current when the switch is off.

I_D, I_S (ON)
Channel leakage current when the switch is on.

V_D (V_S)
Analog Voltage on Terminals D, S.

C_S (OFF)
Channel input capacitance for off condition.

C_D (OFF)
Channel output capacitance for off condition.

C_D, C_S (ON)
On Switch Capacitance.

C_{IN}
Digital Input Capacitance.

t_{ON} (EN)
Delay time between the 50% and 90% points of the digital input and switch on condition.

t_{OFF} (EN)
Delay time between the 50% and 90% points of the digital input and switch off condition.

$t_{TRANSITION}$
Delay time between the 50% and 90% points of the digital inputs and the switch on condition when switching from one address state to another.

t_{OPEN}
"OFF" time measured between 80% points of both switches when switching from one address state to another.

V_{INL}
Maximum input voltage for Logic 0.

V_{INH}
Minimum input voltage for Logic 1.

I_{INL} (I_{INH})
Input current of the digital input.

Off Isolation
A measure of unwanted signal coupling through an off channel.

Charge Injection
A measure of the glitch impulse transferred from the digital input to the analog output during switching.

I_{DD}
Positive Supply Current.

I_{SS}
Negative Supply Current.

THEORY OF OPERATION

The ADG508F/ADG509F/ADG528F multiplexers are capable of withstanding overvoltages from −40 V to +55 V, irrespective of whether the power supplies are present or not. Each channel of the multiplexer consists of an n-channel MOSFET, a p-channel MOSFET, and an n-channel MOSFET, connected in series. When the analog input exceeds the power supplies, one of the MOSFETs will switch off, limiting the current to submicroamp levels, thereby preventing the overvoltage from damaging any circuitry following the multiplexer. Figure 17 illustrates the channel architecture that enables these multiplexers to withstand continuous overvoltages.

When an analog input of V_{SS} + 3 V to V_{DD} − 1.5 V is applied to the ADG508F/ADG509F/ADG528F, the multiplexer behaves as a standard multiplexer, with specifications similar to a standard multiplexer, for example, the on-resistance is 400 Ω maximum. However, when an overvoltage is applied to the device, one of the three MOSFETs will turn off.

Figure 17 to Figure 20 show the conditions of the three MOSFETs for the various overvoltage situations. When the analog input applied to an ON channel approaches the positive power supply line, the n-channel MOSFET turns OFF since the voltage on the analog input exceeds the difference between V_{DD} and the n-channel threshold voltage (V_{TN}). When a voltage more negative than V_{SS} is applied to the multiplexer, the p-channel MOSFET will turn off since the analog input is more negative than the difference between V_{SS} and the p-channel threshold voltage (V_{TP}). Since V_{TN} is nominally 1.5 V and V_{TP} is typically 3 V, the analog input range to the multiplexer is limited to −12 V to +13.5 V when a ±15 V power supply is used.

When the power supplies are present but the channel is off, again either the p-channel MOSFET or one of the n-channel MOSFETs will turn off when an overvoltage occurs.

Finally, when the power supplies are off, the gate of each MOSFET will be at ground. A negative overvoltage switches on the first n-channel MOSFET but the bias produced by the overvoltage causes the p-channel MOSFET to remain turned off. With a positive overvoltage, the first MOSFET in the series will remain off since the gate to source voltage applied to this MOSFET is negative.

During fault conditions, the leakage current into and out of the ADG508F/ADG509F/ADG528F is limited to a few microamps. This protects the multiplexer and succeeding circuitry from over stresses as well as protecting the signal sources which drive the multiplexer. Also, the other channels of the multiplexer will be undisturbed by the overvoltage and will continue to operate normally.

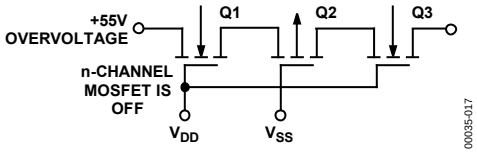

Figure 17. +55 V Overvoltage Input to the On Channel

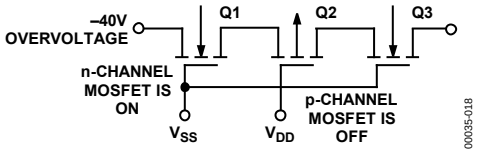

Figure 18. −40 V Overvoltage on an Off Channel with Multiplexer Power On

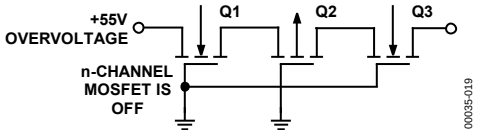

Figure 19. +55 V Overvoltage with Power Off

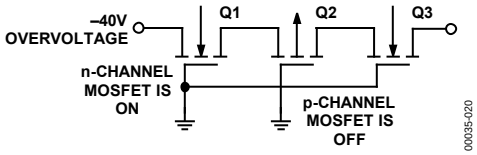

Figure 20. −40 V Overvoltage with Power Off

TEST CIRCUITS



Figure 21. On Resistance

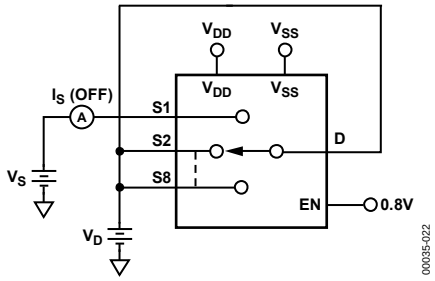

Figure 22. I_S (Off)

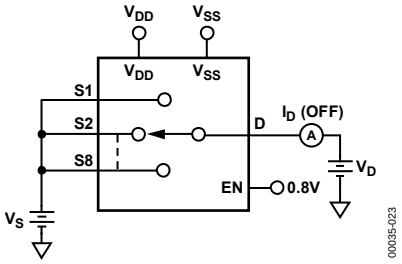

Figure 23. I_D (Off)

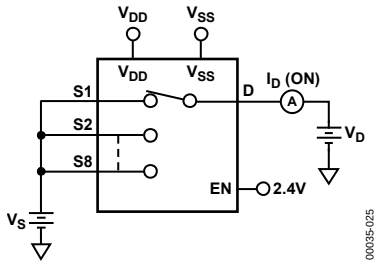

Figure 24. I_D (On)

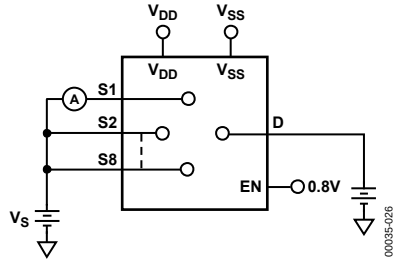

Figure 25. Input Leakage Current (with Overvoltage)

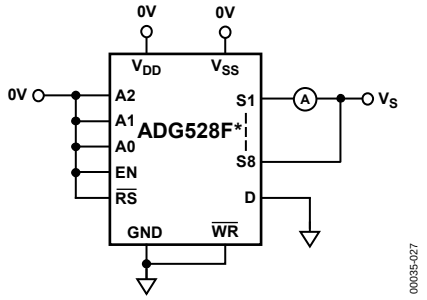

Figure 26. Input Leakage Current (with Power Supplies Off)

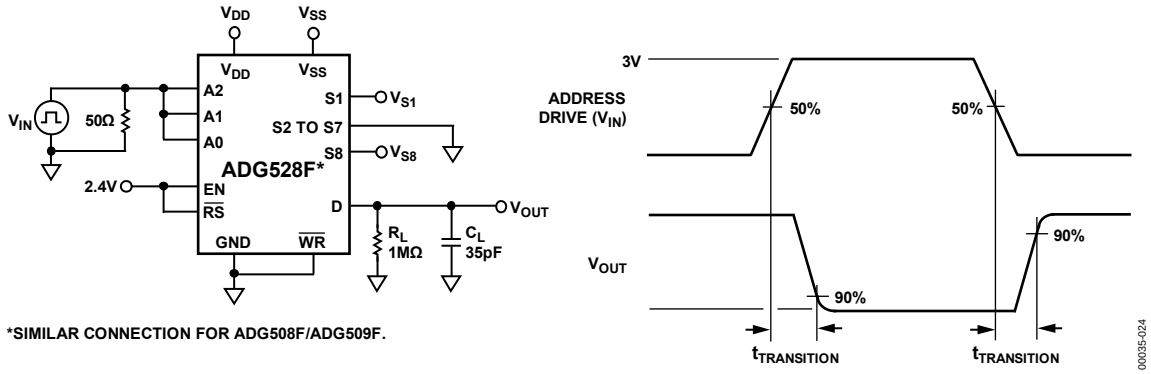

Figure 27. Switching Time of Multiplexer, $t_{TRANSITION}$

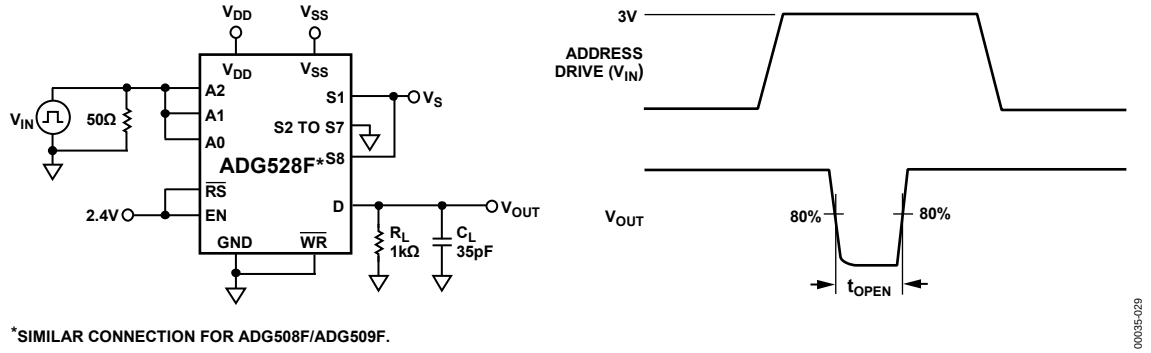

Figure 28. Break-Before-Make Delay, t_{OPEN}

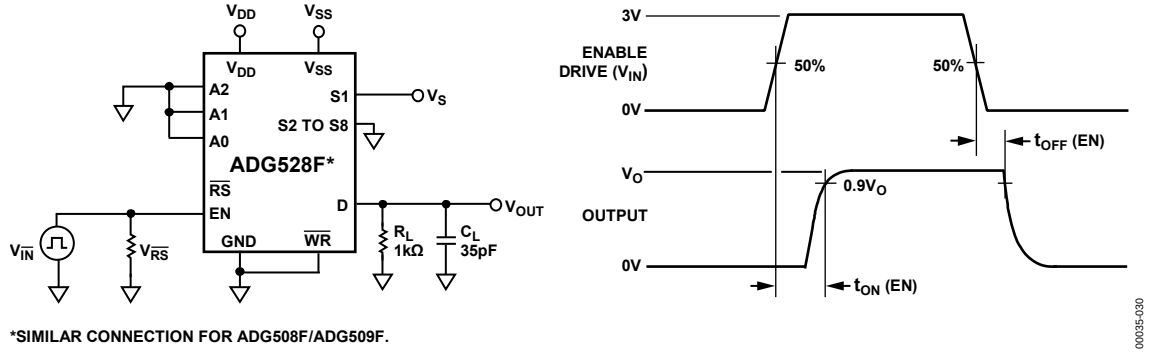

Figure 29. Enable Delay, t_{ON} (EN), t_{OFF} (EN)

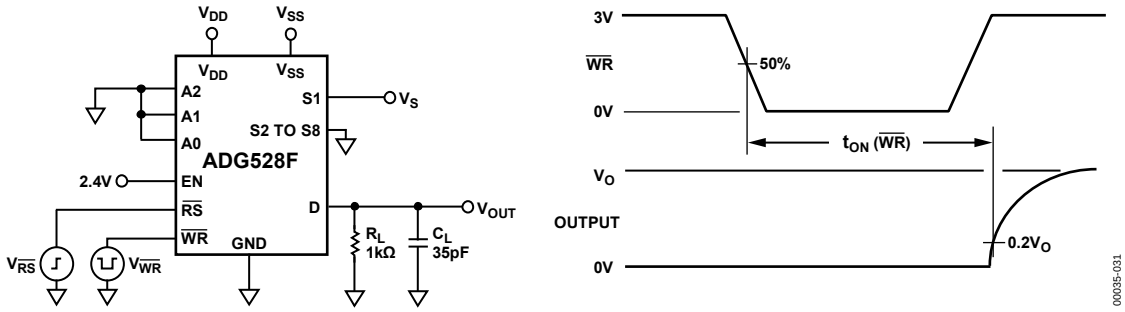

Figure 30. Write Turn-On Time, t_{ON} ($\overline{WR}$)

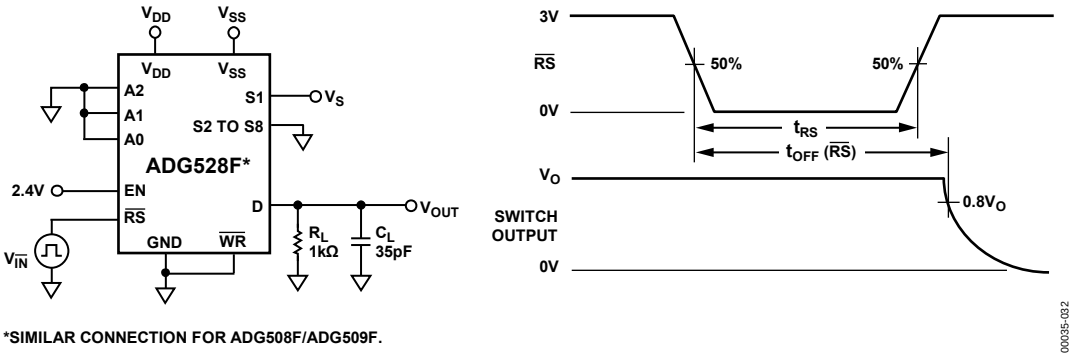

Figure 31. Reset Turn-Off Time, t_{OFF} ($\overline{RS}$)

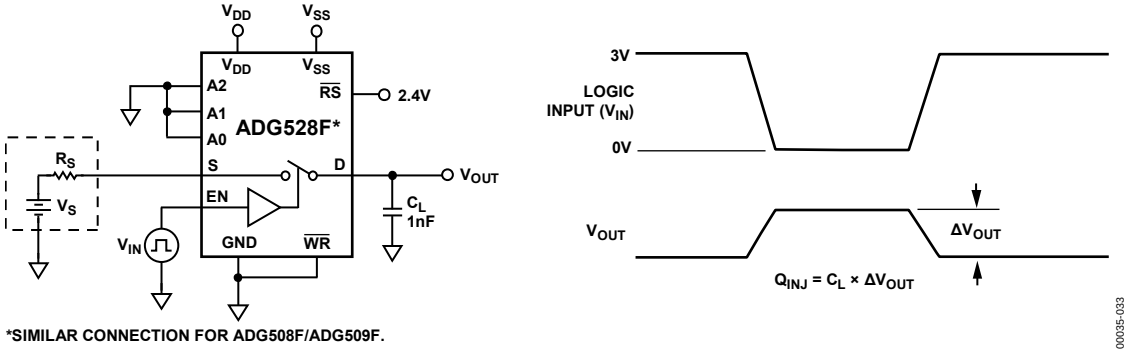

Figure 32. Charge Injection

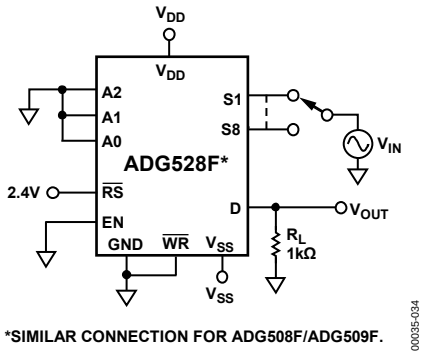

Figure 33. Off Isolation

OUTLINE DIMENSIONS

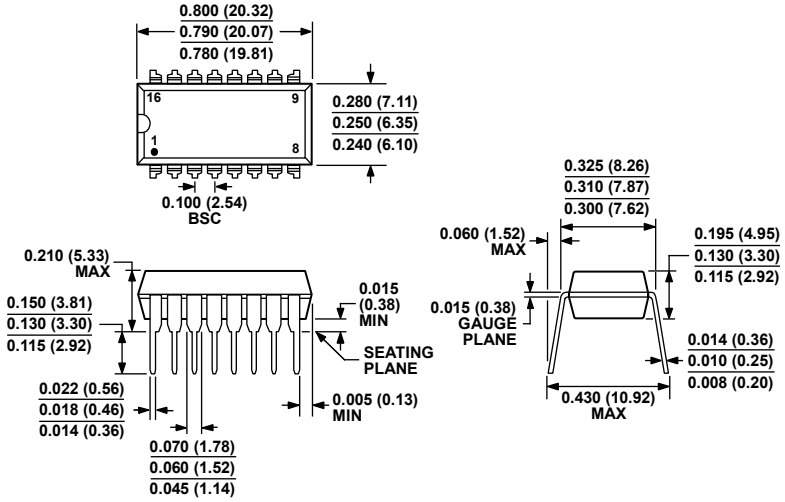

COMPLIANT TO JEDEC STANDARDS MS-001-AB

CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN. CORNER LEADS MAY BE CONFIGURED AS WHOLE OR HALF LEADS.

073106-B

Figure 34. 16-Lead Plastic Dual In-Line Package [PDIP] Narrow Body (N-16)
Dimensions shown in inches and (millimeters)

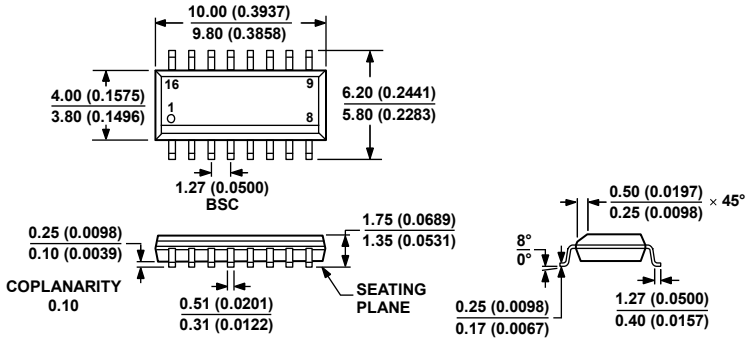

COMPLIANT TO JEDEC STANDARDS MS-012-AC

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

060606-A

Figure 35. 16-Lead Standard Small Outline Package [SOIC-N] Narrow Body (R-16)
Dimensions shown in millimeters and (inches)

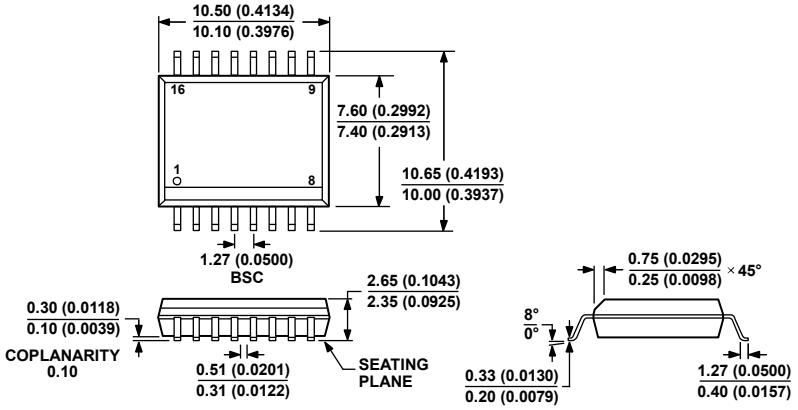

COMPLIANT TO JEDEC STANDARDS MS-013-AA
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

032707-B

Figure 36. 16-Lead Standard Small Outline Package [SOIC-W] Wide Body (RW-16)
Dimensions shown in millimeters and (inches)

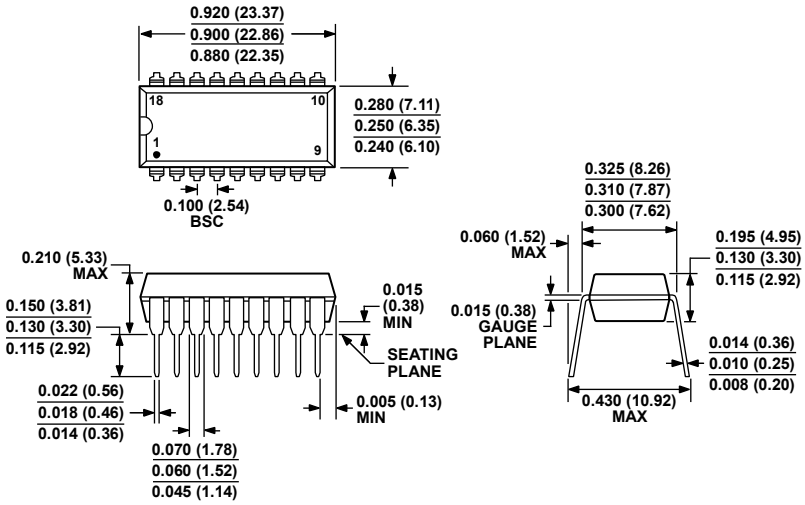

COMPLIANT TO JEDEC STANDARDS MS-001
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.
CORNER LEADS MAY BE CONFIGURED AS WHOLE OR HALF LEADS.

070706-A

Figure 37. 18-Lead Plastic Dual In-Line Package [PDIP] Narrow Body (N-18)
Dimensions shown in inches and (millimeters)

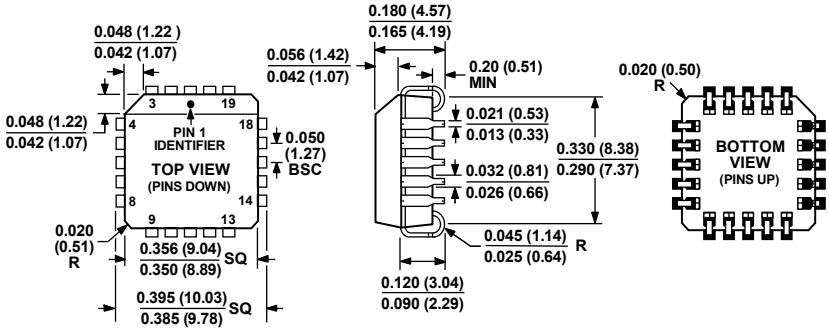

COMPLIANT TO JEDEC STANDARDS MO-047-AA
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 38. 20-Lead Plastic Leaded Chip Carrier [PLCC]
(P-20)
Dimensions shown in inches and (millimeters)

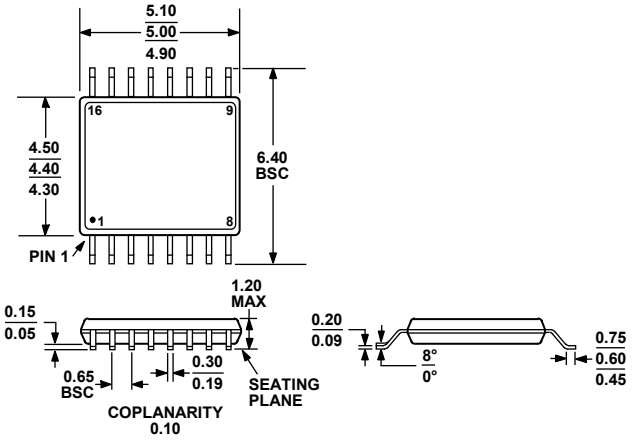

COMPLIANT TO JEDEC STANDARDS MO-153-AB

Figure 39. 16-Lead Thin Shrink Small Outline Package [TSSOP]
(RU-16)
Dimensions shown in millimeters

ORDERING GUIDE

Model	Temperature Range	Package Description	Package Option
ADG508FBN	−40°C to +85°C	16-Lead PDIP	N-16
ADG508FBNZ	−40°C to +85°C	16-Lead PDIP	N-16
ADG508FBRN	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG508FBRN−REEL7	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG508FBRNZ	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG508FBRNZ−REEL7	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG508FBRW	−40°C to +85°C	16-Lead SOIC_W	RW-16
ADG508FBRWZ	−40°C to +85°C	16-Lead SOIC_W	RW-16
ADG508FBRWZ-REEL	−40°C to +85°C	16-Lead SOIC_W	RW-16
ADG508FBRUZ	−40°C to +85°C	16-Lead TSSOP	RU-16
ADG508FBRUZ-REEL7	−40°C to +85°C	16-Lead TSSOP	RU-16
ADG509FBN	−40°C to +85°C	16-Lead PDIP	N-16
ADG509FBNZ	−40°C to +85°C	16-Lead PDIP	N-16
ADG509FBRN	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG509FBRN−REEL7	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG509FBRNZ	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG509FBRNZ−REEL7	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG509FBRW	−40°C to +85°C	16-Lead SOIC_W	RW-16
ADG509FBRW-REEL	−40°C to +85°C	16-Lead SOIC_W	RW-16
ADG509FBRWZ	−40°C to +85°C	16-Lead SOIC_W	RW-16
ADG509FBRWZ-REEL	−40°C to +85°C	16-Lead SOIC_W	RW-16
ADG509FBRUZ	−40°C to +85°C	16-Lead TSSOP	RU-16
ADG509FBRUZ-REEL7	−40°C to +85°C	16-Lead TSSOP	RU-16
ADG528FBN	−40°C to +85°C	18-Lead PDIP	N-18
ADG528FBNZ	−40°C to +85°C	18-Lead PDIP	N-18
ADG528FBP	−40°C to +85°C	20-Lead PLCC	P-20
ADG528FBP-REEL	−40°C to +85°C	20-Lead PLCC	P-20
ADG528FBPZ	−40°C to +85°C	20-Lead PLCC	P-20

NOTES

NOTES

©2001–2009 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.
D00035-0-7/09(E)

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А