

## 0.1 to 6.0GHz SP3T Switch

### DESCRIPTION


- The CG2430X1 is a pHEMT GaAs SP3T (Single Pole Three Throw) switch. This device can operate from 0.1GHz to 6.0GHz, having low insertion loss and high isolation.

### FEATURES

- Control voltage :  
VC(H) = 1.8 to 5.0 V (3.0V TYP.)  
VC(L) = -0.2 to 0.2 V (0V TYP.)
- Low Insertion Loss :  
L<sub>ins</sub> = 0.50 dB TYP. @ f = 2.0 to 2.5 GHz  
L<sub>ins</sub> = 0.60 dB TYP. @ f = 4.9 to 6.0 GHz
- High Isolation :  
ISL = 28 dB TYP. @ f = 2.0 to 2.5 GHz  
ISL = 25 dB TYP. @ f = 4.9 to 6.0 GHz
- Power handling :  
P<sub>in(1dB)</sub> = +31.0 dBm TYP.  
@ VC(H) = 3.0 V, VC(L) = 0 V

### PACKAGE

- 8-pin Thin SON (X1) Package  
(1.5mm x 1.5mm x 0.37mm)




### APPLICATIONS

- Wireless LAN (IEEE 802.11 a/b/g/n/ac)

### ORDERING INFORMATION

Part Number	Order Number	Package	Marking	Description
CG2430X1	CG2430X1-C2	8-pin plastic TSON (Pb-Free)	C01	<ul style="list-style-type: none"> <li>Embossed tape 8 mm wide</li> <li>Pin 1, 8 face the perforation side of the tape</li> <li>MOQ 10 kpcs/reel</li> </ul>
CG2430X1-EVAL	CG2430X1-EVAL			<ul style="list-style-type: none"> <li>Evaluation Board with DC block capacitors, power supply bypass capacitors, and RF and DC connectors</li> <li>MOQ 1</li> </ul>

## PIN CONFIGURATION AND INTERNAL BLOCK DIAGRAM

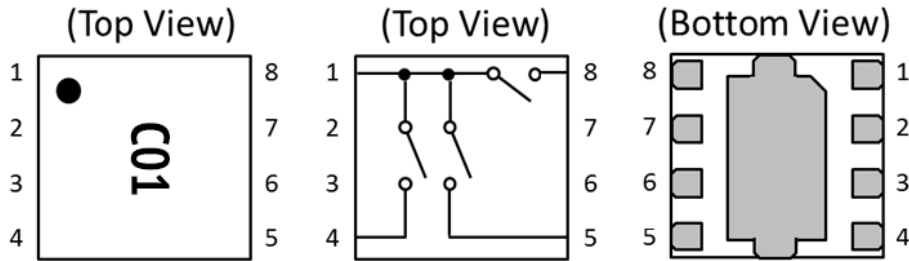

Pin No.	Pin Name
1	RFC
2	GND
3	VC1
4	RF1
5	RF2
6	VC2
7	VC3
8	RF3

Remark Exposed pad : GND

## TRUTH TABLE

VC1	VC2	VC3	RFC-RF1	RFC-RF2	RFC-RF3
High	Low	Low	ON	OFF	OFF
Low	High	Low	OFF	ON	OFF
Low	Low	High	OFF	OFF	ON

## ABSOLUTE MAXIMUM RATINGS

(TA = +25°C, unless otherwise specified)

Parameter	Symbol	Rating	Unit
Control Voltage	VC	6.0 <sup>Note 1</sup>	V
Input Power	P <sub>in</sub>	+32.0 <sup>Note 2</sup>	dBm
Operating Ambient Temperature	T <sub>A</sub>	-45 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-55 ~ +150	°C

**Note** 1.  $|VC1 - VC2| \leq 6.0V$   
 2.  $3.0V \leq |VC1 - VC2| \leq 5.0V$

## RECOMMENDED OPERATING RANGE

(TA = +25°C, unless otherwise specified)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Operating Frequency	f	0.1	-	6.0	GHz
Switch Control Voltage (H)	VC(H)	+1.8	+3.0	+5.0	V
Switch Control Voltage (L)	VC(L)	-0.2	0	+0.2	V

## ELECTRICAL CHARACTERISTICS 1

(TA=+25°C, VC(H)=3.0V, VC(L)=0V, Zo=50Ω, DC Block Capacitance=8pF, unless otherwise specified)

Parameter	Symbol	Path	Condition	MIN.	TYP.	MAX.	Unit
Insertion Loss	L <sub>INS</sub>	RFC to RF1, 2, 3 (ON)	f=0.1GHz to 1.0GHz <sup>Note 1</sup>	-	0.40	0.55	dB
			f=1.0GHz to 2.0GHz <sup>Note 1</sup>	-	0.40	0.55	dB
			f=2.0GHz to 2.5GHz	-	0.50	0.65	dB
			f=2.5GHz to 4.9GHz	-	0.55	0.70	dB
			f=4.9GHz to 6.0GHz	-	0.60	0.80	dB
Isolation	ISL	RFC to RF1, 2, 3 (OFF)	f=0.1GHz to 1.0GHz <sup>Note 1</sup>	30	33	-	dB
			f=1.0GHz to 2.0GHz <sup>Note 1</sup>	27	30	-	dB
			f=2.0GHz to 2.5GHz	25	28	-	dB
			f=2.5GHz to 4.9GHz	23	28	-	dB
			f=4.9GHz to 6.0GHz	20	25	-	dB
Return Loss	RL	RFC to RF1, 2, 3 (ON)	f=0.1GHz to 1.0GHz <sup>Note 1</sup>	15	20	-	dB
			f=1.0GHz to 2.0GHz <sup>Note 1</sup>	15	20	-	dB
			f=2.0GHz to 2.5GHz	15	20	-	dB
			f=2.5GHz to 4.9GHz	15	20	-	dB
			f=4.9GHz to 6.0GHz	15	20	-	dB
0.1dB Loss Compression Input Power <b>Note 2</b>	P <sub>in(-0.1dB)</sub>	RFC to RF1, 2, 3	f=2.5GHz	+25.0	+28.0	-	dBm
			f=6.0GHz	+25.0	+28.0	-	dBm
1dB Loss Compression Input Power <b>Note 3</b>	P <sub>in(-1dB)</sub>	RFC to RF1, 2, 3	f=2.5GHz	+28.0	+31.0	-	dBm
			f=6.0GHz	+28.0	+31.0	-	dBm
3rd Order Input Intercept Point	IIP <sub>3</sub>		f=2.5GHz, 2-tone 5MHz Spacing	-	+55	-	dBm
2nd Harmonics	2f <sub>0</sub>		f=2.5GHz, P <sub>in</sub> =+22dBm	-	75	-	dBc
3rd Harmonics	3f <sub>0</sub>		f=2.5GHz, P <sub>in</sub> =+22dBm	-	70	-	dBc
Error Vector Magnitude	EVM		802.11a, 64QAM, 54Mbps, P <sub>in</sub> ≤+24dBm	-	2.5	-	%
			802.11g, 64QAM, 54Mbps, P <sub>in</sub> ≤+25dBm	-	2.5	-	%
Switching Speed	t <sub>SW</sub>		f=1.0GHz	-	80	-	ns
Switch Control Current	I <sub>CONT</sub>		RF none	-	2	10	uA

**Note** 1. DC block capacitance = 330pF at f=0.1 to 2.0GHz

2. P<sub>in(0.1dB)</sub> is the measured input power level when the insertion loss increases 0.1dB more than that of the linear range.

3. P<sub>in(1dB)</sub> is the measured input power level when the insertion loss increases 1dB more than that of the linear range.

## ELECTRICAL CHARACTERISTICS 2

(TA=+25°C, VC(H)=1.8V, VC(L)=0V, Zo=50Ω, DC Block Capacitance=8pF, unless otherwise specified)

Parameter	Symbol	Path	Condition	MIN.	TYP.	MAX.	Unit
Insertion Loss	L <sub>INS</sub>	RFC to RF1, 2, 3 (ON)	f=0.1GHz to 1.0GHz <sup>Note 1</sup>	---	0.40	0.55	dB
			f=1.0GHz to 2.0GHz <sup>Note 1</sup>	---	0.40	0.55	dB
			f=2.0GHz to 2.5GHz	---	0.50	0.65	dB
			f=2.5GHz to 4.9GHz	---	0.55	0.70	dB
			f=4.9GHz to 6.0GHz	---	0.60	0.80	dB
Isolation	ISL	RFC to RF1, 2, 3 (OFF)	f=0.1GHz to 1.0GHz <sup>Note 1</sup>	30	33	---	dB
			f=1.0GHz to 2.0GHz <sup>Note 1</sup>	27	30	---	dB
			f=2.0GHz to 2.5GHz	25	28	---	dB
			f=2.5GHz to 4.9GHz	23	28	---	dB
			f=4.9GHz to 6.0GHz	20	25	---	dB
Return Loss	RL	RFC to RF1, 2, 3 (ON)	f=0.1GHz to 1.0GHz <sup>Note 1</sup>	15	20	---	dB
			f=1.0GHz to 2.0GHz <sup>Note 1</sup>	15	20	---	dB
			f=2.0GHz to 2.5GHz	15	20	---	dB
			f=2.5GHz to 4.9GHz	15	20	---	dB
			f=4.9GHz to 6.0GHz	15	20	---	dB
0.1dB Loss Compression Input Power <b>Note 2</b>	P <sub>in(-0.1dB)</sub>	RFC to RF1, 2, 3	f=2.5GHz	+19.0	+22.0	---	dBm
			f=6.0GHz	+18.0	+21.0	---	dBm
1dB Loss Compression Input Power <b>Note 3</b>	P <sub>in(-1dB)</sub>	RFC to RF1, 2, 3	f=2.5GHz	+22.0	+25.0	---	dBm
			f=6.0GHz	+21.0	+24.0	---	dBm
3rd Order Input Intercept Point	IIP <sub>3</sub>		f=2.5GHz, 2-tone 5MHz Spacing	---	+47	---	dBm
2nd Harmonics	2f <sub>0</sub>		f=2.5GHz, P <sub>in</sub> =+22dBm	---	75	---	dBc
3rd Harmonics	3f <sub>0</sub>		f=2.5GHz, P <sub>in</sub> =+22dBm	---	60	---	dBc
Switching Speed	t <sub>SW</sub>		f=1.0GHz	---	150	---	ns
Switch Control Current	I <sub>CONT</sub>		RF none	---	2	10	uA

**Note** 1. DC block capacitance = 330pF at f=0.1 to 2.0GHz


2. P<sub>in(0.1dB)</sub> is the measured input power level when the insertion loss increases 0.1dB more than that of the linear range.

3. P<sub>in(1dB)</sub> is the measured input power level when the insertion loss increases 1dB more than that of the linear range.


## TYPICAL CHARACTERISTICS

(VC(H)=3V, VC(L)=0V, T<sub>A</sub> = +25°C, DC Block Capacitance=8pF, through board loss is subtracted in insertion loss data)


### Typical Insertion Loss vs. Frequency

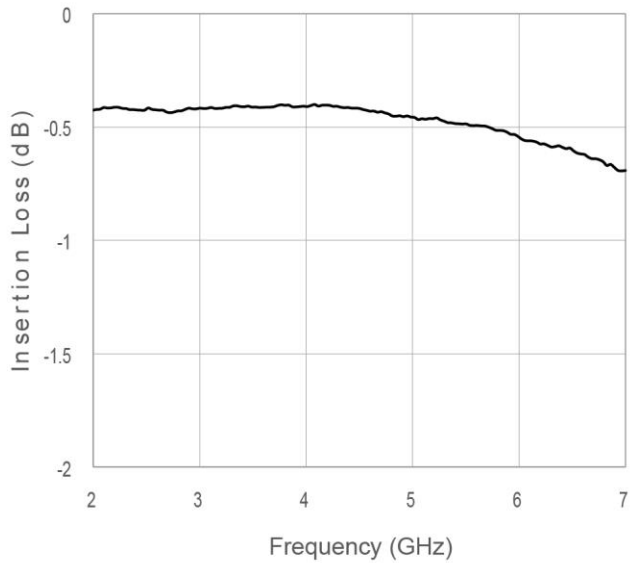


### Typical Isolation vs. Frequency

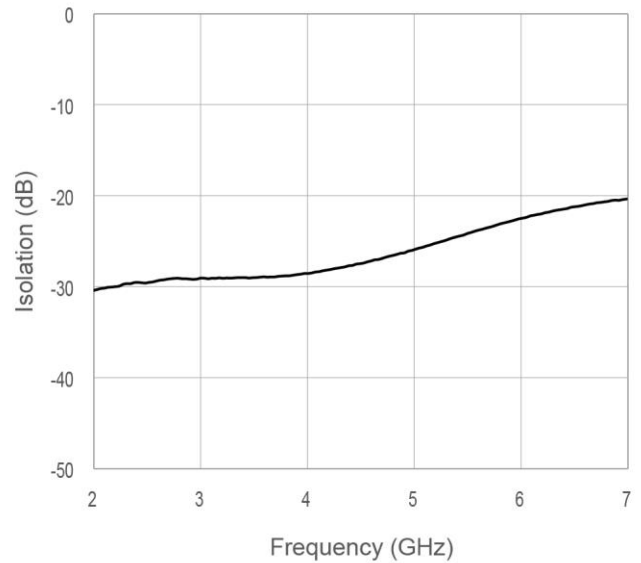


### Typical Return Loss vs. Frequency

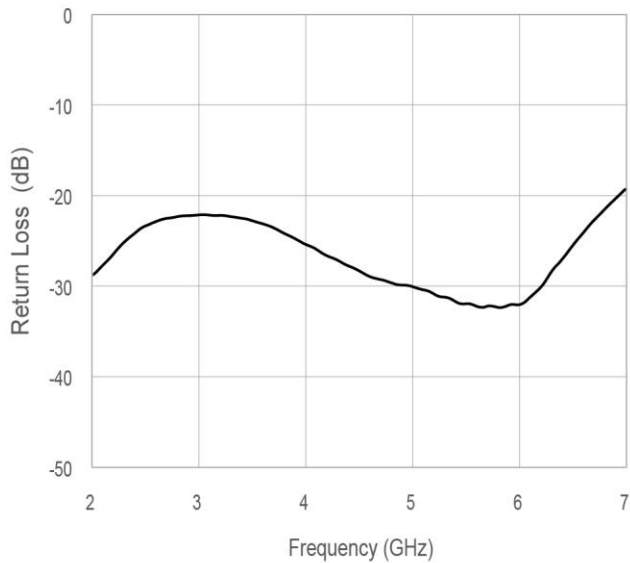

### Typical Insertion Loss vs. Input Power

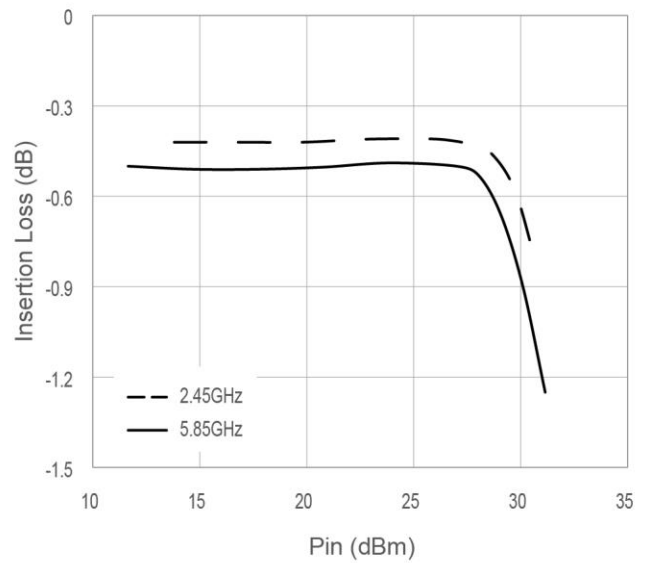

## EVALUATION CIRCUIT

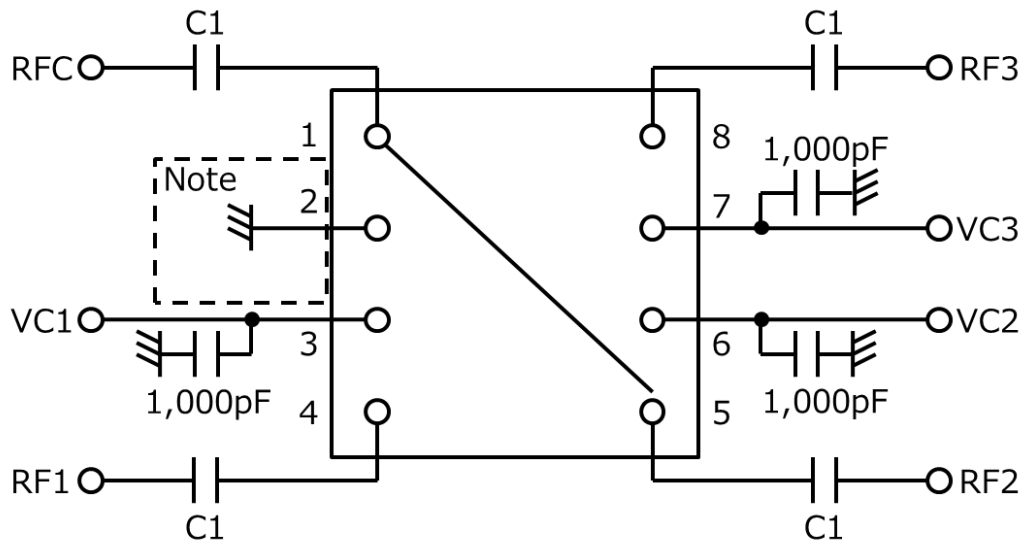


Note: It is recommended to connect the pin directly to ground, or leave unconnected.

**Remarks** C1 : 0.1 to 2.0 GHz 330pF  
 ; 2.0 to 6.0 GHz 8pF

The application circuits and their parameters are for reference only and are not intended for use in actual designs. DC Blocking Capacitors are required at all RF ports.

## PACKAGE DIMENSIONS

8-pin Plastic TSON (Unit: mm)

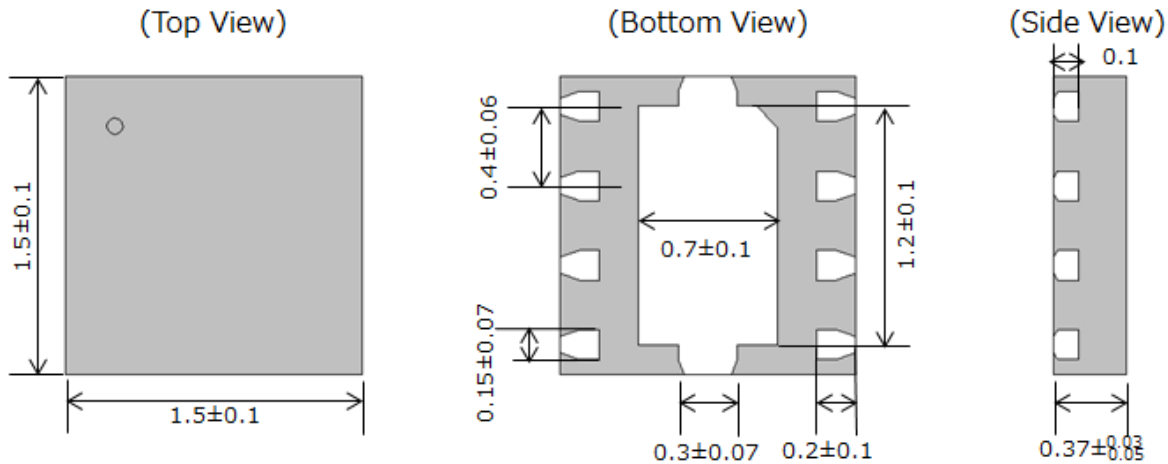

## RECOMMENDED SOLDERING CONDITIONS

Recommended Soldering Conditions are available on CEL's [Part Summary page](#) under Associated Documents

**REVISION HISTORY**

Version	Change to current version	Page(s)
CDS-0010-03 (Issue A) February 17, 2016	Initial datasheet	N/A
CDS-0010-03 (Issue B) March 23, 2016	Added Eval Board ordering information. Updated Marking information.	1,2
CDS-0010-04 (Issue C) April 20, 2016	Revised package dimensions (Added tolerance spec and Pin thickness)	5
CDS-0010-04 (Issue D) August 11, 2016	Removed "Preliminary"	All
CDS-0010-04 (Issue E) January 11, 2017	Added "Recommended Soldering Conditions" section	6
CDS-0010-06 (Issue F) September 13, 2017	Updated Applications section Added Error Vector Magnitude to Electrical Characteristics table 1 Added "Typical Characteristics" graphs section	1, 3, 5



## [CAUTION]

- All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice.
- You should not alter, modify, copy, or otherwise misappropriate any CEL product, whether in whole or in part.
- CEL does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of CEL products or technical information described in this document. No license, expressed, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of CEL or others.
- Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. CEL assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- CEL has used reasonable care in preparing the information included in this document, but CEL does not warrant that such information is error free. CEL assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- Although CEL endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a CEL product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures  
Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
- Please use CEL products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive.  
CEL assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of CEL.
- Please contact CEL if you have any questions regarding the information contained in this document or CEL products, or if you have any other inquiries.

[CAUTION]

This product uses gallium arsenide (GaAs) of the toxic substance appointed in laws and ordinances. GaAs vapor and powder are hazardous to human health if inhaled or ingested.

- Do not dispose in fire or break up this product.
- Do not chemically make gas or powder with this product.
- When discarding this product, please obey the laws of your country.
- Do not lick the product or in any way allow it to enter the mouth.

[CAUTION]

Although this device is designed to be as robust as possible, ESD (Electrostatic Discharge) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions should be used at all times.

**CEL Headquarters** • 4590 Patrick Henry Drive • Santa Clara, CA 95054 • Tel: (408) 919-2500 • [www.cel.com](http://www.cel.com)

For a complete list of sales offices, representatives and distributors,  
Please visit our website: [www.cel.com/contactus](http://www.cel.com/contactus)  
For inquiries email us at [r fw@cel.com](mailto:r fw@cel.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А