

### FEATURES

- 12-channel vertical driver
- 8 three-level drivers
- 4 two-level drivers
- Substrate clock driver
- Input logic supports a 1.6 V to 3.6 V range
- Output drivers support a -9.5 V to +15.5 V range
- 6 mm × 6 mm CSP\_BGA package with 0.65 mm pitch

### APPLICATIONS

- Digital still cameras
- Industrial cameras
- Surveillance cameras
- Medical imaging

### GENERAL DESCRIPTION

The **ADDI9023** is a 12-channel vertical driver for charge-coupled device (CCD) imaging applications. It includes eight three-level drivers and four two-level drivers. The input configuration can support up to nine individual vertical timing phases and eight shift gate signals. A separate substrate clock channel (SUBCK) is also included. Typical load drive capability for each channel is 3 nF.

The **ADDI9023** is specified over an operating temperature range of -25°C to +85°C.

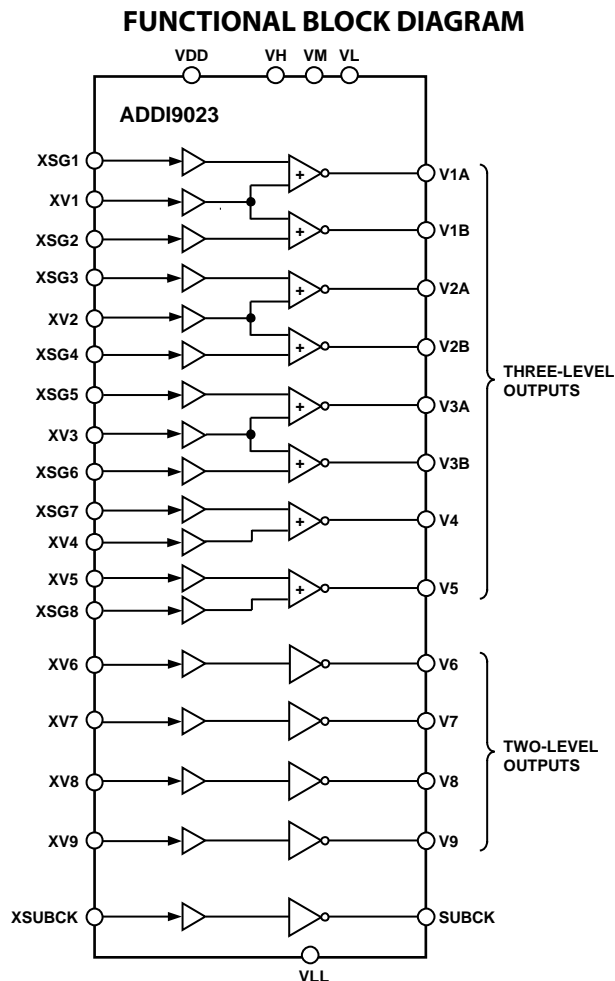


Figure 1.

### Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

**TABLE OF CONTENTS**

|                                    |   |  |    |
|------------------------------------|---|--|----|
| Features .....                     | 1 | Pin Configuration and Function Descriptions..... | 6  |
| Applications.....                  | 1 | Input/Output Logic States .....                  | 8  |
| General Description .....          | 1 | Applications Information .....                   | 10 |
| Functional Block Diagram .....     | 1 | Power-Up Sequence .....                          | 10 |
| Revision History .....             | 2 | Power-Down Sequence.....                         | 10 |
| Specifications.....                | 3 | Circuit Layout Information.....                  | 11 |
| Output Driver Specifications ..... | 4 | Outline Dimensions .....                         | 12 |
| Absolute Maximum Ratings.....      | 5 | Ordering Guide .....                             | 12 |
| Thermal Resistance .....           | 5 |  |    |
| ESD Caution.....                   | 5 |  |    |

**REVISION HISTORY**

4/12—Revision 0: Initial Version

## SPECIFICATIONS

Table 1.

| Parameter                      | Test Conditions/Comments  | Min       | Typ  | Max        | Unit     |
|--------------------------------|---|-----------|------|------------|----------|
| TEMPERATURE RANGE              |   |           |      |            |          |
| Operating                      |   | -25       |      | +85        | °C       |
| Storage                        |   | -65       |      | +150       | °C       |
| V-DRIVER POWER SUPPLY VOLTAGES |   |           |      |            |          |
| VDD                            | Input logic supply  | 1.6       | 3.0  | 3.6        | V        |
| VH                             | V-driver high supply  | 11.0      | 15.0 | 15.5       | V        |
| VL                             | V-driver low supply   | -9.5      | -7.5 | -5.5       | V        |
| VM                             | V-driver midsupply  | -1.5      | 0.0  | +1.5       | V        |
| VLL                            | SUBCKV-driver low supply  | -9.5      | -7.5 | -5.5       | V        |
| VH to VL, VLL                  | Maximum voltage from VH to VL, VLL  |           |      | 24         | V        |
| DC POWER SUPPLY CURRENTS       |   |           |      |            |          |
| $I_{VDD}$                      | VH = +15 V, VM = 0 V, VL = VLL = -7.5 V<br>XVx = XSGx = 0 V<br>XVx = XSGx = VDD |           |      | 0.5<br>0.5 | mA<br>mA |
| $I_{VH}$                       | XVx = XSGx = 0 V<br>XVx = XSGx = VDD  |           |      | 0.4<br>3.3 | mA<br>mA |
| $I_{VL}$                       | XVx = XSGx = 0 V<br>XVx = XSGx = VDD  |           |      | 2.1<br>0.1 | mA<br>mA |
| $I_{VM}$                       | XVx = XSGx = 0 V<br>XVx = XSGx = VDD  |           |      | 0.3<br>0.2 | mA<br>mA |
| $I_{VLL}$                      | XSUBCK = 0 V<br>XSUBCK = VDD  |           |      | 0.3<br>0.1 | mA<br>mA |
| DIGITAL INPUTS                 |   |           |      |            |          |
| High Level Input Voltage       | VDD = 1.6 V to 3.6 V  | VDD - 0.6 |      |            | V        |
| Low Level Input Voltage        |   |           |      | 0.6        | V        |
| High Level Input Current       |   |           | 10   | 50         | μA       |
| Low Level Input Current        |   |           | 10   | 50         | μA       |
| Input Capacitance              |   |           | 10   |            | pF       |

## OUTPUT DRIVER SPECIFICATIONS

VH = 15 V, VM = 0 V, VL, VLL = -7.5 V, T<sub>A</sub> = 25°C.

Table 2.

| Parameter                         | Symbol                              | Test Conditions/Comments         | Min | Typ | Max | Unit |
|-----------------------------------|-------------------------------------|----------------------------------|-----|-----|-----|------|
| <b>V1A TO V5</b>                  |                                     |                                  |     |     |     |      |
| Delay Time, VL to VM and VM to VL | t <sub>PLM</sub> , t <sub>PML</sub> |                                  |     | 37  |     | ns   |
| Delay Time, VM to VH and VH to VM | t <sub>PMH</sub> , t <sub>PHM</sub> |                                  |     | 43  |     | ns   |
| Rise Time, VL to VM               | t <sub>RLM</sub>                    | Load circuit: 20 Ω + 3 nF to GND |     | 110 |     | ns   |
| Rise Time, VM to VH               | t <sub>RMH</sub>                    | Load circuit: 20 Ω + 3 nF to GND |     | 240 |     | ns   |
| Fall Time, VM to VL               | t <sub>FML</sub>                    | Load circuit: 20 Ω + 3 nF to GND |     | 180 |     | ns   |
| Fall Time, VH to VM               | t <sub>FHM</sub>                    | Load circuit: 20 Ω + 3 nF to GND |     | 130 |     | ns   |
| Output Currents                   |                                     | V1A to V5 = -7.25 V              |     | 14  |     | mA   |
|                                   |                                     | V1A to V5 = -0.25 V              |     | -23 |     | mA   |
|                                   |                                     | V1A to V5 = +0.25 V              |     | 23  |     | mA   |
|                                   |                                     | V1A to V5 = +14.75 V             |     | -10 |     | mA   |
| On Resistance                     | R <sub>ON</sub>                     |                                  |     |     |     |      |
| VH                                |                                     |                                  |     | 23  | 35  | Ω    |
| VM                                |                                     |                                  |     | 11  | 20  | Ω    |
| VL                                |                                     |                                  |     | 17  | 25  | Ω    |
| <b>V6 TO V9</b>                   |                                     |                                  |     |     |     |      |
| Delay Time, VL to VM and VM to VL | t <sub>PLM</sub> , t <sub>PML</sub> |                                  |     | 37  |     | ns   |
| Rise Time, VL to VM               | t <sub>RLM</sub>                    | Load circuit: 20 Ω + 3 nF to GND |     | 110 |     | ns   |
| Fall Time, VM to VL               | t <sub>FML</sub>                    | Load circuit: 20 Ω + 3 nF to GND |     | 180 |     | ns   |
| Output Currents                   |                                     | V6 to V9 = -7.25 V               |     | 14  |     | mA   |
|                                   |                                     | V6 to V9 = -0.25 V               |     | -23 |     | mA   |
| On Resistance                     | R <sub>ON</sub>                     |                                  |     |     |     |      |
| VM                                |                                     |                                  |     | 11  | 20  | Ω    |
| VL                                |                                     |                                  |     | 17  | 25  | Ω    |
| <b>SUBCK OUTPUT</b>               |                                     |                                  |     |     |     |      |
| Delay Time, VLL to VH             | t <sub>PLH</sub>                    |                                  |     | 47  |     | ns   |
| Delay Time, VH to VLL             | t <sub>PHL</sub>                    |                                  |     | 47  |     | ns   |
| Rise Time, VLL to VH              | t <sub>RLH</sub>                    | Load circuit: 1 nF to GND        |     | 45  |     | ns   |
| Fall Time, VH to VLL              | t <sub>FHL</sub>                    | Load circuit: 1 nF to GND        |     | 45  |     | ns   |
| Output Currents                   |                                     | SUBCK = -7.25 V                  |     | 23  |     | mA   |
|                                   |                                     | SUBCK = +14.75 V                 |     | -22 |     | mA   |
| VLL On Resistance                 | R <sub>ON</sub>                     |                                  |     | 10  | 17  | Ω    |

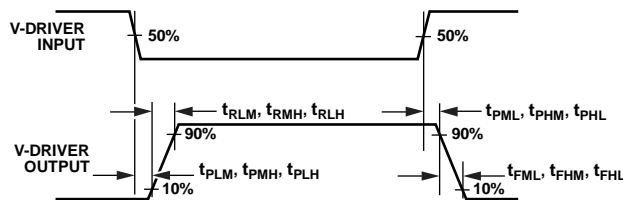


Figure 2. Definition of V-Driver Timing Specifications

## ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter                               | Rating                   |
|---|--------------------------|
| VDD to VSS                              | -0.3 V to +3.9 V         |
| VH to VL, VLL                           | -0.3 V to +25.0 V        |
| VH to VSS                               | -0.3 V to +17.0 V        |
| VL to VSS                               | -17.0 V to +0.3 V        |
| VM to VSS                               | -6.0 V to +3.0 V         |
| VMM to VSS                              | -6.0 V to +3.0 V         |
| VLL to VSS                              | -17.0 V to +0.3 V        |
| V1A to V9 to VSS                        | VL - 0.3 V to VH + 0.3 V |
| VDREN to VSS                            | -0.3 V to VDD + 0.3 V    |
| Junction Temperature                    | 150°C                    |
| Lead Temperature<br>(Soldering, 10 sec) | 350°C                    |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 4. Thermal Resistance

| Package Type    | $\theta_{JA}$ | Unit |
|-----------------|---------------|------|
| 40-Lead CSP_BGA | 46            | °C/W |

## ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

### PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

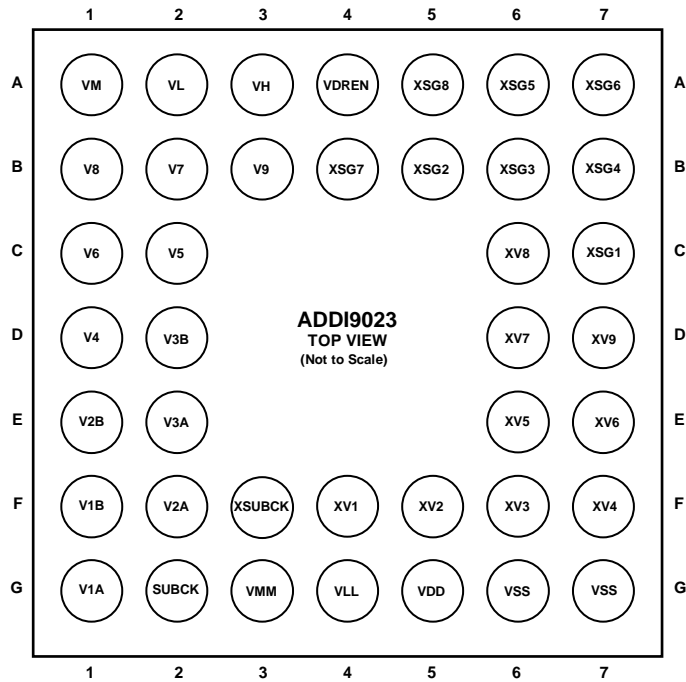


Figure 3. Pin Configuration

Table 5. Pin Function Descriptions

| Pin No. | Mnemonic | Type <sup>1</sup> | Description                               |
|---------|----------|-------------------|---|
| A1      | VM       | P                 | V-Driver Midsupply.                       |
| A2      | VL       | P                 | V-Driver Low Supply.                      |
| A3      | VH       | P                 | V-Driver High Supply.                     |
| A4      | VDREN    | DI                | V-Driver Enable. Active high.             |
| A5      | XSG8     | DI                | Vertical Input.                           |
| A6      | XSG5     | DI                | Vertical Input.                           |
| A7      | XSG6     | DI                | Vertical Input.                           |
| B1      | V8       | VO2               | CCD Vertical Transfer Clock.              |
| B2      | V7       | VO2               | CCD Vertical Transfer Clock.              |
| B3      | V9       | VO2               | CCD Vertical Transfer Clock.              |
| B4      | XSG7     | DI                | Vertical Input.                           |
| B5      | XSG2     | DI                | Vertical Input.                           |
| B6      | XSG3     | DI                | Vertical Input.                           |
| B7      | XSG4     | DI                | Vertical Input.                           |
| C1      | V6       | VO2               | CCD Vertical Transfer Clock.              |
| C2      | V5       | VO3               | CCD Vertical Transfer Clock (XV5 + XSG8). |
| C6      | XV8      | DI                | Vertical Input.                           |
| C7      | XSG1     | DI                | Vertical Input.                           |
| D1      | V4       | VO3               | CCD Vertical Transfer Clock (XV4 + XSG7). |
| D2      | V3B      | VO3               | CCD Vertical Transfer Clock (XV3 + XSG6). |
| D6      | XV7      | DI                | Vertical Input.                           |
| D7      | XV9      | DI                | Vertical Input.                           |
| E1      | V2B      | VO3               | CCD Vertical Transfer Clock (XV2 + XSG4). |
| E2      | V3A      | VO3               | CCD Vertical Transfer Clock (XV3 + XSG5). |
| E6      | XV5      | DI                | Vertical Input.                           |
| E7      | XV6      | DI                | Vertical Input.                           |

| Pin No. | Mnemonic | Type <sup>1</sup> | Description                               |
|---------|----------|-------------------|---|
| F1      | V1B      | VO3               | CCD Vertical Transfer Clock (XV1 + XSG2). |
| F2      | V2A      | VO3               | CCD Vertical Transfer Clock (XV2 + XSG3). |
| F3      | XSUBCK   | DI                | XSUBCK Input to SUBCK Buffer.             |
| F4      | XV1      | DI                | Vertical Input.                           |
| F5      | XV2      | DI                | Vertical Input.                           |
| F6      | XV3      | DI                | Vertical Input.                           |
| F7      | XV4      | DI                | Vertical Input.                           |
| G1      | V1A      | VO3               | CCD Vertical Transfer Clock (XV1 + XSG1). |
| G2      | SUBCK    | VO2               | CCD Substrate Clock Output.               |
| G3      | VMM      | P                 | SUBCK Output Driver Ground.               |
| G4      | VLL      | P                 | V-Driver Low Supply for SUBCK Output.     |
| G5      | VDD      | P                 | Digital Logic Supply.                     |
| G6      | VSS      | P                 | Digital Logic Ground.                     |
| G7      | VSS      | P                 | Digital Logic Ground.                     |

<sup>1</sup> DI = digital input; P = power; VO2 = vertical driver output, two-level; VO3 = vertical driver output, three-level.

## INPUT/OUTPUT LOGIC STATES

**Table 6. V1A Output Polarity**

| Vertical Driver Input |      | V1A Output |
|-----------------------|------|------------|
| XV1                   | XSG1 |            |
| L                     | L    | VH         |
| L                     | H    | VM         |
| H                     | L    | VL         |
| H                     | H    | VL         |

**Table 7. V1B Output Polarity**

| Vertical Driver Input |      | V1B Output |
|-----------------------|------|------------|
| XV1                   | XSG2 |            |
| L                     | L    | VH         |
| L                     | H    | VM         |
| H                     | L    | VL         |
| H                     | H    | VL         |

**Table 8. V2A Output Polarity**

| Vertical Driver Input |      | V2A Output |
|-----------------------|------|------------|
| XV2                   | XSG3 |            |
| L                     | L    | VH         |
| L                     | H    | VM         |
| H                     | L    | VL         |
| H                     | H    | VL         |

**Table 9. V2B Output Polarity**

| Vertical Driver Input |      | V2B Output |
|-----------------------|------|------------|
| XV2                   | XSG4 |            |
| L                     | L    | VH         |
| L                     | H    | VM         |
| H                     | L    | VL         |
| H                     | H    | VL         |

**Table 10. V3A Output Polarity**

| Vertical Driver Input |      | V3A Output |
|-----------------------|------|------------|
| XV3                   | XSG5 |            |
| L                     | L    | VH         |
| L                     | H    | VM         |
| H                     | L    | VL         |
| H                     | H    | VL         |

**Table 11. V3B Output Polarity**

| Vertical Driver Input |      | V3B Output |
|-----------------------|------|------------|
| XV3                   | XSG6 |            |
| L                     | L    | VH         |
| L                     | H    | VM         |
| H                     | L    | VL         |
| H                     | H    | VL         |

**Table 12. V4 Output Polarity**

| Vertical Driver Input |      | V4 Output |
|-----------------------|------|-----------|
| XV4                   | XSG7 |           |
| L                     | L    | VH        |
| L                     | H    | VM        |
| H                     | L    | VL        |
| H                     | H    | VL        |

**Table 13. V5 Output Polarity**

| Vertical Driver Input |      | V5 Output |
|-----------------------|------|-----------|
| XV5                   | XSG8 |           |
| L                     | L    | VH        |
| L                     | H    | VM        |
| H                     | L    | VL        |
| H                     | H    | VL        |

**Table 14. V6 to V9 Output Polarity**

| Vertical Driver Input | V6, V7, V8, or V9 Output |
|-----------------------|--------------------------|
| XV6, XV7, XV8, or XV9 |                          |
| L                     | VM                       |
| H                     | VL                       |

**Table 15. SUBCK Output Polarity**

| Vertical Driver Input | SUBCK Output |
|-----------------------|--------------|
| XSUBCK                |              |
| L                     | VH           |
| H                     | VLL          |



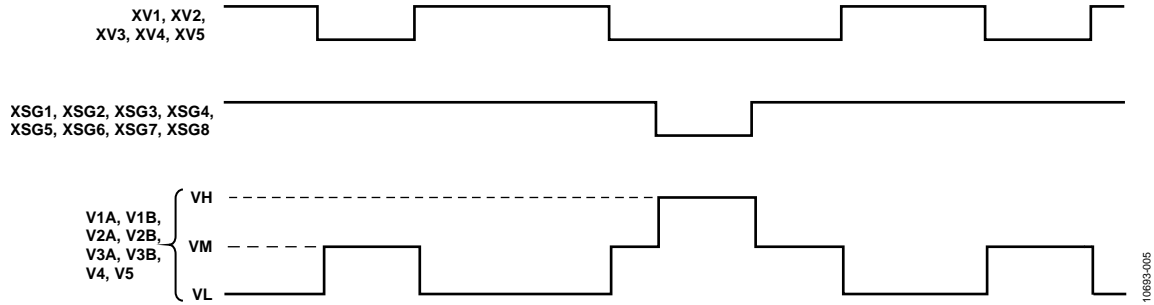


Figure 4. Three-Level V-Driver Output Polarities

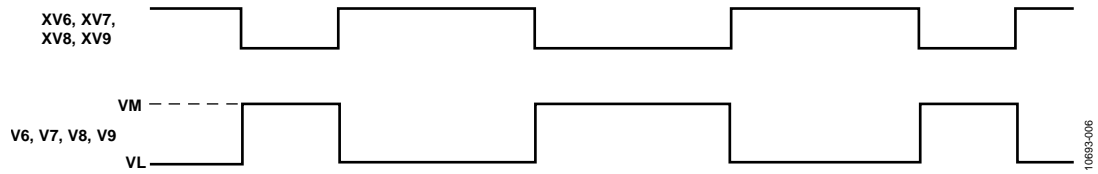


Figure 5. Two-Level V-Driver Output Polarities

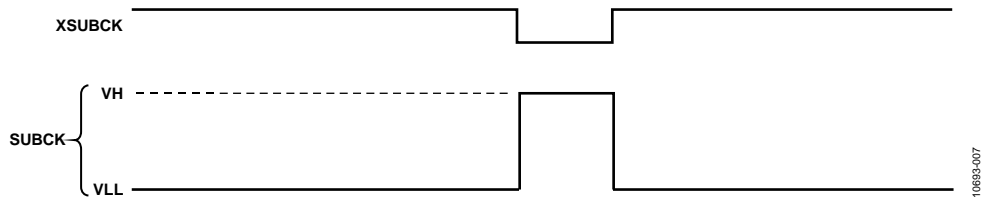


Figure 6. SUBCK Output Polarity

# APPLICATIONS INFORMATION

## POWER-UP SEQUENCE

When the [ADDI9023](#) is powered up, the following sequence is recommended (refer to Figure 7 for each step). Note that VH is powered on before VL but, depending on CCD restrictions, VH and VL can also be powered on simultaneously.

1. Turn on the VDD power supply, either 1.8 V or 3.3 V. After VDD settles, the logic inputs from the timing generator (XV, XSG, XSUBCK) can become active. Keep VDREN low during this time.
2. Turn on the VH power supply, typically +12 V to +15 V.

3. Turn on the VL/VLL power supply, typically -6 V to -9 V.
4. Take the VDREN pin high to enable the V-driver outputs. VDREN must remain high throughout normal vertical timing operation.

## POWER-DOWN SEQUENCE

When the [ADDI9023](#) is powered down, reverse the procedure shown in Figure 7.

1. Take the VDREN pin low to disable the V-driver outputs.
2. Turn off the VL/VLL and VH power supplies.
3. Turn off the VDD power supply.

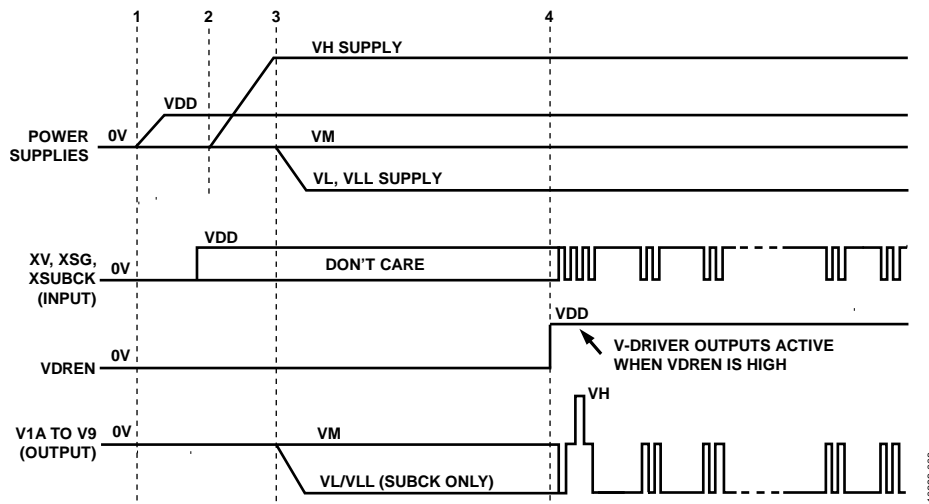


Figure 7. Recommended Power-Up Sequence

**CIRCUIT LAYOUT INFORMATION**

The recommended circuit configuration is shown in Figure 8. Each supply pin should have a high quality 0.1  $\mu\text{F}$  capacitor connected to ground. The VH and VL supplies should have an

additional bypass capacitor, such as a 1.0  $\mu\text{F}$  to 22  $\mu\text{F}$  capacitor, depending on CCD and performance requirements. Connect the ground pins (VSS, VM, and VMM) to a common ground plane.


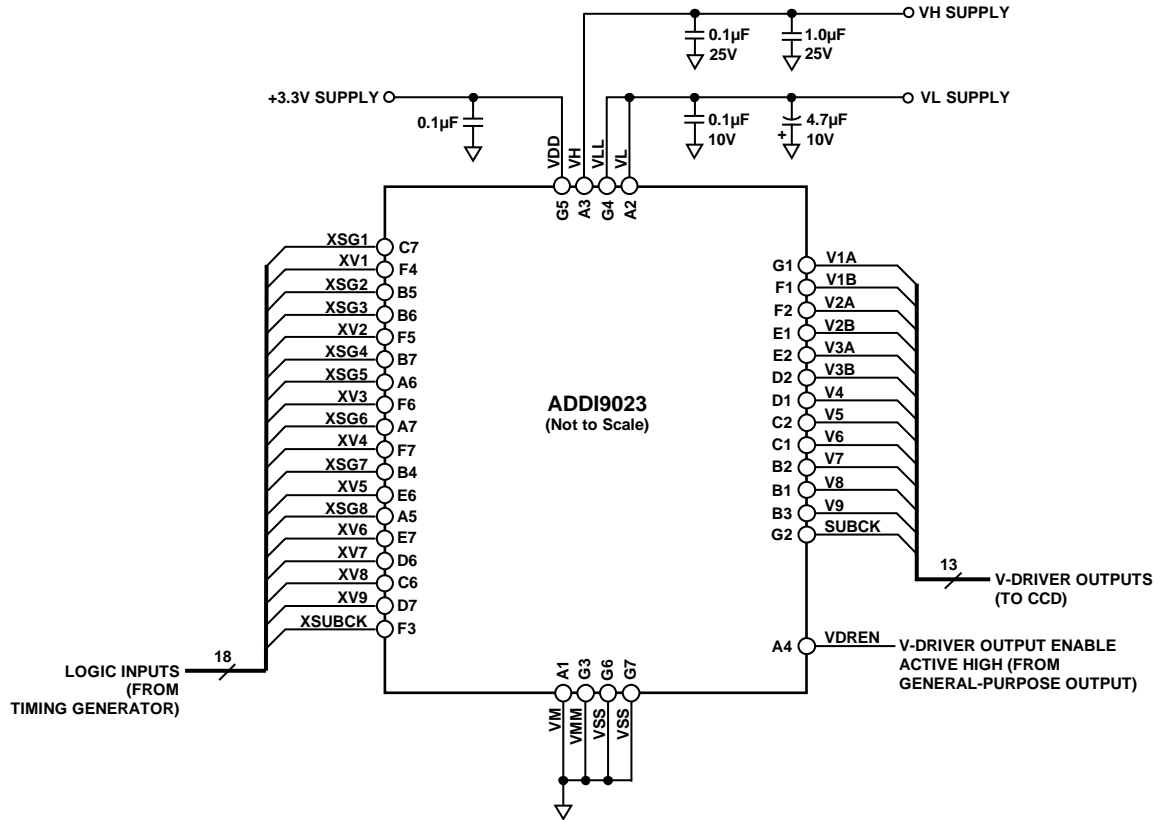


Figure 8. Typical Circuit Configuration

10693-009

OUTLINE DIMENSIONS

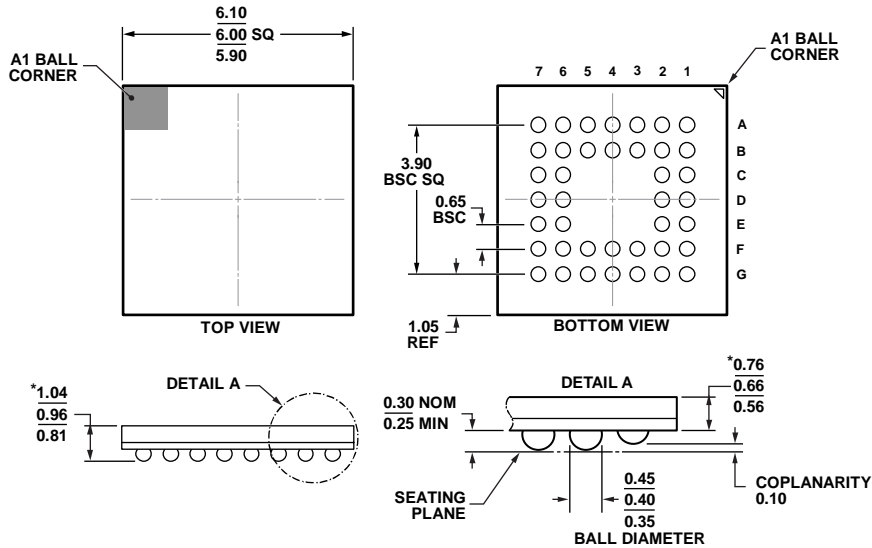

\*COMPLIANT TO JEDEC STANDARDS MO-225 WITH THE EXCEPTION OF PACKAGE HEIGHT AND THICKNESS.

Figure 9. 40-Ball Chip Scale Package Ball Grid Array [CSP\_BGA] BC-40-1

Dimensions shown in millimeters

04-3302012-A

ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description | Package Option |
|--------------------|-------------------|---------------------|----------------|
| ADDI9023BBCZ       | -25°C to +85°C    | 40-Lead CSP_BGA     | BC-40-1        |
| ADDI9023BBCZRL     | -25°C to +85°C    | 40-Lead CSP_BGA     | BC-40-1        |

<sup>1</sup> Z = RoHS Compliant Part.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А