


# CGHV27060MP

## 60 W, DC - 2700 MHz, 50 V, GaN HEMT for LTE and Pulse Radar Applications

Cree's CGHV27060MP is a 60W gallium nitride (GaN) high electron mobility transistor (HEMT) housed in a small plastic SMT package 4.4mm x 6.5mm. The transistor is a broadband device with no internal input or output match which allows for the agility to apply to a wide range of frequencies from UHF thru 2.7GHz. The CGHV27060MP makes for an excellent transistor for pulsed applications at UHF, L Band or low S Band (<2.7GHz). Additionally, the transistor is well suited for LTE micro basestation amplifiers in the power class of 10 to 15W average power in high efficiency topologies such as Class A/B, F or Doherty amplifiers. The CGHV27060MP typical performance described in the datasheet is derived from a Class A/B reference design from 2.5-2.7GHz.

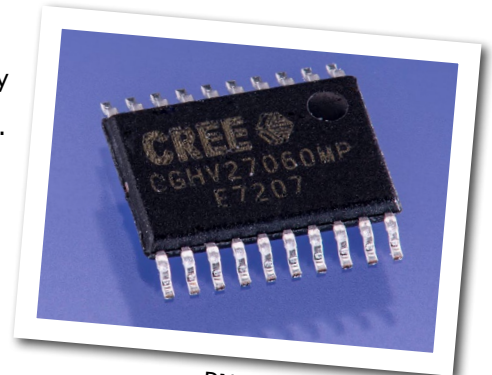

PN: CGHV27060MP

### Typical Performance Over 2.5 - 2.7 GHz ( $T_c = 25^\circ\text{C}$ ) of Demonstration Amplifier

Parameter	2.5 GHz	2.6 GHz	2.7 GHz	Units
Gain @ 41.5 dBm Avg $P_{OUT}$	18.25	18.5	18.25	dB
ACLR @ 41.5 dBm Avg $P_{OUT}$	-34	-37	-38	dBc
Drain Efficiency @ 41.5 dBm Avg $P_{OUT}$	33	35	33	%

**Note:**

Measured in the CGHV27060MP-TB amplifier circuit, under WCDMA 3GPP test model 1, 64 DPCH, 45% clipping, PAR = 7.5 dB @ 0.01% Probability on CCDF,  $V_{DD} = 50\text{ V}$ ,  $I_{DS} = 125\text{ mA}$ .

### Typical Performance Over 2.5 - 2.7 GHz ( $T_c = 25^\circ\text{C}$ ) of Demonstration Amplifier

Parameter	2.5 GHz	2.6 GHz	2.7 GHz	Units
Gain	16.5	16.3	16.2	dB
Output Power	84	82	79	dBc
Drain Efficiency	71	69	65	%

**Note:**

Measured in the CGHV27060MP-TB amplifier circuit, under pulse width 100  $\mu\text{s}$ , 10% duty cycle,  $P_{IN} = 33\text{ dBm}$

### Features - WCDMA

- 2.5 - 2.7 GHz Reference Design Amplifier
- 18.5 dB Gain at 14 W  $P_{AVE}$
- -35 dBc ACLR at 14 W  $P_{AVE}$
- 35% Efficiency at 14 W  $P_{AVE}$
- High Degree of DPD Correction Can be Applied

### Features - Pulsed

- 16.5 dB Gain at Pulsed  $P_{SAT}$
- 70% Efficiency at Pulsed  $P_{SAT}$
- 80W at Pulsed  $P_{SAT}$



## Absolute Maximum Ratings (not simultaneous) at 25 °C Case Temperature

Parameter	Symbol	Rating	Units	Conditions
Drain-Source Voltage	$V_{DS}$	150	Volts	25 °C
Gate-to-Source Voltage	$V_{GS}$	-10, +2	Volts	25 °C
Storage Temperature	$T_{STG}$	-65, +150	°C	
Operating Junction Temperature	$T_J$	225	°C	
Maximum Forward Gate Current	$I_{GMAX}$	10.4	mA	25 °C
Maximum Drain Current <sup>1</sup>	$I_{DMAX}$	6.3	A	25 °C
Soldering Temperature <sup>2</sup>	$T_S$	245	°C	
Thermal Resistance, Junction to Case <sup>3</sup>	$R_{\theta JC}$	2.6	°C/W	85 °C, $P_{DISS} = 52 W$
Thermal Resistance Pulsed 10%, 100 $\mu s$ , Junction to Case	$R_{\theta JC}$	1.95	°C/W	85 °C, $P_{DISS} = 62W, 100 \mu s/10\%$
Case Operating Temperature <sup>4</sup>	$T_C$	-40, +90	°C	

Note:

<sup>1</sup> Current limit for long term, reliable operation.

<sup>2</sup> Refer to the Application Note on soldering at <http://www.cree.com/rf/document-library>

<sup>3</sup> Measured for the CGHV27060MP

<sup>4</sup> See also, the Power Dissipation De-rating Curve on Page 4.

## Electrical Characteristics ( $T_C = 25^\circ C$ )

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
<b>DC Characteristics<sup>1</sup></b>						
Gate Threshold Voltage	$V_{GS(th)}$	-3.8	-3.0	-2.3	$V_{DC}$	$V_{DS} = 10 V, I_D = 10.4 mA$
Gate Quiescent Voltage	$V_{GS(Q)}$	-	-2.7	-	$V_{DC}$	$V_{DS} = 50 V, I_D = 125 mA$
Saturated Drain Current <sup>2</sup>	$I_{DS}$	8.4	10.4	-	A	$V_{DS} = 6.0 V, V_{GS} = 2.0 V$
Drain-Source Breakdown Voltage	$V_{BR}$	150	-	-	$V_{DC}$	$V_{GS} = -8 V, I_D = 10.4 mA$
<b>RF Characteristics<sup>5</sup> (<math>T_C = 25^\circ C, F_0 = 2.7 GHz</math> unless otherwise noted)</b>						
Saturated Output Power <sup>3,4</sup>	$P_{SAT}$	-	80	-	W	$V_{DD} = 50 V, I_{DQ} = 125 mA$
Pulsed Drain Efficiency <sup>3,4</sup>	$\eta$	-	70	-	%	$V_{DD} = 50 V, I_{DQ} = 125 mA, P_{OUT} = P_{SAT}$
Gain <sup>3,4</sup>	G	-	16.5	-	dB	$V_{DD} = 50 V, I_{DQ} = 125 mA, P_{OUT} = P_{SAT}$
Gain <sup>6</sup>	G	-	18.5	-	dB	$V_{DD} = 50 V, I_{DQ} = 125 mA, P_{OUT} = 41.5 dBm$
WCDMA Linearity <sup>6</sup>	ACLR	-	-35	-	dBc	$V_{DD} = 50 V, I_{DQ} = 125 mA, P_{OUT} = 41.5 dBm$
Drain Efficiency <sup>6</sup>	$\eta$	-	34	-	%	$V_{DD} = 50 V, I_{DQ} = 125 mA, P_{OUT} = 41.5 dBm$
Output Mismatch Stress <sup>3</sup>	VSWR	-	-	TBD	$\Psi$	No damage at all phase angles, $V_{DD} = 50 V, I_{DQ} = 125 mA, P_{OUT} = 60 W$ Pulsed
<b>Dynamic Characteristics</b>						
Input Capacitance <sup>7</sup>	$C_{GS}$	-	15.3	-	pF	$V_{DS} = 50 V, V_{GS} = -8 V, f = 1 MHz$
Output Capacitance <sup>7</sup>	$C_{DS}$	-	4.7	-	pF	$V_{DS} = 50 V, V_{GS} = -8 V, f = 1 MHz$
Feedback Capacitance	$C_{GD}$	-	0.5	-	pF	$V_{DS} = 50 V, V_{GS} = -8 V, f = 1 MHz$

Notes:

<sup>1</sup> Measured on wafer prior to packaging.

<sup>2</sup> Scaled from PCM data.

<sup>3</sup> Pulse Width = 100  $\mu s$ , Duty Cycle = 10%

<sup>4</sup>  $P_{SAT}$  is defined as  $I_{GS} = 1.0 mA$  peak


<sup>5</sup> Measured in CGHV27060MP-TB.

<sup>6</sup> Single Carrier WCDMA, 3GPP Test Model 1, 64 DPCH, 45% Clipping, PAR = 7.5 dB @ 0.01% Probability on CCDF,  $V_{DD} = 50 V$ .


<sup>7</sup> Includes package.

## Typical Performance


**Figure 1. - Small Signal Gain and Return Losses of the CGHV27060MP Measured in Demonstration Amplifier Circuit CGHV27060MP-TB**

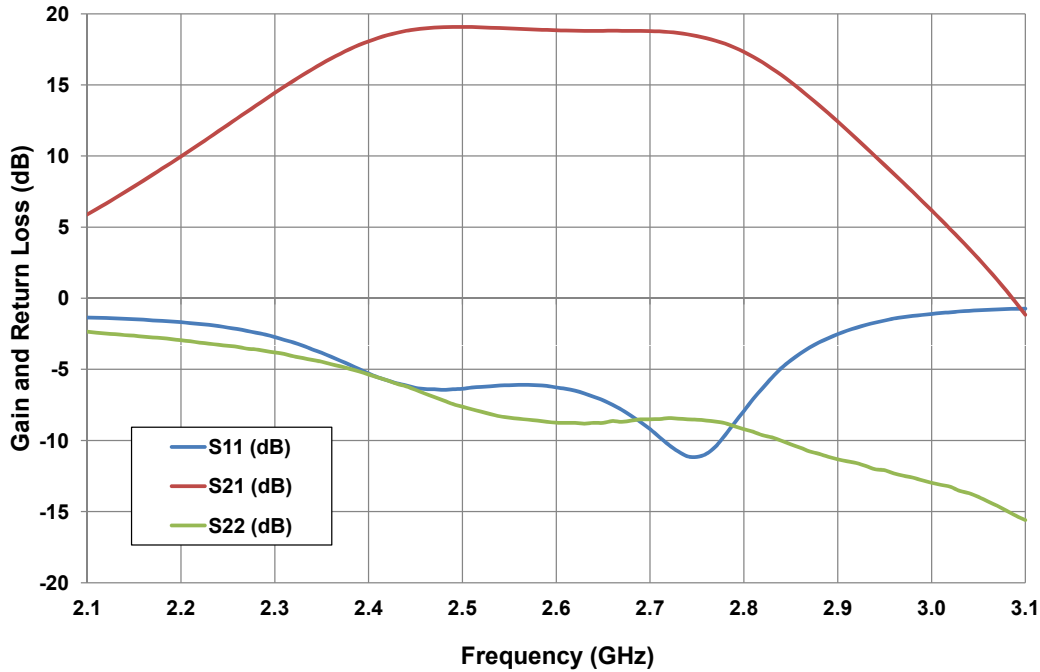

**Figure 2. - Gain, Power Added Efficiency & Average Power Output at 10% Duty Cycle for the CGHV27060MP Measured in Demonstration Amplifier Circuit CGHV27060MP-TB**

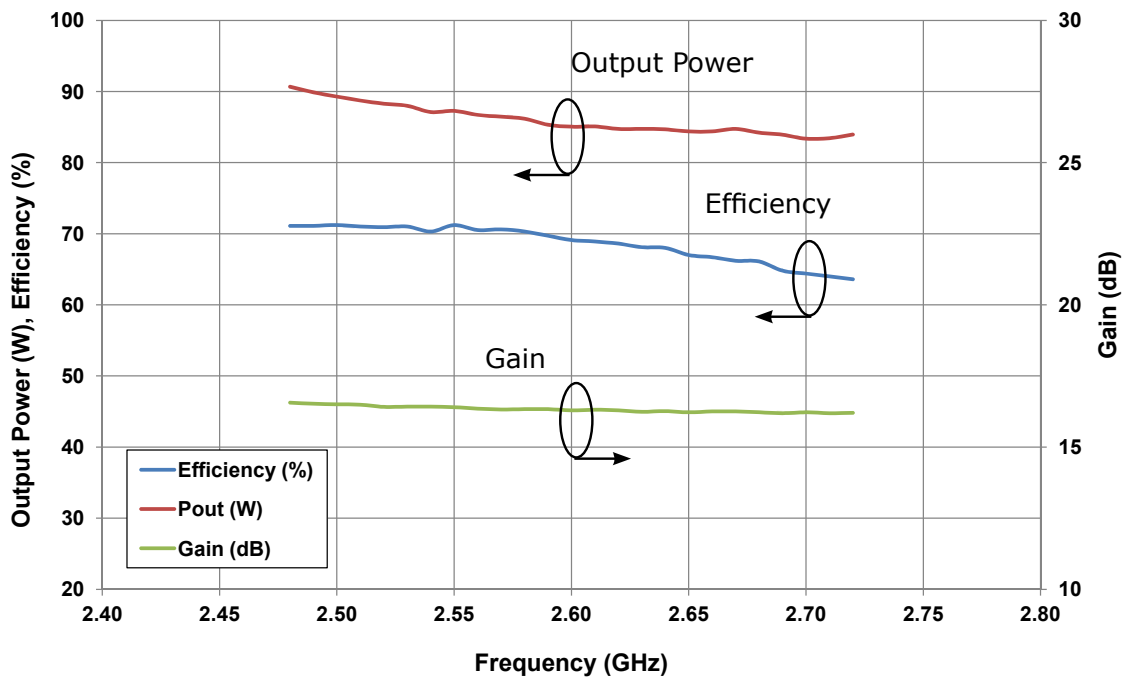


## CGHV27060MP Power Dissipation De-rating Curve

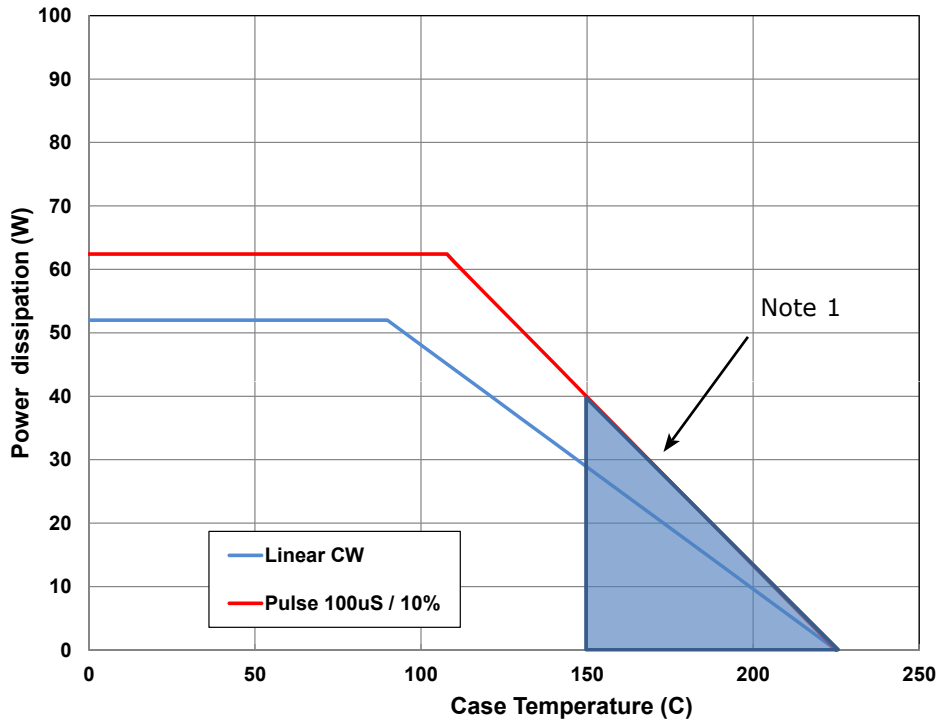

Note 1. Area exceeds Maximum Case Temperature (See Page 2).

## Part Number System

### CGHV27060MP

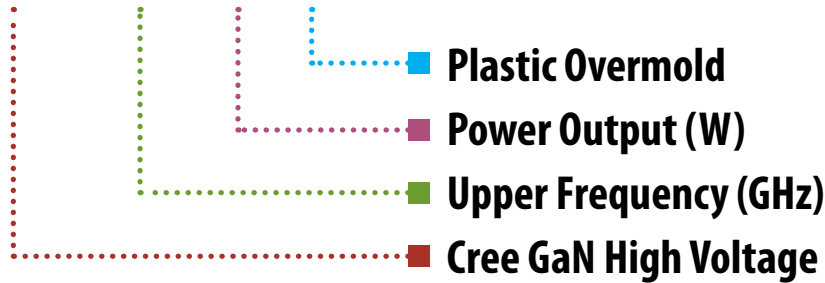

Parameter	Value	Units
Upper Frequency <sup>1</sup>	2.7	GHz
Power Output	60	W
Package	MP	-

**Table 1.**

**Note<sup>1</sup>:** Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples:	1A = 10.0 GHz 2H = 27.0 GHz

**Table 2.**



## Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

For more information, please contact:

Cree, Inc.  
4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.cree.com/rf](http://www.cree.com/rf)

Sarah Miller  
Marketing & Export  
Cree, RF Components  
1.919.407.5302

Ryan Baker  
Marketing  
Cree, RF Components  
1.919.407.7816

Tom Dekker  
Sales Director  
Cree, RF Components  
1.919.407.5639

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А