

PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W


EN/LZT 146 416 R4A Nov 2011
© Ericsson AB

Key Features

- Industry standard Quarter-brick. 57.9 x 36.8 x 9.35 mm (2.28 x 1.45 x 0.368 in)
- High efficiency, typ. 93.5% at 12 Vout half load
- 1500 Vdc input to output isolation
- Meets isolation requirements equivalent to basic insulation according to IEC/EN/UL 60950
- More than 3.3 million hours MTBF

General Characteristics

- Output over voltage protection
- Over temperature protection
- Output short-circuit protection
- Hiccup over current protection as an option
- Remote control
- Output voltage adjust function
- Highly automated manufacturing ensures quality
- ISO 9001/14001 certified supplier

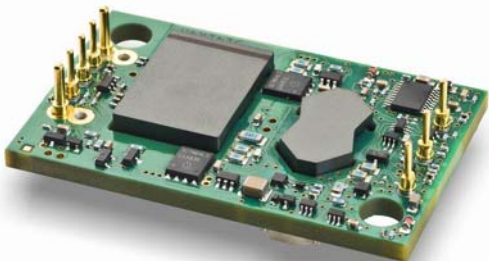

Safety Approvals



Design for Environment



Meets requirements in high-temperature lead-free soldering processes.

Contents

Ordering Information	2
General Information	2
Safety Specification	3
Absolute Maximum Ratings	4
Electrical Specification	
3.3V, 35A / 115W	PKM 4110D PINB 5
5.0V, 25A / 125W	PKM 4111D PINB 9
12V, 11A / 132W	PKM 4113D PINB 13
14V, 10A / 140W	PKM 4117KD PINB 17
15V, 8A / 120W	PKM 4115D PINB 21
EMC Specification	25
Operating Information	26
Thermal Consideration	27
Connections	29
Mechanical Information	30
Soldering Information	32
Delivery Information	32
Product Qualification Specification	33

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

Ordering Information

Product program	Output
PKM 4110D PI	3.3 V, 35 A / 115 W
PKM 4111D PI	5 V, 25 A / 125 W
PKM 4113D PI	12 V, 11 A / 132 W
PKM 4117KD PI	14 V, 10 A / 140 W
PKM 4115D PI	15 V, 8 A / 120 W

Product number and Packaging

PKM 4XXD PI n ₁ n ₂ n ₃ n ₄ n ₅					
Options	n ₁	n ₂	n ₃	n ₄	n ₅
Remote Control logic	o				
Baseplate		o			
Hiccup OCP			o		
Increased stand-off height				o	
Lead length					o

Options	Description
n ₁	Negative * Positive
n ₂	Without baseplate * With baseplate
n ₃	Hiccup OCP
n ₄	Standard stand-off height * Increased stand-off height
n ₅	5.30 mm * 3.69 mm LB ^{note1} 4.57 mm

Example a through-hole mounted, positive logic, no base plate, short pin product with increased stand-off height would be PKM 4111DPIPNBMLB.

* Standard variant (i.e. no option selected).

Note1: LB option only available for NB option.

General Information
Reliability

The failure rate (λ) and mean time between failures (MTBF=1/ λ) is calculated at max output power and an operating ambient temperature (T_A) of +40°C. Ericsson Power Modules uses Telcordia SR-332 Issue 2 Method 1 to calculate the mean steady-state failure rate and standard deviation (σ).

Telcordia SR-332 Issue 2 also provides techniques to estimate the upper confidence levels of failure rates based on the mean and standard deviation.

Mean steady-state failure rate, λ Std. deviation, σ

299 nFailures/h 42.3 nFailures/h

MTBF (mean value) for the PKM4000D series = 3.3 Mh.

MTBF at 90% confidence level = 2.8 Mh

Compatibility with RoHS requirements

The products are compatible with the relevant clauses and requirements of the RoHS directive 2002/95/EC and have a maximum concentration value of 0.1% by weight in homogeneous materials for lead, mercury, hexavalent chromium, PBB and PBDE and of 0.01% by weight in homogeneous materials for cadmium.

Exemptions in the RoHS directive utilized in Ericsson Power Modules products include:

- Lead in high melting temperature type solder (used to solder the die in semiconductor packages)
- Lead in glass of electronics components and in electronic ceramic parts (e.g. fill material in chip resistors)
- Lead as an alloying element in copper alloy containing up to 4% lead by weight (used in connection pins made of Brass)

Quality Statement

The products are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, 6 σ (sigma), and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out and they are subjected to an ATE-based final test. Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of our products.

Warranty

Warranty period and conditions are defined in Ericsson Power Modules General Terms and Conditions of Sale.

Limitation of Liability

Ericsson Power Modules does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

© Ericsson AB 2011

The information and specifications in this technical specification is believed to be correct at the time of publication. However, no liability is accepted for inaccuracies, printing errors or for any consequences thereof. Ericsson AB reserves the right to change the contents of this technical specification at any time without prior notice.

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

Safety Specification
General information

Ericsson Power Modules DC/DC converters and DC/DC regulators are designed in accordance with the safety standards IEC 60950-1, EN 60950-1 and UL 60950-1 *Safety of Information Technology Equipment*.

IEC/EN/UL 60950-1 contains requirements to prevent injury or damage due to the following hazards:

- Electrical shock
- Energy hazards
- Fire
- Mechanical and heat hazards
- Radiation hazards
- Chemical hazards

On-board DC/DC converters and DC/DC regulators are defined as component power supplies. As components they cannot fully comply with the provisions of any safety requirements without “conditions of acceptability”. Clearance between conductors and between conductive parts of the component power supply and conductors on the board in the final product must meet the applicable safety requirements. Certain conditions of acceptability apply for component power supplies with limited stand-off (see Mechanical Information for further information). It is the responsibility of the installer to ensure that the final product housing these components complies with the requirements of all applicable safety standards and regulations for the final product.

Component power supplies for general use should comply with the requirements in IEC/EN/UL 60950-1 *Safety of Information Technology Equipment*. Product related standards, e.g. IEEE 802.3af *Power over Ethernet*, and ETS-300132-2 *Power interface at the input to telecom equipment, operated by direct current (dc)* are based on IEC/EN/UL 60950-1 with regards to safety.

Ericsson Power Modules DC/DC converters and DC/DC regulators are UL 60950-1 recognized and certified in accordance with EN 60950-1. The flammability rating for all construction parts of the products meet requirements for V-0 class material according to IEC 60695-11-10, *Fire hazard testing, test flames* – 50 W horizontal and vertical flame test methods.

Isolated DC/DC converters

Galvanic isolation between input and output is verified in an electric strength test and the isolation voltage (V_{iso}) meets the voltage strength requirement for basic insulation according to IEC/EN/UL 60950-1.

It is recommended to use a slow blow fuse at the input of each DC/DC converter. If an input filter is used in the circuit the fuse should be placed in front of the input filter. In the rare event of a component problem that imposes a short circuit on the input source, this fuse will provide the

following functions:

- Isolate the fault from the input power source so as not to affect the operation of other parts of the system
- Protect the distribution wiring from excessive current and power loss thus preventing hazardous overheating

The DC/DC converter output is considered as safety extra low voltage (SELV) if one of the following conditions is met:

- The input source has double or reinforced insulation from the AC mains according to IEC/EN/UL 60950-1
- The input source has basic or supplementary insulation from the AC mains and the input of the DC/DC converter is maximum 60 Vdc and connected to protective earth according to IEC/EN/UL 60950-1
- The input source has basic or supplementary insulation from the AC mains and the DC/DC converter output is connected to protective earth according to IEC/EN/UL 60950-1


PKM 4000D PINB series Direct Converters Input 36-75 V, Output up to 35 A / 140 W	EN/LZT 146 416 R4A Nov 2011
	© Ericsson AB

Absolute Maximum Ratings

Characteristics			min	typ	max	Unit
T _{P1}	Operating Temperature (see Thermal Consideration section)		-40		+110	°C
T _S	Storage temperature		-55		+125	°C
V _I	Input voltage		-0.5		+80	V
V _{iso}	Isolation voltage (input to output test voltage)				1500	Vdc
V _{tr}	Input voltage transient (t _p 100 ms)				100	V
V _{RC}	Remote Control pin voltage (see Operating Information section)	Positive logic option	-0.5		+15	V
		Negative logic option	-0.5		+15	V
V _{adj}	Adjust pin voltage (see Operating Information section)		-0.5		+5	V

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as no destruction limits, are normally tested with one parameter at a time exceeding the limits in the Electrical Specification. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

Fundamental Circuit Diagram

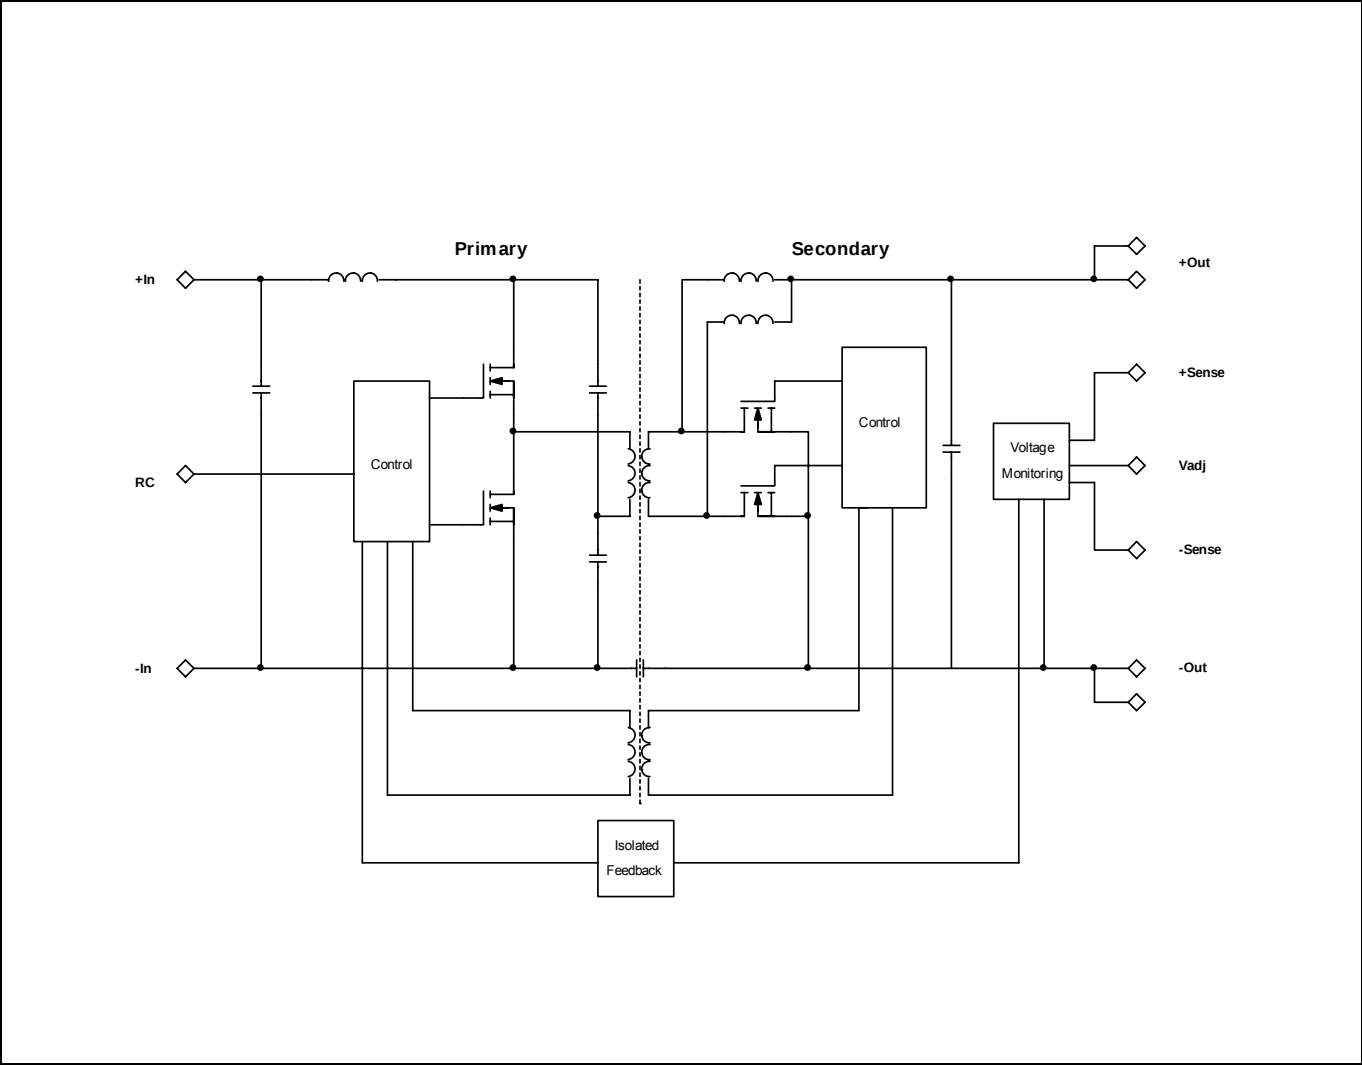

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

3.3V, 35A /115W Electrical Specification
PKM 4110D PINB
 $T_{P1} = -40$ to $+90^{\circ}\text{C}$, $V_I = 36$ to 75 V, sense pins connected to output pins unless otherwise specified under Conditions.

 Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, I_O max, unless otherwise specified under Conditions.

 Additional $C_{in} = 0$ μF . See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		36		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage	30.0	32.0	33.5	V
V _{Ion}	Turn-on input voltage	Increasing input voltage	32.0	34.0	35.5	V
C _I	Internal input capacitance			6.0		μF
P _O	Output power		0		115	W
η	Efficiency	50 % of max I _O		91.4		%
		max I _O		90.3		
		50 % of max I _O , V _I = 48 V		91.7		
		max I _O , V _I = 48 V		90.2		
P _d	Power Dissipation	max I _O		12.7	16.5	W
P _{ii}	Input idling power	I _O = 0 A, V _I = 53 V		2.6		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		0.15		W
f _s	Switching frequency	0-100 % of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 50$ A	3.24	3.30	3.36	V
V_O	Output adjust range	See operating information	2.97		3.63	V
	Output voltage tolerance band	0-100 % of max I_O	3.23		3.37	V
	Idling voltage	$I_O = 0$ A	3.23		3.37	V
	Line regulation	max I_O		5	15	mV
	Load regulation	$V_I = 53$ V, 0-100 % of max I_O		5	15	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 5$ A/ μs see Note 1		± 250	± 300	mV
t_{tr}	Load transient recovery time			70	100	μs
t_r	Ramp-up time (from 10-90 % of V_{Oi})	10-100 % of max I_O	1	4	6	ms
t_s	Start-up time (from V_I connection to 90 % of V_{Oi})		8	14	20	ms
t_f	V_I shut-down fall time (from V_I off to 10 % of V_O)	max I_O		0.12		ms
		$I_O = 0.35$ A		0.01		s
t_{RC}	RC start-up time	max I_O		15		ms
	RC shut-down fall time (from RC off to 10 % of V_O)	max I_O		0.09		ms
		$I_O = 0.35$ A		0.009		s
I_O	Output current		0		35	A
I_{lim}	Current limit threshold	$T_{P1} < \max T_{P1}$	38	44	50	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$		52	58	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		3500	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}		80	120	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, 0-100 % of max I_O	3.6	4.2	4.8	V

 Note 1: 7 pieces of 470 μF and 1 piece of 330 μF aluminium solid capacitors are connected to the module.

Note 2: Aluminium electrolytic capacitors, ESR is lower than 10m ohm.


PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB


3.3V, 35A /115W Typical Characteristics

PKM 4110D PINB


Efficiency

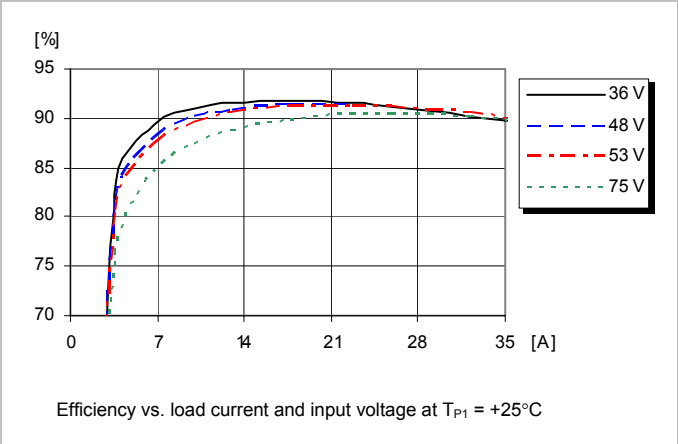


Power Dissipation

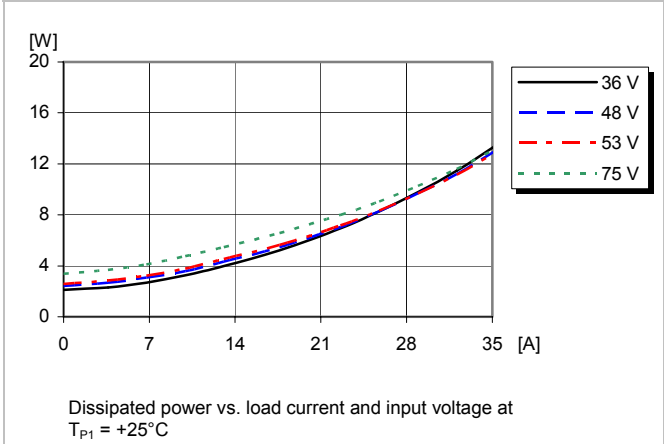

Output Characteristics

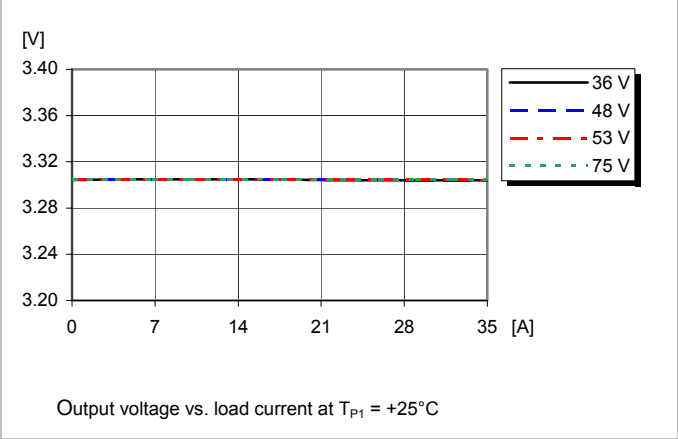


Current Limit Characteristics

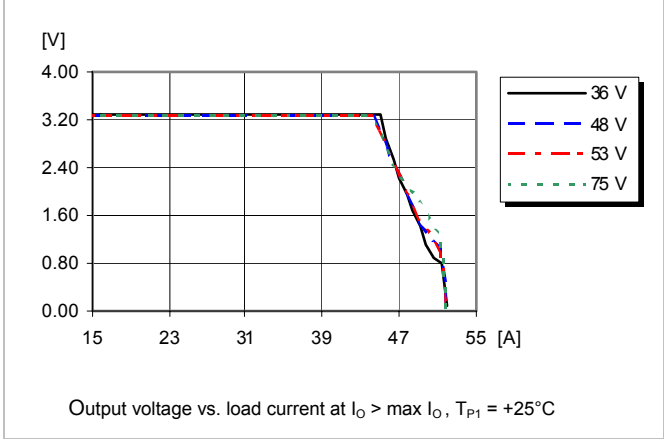


PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011


© Ericsson AB

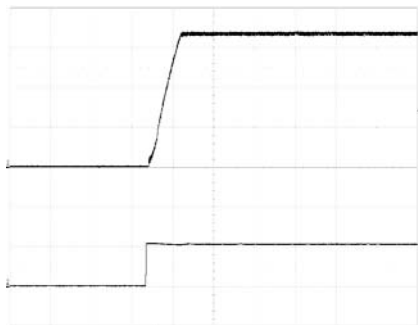3.3V, 35A /115W Typical Characteristics
PKM 4110D PINB
Start-up

 Start-up enabled by connecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$,
 $I_O = 35\text{ A}$ resistive load.

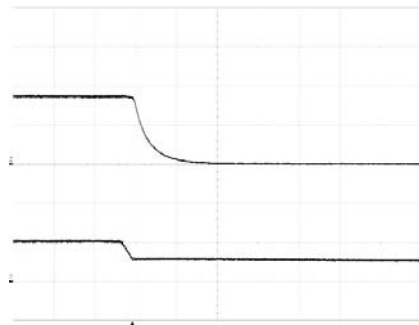 Top trace: output voltage 2.0 V/div.,
 Bottom trace: input voltage (50 V/div.).
 Time scale: (10 ms/div.).

Shut-down

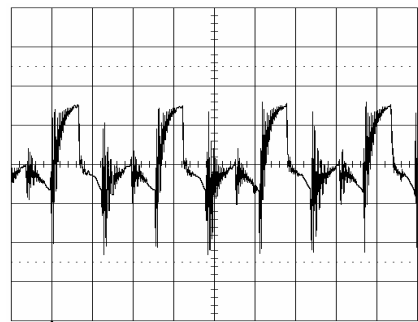 Shut-down enabled by disconnecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$,
 $I_O = 35\text{ A}$ resistive load.

 Top trace: output voltage (2.0 V/div.).
 Bottom trace: input voltage (50 V/div.).
 Time scale: (0.1 ms/div.).

Output Ripple & Noise

 Output voltage ripple at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$,
 $I_O = 35\text{ A}$ resistive load.

 Trace: output voltage (20 mV/div.).
 Time scale: (2 μs/div.).

Output Load Transient Response

 Output voltage response to load current step-
 change (8.75-26.25-8.75 A) at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$.

 Top trace: output voltage (200 mV/div.).
 Bottom trace: load current (20 A/div.).
 Time scale: (0.1 ms/div.).

Output Voltage Adjust (see operating information)
Passive adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = \left(\frac{5.11 \times 3.3(100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

 Example: Increase 4% $\Rightarrow V_{out} = 3.43\text{ Vdc}$

$$\left(\frac{5.11 \times 3.3(100 + 4)}{1.225 \times 4} - \frac{511}{4} - 10.22 \right) \text{ k}\Omega = 219.9 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11 \left(\frac{100}{\Delta\%} - 2 \right) \text{ k}\Omega$$

 Example: Decrease 2% $\Rightarrow V_{out} = 3.23\text{ Vdc}$
 $\text{k}\Omega = 404.32 \text{ k}\Omega$

$$5.11 \left(\frac{100}{2} - 2 \right) \text{ k}\Omega = 245.3 \text{ k}\Omega$$


PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB


3.3V, 35A /115W Typical Characteristics

PKM 4110D PINB


Output Current Derating – Open frame

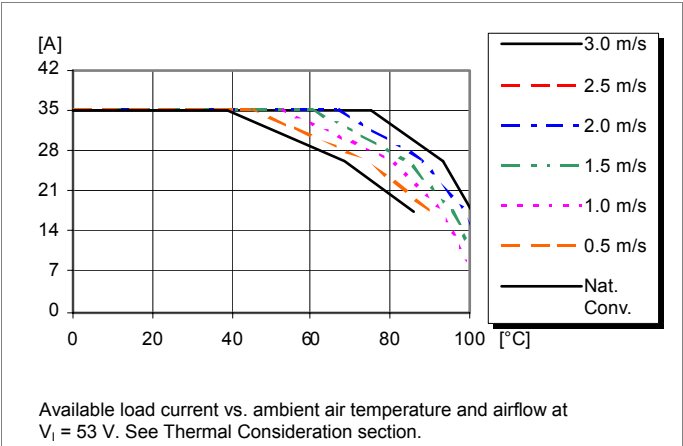


Output Current Derating – Base plate

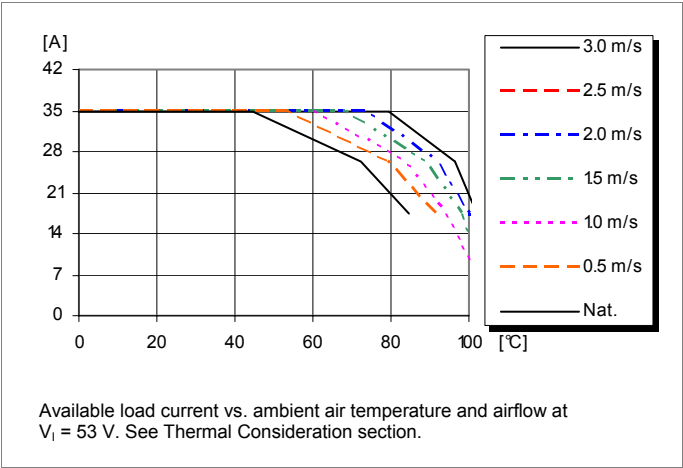

Thermal Resistance – Base plate

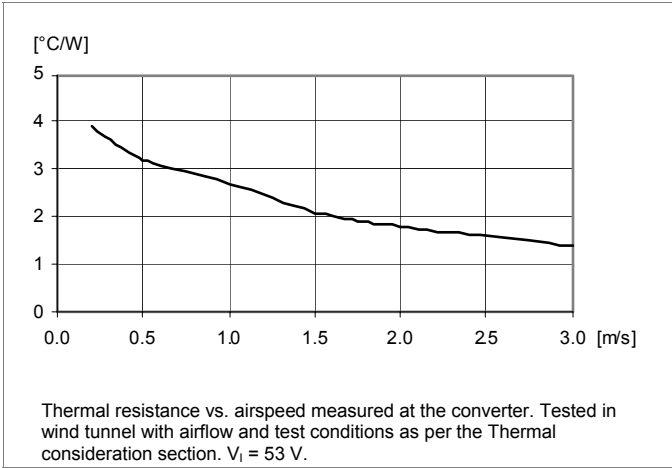

Output Current Derating – Cold wall sealed box

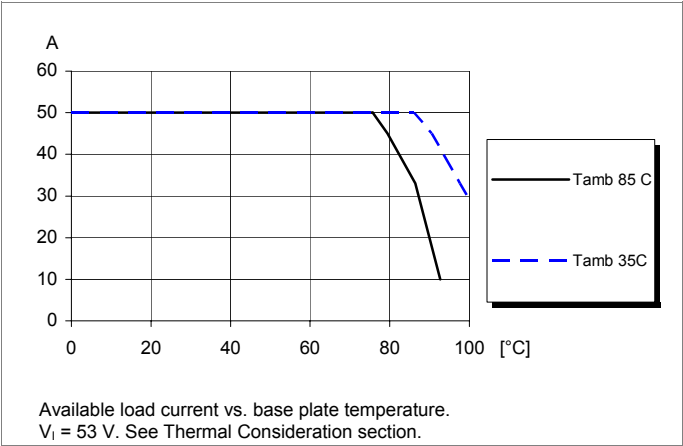

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

5.0V, 25A /125W Electrical Specification
PKM 4111D PINB
 $T_{P1} = -40$ to $+90^{\circ}\text{C}$, $V_I = 36$ to 75 V, sense pins connected to output pins unless otherwise specified under Conditions.

 Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, I_O max, unless otherwise specified under Conditions.

 Additional $C_{in} = 0$ μF . See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		36		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage	30.0	32.0	33.5	V
V _{Ion}	Turn-on input voltage	Increasing input voltage	32.0	34.0	35.5	V
C _I	Internal input capacitance			6.0		μF
P _O	Output power		0		125	W
η	Efficiency	50 % of max I _O		91.8		%
		max I _O		91.3		
		50 % of max I _O , V _I = 48 V		92.1		
		max I _O , V _I = 48 V		91.4		
P _d	Power Dissipation	max I _O		11.8	14.1	W
P _{ii}	Input idling power	I _O = 0 A, V _I = 53 V		2.9		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		0.15		W
f _s	Switching frequency	0-100 % of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 25$ A	4.90	5.00	5.10	V
V_O	Output adjust range	See operating information	4.50		5.50	V
	Output voltage tolerance band	0-100 % of max I_O	4.80		5.20	V
	Idling voltage	$I_O = 0$ A	4.80		5.20	V
	Line regulation	max I_O		5	15	mV
	Load regulation	$V_I = 53$ V, 0-100 % of max I_O		5	15	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 5$ A/ μs see Note 1		± 200	± 300	mV
t_{tr}	Load transient recovery time			20	50	μs
t_r	Ramp-up time (from 10-90 % of V_{Oi})	10-100 % of max I_O	1	5	15	ms
t_s	Start-up time (from V_I connection to 90 % of V_{Oi})		7	10	30	ms
t_f	V_I shut-down fall time (from V_I off to 10 % of V_O)	max I_O		0.2		ms
		$I_O = 0.4$ A		0.02		s
t_{RC}	RC start-up time	max I_O		9		ms
	RC shut-down fall time (from RC off to 10 % of V_O)	max I_O		0.2		ms
		$I_O = 0.4$ A		0.02		s
I_O	Output current		0		25	A
I_{lim}	Current limit threshold	$T_{P1} < \max T_{P1}$	28	32	36	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$		40	45	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		2500	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}		60	130	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, 0-100 % of max I_O	6.2	6.8	7.2	V

 Note 1: 6 pieces of 470 μF aluminium solid capacitors are connected to the module.

Note 2: Aluminium electrolytic capacitors, ESR is lower than 10 mohm.


PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB


5.0V, 25A /125W Typical Characteristics

PKM 4111D PINB


Efficiency

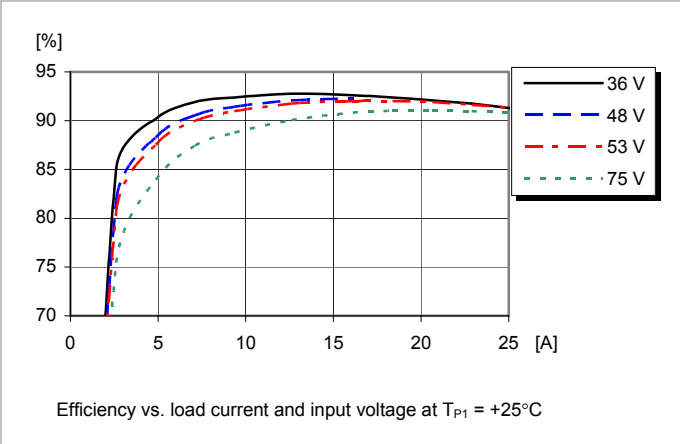


Power Dissipation

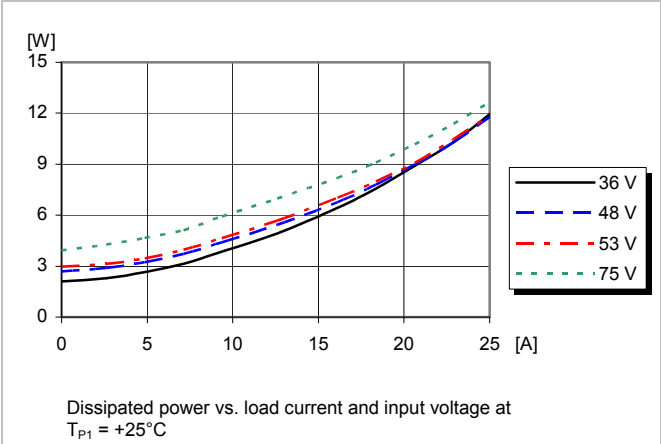

Output Characteristics

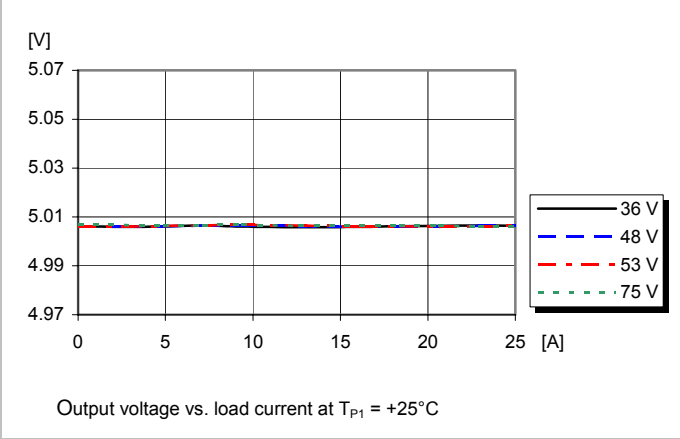


Current Limit Characteristics

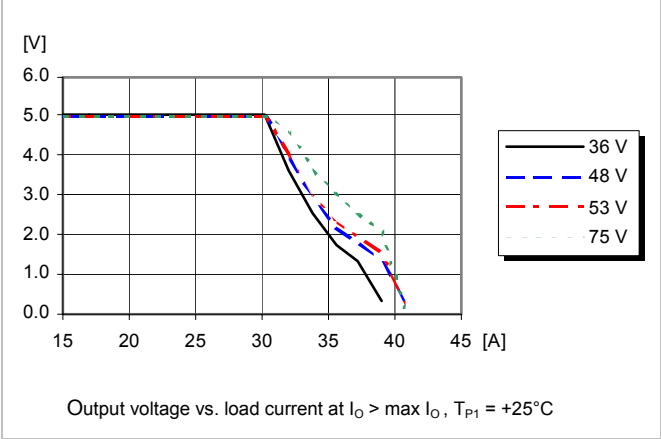


PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011


© Ericsson AB

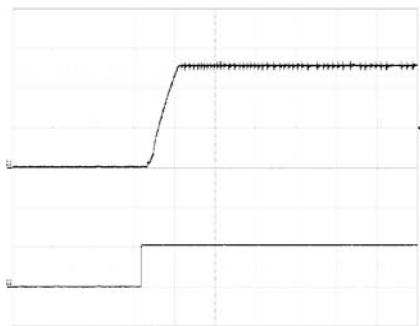5.0V, 25A /125W Typical Characteristics
PKM 4111D PINB
Start-up

 Start-up enabled by connecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$
 $I_O = 25\text{ A}$ resistive load.

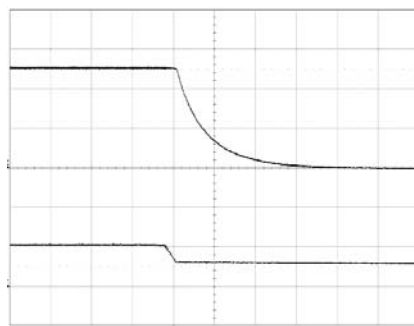 Top trace: output voltage (2 V/div.).
 Bottom trace: input voltage (50 V/div.).
 Time scale: (5 ms/div.).

Shut-down

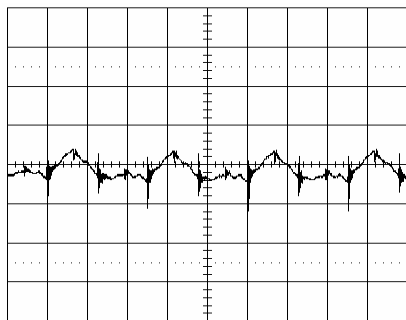 Shut-down enabled by disconnecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$,
 $I_O = 25\text{ A}$ resistive load.

 Top trace: output voltage (2 V/div.).
 Bottom trace: input voltage (50 V/div.).
 Time scale: (0.1 ms/div.).

Output Ripple & Noise

 Output voltage ripple at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$,
 $I_O = 25\text{ A}$ resistive load.

 Trace: output voltage (50 mV/div.).
 Time scale: (2 μs /div.).

Output Load Transient Response

 Output voltage response to load current step-change (6.25-18.75-6.25 A) at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$.

 Top trace: output voltage (200 mV/div.).
 Bottom trace: load current (10 A/div.).
 Time scale: (0.1 ms/div.).

Output Voltage Adjust (see operating information)
Passive adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = \left(\frac{5.11 \times 5.0(100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

 Example: Increase 4% $\Rightarrow V_{out} = 5.20\text{ Vdc}$

$$\left(\frac{5.11 \times 5.0(100 + 4)}{1.225 \times 4} - \frac{511}{4} - 10.22 \right) \text{ k}\Omega = 404.3 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11 \left(\frac{100}{\Delta\%} - 2 \right) \text{ k}\Omega$$

 Example: Decrease 2% $\Rightarrow V_{out} = 4.90\text{ Vdc}$
 $\text{k}\Omega = 404.32 \text{ k}\Omega$

$$5.11 \left(\frac{100}{2} - 2 \right) \text{ k}\Omega = 245.3 \text{ k}\Omega$$


PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB


5.0V, 25A /125W Typical Characteristics

PKM 4111D PINB


Output Current Derating – Open frame

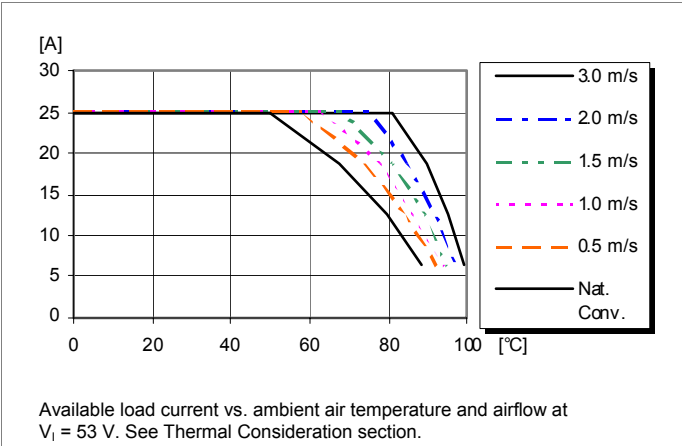


Output Current Derating – Base plate

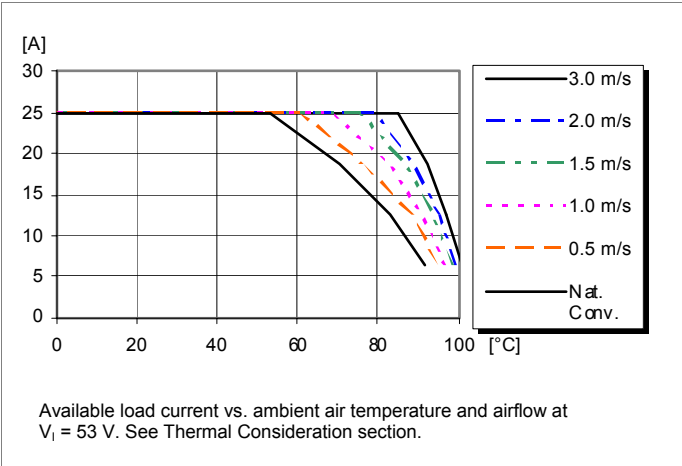

Thermal Resistance – Base plate

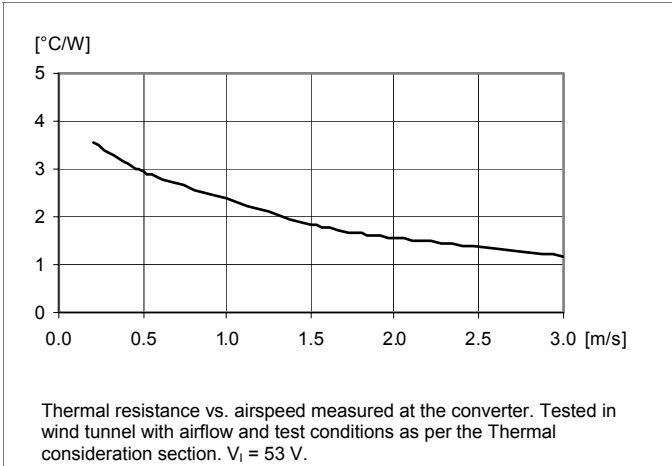

Output Current Derating – Cold wall sealed box

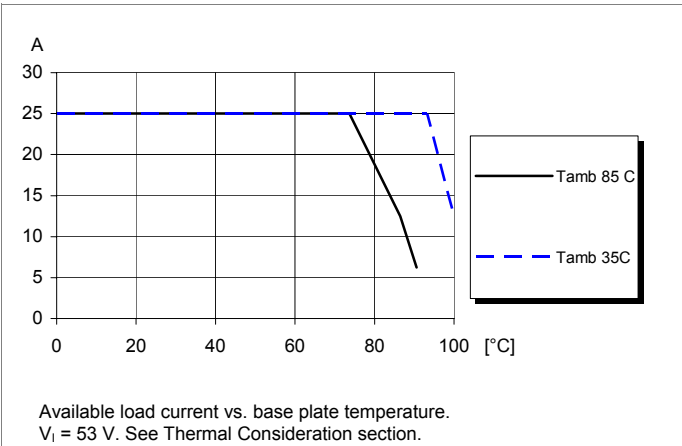

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

12V, 11A/132W Electrical Specification
PKM 4113D PINB
 $T_{P1} = -40$ to $+90^{\circ}\text{C}$, $V_I = 38$ to 75 V, sense pins connected to output pins unless otherwise specified under Conditions.

 Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, I_O max, unless otherwise specified under Conditions.

 Additional $C_{in} = 0$ μF . See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		38		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage	30	31	32	V
V _{Ion}	Turn-on input voltage	Increasing input voltage	32	33	34	V
C _I	Internal input capacitance			6.0		μF
P _O	Output power		0		132	W
η	Efficiency	50 % of max I _O		93.5		%
		max I _O		94.2		
		50 % of max I _O , V _I = 48 V		93.8		
		max I _O , V _I = 48 V		94.3		
P _d	Power Dissipation	max I _O		8.1	12	W
P _{li}	Input idling power	I _O = 0 A, V _I = 53 V		2.7		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		0.14		W
f _s	Switching frequency	0-100 % of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 40$ A	11.8	12	12.2	V
V_O	Output adjust range	See operating information	10.8		13.2	V
	Output voltage tolerance band	0-100 % of max I_O	11.7		12.3	V
	Idling voltage	$I_O = 0$ A	11.8		12.2	V
	Line regulation	max I_O		10	20	mV
	Load regulation	$V_I = 53$ V, 0-100 % of max I_O		10	20	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 5\text{A}/\mu\text{s}$, see Note 1		± 300	± 450	mV
t_{tr}	Load transient recovery time			100	170	μs
t_r	Ramp-up time (from 10-90 % of V_{Oi})	10-100 % of max I_O	4	6	20	ms
t_s	Start-up time (from V_I connection to 90 % of V_{Oi})		6	8	20	ms
t_f	V_I shut-down fall time (from V_I off to 10 % of V_O)	max I_O		0.3		ms
		$I_O = 0$ A		9		s
t_{RC}	RC start-up time	max I_O		8		ms
	RC shut-down fall time (from RC off to 10 % of V_O)	max I_O		0.3		ms
		$I_O = 0$ A		9		s
I_O	Output current		0		11	A
I_{lim}	Current limit threshold	$T_{P1} < \text{max } T_{P1}$	12	15	19	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$, see Note 2		21		A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 3	0		1100	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}		100	150	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, 0-100 % of max I_O		14.8		V

 Note 1: 1100 μF aluminium solid capacitors are connected to the module.

Note 2: short circuit load is 5mohm.

Note 3: Aluminium electrolytic capacitors, ESR is lower than 10 mohm.


PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB


12V, 11A /132W Typical Characteristics

PKM 4113D PINB


Efficiency

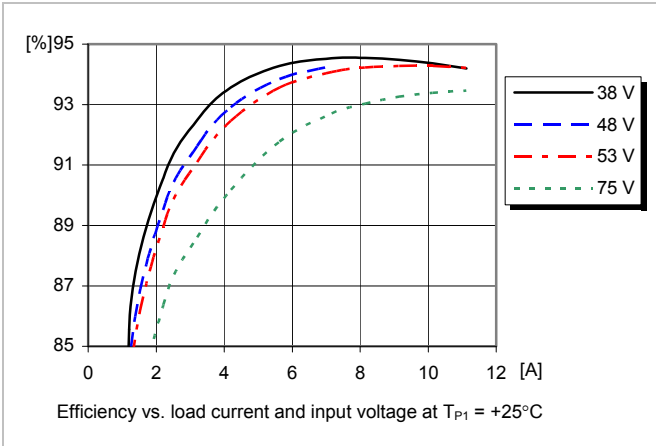


Power Dissipation

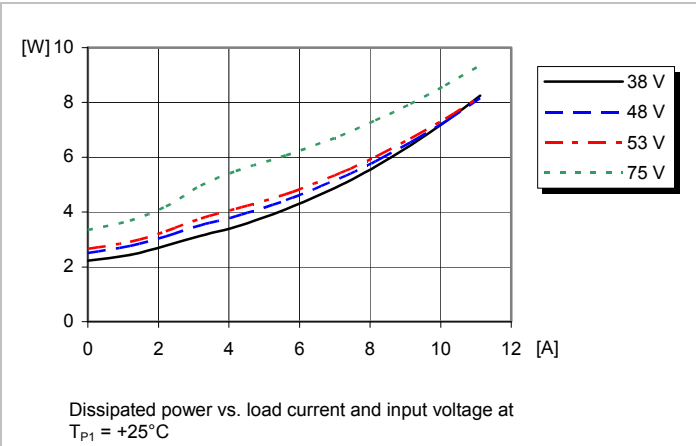

Output Characteristics

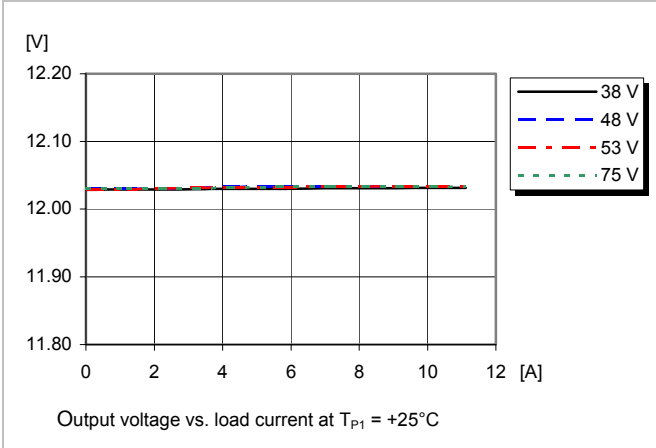

Current Limit Characteristics

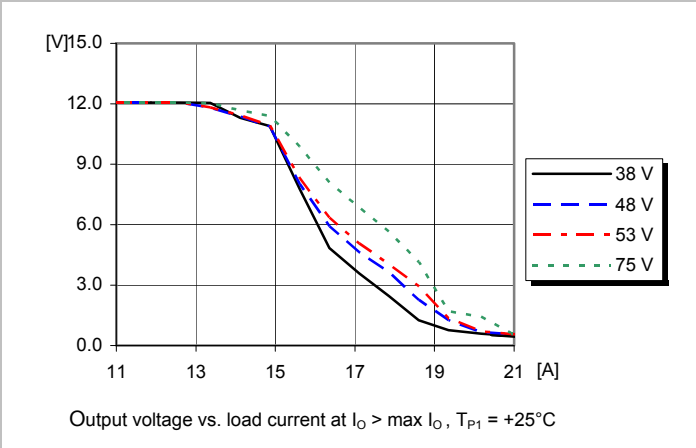

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W


EN/LZT 146 416 R4A Nov 2011

© Ericsson AB


12V, 11A /132W Typical Characteristics
PKM 4113D PINB
Start-up

 Start-up enabled by connecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$,
 $I_o = 11\text{ A}$ resistive load.


 Top trace: output voltage (5 V/div.).
 Bottom trace: input voltage (50 V/div.).
 Time scale: (10 ms/div.).

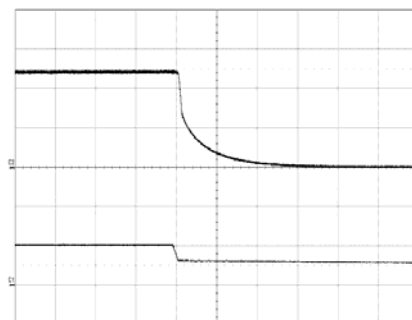Shut-down

 Shut-down enabled by disconnecting V_i at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$,
 $I_o = 11\text{ A}$ resistive load.

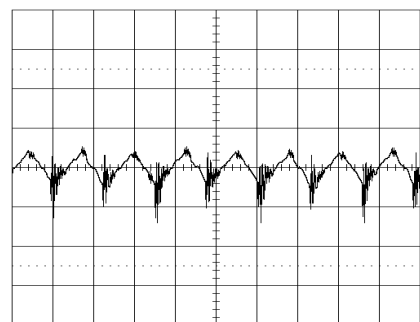 Top trace: output voltage (5 V/div.).
 Bottom trace: input voltage (50 V/div.).
 Time scale: (0.2 ms/div.).

Output Ripple & Noise

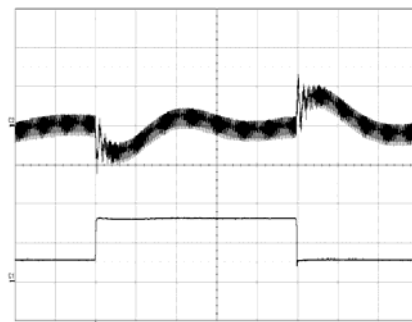 Output voltage ripple at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$,
 $I_o = 11\text{ A}$ resistive load.

 Trace: output voltage (50 mV/div.).
 Time scale: (2 μs /div.).

Output Load Transient Response

 Output voltage response to load current step-
 change (2.75-8.25-2.75 A) at:
 $T_{P1} = +25^\circ\text{C}$, $V_i = 53\text{ V}$.

 Top trace: output voltage (200mV/div.).
 Bottom trace: load current (5 A/div.).
 Time scale: (0.1 ms/div.).

Output Voltage Adjust (see operating information)
Passive adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = \left(\frac{5.11 \times 12 \times (100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

 Example: Increase 4% $\Rightarrow V_{out} = 12.48\text{ Vdc}$

$$\left(\frac{5.11 \times 12 \times (100 + 4)}{1.225 \times 4} - \frac{511}{4} - 10.22 \right) \text{ k}\Omega = 1163.5 \text{ k}\Omega$$

Output Voltage Adjust Downwards, Decrease:

$$R_{adj} = 5.11 \left(\frac{100}{\Delta\%} - 2 \right) \text{ k}\Omega$$

 Example: Decrease 2% $\Rightarrow V_{out} = 11.76\text{ Vdc}$

$$5.11 \left(\frac{100}{2} - 2 \right) \text{ k}\Omega = 245.3 \text{ k}\Omega$$


PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB


12V, 11A /132W Typical Characteristics

PKM 4113D PINB


Output Current Derating – Open frame

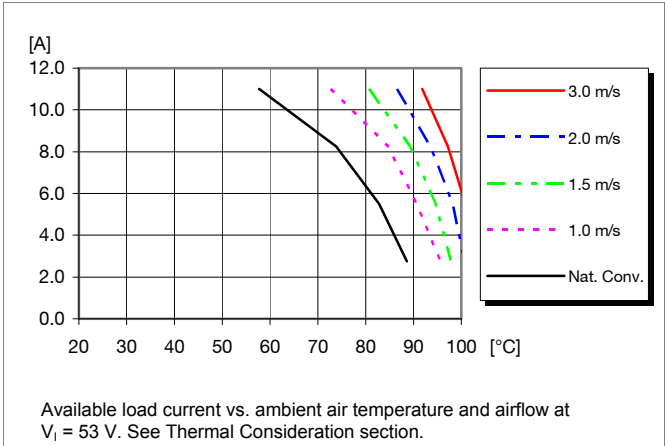


Output Current Derating – Base plate

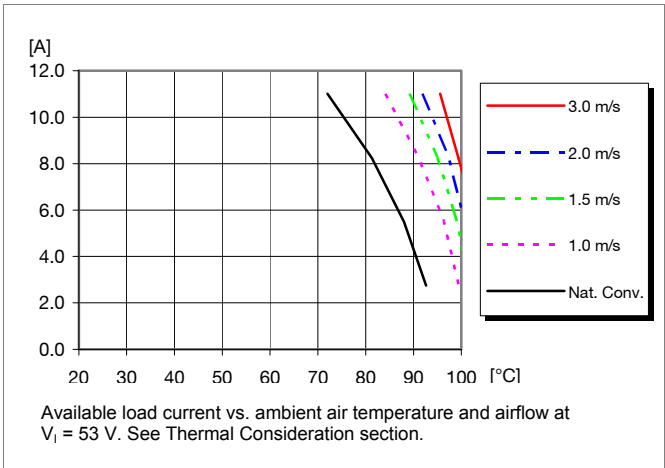

Thermal Resistance – Base plate

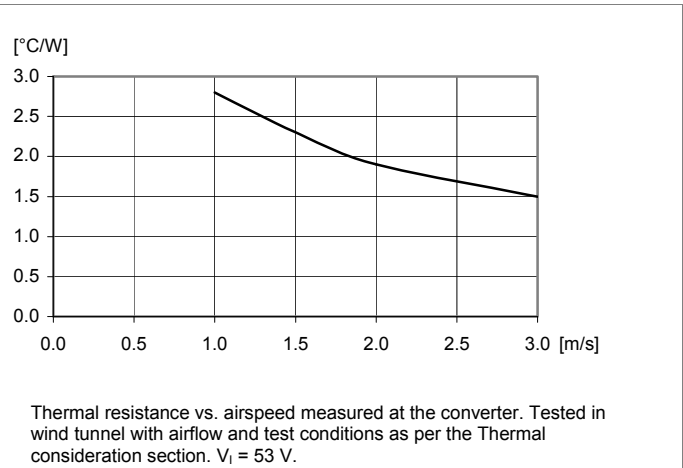

Output Current Derating – Cold wall sealed box

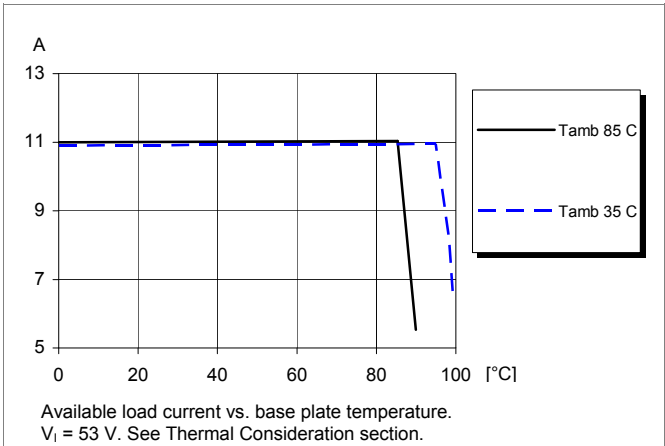

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

14V, 10A /140W Electrical Specification
PKM 4117KD PINB
 $T_{P1} = -40$ to $+90^{\circ}\text{C}$, $V_I = 36$ to 75 V, sense pins connected to output pins unless otherwise specified under Conditions.

 Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, I_O max, unless otherwise specified under Conditions.

 Additional $C_{in} = 0$ μF . See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		36		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage	29.0	31.0	33.0	V
V _{Ion}	Turn-on input voltage	Increasing input voltage	32.0	33.5	35.0	V
C _I	Internal input capacitance			6.0		μF
P _O	Output power		0		140	W
η	Efficiency	50 % of max I _O		91.7		%
		max I _O		92.0		
		50 % of max I _O , V _I = 48 V		92.0		
		max I _O , V _I = 48 V		92.0		
P _d	Power Dissipation	max I _O		12.0	17	W
P _{ii}	Input idling power	I _O = 0 A, V _I = 53 V		4.2		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		0.15		W
f _s	Switching frequency	0-100 % of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 8$ A	13.70	14.00	14.30	V
V_O	Output adjust range	See operating information	11.20		15.40	V
	Output voltage tolerance band	0-100 % of max I_O	13.58		14.42	V
	Idling voltage	$I_O = 0$ A	13.72		14.28	V
	Line regulation	max I_O		2	30	mV
	Load regulation	$V_I = 53$ V, 0-100 % of max I_O		8	20	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 1$ A/ μs see Note 1		± 350	± 450	mV
t_{tr}	Load transient recovery time			± 300	± 400	μs
t_r	Ramp-up time (from 10-90 % of V_{Oi})	10-100 % of max I_O		11		ms
t_s	Start-up time (from V_I connection to 90 % of V_{Oi})			20		ms
t_f	V_I shut-down fall time (from V_I off to 10 % of V_O)	max I_O		0.4		ms
		$I_O = 0$ A		2.4		s
t_{RC}	RC start-up time	max I_O		20		ms
	RC shut-down fall time (from RC off to 10 % of V_O)	max I_O		0.4		ms
		$I_O = 0$ A		2.4		s
I_O	Output current		0		10	A
I_{lim}	Current limit threshold	$T_{P1} < \text{max } T_{P1}$	12	14	16	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$		17	18.5	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 2	0		3000	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}		80	150	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, 0-100 % of max I_O		17		V

 Note 1: 1000 μF low ESR electrolytic capacitors are connected to the module.


Note 2: Aluminium electrolytic capacitors, ESR is lower than 10m ohm.

PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W


EN/LZT 146 416 R4A Nov 2011
© Ericsson AB

14V, 10A /140W Typical Characteristics


Efficiency

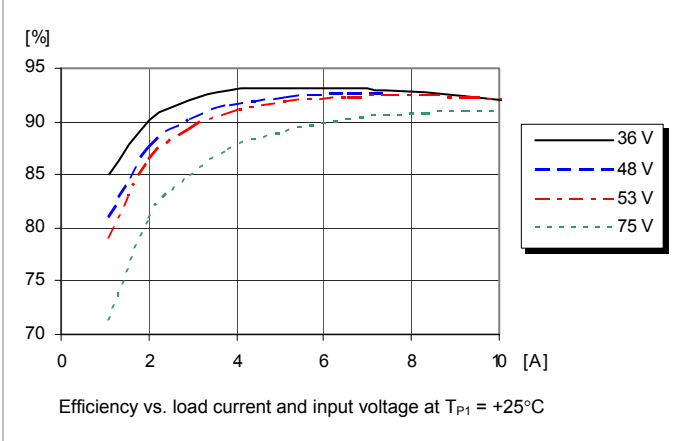


Output Characteristics

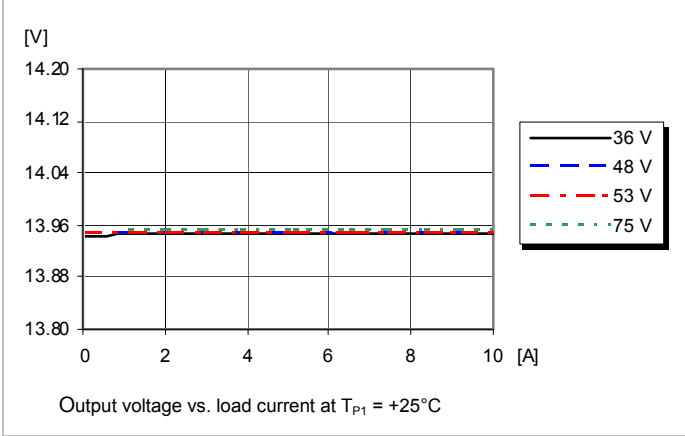

Power Dissipation

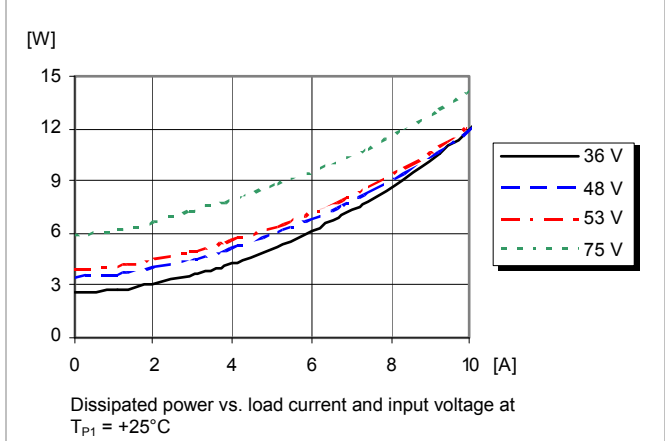

Current Limit Characteristics

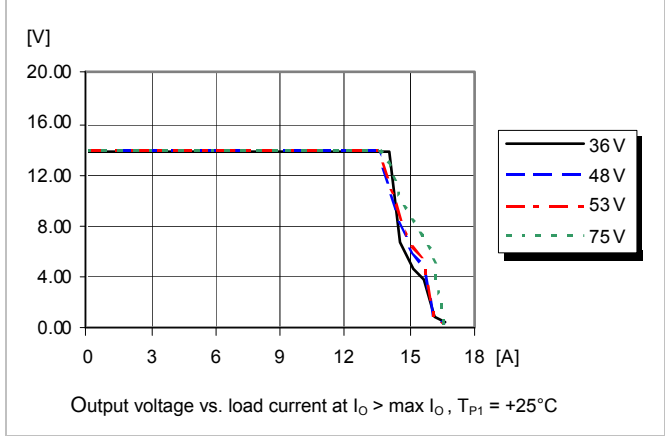


PKM 4117KD PINB

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W


EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

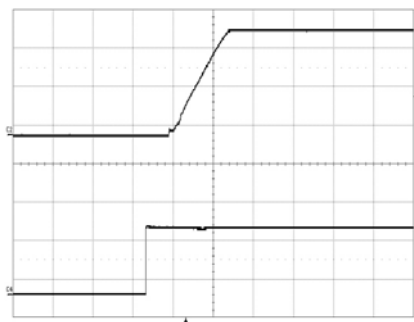14V, 10A /140W Typical Characteristics
PKM 4117KD PINB
Start-up


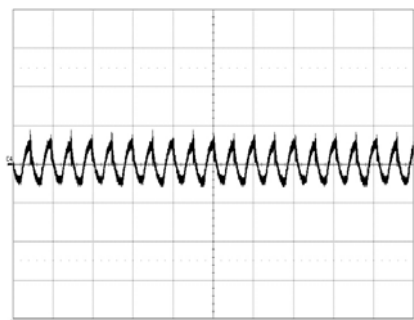
Start-up enabled by connecting V_I at:
 $T_{P1} = +25^\circ\text{C}$, $V_I = 53\text{ V}$,
 $I_O = 10\text{ A}$ resistive load.

Top trace: output voltage (5.0 V/div.).
 Bottom trace: input voltage (30 V/div.).
 Time scale: (10 ms/div.).

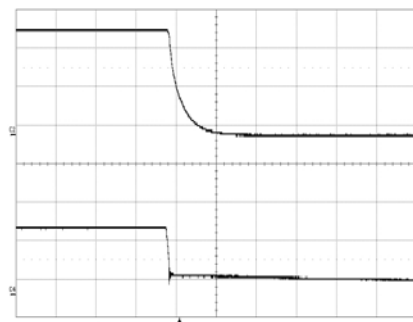Shut-down


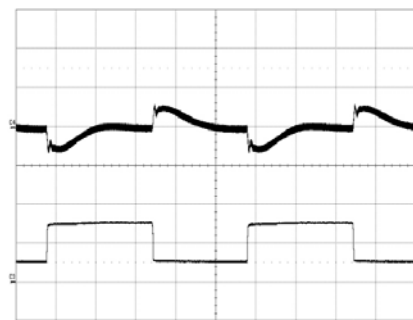
Shut-down enabled by disconnecting V_I at:
 $T_{P1} = +25^\circ\text{C}$, $V_I = 53\text{ V}$,
 $I_O = 10\text{ A}$ resistive load.

Top trace: output voltage (5.0 V/div.).
 Bottom trace: input voltage (30 V/div.).
 Time scale: (0.5 ms/div.).

Output Ripple & Noise


Output voltage ripple at:
 $T_{P1} = +25^\circ\text{C}$, $V_I = 53\text{ V}$,
 $I_O = 10\text{ A}$ resistive load.

Trace: output voltage (50 mV/div.).
 Time scale: (5 μs /div.).

Output Load Transient Response


Output voltage response to load current step-change (2.5-7.5-2.5 A) at:
 $T_{P1} = +25^\circ\text{C}$, $V_I = 53\text{ V}$.

Top trace: output voltage (500 mV/div.).
 Bottom trace: load current (5 A/div.).
 Time scale: (0.2 ms/div.).

Output Voltage Adjust (see operating information)
Passive adjust

The resistor value for an adjusted output voltage is calculated by using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = \left(\frac{5.11 \times 14(100 + \Delta\%) - 511}{1.225 \times \Delta\%} - 10.22 \right) \text{ k}\Omega$$

Example: Increase 4% $\Rightarrow V_{out} = 14.56\text{ Vdc}$

$$\left(\frac{5.11 \times 14(100 + 4)}{1.225 \times 4} - \frac{511}{4} - 10.22 \right) \text{ k}\Omega = 1380.43 \text{ k}\Omega$$

Output Voltage Adjust Downwards, decrease:

$$R_{adj} = 5.11 \left(\frac{100}{\Delta\%} - 2 \right) \text{ k}\Omega$$

Example: Decrease 2% $\Rightarrow V_{out} = 13.72\text{ Vdc}$

$$5.11 \left(\frac{100}{2} - 2 \right) \text{ k}\Omega = 245.3 \text{ k}\Omega$$


PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB


14V, 10A /140W Typical Characteristics

PKM 4117KD PINB


Output Current Derating – Open frame

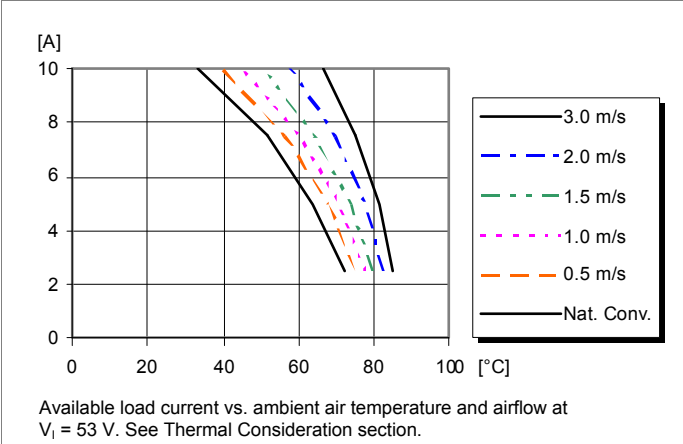

Output Current Derating – Base plate

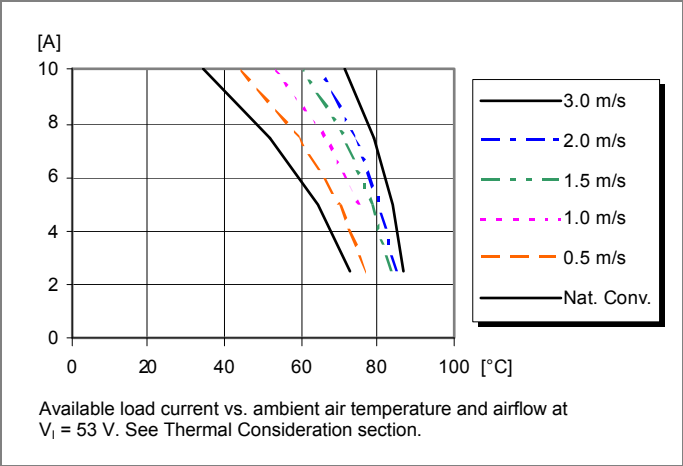

Thermal Resistance – Base plate

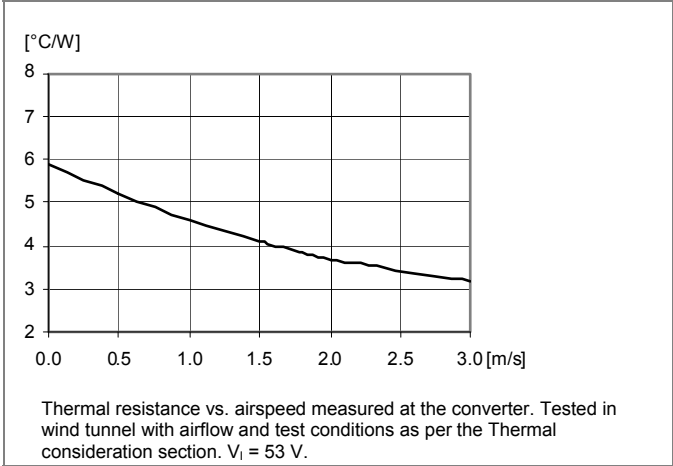

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

15V, 8A /120W Electrical Specification
PKM 4115D PINB
 $T_{P1} = -40$ to $+90^{\circ}\text{C}$, $V_I = 36$ to 75 V, sense pins connected to output pins unless otherwise specified under Conditions.

 Typical values given at: $T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, I_O max, unless otherwise specified under Conditions.

 Additional $C_{in} = 0$ μF . See Operating Information section for selection of capacitor types.

Characteristics		Conditions	min	typ	max	Unit
V _I	Input voltage range		36		75	V
V _{Ioff}	Turn-off input voltage	Decreasing input voltage	29.0	31.3	33.0	V
V _{Ion}	Turn-on input voltage	Increasing input voltage	32.0	33.9	35.5	V
C _I	Internal input capacitance			6.0		μF
P _O	Output power		0		120	W
η	Efficiency	50 % of max I _O		91.4		%
		max I _O		92.7		
		50 % of max I _O , V _I = 48 V		92.0		
		max I _O , V _I = 48 V		92.9		
P _d	Power Dissipation	max I _O		9.4	13	W
P _{li}	Input idling power	I _O = 0 A, V _I = 53 V		4.0		W
P _{RC}	Input standby power	V _I = 53 V (turned off with RC)		0.11		W
f _s	Switching frequency	0-100 % of max I _O	180	200	220	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, $I_O = 8$ A	14.70	15.00	15.30	V
V_O	Output adjust range	See operating information	12.00		16.50	V
	Output voltage tolerance band	0-100 % of max I_O	14.55		15.45	V
	Idling voltage	$I_O = 0$ A	14.70		15.30	V
	Line regulation	max I_O , see Note 1		2	30	mV
	Load regulation	$V_I = 53$ V, 0-100 % of max I_O		8	20	mV
V_{tr}	Load transient voltage deviation	$V_I = 53$ V, Load step 25-75-25 % of max I_O , $di/dt = 1$ A/ μs see Note 2		± 300	± 550	mV
t_{tr}	Load transient recovery time			260	300	μs
t_r	Ramp-up time (from 10-90 % of V_{Oi})	10-100 % of max I_O	9	11	15	ms
t_s	Start-up time (from V_I connection to 90 % of V_{Oi})		15	20	30	ms
t_f	V_I shut-down fall time (from V_I off to 10 % of V_O)	max I_O		0.55		ms
		$I_O = 0$ A		2.3		s
t_{RC}	RC start-up time	max I_O		20		ms
	RC shut-down fall time (from RC off to 10 % of V_O)	max I_O		0.52		ms
		$I_O = 0$ A		2.4		s
I_O	Output current		0		8	A
I_{lim}	Current limit threshold	$T_{P1} < \max T_{P1}$	9	11.3	14	A
I_{sc}	Short circuit current	$T_{P1} = 25^{\circ}\text{C}$		14	18	A
C_{out}	Recommended Capacitive Load	$T_{P1} = 25^{\circ}\text{C}$, see Note 3	0		800	μF
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}		50	150	mVp-p
OVP	Over voltage protection	$T_{P1} = +25^{\circ}\text{C}$, $V_I = 53$ V, 0-100 % of max I_O		19.2		V

 Note 1: There can be some voltage drop at $V_{in} < 38$ V, full load, easier to occur at high temperature.

 Note 2: one 470 μF + one 330 μF low ESR electrolytic capacitors are connected to the module.

Note 3: Aluminium electrolytic capacitors, ESR is lower than 10m ohm.


PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB


15V, 8A /120W Typical Characteristics

PKM 4115D PINB


Efficiency

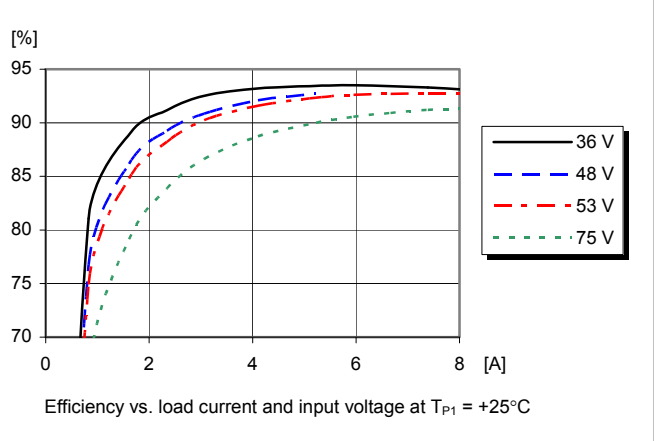


Power Dissipation

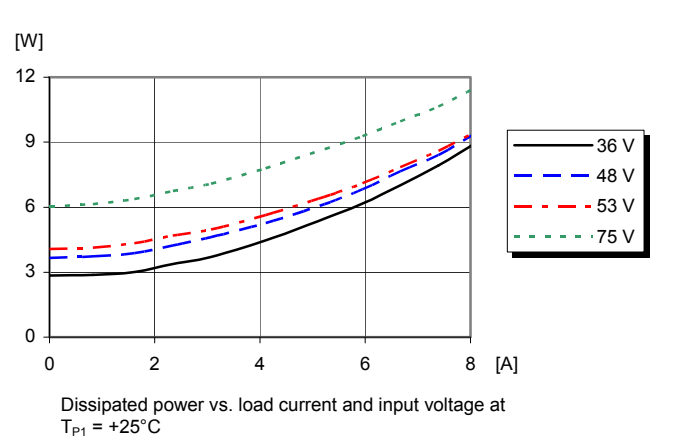

Output Characteristics

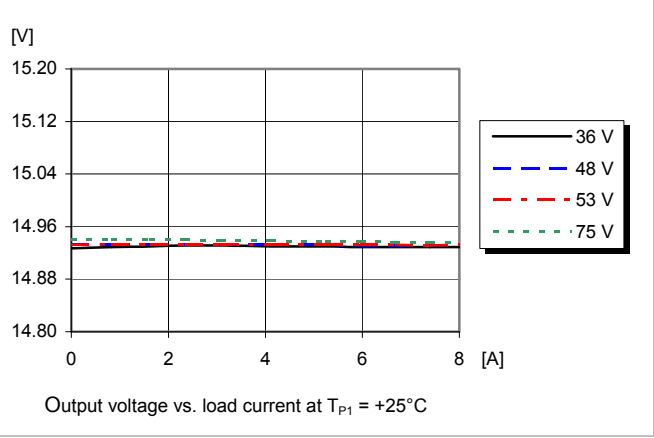


Current Limit Characteristics

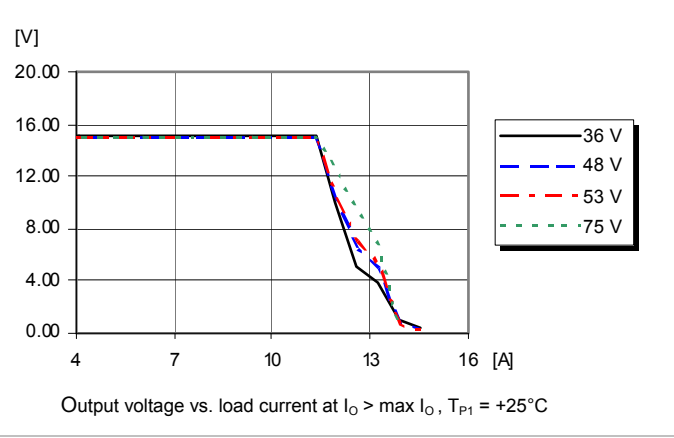


PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011


© Ericsson AB

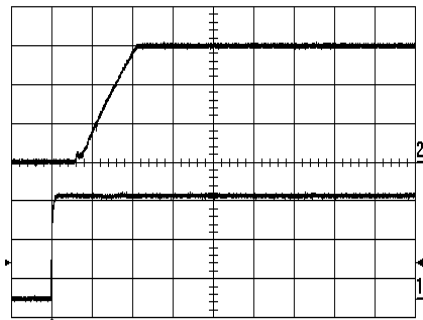15V, 8A /120W Typical Characteristics
PKM 4115D PINB
Start-up

 Start-up enabled by connecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 53\text{ V}$,
 $I_O = 8\text{ A}$ resistive load.

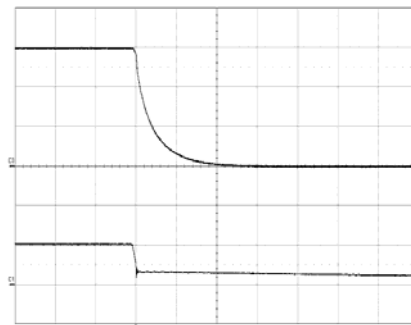
 Top trace: output voltage (5.0 V/div.).
 Bottom trace: input voltage (20 V/div.).
 Time scale: (10 ms/div.).

Shut-down

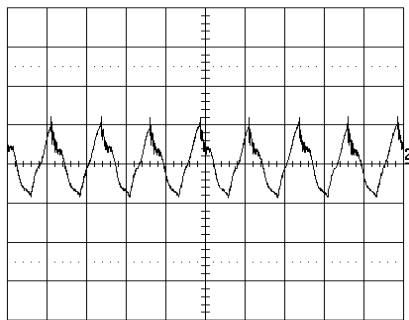 Shut-down enabled by disconnecting V_I at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 53\text{ V}$,
 $I_O = 8\text{ A}$ resistive load.

 Top trace: output voltage (5.0 V/div.).
 Bottom trace: input voltage (50 V/div.).
 Time scale: (0.5 ms/div.).

Output Ripple & Noise

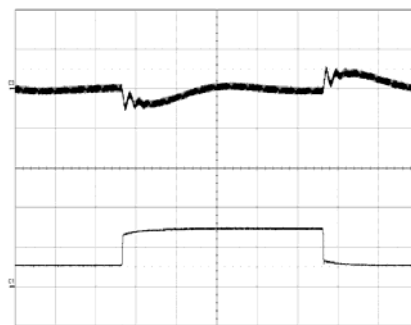 Output voltage ripple at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 53\text{ V}$,
 $I_O = 8\text{ A}$ resistive load.

 Trace: output voltage (20 mV/div.).
 Time scale: (2 μs/div.).

Output Load Transient Response

 Output voltage response to load current step-
 change (2-6-2 A) at:
 $T_{P1} = +25^{\circ}\text{C}$, $V_I = 53\text{ V}$.

 Top trace: output voltage (500 mV/div.).
 Bottom trace: load current (4 A/div.).
 Time scale: (0.1 ms/div.).

Output Voltage Adjust (see operating information)
Passive adjust

 The resistor value for an adjusted output voltage is calculated by
 using the following equations:

Output Voltage Adjust Upwards, Increase:

$$R_{adj} = \left(\frac{5.11 \times 15(100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) \text{ k}\Omega$$

 Example: Increase 4% $\Rightarrow V_{out} = 15.6\text{ Vdc}$

$$\left(\frac{5.11 \times 15(100 + 4)}{1.225 \times 4} - \frac{511}{4} - 10.22 \right) \text{ k}\Omega = 1488.89 \text{ k}\Omega$$

Output Voltage Adjust Downwards, decrease:

$$R_{adj} = 5.11 \left(\frac{100}{\Delta\%} - 2 \right) \text{ k}\Omega$$

 Example: Decrease 2% $\Rightarrow V_{out} = 14.7\text{ Vdc}$

$$5.11 \left(\frac{100}{2} - 2 \right) \text{ k}\Omega = 245.3 \text{ k}\Omega$$


PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB


15V, 8A /120W Typical Characteristics

PKM 4115D PINB


Output Current Derating – Open frame

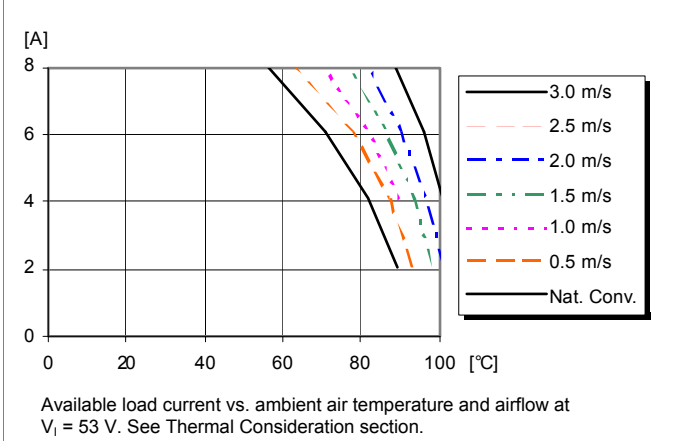


Output Current Derating – Base plate

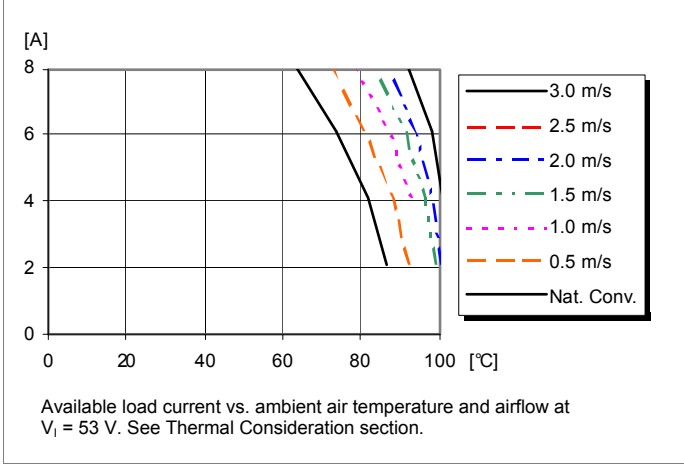

Thermal Resistance – Base plate

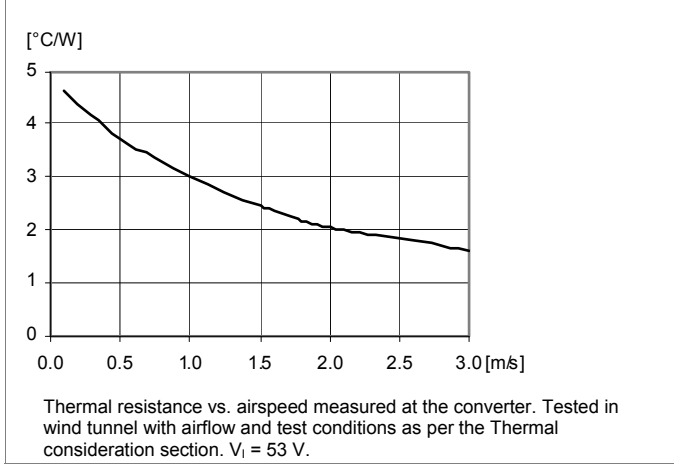

Output Current Derating – Cold wall sealed box

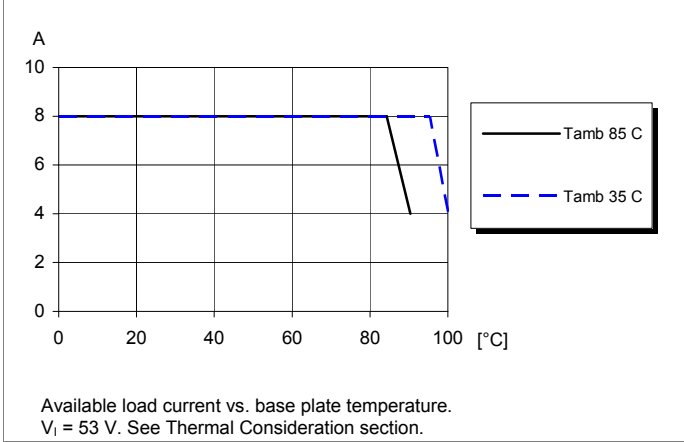

PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W


EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

EMC Specification

Conducted EMI measured according to EN55022, CISPR 22 and FCC part 15J (see test set-up). See Design Note 009 for further information. The fundamental switching frequency is 200 kHz for PKM 4111D PINB@ $V_1 = 53$ V, max I_O .



Conducted EMI Input terminal value (typ)

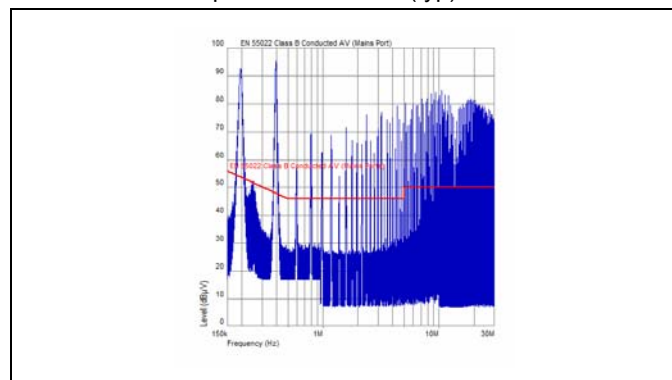


EMI without filter

External filter (class B)

Required external input filter in order to meet class B in EN 55022, CISPR 22 and FCC part 15J.

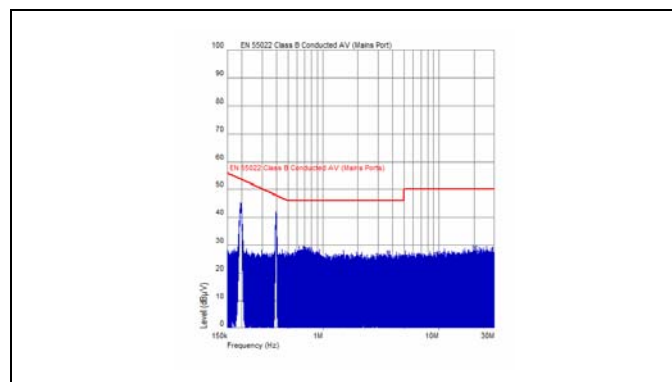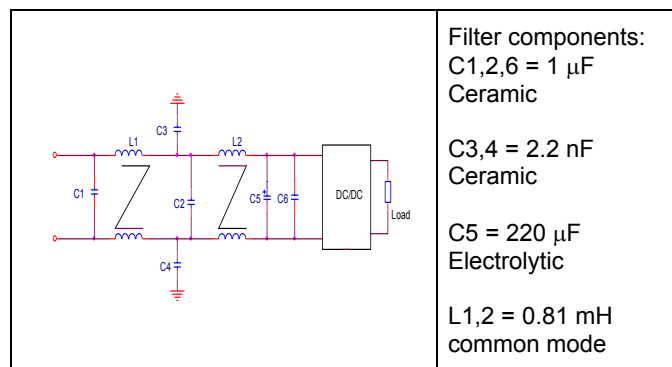

EMI with filter

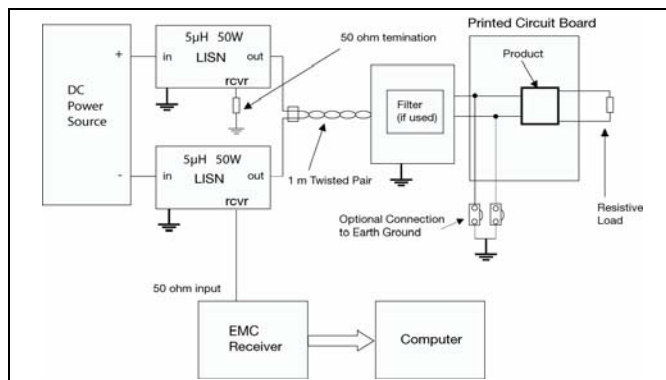

Test set-up


Layout recommendations

The radiated EMI performance of the Product will depend on the PCB layout and ground layer design. It is also important to consider the stand-off of the product. If a ground layer is used, it should be connected to the output of the product and the equipment ground or chassis.

A ground layer will increase the stray capacitance in the PCB and improve the high frequency EMC performance.

Output ripple and noise

Output ripple and noise measured according to figure below. See Design Note 022 for detailed information.

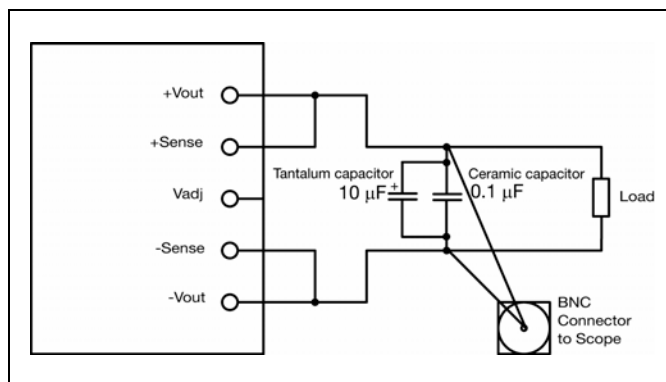

Output ripple and noise test setup

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

Operating information
Input Voltage


The input voltage range 36 to 75Vdc meets the requirements of the European Telecom Standard ETS 300 132-2 for normal input voltage range in -48 and -60 Vdc systems, -40.5 to -57.0 V and -50.0 to -72 V respectively.

At input voltages exceeding 75 V, the power loss will be higher than at normal input voltage and T_{P1} must be limited to absolute max +110°C. The absolute maximum continuous input voltage is 80 Vdc.

Turn-off Input Voltage

The products monitor the input voltage and will turn on and turn off at predetermined levels.

The minimum hysteresis between turn on and turn off input voltage is 1V.

Remote Control (RC)


The products are fitted with a remote control function referenced to the primary negative input connection (-In), with negative and positive logic options available. The RC function allows the product to be turned on/off by an external device like a semiconductor or mechanical switch.

The maximum required sink current is 1 mA. When the RC pin is left open, the voltage generated on the RC pin is 5.0 – 7.0 V. The standard product is provided with “negative logic” remote control and will be off until the RC pin is connected to the -In. To turn on the product the voltage between RC pin and -In should be less than 1V. To turn off the converter the RC pin should be left open, or connected to a voltage higher than 13 V referenced to -In. In situations where it is desired to have the product to power up automatically without the need for control signals or a switch, the RC pin can be wired directly to -In.

The second option is “positive logic” remote control, which can be ordered by adding the suffix “P” to the end of the part number. When the RC pin is left open, the product starts up automatically when the input voltage is applied. Turn off is achieved by connecting the RC pin to the -In. To ensure safe turn off the voltage difference between RC pin and the -In pin shall be less than 1V. The product will restart automatically when this connection is opened.

See Design Note 021 for detailed information.

Input and Output Impedance

The impedance of both the input source and the load will interact with the impedance of the product. It is important that the input source has low characteristic impedance. The products are designed for stable operation without external capacitors connected to the input or output. The performance

in some applications can be enhanced by addition of external capacitance as described under External Decoupling Capacitors.

If the input voltage source contains significant inductance, the addition of a 22 - 100 μ F capacitor across the input of the product will ensure stable operation. The capacitor is not required when powering the product from an input source with an inductance below 10 μ H. The minimum required capacitance value depends on the output power and the input voltage. The higher output power the higher input capacitance is needed. Approximately doubled capacitance value is required for a 24 V input voltage source compared to a 48V input voltage source.

External Decoupling Capacitors

When powering loads with significant dynamic current requirements, the voltage regulation at the point of load can be improved by addition of decoupling capacitors at the load. The most effective technique is to locate low ESR ceramic and electrolytic capacitors as close to the load as possible, using several parallel capacitors to lower the effective ESR. The ceramic capacitors will handle high-frequency dynamic load changes while the electrolytic capacitors are used to handle low frequency dynamic load changes. It is equally important to use low resistance and low inductance PCB layouts and cabling.

External decoupling capacitors will become part of the product's control loop. The control loop is optimized for a wide range of external capacitance and the maximum recommended value that could be used without any additional analysis is found in the Electrical specification.

The ESR of the capacitors is a very important parameter. Stable operation is guaranteed with a verified ESR value of >5 m Ω across the output connections.

For further information please contact your local Ericsson Power Modules representative.

Output Voltage Adjust (V_{adj})

The products have an Output Voltage Adjust pin (V_{adj}). This pin can be used to adjust the output voltage above or below Output voltage initial setting.


When increasing the output voltage, the voltage at the output pins (including any remote sense compensation) must be kept below the threshold of the over voltage protection, (OVP) to prevent the product from shutting down. At increased output voltages the maximum power rating of the product remains the same, and the max output current must be decreased correspondingly.

To increase the voltage the resistor should be connected between the V_{adj} pin and +Sense pin. The resistor value of the Output voltage adjust function is according to information given under the Output section for the respective product. To decrease the output voltage, the resistor should be connected between the V_{adj} pin and -Sense pin.

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

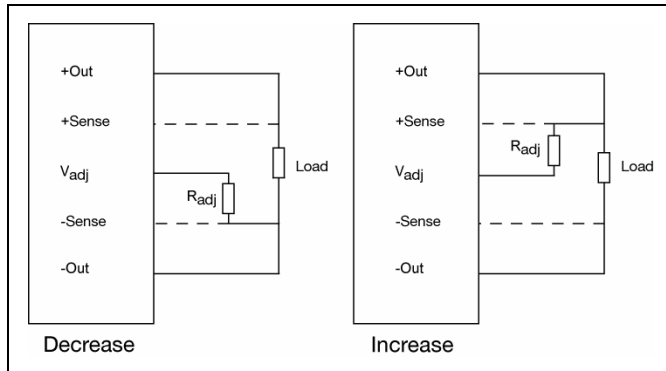
Parallel Operation

Two products may be paralleled for redundancy if the total power is equal or less than P_O max. It is not recommended to parallel the products without using external current sharing circuits.

See Design Note 006 for detailed information.

Remote Sense

The products have remote sense that can be used to compensate for voltage drops between the output and the point of load. The sense traces should be located close to the PCB ground layer to reduce noise susceptibility. The remote sense circuitry will compensate for up to 10% voltage drop between output pins and the point of load.

If the remote sense is not needed +Sense should be connected to +Out and -Sense should be connected to -Out.

Over Temperature Protection (OTP)

The products are protected from thermal overload by an internal over temperature shutdown circuit. When T_{P1} as defined in thermal consideration section exceeds 135°C the product will shut down. The product will make continuous attempts to start up (non-latching mode) and resume normal operation automatically when the temperature has dropped >15°C below the temperature threshold.

Over Voltage Protection (OVP)

The products have output over voltage protection that will shut down the product in over voltage conditions. The product will make continuous attempts to start up (non-latching mode) and resume normal operation automatically after removal of the over voltage condition.

Over Current Protection (OCP)

The products include current limiting circuitry for protection at continuous overload.

PKMD standard module, the output voltage will decrease towards zero for output currents in excess of max output current (I_{omax}).

The converter will resume normal operation after removal of

the overload. The load distribution system should be designed to carry the maximum output short circuit current specified.

The PKMD series include hiccup OCP option, the output voltage will decrease when the output current in excess of its current limit point, when the load continue to increase to some higher level, the module will enter into hiccup mode.


During hiccup, the module will try to restart and shutdown again for the overload. When the overload is removed, the products will continue to work normally.

Thermal Consideration
General

The products are designed to operate in different thermal environments and sufficient cooling must be provided to ensure reliable operation.

For products mounted on a PCB without a heat sink attached, cooling is achieved mainly by conduction, from the pins to the host board, and convection, which is dependant on the airflow across the product. Increased airflow enhances the cooling of the product. The Output Current Derating graph found in the Output section for each model provides the available output current vs. ambient air temperature and air velocity at $V_I = 53$ V.



The product is tested on a 254 x 254 mm, 35 μ m (1 oz), 16-layer test board mounted vertically in a wind tunnel with a cross-section of 608 x 203 mm.

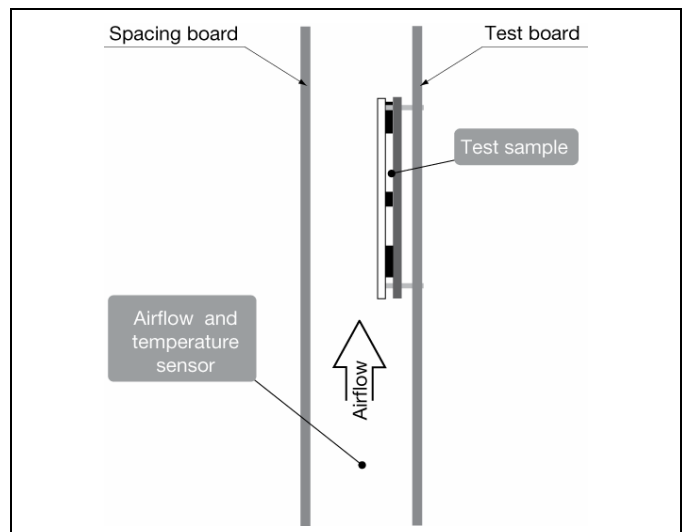

For products with base plate used in a sealed box/cold wall application, cooling is achieved mainly by conduction through the cold wall. The Output Current Derating graphs are found in the Output section for each module. The product is tested in a sealed box test set up with ambient temperatures 85 and 35°C. See Design Note 028 for further details.

PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB

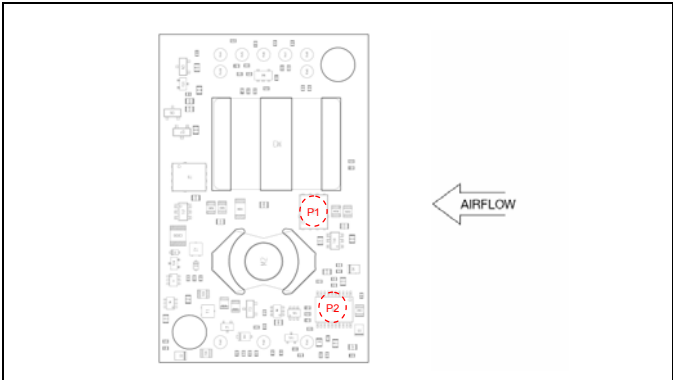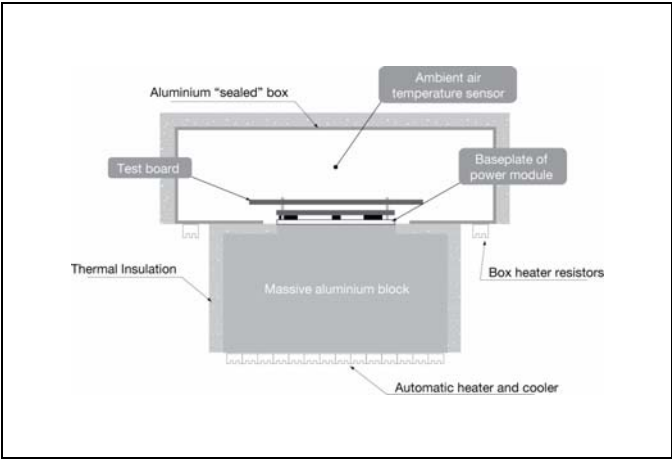


Base plate

Definition of product operating temperature

The product operating temperatures is used to monitor the temperature of the product, and proper thermal conditions can be verified by measuring the temperature at positions P1, P2. The temperature at these positions T_{P1} , T_{P2} should not exceed the maximum temperatures in the table below. The number of measurement points may vary with different thermal design and topology. Temperatures above maximum T_{P1} , measured at the reference point P1 are not allowed and may cause permanent damage.

Position	Description	Max Temp.
P1	MOSFET	$T_{P1}=125^{\circ}\text{C}$
P2	Control IC	$T_{P2}=125^{\circ}\text{C}$

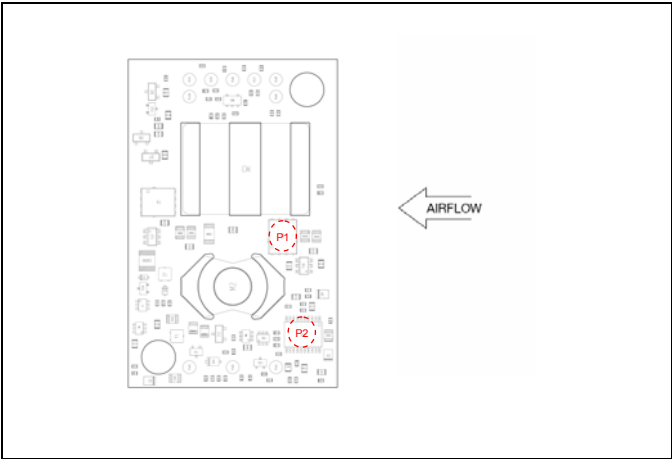

Open frame

Ambient Temperature Calculation

For products with base plate the maximum allowed ambient temperature can be calculated by using the thermal resistance.

1. The power loss is calculated by using the formula $((1/\eta) - 1) \times \text{output power} = \text{power losses (Pd)}$.
 $H = \text{efficiency of product. E.g. } 89.5\% = 0.895$
2. Find the thermal resistance (R_{th}) in the Thermal Resistance graph found in the Output section for each model. **Note that the thermal resistance can be significantly reduced if a heat sink is mounted on the top of the base plate.**

Calculate the temperature increase (ΔT).
 $\Delta T = R_{th} \times P_d$

3. Max allowed ambient temperature is:
 $\text{Max } T_{P1} - \Delta T$.

E.g. PKM 4111D PINBat 1.5m/s:

1. $((\frac{1}{0.91}) - 1) \times 125\text{ W} = 12.4\text{ W}$
2. $12.4\text{ W} \times 3.5^{\circ}\text{C/W} = 43.4^{\circ}\text{C}$
3. $125^{\circ}\text{C} - 43.4^{\circ}\text{C} = \text{max ambient temperature is } 81.6^{\circ}\text{C}$


The actual temperature will be dependent on several factors such as the PCB size, number of layers and direction of airflow.

PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

Connections

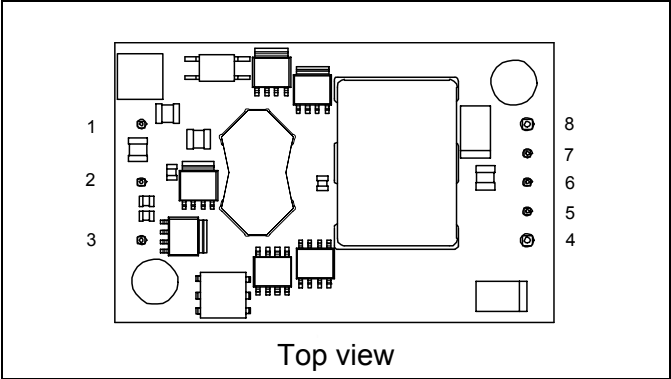

Pin	Designation	Function
1	+In	Positive input
2	RC	Remote control
3	- In	Negative input
4	- Out	Negative output
5	- Sen	Negative remote sense
6	Vadj	Output voltage adjust
7	+ Sen	Positive remote sense
8	+ Out	Positive output

PKM 4000D PINB series Direct Converters
Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011
© Ericsson AB

Mechanical Drawing for open frame with holes

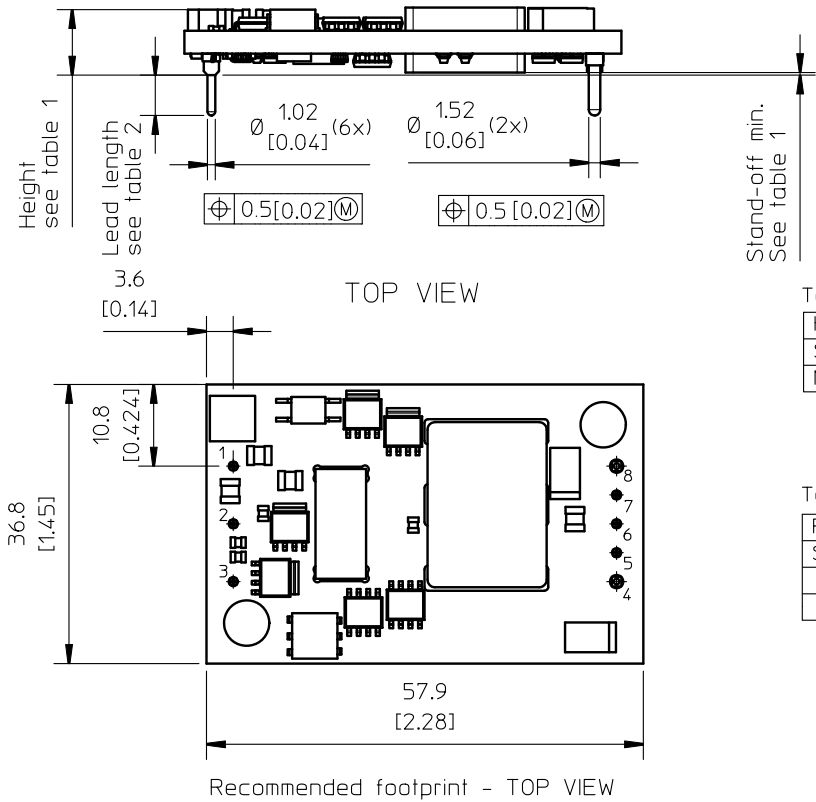


Table 1


Height option	Height max.	Stand-off min.
Standard	9.35 [0.368]	0.07 [0.003]
M	10.53 [0.415]	1.25 [0.049]

Table 2

Pin option	Lead Length
Standard	5.33 [0.210]
LA	3.69 [0.145]
LB	4.57 [0.180]

Weight: Typical 40g

Pins:
Material, pins 1-3, 5-7: Brass
Material, pins 4,8: Copper alloy
Plating: 0.1 µm Gold over 2 µm Nickel

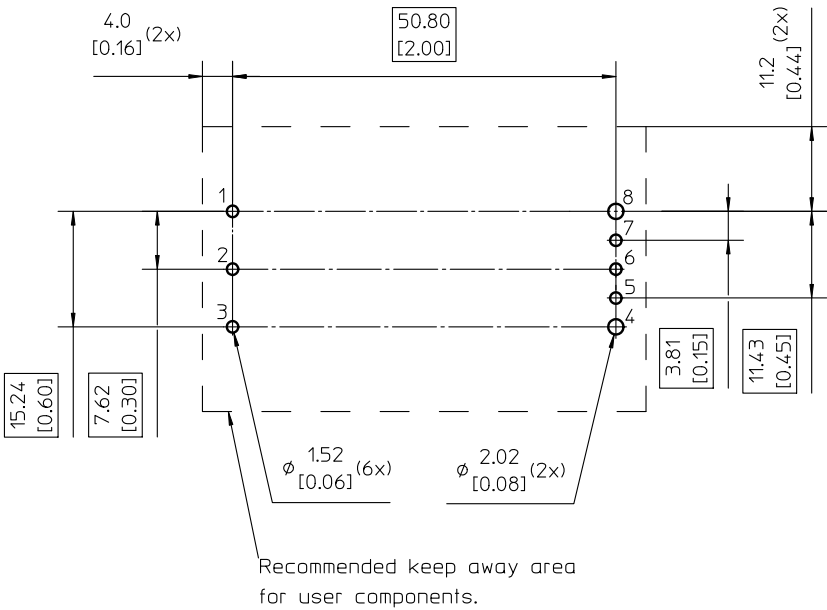

All dimensions are in mm [inches]
Tolerances unless specified
x.x ± 0.5 [0.02]
x.xx ± 0.25 [0.01]
Not applied on the recommended footprint

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

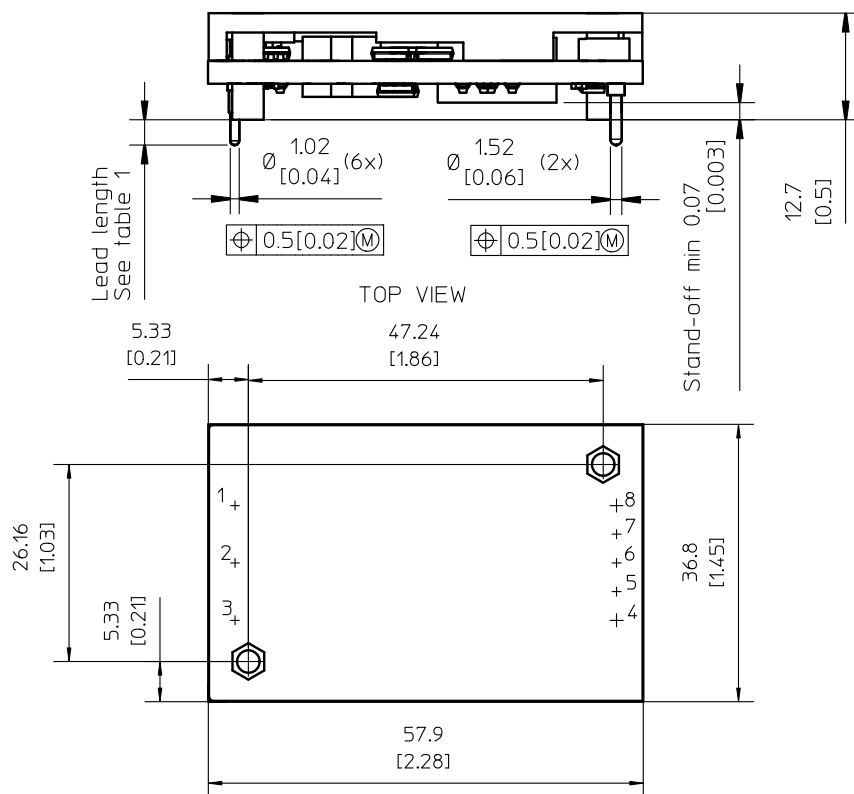

Mechanical Drawing for base plate with inserts


Table 1

Pin option	Lead Length
Standard	5.33 +0/-0.1 [0.210]
LA	3.69 [0.145]
LB	4.57 [0.180]


Weight: Typical 65g

Pins:

Material, pins 1-3, 5-7: Brass

Material, pins 4-8: Copper alloy

Plating: 0,1 µm Gold over 2 µm Nickel

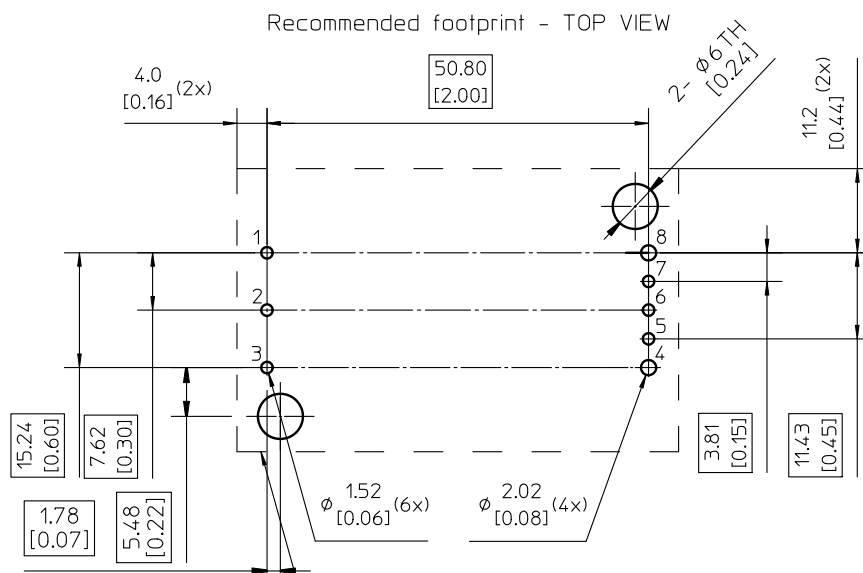
 Recommended keep away area
 for user components.

All dimensions are in mm [inches]

Tolerances unless specified

x.x ± 0.5 [0.02]

x.xx ± 0.25 [0.01]

Not applied on the recommended footprint



PKM 4000D PINB series Direct Converters Input 36-75 V, Output up to 35 A / 140 W	EN/LZT 146 416 R4A Nov 2011
	© Ericsson AB

Soldering Information - Hole Mounting

The hole mounted product is intended for plated through hole mounting by wave or manual soldering. The pin temperature is specified to maximum to 270°C for maximum 10 seconds.


A maximum preheat rate of 4°C/s and maximum preheat temperature of 150°C is suggested. When soldering by hand, care should be taken to avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

A no-clean flux is recommended to avoid entrapment of cleaning fluids in cavities inside the product or between the product and the host board. The cleaning residues may affect long time reliability and isolation voltage.

Delivery Package Information

The products are delivered in antistatic trays

Tray Specifications	
Material	Antistatic PS
Surface resistance	10 ⁵ < Ohm/square < 10 ¹²
Bakability	The trays are not bakeable
Tray thickness	26 mm [1.02 inch]
Box capacity	20 products (1 full tray/box)
Tray weight	140 g empty, 940 g full tray

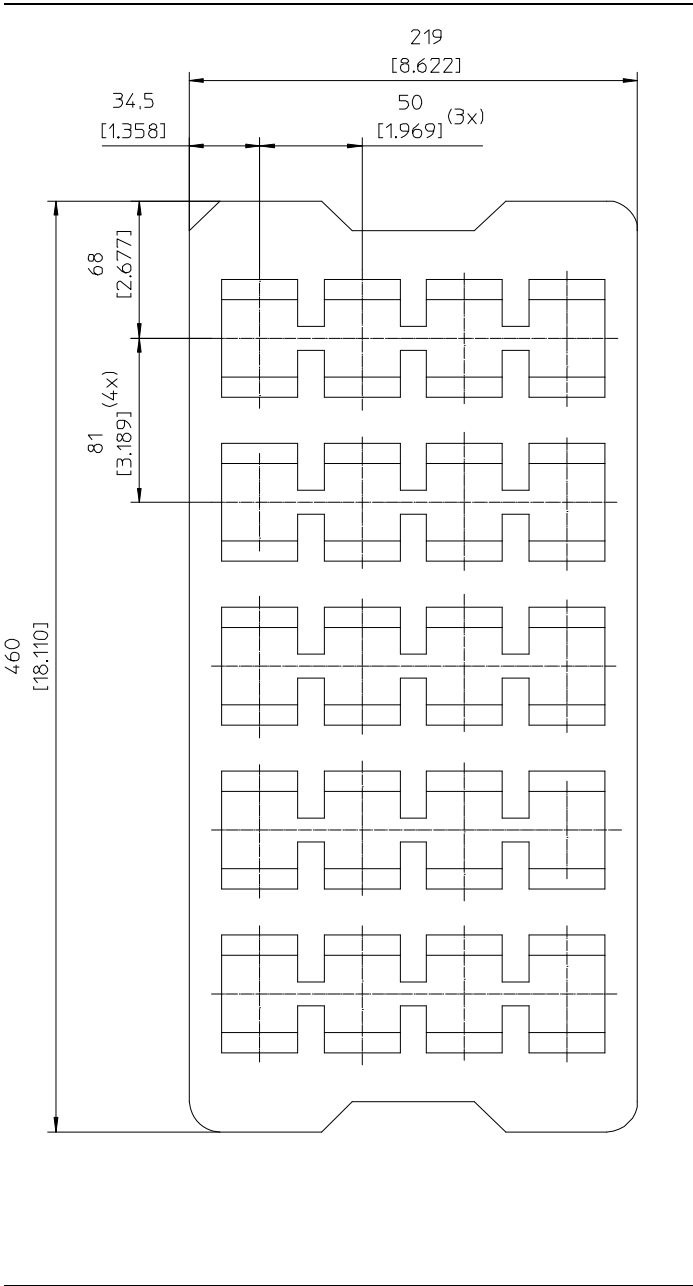

PKM 4000D PINB series Direct Converters
 Input 36-75 V, Output up to 35 A / 140 W

EN/LZT 146 416 R4A Nov 2011

© Ericsson AB

Product Qualification Specification

Characteristics			
External visual inspection	IPC-A-610		
Change of temperature (Temperature cycling)	IEC 60068-2-14 Na	Temperature range Number of cycles Dwell/transfer time	-40 to 100°C 1000 15 min/0-1 min
Cold (in operation)	IEC 60068-2-1 Ad	Temperature T _A Duration	-45°C 72 h
Damp heat	IEC 60068-2-67 Cy	Temperature Humidity Duration	85°C 85 % RH 1000 hours
Dry heat	IEC 60068-2-2 Bd	Temperature Duration	125°C 1000 h
Electrostatic discharge susceptibility	IEC 61340-3-1, JESD 22-A114 IEC 61340-3-2, JESD 22-A115	Human body model (HBM) Machine Model (MM)	Class 2, 2000 V Class 3, 200 V
Immersion in cleaning solvents	IEC 60068-2-45 XA, method 2	Water Glycol ether Isopropyl alcohol	55°C 35°C 35°C
Mechanical shock	IEC 60068-2-27 Ea	Peak acceleration Duration	100 g 6 ms
Moisture reflow sensitivity ¹	J-STD-020C	Level 1 (SnPb-eutectic) Level 3 (Pb Free)	225°C 260°C
Operational life test	MIL-STD-202G, method 108A	Duration	1000 h
Resistance to soldering heat ²	IEC 60068-2-20 Tb, method 1A	Solder temperature Duration	270°C 10-13 s
Robustness of terminations	IEC 60068-2-21 Test Ua1 IEC 60068-2-21 Test Ue1	Through hole mount products Surface mount products	All leads All leads
Solderability	IEC 60068-2-58 test Td ¹	Preconditioning Temperature, SnPb Eutectic Temperature, Pb-free	150°C dry bake 16 h 215°C 235°C
	IEC 60068-2-20 test Ta ²	Preconditioning Temperature, SnPb Eutectic Temperature, Pb-free	Steam ageing 235°C 245°C
Vibration, broad band random	IEC 60068-2-64 Fh, method 1	Frequency Spectral density Duration	10 to 500 Hz 0.07 g ² /Hz 10 min in each direction

Notes
¹ Only for products intended for reflow soldering (surface mount products)

² Only for products intended for wave soldering (plated through hole products)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А