

# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

# PMC



### Highlights & Features

- Universal AC input range from 85Vac to 264Vac without power de-rating
- Full Aluminum casing for light weight and corrosion resistant handling
- High MTBF > 700,000 hrs. as per Telcordia SR-332
- Overvoltage / Overcurrent / Over Temperature Protections
- IP 20 Compliant (for PMC-24V150W1AJ)

### Safety Standards



CB Certified for worldwide use

**Model Number:** PMC-24V150W1AX  
**Unit Weight:** 0.48 kg  
**Dimensions (L x W x D):** 178 mm x 97 mm x 38 mm

### General Description

The new Panel Mount Power Supply is the latest offering from one of the world's largest power supply manufacturers and solution providers - Delta. The product range offers a nominal output voltage of 24V, a wide temperature range from -10°C to +70°C and a highly dependable minimum holdup time. The state-of-the-art design is made to withstand harsh industrial environments. What makes the product stand out from the crowd is its lightweight full aluminum body design which can withstand shock and vibration according to IEC60068-2. Delta's Panel Mount Power Supply also offers overvoltage and overload protection. Using a wide input voltage range design, it is compatible worldwide. The input also includes DC operating voltage from 125-375Vdc. Best of all, this excellent design and quality does not come with a big price tag.

### Model Information

#### PMC Panel Mount Power Supply

| Model Number           | Input Voltage Range    | Output Voltage | Output Current |
|------------------------|------------------------|----------------|----------------|
| PMC-24V150W1A <u>X</u> | 85-264Vac (125-375Vdc) | 24Vdc          | 6.25A          |

### Model Numbering

| PMC        | 24V            | 150W         | 1            | A              | <u>X</u>  |
|------------|----------------|--------------|--------------|----------------|---|
| PMC Series | Output Voltage | Output Power | Single Phase | Delta Standard | A - Terminal Block Connector<br>J - IP 20 Connector |

# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

### Specifications

#### Input Ratings / Characteristics

|                          |                                  |
|--------------------------|----------------------------------|
| Nominal Input Voltage    | 100-240Vac                       |
| Input Voltage Range      | 85-264Vac                        |
| Nominal Input Frequency  | 50-60Hz                          |
| Input Frequency Range    | 47-63Hz                          |
| Nominal DC Input Voltage | 125-250Vdc                       |
| DC Input Voltage Range   | 125-375Vdc                       |
| Input Current            | < 3.1A @ 115Vac, < 2.0A @ 230Vac |
| Efficiency at 100% Load  | > 87% @ 115Vac, > 88% @ 230Vac   |
| Max Inrush Current       | < 60A @ 115Vac, < 120A @ 230Vac  |
| Power Factor             | NA                               |
| Leakage Current          | < 1mA @ 240Vac                   |

#### Output Ratings / Characteristics

|   |   |
|---|---|
| Nominal Output Voltage                                | 24Vdc   |
| Output Voltage Tolerance                              | ± 2% (initial set point tolerance from factory) |
| Output Voltage Adjustment Range                       | 22-28Vdc  |
| Output Current  | 6.25A   |
| Output Power  | 150W  |
| Line Regulation                                       | < 0.5% typ. (@ 85-264Vac input, 100% load)      |
| Load Regulation                                       | < 1% typ. (@ 85-264Vac input, 0-100% load)      |
| PARD (20MHz)  | < 100mVpp                                       |
| Rise Time   | < 30ms @ nominal input (100% load)              |
| Start-up Time   | < 1000ms @ nominal input (100% load)            |
| Hold-up Time  | > 15ms @ 115Vac, > 80ms @ 230Vac (100% load)    |
| Dynamic Response (Overshoot & Undershoot O/P Voltage) | ± 5% @ 0-100% load                              |
| Start-up with Capacitive Loads                        | 8,000µF Max                                     |

### Mechanical

|                        |  |
|------------------------|--|
| Case Cover             | Aluminium  |
| Dimensions (L x W x D) | 178 mm x 97 mm x 38 mm   |
| Unit Weight            | 0.48 kg  |
| Indicator              | Green LED (DC OK)  |
| System Cooling         | Convection   |
| Terminal               | Input and Output   |
|                        | PMC-24V150W1AA: M3.5 x 7 Pins (Rated 300V/15A)<br>PMC-24V150W1AJ: M3.5 x 7 Pins (Rated 300V/20A) |
| Wire                   | PMC-24V150W1AA: AWG 22-14<br>PMC-24V150W1AJ: AWG 22-12   |
| Noise                  | Sound Pressure Level (SPL) <40dBA  |

# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

### Environment

|                             |           |  |
|-----------------------------|-----------|--|
| Surrounding Air Temperature | Operating | -10°C to +70°C   |
|                             | Storage   | -25°C to +85°C   |
| Power De-rating             |           | > 50°C de-rate power by 2.5% / °C  |
| Operating Humidity          |           | < 95% RH   |
| Operating Altitude          |           | 3,000 Meters   |
| Shock Test (Non-Operating)  |           | IEC60068-2-27, 30G (300m/S <sup>2</sup> ) for a duration of 18ms<br>3 times per direction, 18 times in total |
| Vibration (Non-Operating)   |           | IEC60068-2-6, 10Hz to 500Hz @ 50m/S <sup>2</sup> (5G peak);<br>20 min per axis for all X, Y, Z direction     |
| Pollution Degree            |           | 2  |

### Protections

|                          |  |   |
|--------------------------|--|---|
| Overvoltage              |  | < 32V ±10%, SELV output, Hicc-up Mode, Non-Latching (Auto recovery).      |
| Overload / Overcurrent   |  | > 120% of rated load current, Hicc-up Mode, Non-Latching (Auto recovery). |
| Over Temperature         |  | < 75°C Ambient Temp@ 100% load, Non-Latching (Auto-recovery).             |
| Short Circuit            |  | Hicc-up Mode, Non-Latching (Auto-recovery when the fault is removed).     |
| Protection Against Shock |  | Class I with PE* connection   |

\*PE: Primary Earth

### Reliability Data

|                        |  |   |
|------------------------|--|---|
| MTBF                   |  | > 700,000 hrs, as per per Telcordia SR-332  |
| Expected Cap Life Time |  | 10 years (115Vac & 230Vac, 50% load @ 40°C) |

# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

### Safety Standards / Directives

|                    |                  |  |
|--------------------|------------------|--|
| Electrical Safety  |                  | TUV Bauart to EN60950-1, UL/cUL recognized to UL60950-1 and CSA C22.2 No. 60950-1, CB scheme to IEC60950-1 |
| CE                 |                  | In conformance with EMC Directive 2014/30/EU and Low Voltage Directive 2014/35/EU                          |
| Material and Parts |                  | RoHS Directive 2011/65/EU Compliant  |
| Galvanic Isolation | Input to Output  | 3.0 KVac   |
|                    | Input to Ground  | 1.5 KVac   |
|                    | Output to Ground | 500 Vac  |

### EMC

|                                   |               |  |
|-----------------------------------|---------------|--|
| EMC / Emissions                   |               | CISPR32, EN55032, FCC Title 47: Class B  |
| Immunity to                       |               |  |
| Electrostatic Discharge           | IEC61000-4-2  | Level 4 Criteria A <sup>1)</sup><br>Air Discharge: 15kV<br>Contact Discharge: 8kV                            |
| Radiated Field                    | IEC61000-4-3  | Level 3 Criteria A <sup>1)</sup><br>80MHz-1GHz, 10V/M with 1kHz tone / 80% modulation                        |
| Electrical Fast Transient / Burst | IEC61000-4-4  | Level 3 Criteria A <sup>1)</sup><br>2kV  |
| Surge                             | IEC61000-4-5  | Level 3 Criteria A <sup>1)</sup><br>Common Mode <sup>2)</sup> : 2kV<br>Differential Mode <sup>3)</sup> : 2kV |
| Conducted                         | IEC61000-4-6  | Level 3 Criteria A <sup>1)</sup><br>150kHz-80MHz, 10Vrms   |
| Power Frequency Magnetic Fields   | IEC61000-4-8  | Criteria A <sup>1)</sup><br>10A/Meter  |
| Voltage Dips                      | IEC61000-4-11 | 100% dip; 1 cycle (20ms); Self Recoverable   |
| Low Energy Pulse Test (Ring Wave) | IEC61000-4-12 | Level 3 Criteria A <sup>1)</sup><br>Common Mode <sup>2)</sup> : 2kV<br>Differential Mode <sup>3)</sup> : 1kV |

1) Criteria A: Normal performance within the specification limits


2) Asymmetrical: Common mode (Line to earth)

3) Symmetrical: Differential mode (Line to line)


# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

### Block Diagram

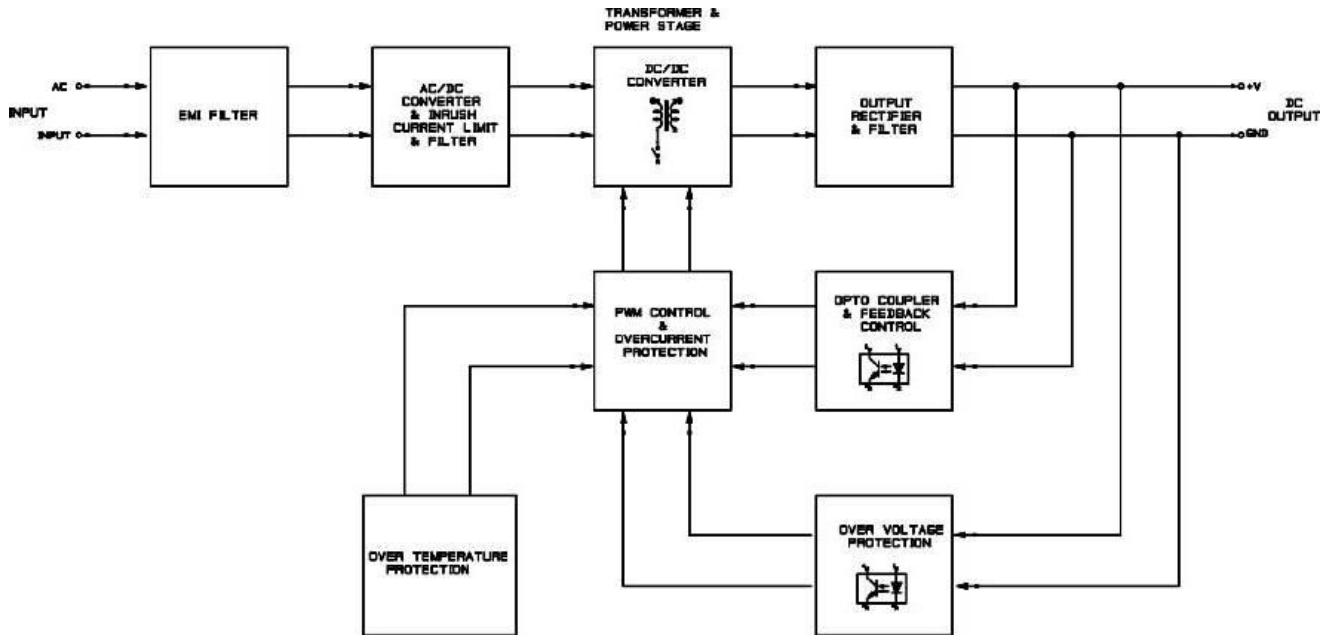

### Device Description

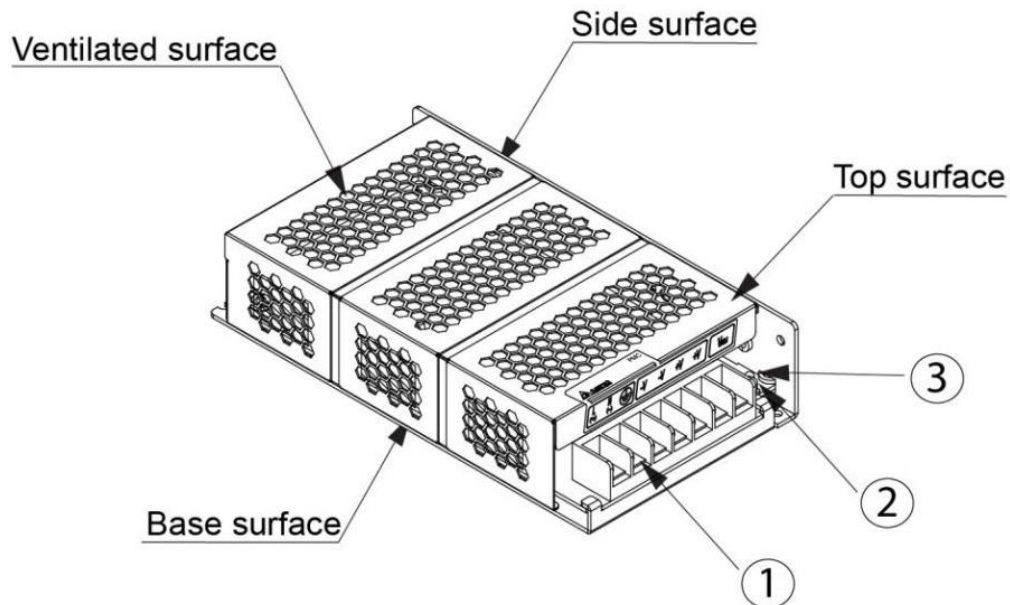


- 1) Input & Output terminal block connector
- 2) DC Voltage adjustment potentiometer
- 3) DC OK control LED (Green)

# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

### Dimensions

L x W x D: 178 x 97 x 38 mm

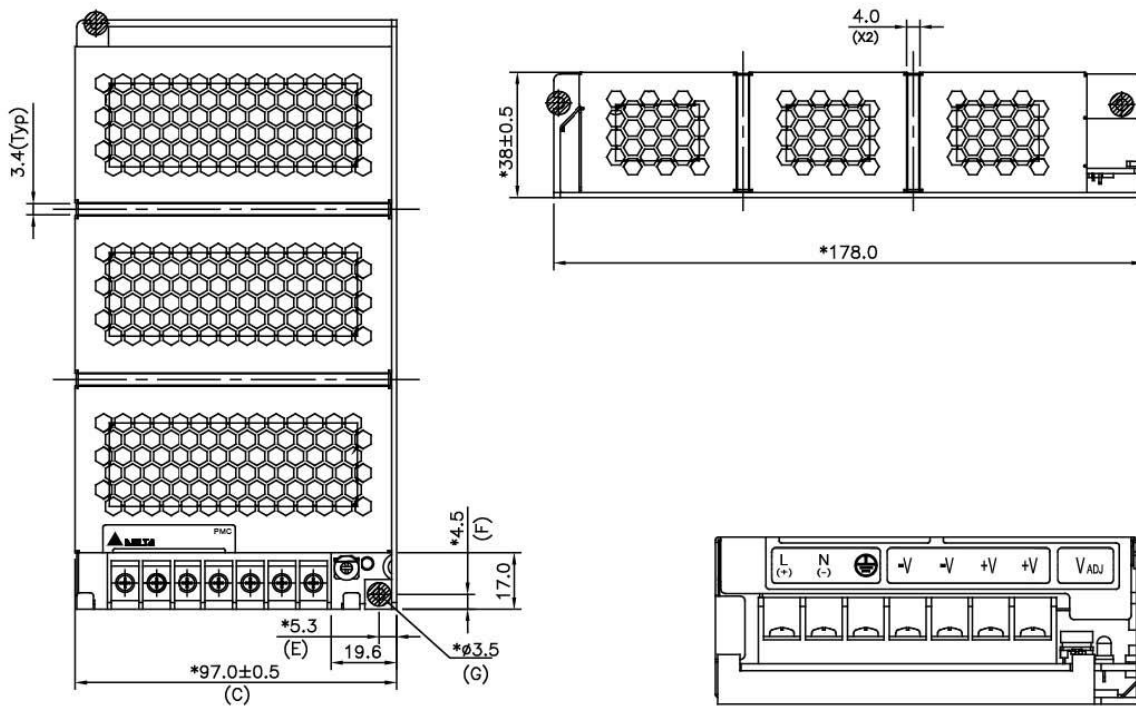

### Engineering Data

#### De-rating VS surrounding air temperature

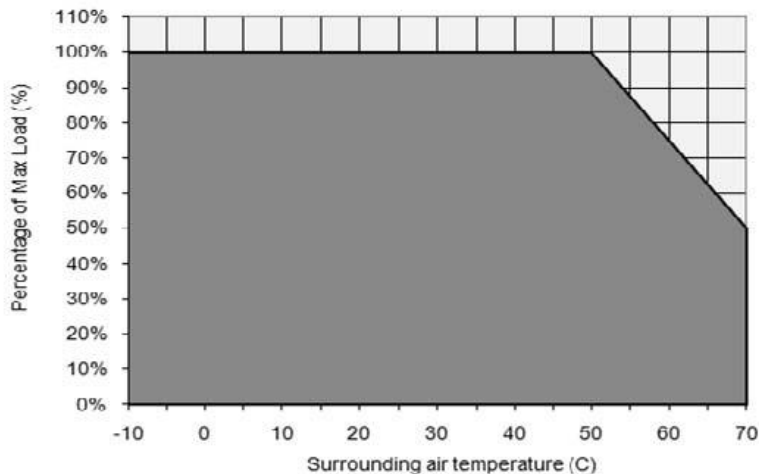


Fig. 1 De-rating for Vertical and Horizontal Mounting Orientation > 50°C de-rate power by 2.5% / °C


#### Note

1. Power supply components may degrade, or be damaged, when the power supply is continuously used outside the shaded region, refer to the graph shown in Fig. 1.
2. If the output capacity is not reduced when the surrounding air temperature > 50°C, the device may run into Over Temperature Protection. When activated, the output voltage will go into bouncing mode and will recover when the surrounding air temperature is lowered or the load is reduced as far as necessary to keep the device in working condition.
3. If the device has to be mounted in any other orientation, please do not hesitate to contact [info@deltapsu.com](mailto:info@deltapsu.com) for more details.
4. In order for the device to function in the manner intended, it is also necessary to keep a safety distance of 20mm with adjacent units while the device is in operation.
5. Depending on the surrounding air temperature and output load delivered by the power supply, the device housing can be very hot!

# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

### De-rating VS AC input voltage

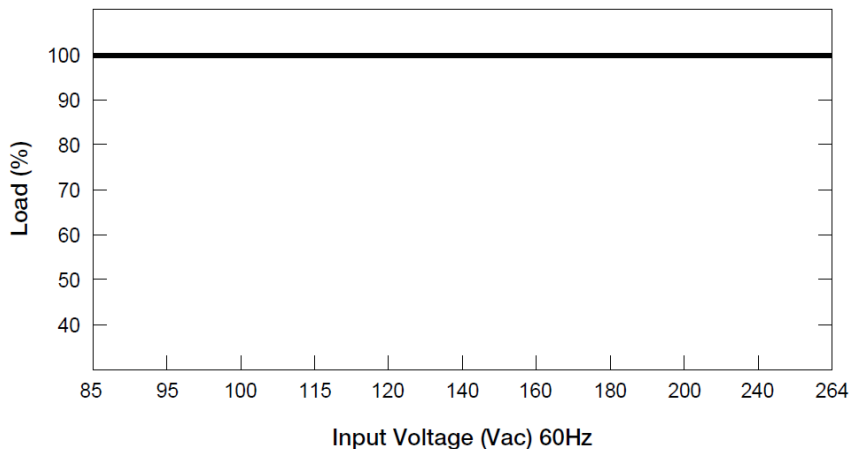


■ No output power de-rating across the entire input voltage range

### Assembly & Installation


#### Mounting

- Ⓐ Mounting holes for power supply assembly onto the mounting surface. Power supply shall be mounted on minimum 2 mounting holes using M3 screw minimum 5 mm length.
- Ⓑ This surface belongs to customer's end system or panel where the power supply is mounted.
- Ⓒ Connector.

#### Side Mounting (Vertical)

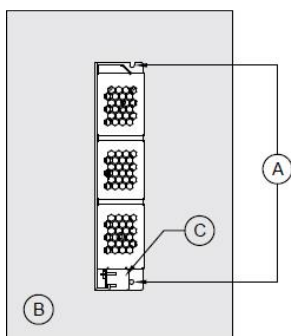

#### Base Mounting (Vertical)

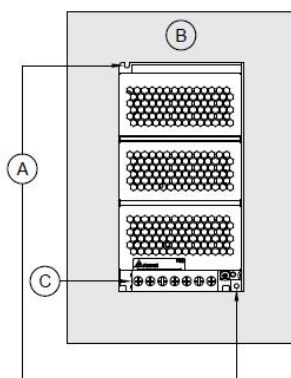

#### Side Mounting (Horizontal)


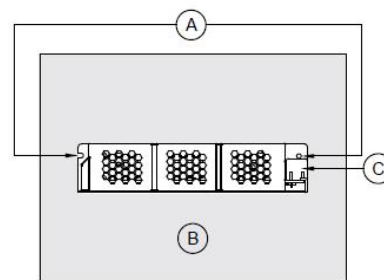


Fig. 2 Mounting Orientation

#### Installation

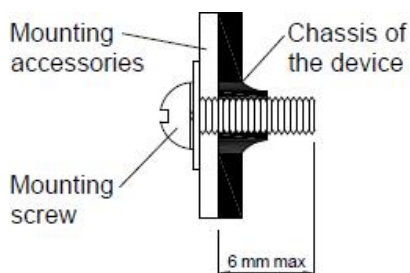

- Only use M3 screw  $\leq 6$  mm through the base mounting holes. This is to keep a safe distance between the screw and internal components.
- Recommended mounting tightening torque : 4-8Kgf.cm

# PMC Panel Mount Power Supply


## 24V 150W 1 Phase / PMC-24V150W1AX

### Safety Instructions

- To ensure sufficient convection cooling, always maintain a safety distance of > 20mm from all ventilated surfaces while the device is in operation.
- The device is not recommended to be placed on low thermal conductive surface, for example, plastics.
- Note that the enclosure of the device can become very hot depending on the ambient temperature and load of the power supply. Do not touch the device while it is in operation or immediately after power is turned OFF. Risk of burning!
- Do not touch the terminals while power is being supplied. Risk of electric shock.
- Prevent any foreign metal, particles or conductors to enter the device through the openings during installation. It can cause: -  
- Electric shock; Safety Hazard; Fire; Product failure
- Warning: When connecting the device, secure Earth connection before connecting L and N. When disconnecting the device, remove L and N connections before removing the Earth connection.

### Functions

#### ■ Graph illustrating the Start-up Time, Rise Time, and Hold-up Time

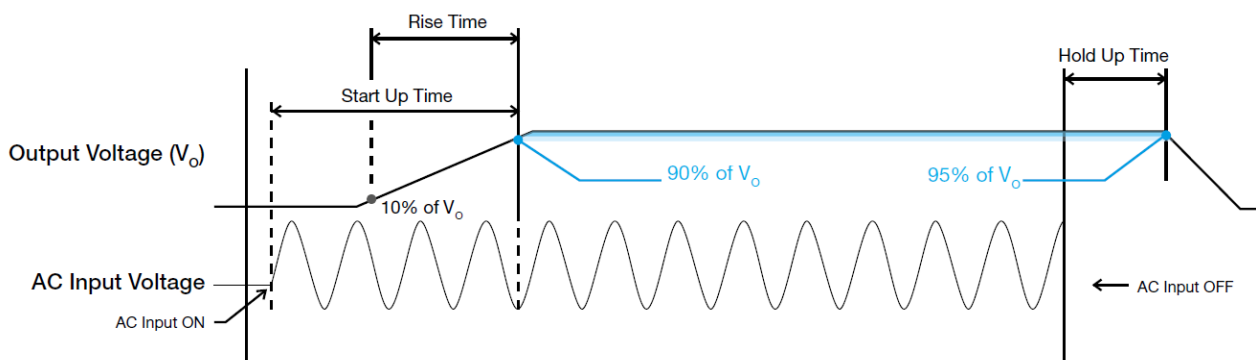

#### Start-up Time

The time required for the output voltage to reach 90% of its set value, after the input voltage is applied.

#### Rise Time

The time required for the output voltage to change from 10% to 90% of its set value.

#### Hold-up Time

Hold up time is the time when the AC input collapses and output voltage retains regulation for a certain period of time. The time required for the output to reach 95% of its set value, after the input voltage is removed.




# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

### Inrush Current


Inrush Current is the first surge current seen on the input side when AC input is applied to the power supply. It is the first pulse captured; see a typical picture for the inrush current as seen in the power supply.

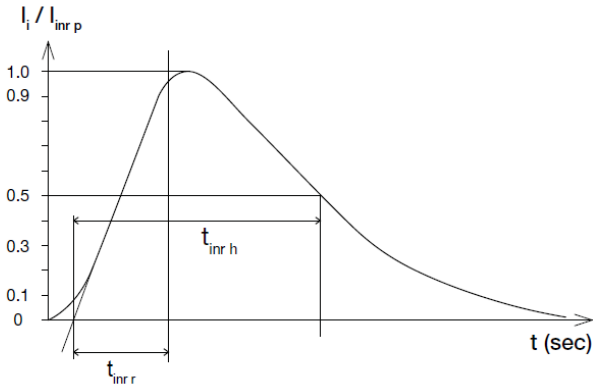

### Dynamic Response


The power supply output voltage will remain within  $\pm 5\%$  of its steady state value, when subjected to a dynamic load from 5% to 100% of its rated current.

#### ■ 50% duty cycle / 5Hz to 1KHz

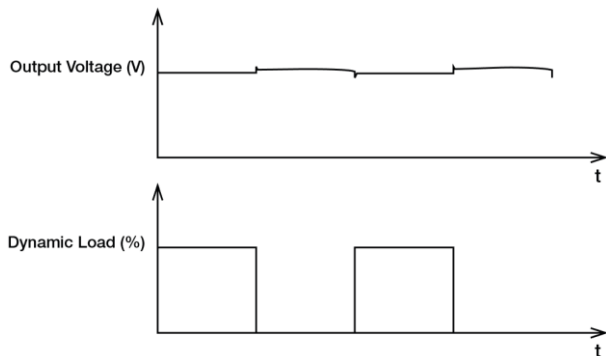


### Overvoltage Protection

The power supply's overvoltage circuit will be activated when its internal feedback circuit fails. The output voltage shall not exceed its specifications defined on Page 3 under "Protections".

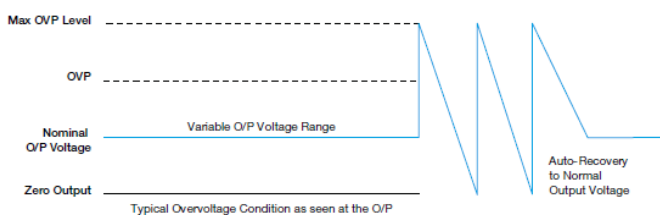

### Overload & Overcurrent Protections

The power supply's Overload (OLP) and Over current (OCP) Protections will be activated when output current exceeds 120% of  $I_o$  (Max load). In such occurrence, the  $V_o$  will start to droop and once the power supply has reached its maximum power limit, the protection is activated and the power supply will go into "Hiccup mode" (Auto-Recovery). The power supply will recover once the fault condition of the OLP and OCP is removed and  $I_o$  is back within the specifications.

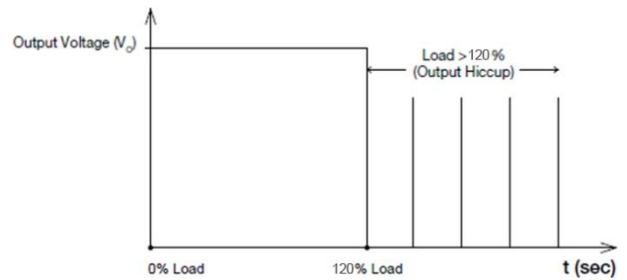

Additionally, if the  $I_o$  is  $< 120\%$  but  $> 100\%$  for a prolonged period of time (depending on the load), the Over Temperature Protection (OTP) will be activated due to high temperature on critical components. The power supply will then go into "Hiccup mode" until power supply cool down.

### Over Temperature Protection

As mentioned above, the power supply also has Over Temperature Protection (OTP). This is activated when the overload condition persists for an extended duration and the output current is below the overload trigger point but  $> 100\%$  load. In the event of a higher operating condition at 100% load, the power supply will run into OTP when the surrounding air temperature is  $> 75^\circ\text{C}$ . When activated, the output voltage will go into bouncing mode until the operating surrounding temperature drops to  $50^\circ\text{C}$  or output capacity is reduced as recommended in the de-rating graph.

### Short Circuit Protection

The power supply's output OLP/OCP function also provides protection against short circuits. When a short circuit is applied, the output current will operate in "Hiccup mode", as shown in the illustration in the OLP/OCP section on this page. The power supply will return to normal operation after the short circuit is removed.

# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

### Operating Mode

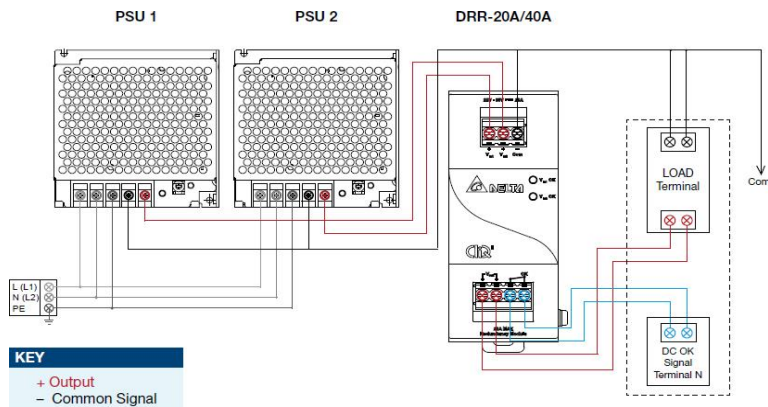


Fig. 3 Redundancy / Parallel Operation Connection Diagram

### Parallel Operation

These DRR modules can also be used for Parallel function in order to increase the output power by N+1 (e.g. 2.5A + 2.5A = 5A or 2.5A + 2.5A + 2.5A = 7.5A) or current sharing, and thus increasing the power supply and system reliability. Though the PMC-24V150W1AX is not designed for current sharing, a good current sharing between two power supplies can be achieved by following simple steps as below (Refer to Fig. 3 for the Connection Diagram).

**Step 1.**  
Set output load condition for both supplies at 50% and measure the output voltages.

**Step 2.**  
Adjust output voltages to the same level or within  $\pm 25\text{mV}$  difference.

**Step 3.**  
Connect PSU 1 and PSU 2 with the DRR-20A module and measure at  $V_{in 1}$  &  $V_{in 2}$  to verify the voltage difference. Ensure the voltages are within  $\pm 25\text{mV}$ .

**Step 4.**  
Output voltage from DRR module  $V_{out}$  will be =  $V_O$  (output voltage of power supply) -  $V_{drop}^*$  (in DRR module).

\* $V_{drop}$  will vary from 0.60V to 0.90V (Typical 0.65V) depending on the load current and surrounding air temperature.

### Redundancy Operation

In order to ensure proper redundancy operation for the power supply unit (PSU), ensure that the output voltage difference between the two units is kept at 0.45~0.50V for 24V supplies. Follow simple steps given below to verify:

**Step 1.**  
Measure output voltage of PSU 1 and PSU 2. If PSU 1 is the master unit, then  $V_O$  of PSU 1 must be higher than PSU 2.

In order to set the output voltage, connect the power supply to 50% load and set the PSU 1 and PSU 2 output voltage.

**Step 2.**  
Connect the right DRR module, 20A as per the system requirement to the power supply units PSU 1 and PSU 2 at  $V_{in 1}$  &  $V_{in 2}$  respectively.

**Step 3.**  
Connect the system load from  $V_{out}$ . Please note that output voltage  $V_{out}$  from DRR module will be =  $V_O$  (output voltage of power supply) -  $V_{drop}^*$  (in DRR module).

# PMC Panel Mount Power Supply

## 24V 150W 1 Phase / PMC-24V150W1AX

### Others

#### Delta RoHS Compliant



#### Restriction of the usage of hazardous substances

The European directive 2011/65/EU limits the maximum impurity level of homogeneous materials such as lead, mercury, cadmium, chrome, polybrominated flame retardants PBB and PBDE for the use in electrical and electronic equipment. RoHS is the abbreviation for "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

This product conforms to this standard.

### Attention

Delta provides all information in the datasheets on an "AS IS" basis and does not offer any kind of warranty through the information for using the product. In the event of any discrepancy between the information in the catalog and datasheets, the datasheets shall prevail (please refer to [www.DeltaPSU.com](http://www.DeltaPSU.com) for the latest datasheets information). Delta shall have no liability of indemnification for any claim or action arising from any error for the provided information in the datasheets. Customer shall take its responsibility for evaluation of using the product before placing an order with Delta.

Delta reserves the right to make changes to the information described in the datasheets without notice.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А