



Introducing RMW

Rugged, medium wall RMW tubing is specifically designed for use in a broad range of low-voltage applications. RMW is tough and flexible, making it particularly suited for the insulation and protection of cable joints in low voltage electrical systems as well as for cable repair. Uncoated RMW provides insulation and strain relief. Adhesive-lined RMW also provides an environmental seal. RMW is a good choice for applications where maximum reliability and product performance and simplified installation are required.

KEY FEATURES

- Withstands mechanical abuse for increased product reliability
- Resistant to impact and abrasion
- Resistant to chemicals and moisture
- Adhesive-lined version provides a complete moisture-proof seal preventing corrosion of underlying components
- Adhesive liner specially formulated to seal to most common insulation materials including crosslinked polyolefin, PVC, neoprene and other elastomeric materials as well as most metals
- Available in sizes ranging from 10mm to 285mm as supplied to cover a wide range of cable sizes and splice diameters
- Fast easy installation with a torch or heat gun
- High shrink ratio to cover uneven substrates
- UV Resistant
- RoHS compliant

APPLICATIONS

- Power Distribution
- Trucks and buses
- Heavy Equipment
- Rail cars and locomotives
- Shipyards
- Underground wells

SAMPLES NOW AVAILABLE

te.com/products/RMW

ELECTRICAL

- Medium wall provides reliable electrical insulation

MECHANICAL

- Medium wall withstands mechanical abuse
- Resistant to impact and abrasion
- Provides strain relief when installed on splices and joints
- Particularly suited for cable jacket repair

TEMPERATURE RATING

- Full recovery temperature: 125°C [257°F]
- Operating Temperature range: -40°C to 110°C [-40°F to 230°F]

STANDARDS AND SPECIFICATIONS


- RMW SCD

ORDERING INFORMATION

- Color: Black only
- Standard packaging: 1200MM lengths
- Ordering description: Specify product name, size, length, coating and color; for example, RMW-16/5-1200/ADH-0.
- Always order the largest size that will shrink snugly around the component being covered.
- Special cut lengths are available upon request.
- Marking: Tubing will be marked with product name, size and batch number.



RMW DIMENSIONS

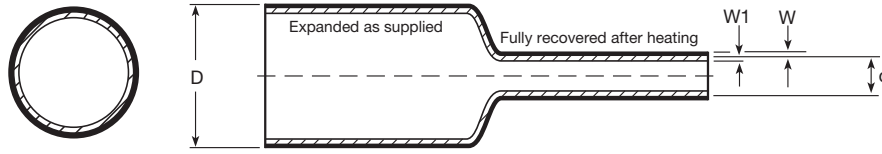

Size	Minimum Expanded I.D. (D)		Maximum Expanded I.D. (d)		Nominal Recovered Jacket Wall (W minus W1)		Nominal Recovered Adhesive Wall (W1)	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.
10/3	.394	10	.118	3	.039	1.0	.010	.25
16/5	.630	16	.197	5	.055	1.4	.012	.30
25/8	.984	25	.315	8	.079	2.0	.014	.35
35/12	1.378	35	.472	12	.079	2.0	.014	.35
50/16	1.968	50	.630	16	.079	2.0	.014	.35
63/19	2.480	63	.748	19	.095	2.4	.016	.40
75/22	2.953	75	.866	22	.106	2.7	.016	.40
85/25	3.346	85	.984	25	.110	2.8	.016	.40
95/29	3.740	95	1.142	29	.122	3.1	.018	.45
115/34	4.527	115	1.339	34	.122	3.1	.018	.45
140/42	5.512	140	1.654	42	.122	3.1	.018	.45
160/50	6.300	160	1.968	50	.126	3.2	.020	.50
180/60	7.087	180	2.362	60	.126	3.2	.020	.50
245/80*	9.646	245	3.150	80	.095	2.4	N/A	N/A
285/135*	11.220	285	5.315	135	.055	1.4	N/A	N/A

*Uncoated only

PRODUCT OFFERING

Material Description	Material Number
RMW-10/3-1200/ADH-O	C71645-000
RMW-10/3-1200/U-O	F35964-000
RMW-115/34-1200/ADH-O	C12980-000
RMW-115/34-1200/U-O	E34697-000
RMW-140/42-1200/ADH-O	C31677-000
RMW-140/42-1200/U-O	E64798-000
RMW-16/5-1200/ADH-O	397892-000
RMW-16/5-1200/U-O	F43323-000
RMW-160/50-1200/ADH-O	F46631-000
RMW-160/50-1200/U-O	E24686-000
RMW-180/60-1200/ADH-O	F37103-000

Material Description	Material Number
RMW-180/60-1200/U-O	D87452-000
RMW-25/8-1200/ADH-O	782628-000
RMW-25/8-1200/U-O	A35258-000
RMW-25/8-490/U-O	CN2228-000
RMW-25/8-80/ADH-O	909858-000
RMW-35/12-1200/ADH-O	420356-000
RMW-35/12-1200/U-O	E76068-000
RMW-35/12-80/ADH-O	E93139-000
RMW-50/16-100/ADH-O	644770-000
RMW-50/16-1200/ADH-O	420494-000
RMW-50/16-1200/U-O	C36400-000
RMW-63/19-100/ADH-O	358414-000
RMW-63/19-1200/ADH-O	166916-000
RMW-63/19-1200/U-O	F61441-000
RMW-75/22-1200/ADH-O	934922-000
RMW-75/22-1200/U-O	F55912-000
RMW-85/25-1200/ADH-O	E52178-000
RMW-85/25-1200/U-O	D57524-000
RMW-95/29-1200/ADH-O	O68792-000
RMW-95/29-1200/U-O	D12371-000

SAMPLE INVENTORY

RMW-16/5-1200/ADH-O
RMW-25/8-1200/ADH-O
RMW-35/12-1200/ADH-O
RMW-50/16-1200/ADH-O
RMW-63/19-1200/ADH-O
RMW-75/22-1200/ADH-O
RMW-95/29-1200/ADH-O
RMW-160/50-1200/ADH-O
RMW-180/60-1200/ADH-O
RMW-16/5-1200/ADH-O



te.com/products/RMW

RMW PROPERTY REQUIREMENTS

Property	Unit	Requirement	Test Method
Dimensions	Inch (mm)	Table 1	ASTM D2671
Tensile Strength	psi (MPa)	1750 minimum (12)	ASTM D2671
Ultimate Elongation	Percent	350 minimum	ASTM D2671
Longitudinal Change	Percent	+5 to -15 maximum	ASTM D2671
Specific Gravity		1.2 maximum	ASTM D792
Hardness	Shore D	40 - 60	ASTM D2240
Low Temperature Flexibility 4 hrs @ -40°C		No cracking	ASTM D2671
Heat Resistance 168 h @150°C followed by Ultimate Elongation	Percent	350 minimum	ASTM D2671
Fungus Growth		Rating of 1 or less	ASTM G21
ELECTRICAL			
Dielectric Strength	V/mil (kV/cm)	300 minimum (120)	ASTM D149
Volume Resistivity	Ohm-cm	1 X 10 ¹² minimum	ASTM D257
CHEMICAL			
Fluid Resistance 168 hrs @ 23°C Immersion in VDE 0370 oil followed by tests for:	psi	1450 minimum (10)	ASTM D2671
Tensile Strength	Percent	300 minimum	
Ultimate Elongation			
Corrosive Effect 16 hrs @ 150°C		Noncorrosive	ASTM D2671, Proc. A
Water Absorption 24 hrs @ 23°C	Percent	0.50 maximum	ASTM D570

RMW & RHW ORDERING DESCRIPTION


Example 1:

RHW-130/36-1200/ADH-0



Example 2:

RMW-160/50-1200/U-0

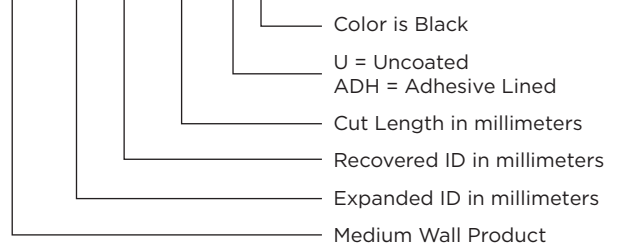

While TE has made every reasonable effort to ensure the accuracy of the information in this flyer, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this flyer are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

te.com/products/RMW



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А