

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0009930900
Status: Active
Overview: kk
Description: 3.96mm (.156") Pitch KK® Crimp Terminal Housing, Friction Ramp, 9 Circuits, Glow Wire Compatible

Documents:
[3D Model](#) [Product Specification PS-99020-0087 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E29179

General

Product Family Crimp Housings
Series 3069
Overview kk
Product Name KK®

Physical


Circuits (maximum) 9
Circuits Detail 9
Color - Resin Natural
Flammability 94V-2
Gender Female
Glow-Wire Compliant Yes
Lock to Mating Part Yes
Material - Resin Nylon
Number of Rows 1
Packaging Type Bag
Panel Mount No
Pitch - Mating Interface (in) 0.156 In
Pitch - Mating Interface (mm) 3.96 mm
Temperature Range - Operating 0°C to +75°C

Material Info

Old Part Number 3069-G09

Reference - Drawing Numbers

Product Specification PS-99020-0087
Sales Drawing SD-3069-GN***

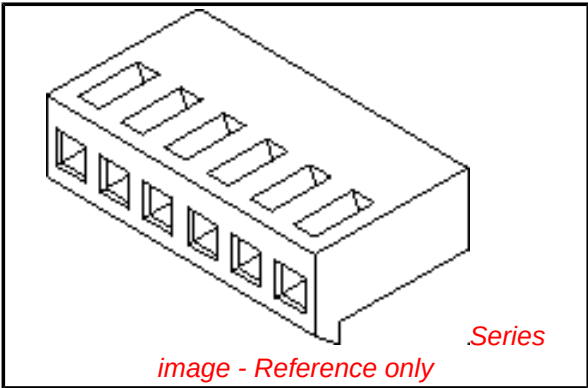

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status

China RoHS



Need more information on product
environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
3069Series

Mates With
2220 , 3190 , 3192 , 3243, 3246, A4042,
41661 , 41662 , 41671 , 41672 , 41681 ,
41682 , 41701 , 41711 , 41721 , 41741 ,
41761 , 41771 , 41772 , 41791 , 41792 ,
42441 , 42461 , 42471 , 42491 , 42492

Use With
2478 Crimp Terminals for 18-24 AWG, 2578
Crimp Terminals for 22-26 AWG


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

No. OF CCTS.	C	D	No. OF CCTS.	C	D
14	(51.51 ±.008) 2.028 ±.008	(55.37 ±.008) 2.180 ±.008	2	(3.96 ±.008) .156 ±.008	(7.82 ±.008) .308 ±.008
15	(55.47 ±.008) 2.184 ±.008	(59.33 ±.008) 2.336 ±.008	3	(7.92 ±.008) .312 ±.008	(11.79 ±.008) .464 ±.008
16	(59.44 ±.008) 2.340 ±.008	(63.30 ±.008) 2.492 ±.008	4	(11.89 ±.008) .468 ±.008	(15.75 ±.008) .620 ±.008
17	(63.40 ±.008) 2.496 ±.008	(67.26 ±.008) 2.648 ±.008	5	(15.85 ±.008) .624 ±.008	(19.71 ±.008) .776 ±.008
18	(67.36 ±.008) 2.652 ±.008	(71.22 ±.008) 2.804 ±.008	6	(19.81 ±.008) .780 ±.008	(23.67 ±.008) .932 ±.008
19	(71.32 ±.008) 2.808 ±.008	(75.18 ±.008) 2.960 ±.008	7	(23.77 ±.008) .936 ±.008	(27.64 ±.008) 1.088 ±.008
20	(75.29 ±.008) 2.964 ±.008	(79.15 ±.008) 3.116 ±.008	8	(27.74 ±.008) 1.092 ±.008	(31.60 ±.008) 1.244 ±.008
			9	(31.70 ±.008) 1.248 ±.008	(35.56 ±.008) 1.400 ±.008
			10	(35.66 ±.008) 1.404 ±.008	(39.52 ±.008) 1.556 ±.008
			11	(39.62 ±.008) 1.560 ±.008	(43.48 ±.008) 1.712 ±.008
			12	(43.59 ±.008) 1.716 ±.008	(47.45 ±.008) 1.868 ±.008
			13	(47.55 ±.008) 1.872 ±.008	(51.41 ±.008) 2.024 ±.008


NOTES:

- FOR USE WITH TERMINAL No. 2478 OR 2578
- ASSEMBLED CONNECTOR MATES WITH (1.14)/0.045 SQUARE OR ROUND PIN.
- EXTENDED PIN ENTRY WINDOWS ARE POSSIBLE.

RECOMMENDED P/C BOARD

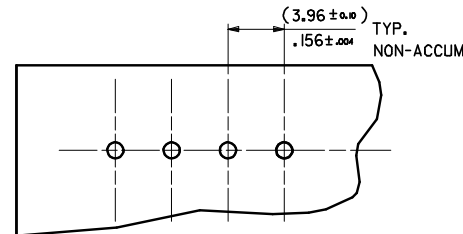

OPTIONAL WINDOW DETAIL



DIRECTION OF
TERMINAL INSERTION.

ENG. No. DESIGNATION



3069 - G N 2

"G" GWT (750°C) PA66 BALCK

"2" INDICATES HOUSING WITHOUT RAMP
"BLANK" INDICATES HOUSING WITH RAMP

NO. OF CKT'S

WORKMANAGER ERROR		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: E2008-0403	2008/01/30	DRWN:BRUTTE	2008/01/30	CHKO: CHKO	2008/01/30	APPR:BMAGUIRE	2008/01/30	DESCRIPTION	DESCRIPTION	DESCRIPTION	DESCRIPTION	DESCRIPTION	DESCRIPTION
B		REV		mm		INCH		4:1		METRIC		THIRD ANGLE PROJECTION	
B		REV		4 PLACES ± ---		± ---		DRAWN BY		DATE		TITLE	
B		REV		3 PLACES ± ---		± .010		BRIAN RUTLE		10/12/2007		HOUSING KK CONNECTOR	
B		REV		2 PLACES ± 0.25		± .014		CHECKED BY		DATE		750 GLOW WIRE VERSION	
B		REV		1 PLACE ± 0.35		± ---		B. MAGUIRE		12/12/2007		MOLEX INCORPORATED	
B		REV		ANGULAR ± 2 °		± ---		APPROVED BY		DATE		MATERIAL NO.	
B		REV		DRAFT WHERE APPLICABLE		MUST REMAIN WITHIN DIMENSIONS		B. MAGUIRE		14/12/2007		DOCUMENT NO.	
B		REV		SEE CHART		SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SD-3069-GN***		SHEET NO.	
B		REV										1 OF 2	

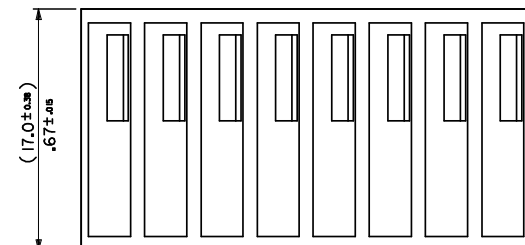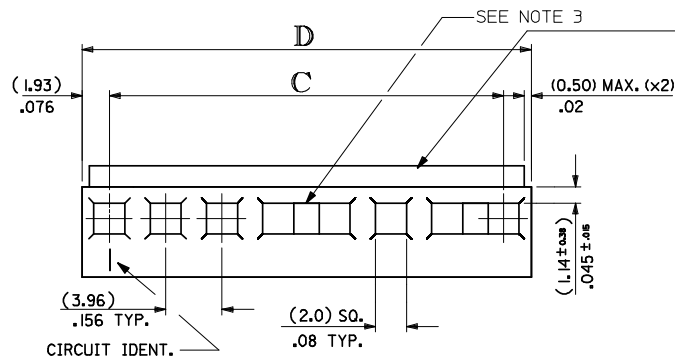

	10	9	8	7	6	5	4	3	2	1	
F	No. OF CCTS.	ENG. No.	PART No.	LOCKING RAMP							F
	2	3069-G02	09-93-0200	YES							
		↑ -G022	↑ -94-0200	NO							
	3	-G03	-93-0300	YES							
		-G032	-94-0300	NO							
	4	-G04	-93-0400	YES							
		-G042	-94-0400	NO							
	5	-G05	-93-0500	YES							
		-G052	-94-0500	NO							
	6	-G06	-93-0600	YES							
		-G062	-94-0600	NO							
	7	-G07	-93-0700	YES							
		-G072	-94-0700	NO							
	8	-G08	-93-0800	YES							
		-G082	-94-0800	NO							
	9	-G09	-93-0900	YES							
		-G092	-94-0900	NO							
	10	-G10	-93-1000	YES							
		-G102	-94-1000	NO							
	11	-G11	-93-1100	YES							
		-G112	-94-1100	NO							
	12	-G12	-93-1200	YES							
		-G122	-94-1200	NO							
	13	-G13	-93-1300	YES							
		-G132	-94-1300	NO							
	14	-G14	-93-1400	YES							
		-G142	-94-1400	NO							
	15	-G15	-93-1500	YES							
		-G152	-94-1500	NO							
	16	-G16	-93-1600	YES							
		-G162	-94-1600	NO							
	17	-G17	-93-1700	YES							
		-G172	-94-1700	NO							
	18	-G18	-93-1800	YES							
		-G182	-94-1800	NO							
	19	-G19	-93-1900	YES							
		-G192	-94-1900	NO							
	20	-G20	-93-2000	YES							
		3069-G202	09-94-2000	NO							
E											E
D											D
C											C
B											B
A											A

SEE SHEET 1

EC NO: E2008-0403

DRWN:BRUTTLE

CHKD:

APPR:BMAGUIRE

REV

2008/01/30

2008/01/30

DESCRIPTION

QUALITY SYMBOLS

▽=0

▽=0

2008/01/30

GENERAL TOLERANCES (UNLESS SPECIFIED)

mm

INCH

4 PLACES

3 PLACES

2 PLACES

1 PLACE

± ---

± ---

± 0.25

± 0.35

± ---

± ---

± .010

± .014

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

MM/IN

DRAWN BY

DATE

BRIAN RUTTLE

10/12/2007

CHECKED BY

DATE

B. MAGUIRE

12/12/2007

APPROVED BY

DATE

B. MAGUIRE

14/12/2007

MATERIAL NO.

SEE CHART

SIZE

A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

1:1

DESIGN UNITS

METRIC

THIRD ANGLE PROJECTION

TITLE

HOUSING KK CONNECTOR (3.96)/0.156 CRIMP 750 GLOW WIRE VERSION

MOLEX INCORPORATED

DOCUMENT NO.

SD-3069-GN***

SHEET NO.

2 OF 2

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А