

LTM4643EV

Quad DC/DC μ Module Regulator with Configurable 3A Output Array

DESCRIPTION

Demonstration circuit 2453A features the **LTM[®]4643** μ Module[®] regulator, a high performance high efficiency 4 output step-down regulator. The LTM4643EV has an operating input voltage range of 4V to 20V and is able to provide up to 3A out output current from each of its phases. Each output's voltage is programmable from 0.6V to 3.3V. The LTM4643EV is a complete DC/DC point of load regulator in a thermally enhanced 15mm $\times$ 9mm $\times$ 1.82mm LGA package requiring only a few input and output capacitors. Output voltage tracking is available through the

TRACK/SS pin for supply rail sequencing. External clock synchronization is also available through the CLKIN pin. The CLKOUT pin provides for synchronization of additional modules' phases. The LTM4643 data sheet must be read in conjunction with this demo manual for working on or modifying demo circuit 2453A.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2453A>

LT, LTC, LTM, Linear Technology, the Linear logo and μ Module are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

BOARD PHOTO

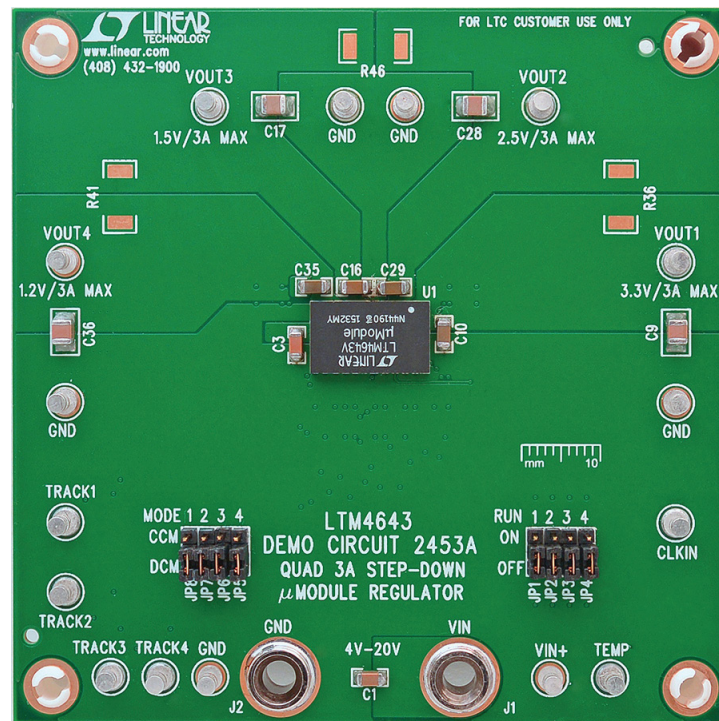


Figure 1. Quad 3A LTM4643; DC2453A

PERFORMANCE SUMMARY

PARAMETER	CONDITIONS/NOTES	VALUE
Input Voltage Range		4V – 20V
Output Voltage V_{OUT}	Jumper Selectable	$V_{OUT1} = 3.3\text{VDC}$, $V_{OUT2} = 2.5\text{VDC}$, $V_{OUT3} = 1.5\text{VDC}$, $V_{OUT4} = 1.2\text{VDC}$
Maximum Continuous Output Current per Phase	Derating is Necessary for Certain Operating Conditions. See Data Sheet for Details	3ADC
Default Operating Frequency		1.2MHz
Efficiency	$V_{IN} = 12\text{V}$, $V_{OUT1} = 3.3\text{V}$, $I_{OUT} = 3\text{A}$	89% See Figure 2

QUICK START PROCEDURE

Demonstration circuit 2453A is an easy way to evaluate the performance of the LTM4643EV. Please refer to Figure 1 for test setup connections and follow the procedure below.

1. With power off, place the jumpers in the following positions:

JP1	JP2	JP3	JP2
RUN1	RUN2	RUN3	RUN4
ON	ON	ON	ON

JP8	JP7	JP6	JP5
MODE1	MODE2	MODE3	MODE4
CCM	CCM	CCM	CCM

2. Before connecting input supply, loads and meters, preset the input voltage supply to be between 4V to 20V. Preset the load currents to 0A.
3. With power off, connect the loads, input voltage supply and meters as shown in Figure 1.
4. Turn on input power supply. The output voltage meters for each phase should display the programmed output voltage $\pm 2\%$.
5. Once the proper output voltage is established, adjust the load currents for each phase within the 0A to 3A range and observe the load regulation, efficiency, and other parameters. Output voltage ripple should be measured at J6 with a BNC cable and oscilloscope.
6. To observe increased light load efficiency place, a Mode pin jumper (JP5-JP8) in the DCM Mode position.

QUICK START PROCEDURE

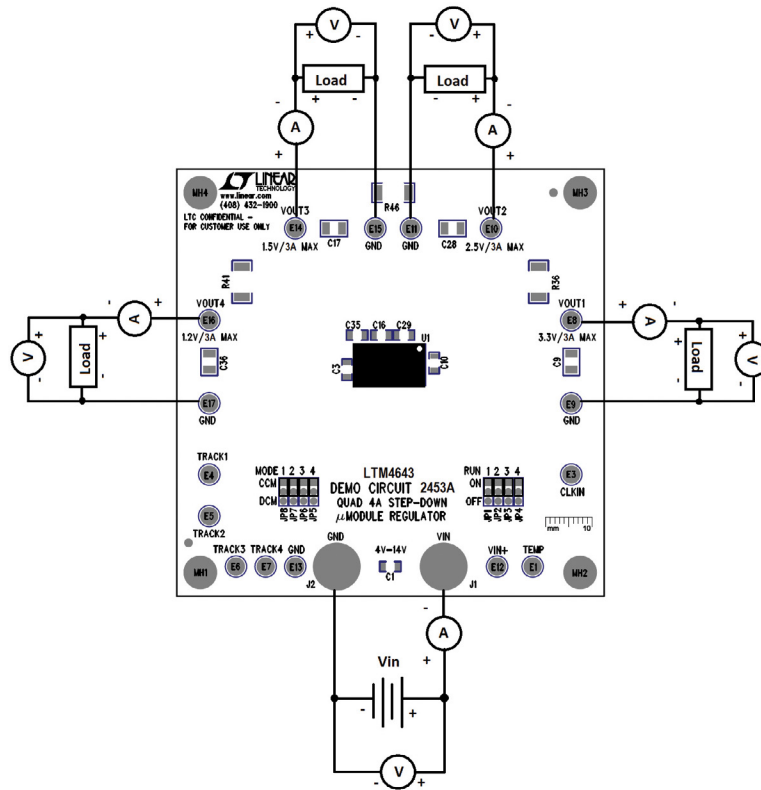


Figure 2. Test Setup of DC2453A

QUICK START PROCEDURE

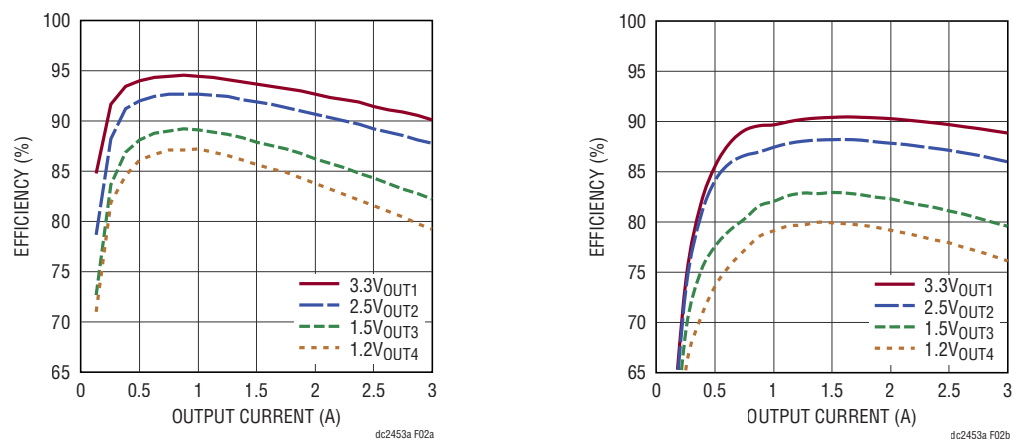


Figure 2. Measured Supply Efficiency at 5VIN and 12VIN


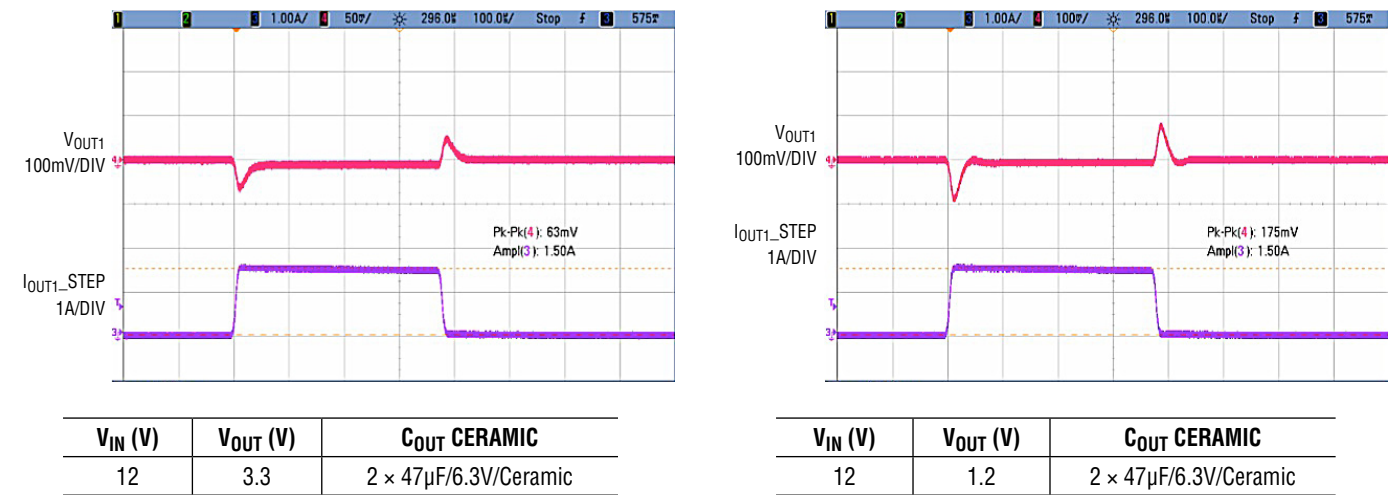


Figure 3. Measured V_{OUT1} = 3.3V and V_{OUT4} = 1.2V Load Transient Responses (1.5A to 3A Load Step)

QUICK START PROCEDURE

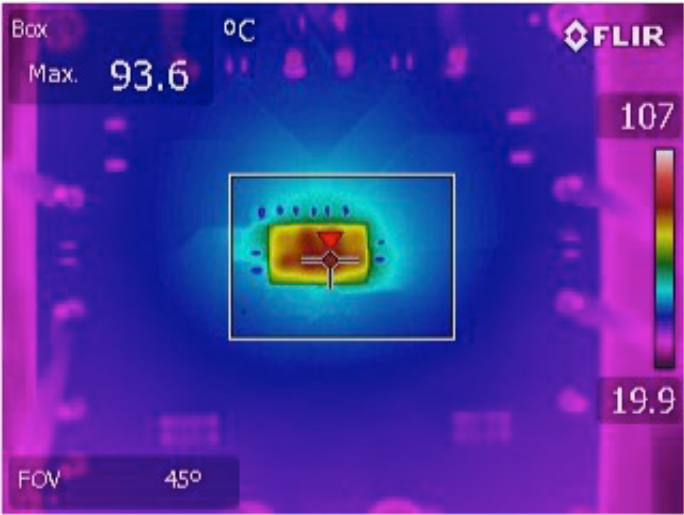

V _{IN} (V)	AIRFLOW	AMBIENT (°C)
5	Natural Convection	28


Figure 4. Measured Thermal Capture with All Phases at Full Load (3A)

DEMO MANUAL DC2453A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	2	C1, C3	CAP, CER, 22 μ F, 25V, X5R, 20%, 1206	MURATA, GRM31CR61E226ME15L
2	1	C6	CAP, X5R, 1 μ F, 16V 10%, 0603	AVX, 0603YD105KAT2A
3	4	C9, C17, C28, C36	CAP, CER, 47 μ F, 6.3V, X5R, 20%, 1210	AVX, 12106D476MAT2A
4	4	C10, C16, C29, C35	CAP, CER, 47 μ F, 6.3V, X5R, 20%, 1206	TAIYO YUDEN, JMK316ABJ476MLHT
5	4	C25, C26, C45, C46	CAP, CER, 0.10 μ F, 50V, X7R, 10%, 0603	TDK, C1608X7R1H104K
6	1	R1	RES, 10k, 1%, 1/10W, 0603	VISHAY, CRCW060310K0FKED
7	1	R2	RES, 1 Ω , 5%, 1/10W, 0603	VISHAY, CRCW06031R00JNEA
8	1	R3	RES, 13.3k, 1%, 1/10W, 0603	VISHAY CRCW060313K3FKEA
9	1	R4	RES, 40.2k, 1%, 1/10W, 0603	VISHAY CRCW060340K2FKEA
10	1	R11	RES, 19.1k, 1%, 1/10W, 0603	VISHAY CRCW060319K1FKEA
11	1	R12	RES, 60.4k, 1%, 1/10W, 0603	VISHAY CRCW060360K4FKEA
12	1	R28	RES, 0805, 0 Ω 5% 1/16W	VISHAY, CRCW08050000Z0EA
13	1	U1	LTM4643EV, BGA-15X9-5.01	LINEAR TECH. CORP. LTM4643EV#PBF
Additional Demo Board Circuit Components				
1	2	C4, C5	CAP, CER, 22 μ F, 25V, X5R, 20%, 1206	MURATA, GRM31CR61E226ME15L
2	1	C2	CAP, POSCAP, 33 μ F, 25V, 7343	PANASONIC, 25TQC33MYF
3	6	C7, C21, C22, C31, C41, C42	CAP, 0603	OPTION
4	4	C8, C18, C27, C37	CAP, POSCAP, 7343	OPTION
5	8	C11, C12, C14, C15, C30, C33, C34, C38	CAP, CER, 1206	OPTION
6	2	C13, C32	CAP, CER, 100pF, 25V, X7R, 10%, 0603	AVX 06033C101KAT2A
7	4	R7, R8, R15, R16	RES, 0 Ω , 1%, 1/10W, 0603	VISHAY, CRCW06030000Z0ED
8	4	R19, R20, R21, R22	RES, 150k, 5%, 1/10W, 0603	VISHAY CRCW0603150KJNEA
9	8	R23, R24, R25, R26, R27, R29, R30, R31	RES, 100k, 5%, 1/10W, 0603	VISHAY CRCW0603100KJNEA
10	16	R9, R10, R17, R18, R32-R35, R37-R40, R42-R45	RES, 0603, OPT	OPT
11	3	R36, R41, R46	RES, 0 OHM, 2512, OPT	OPT
Hardware				
1	16	E1, E3-E17	TESTPOINT, TURRET 0.094"	MILL MAX 2501-2-00-80-00-00-07-0
2	2	J1, J2	JACK, BANANA	KEYSTONE 575-4
3	8	JP1-JP8	HEADER, 0.079" SINGLE ROW, 3-PIN	SULLINS, NRPN031PAEN-RC
4	8	XJP1-XJP8	SHUNT, 0.079" CENTER	SAMTEC, 2SN-BK-G
5	4	STAND-OFFS	STAND-OFF, NYLON 0.375" TALL (SNAP ON)	KEYSTONE, 8832

SCHEMATIC DIAGRAM

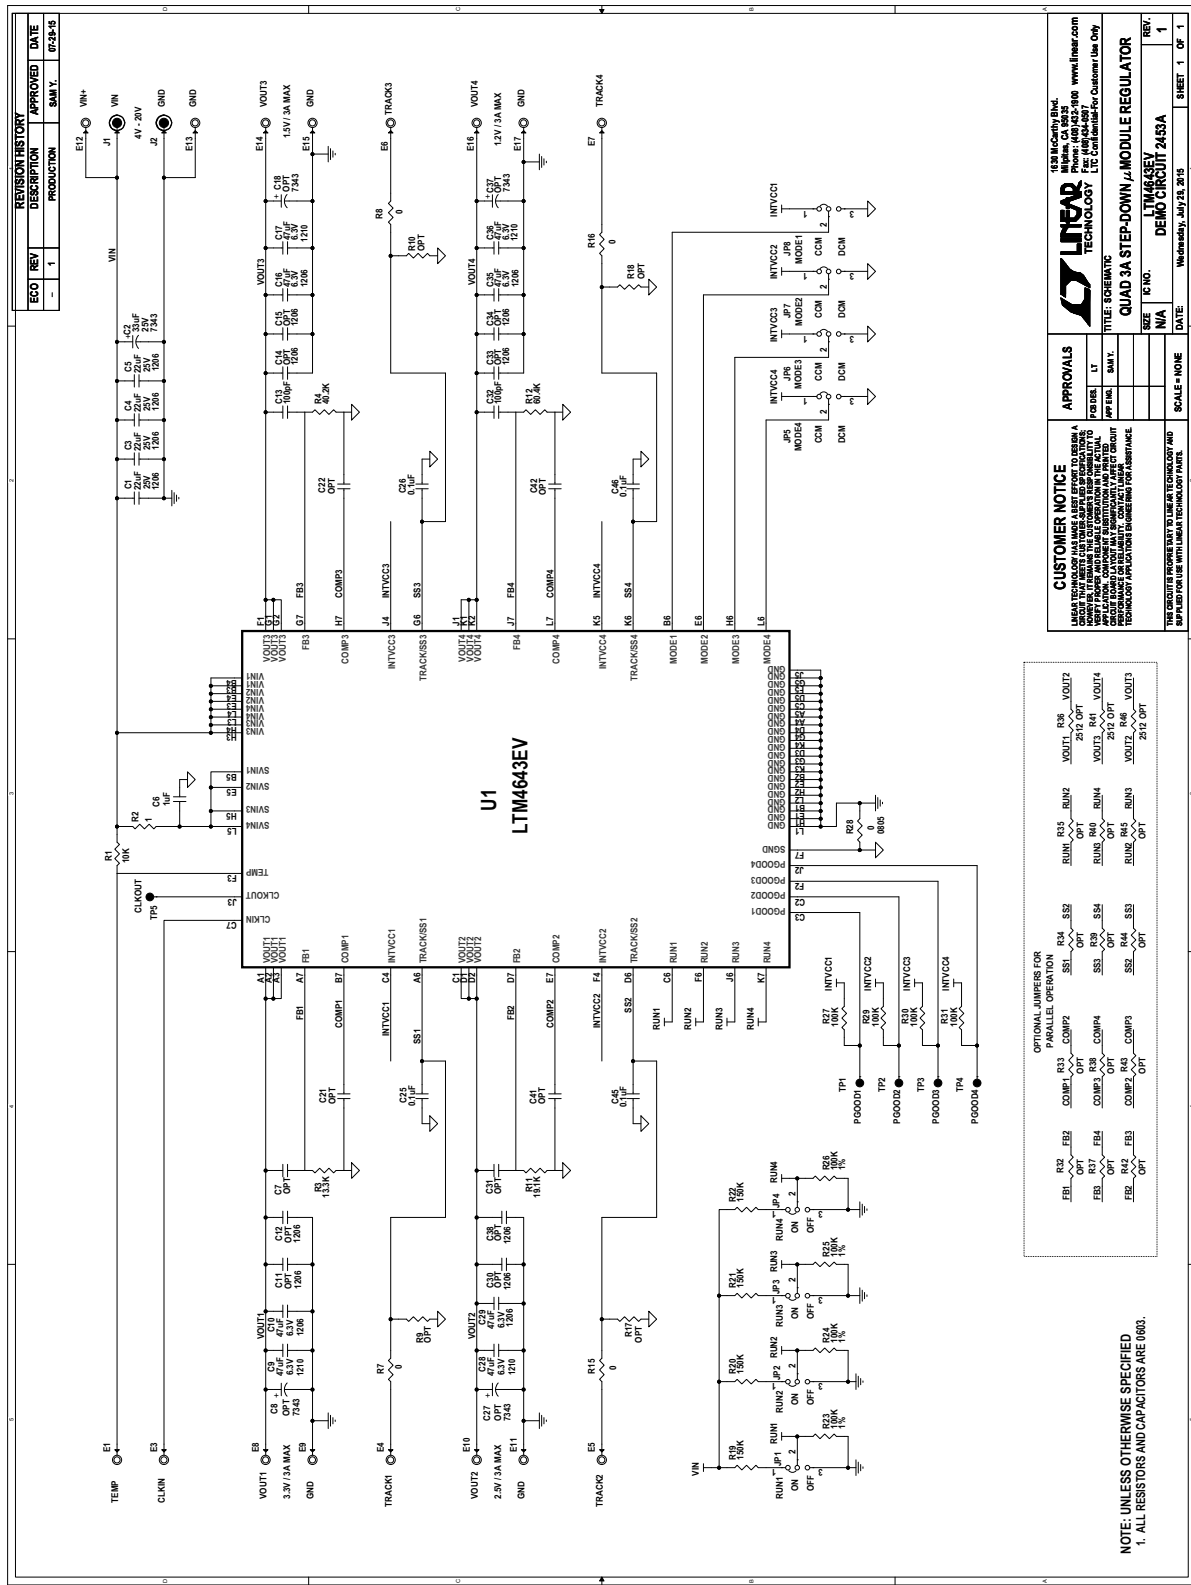

DEMO MANUAL DC2453A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А