

ABC800 Series

Open Frame Power Supplies

The ABC800 Series of open frame power supplies feature a wide universal AC input range of 85 – 264 VAC, offering up to 800 W of output power with forced air cooling in a compact footprint, with a variety of single output voltages.

The high efficiency and high power density of the ABC800 series ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

These power supplies are ideal for medical, telecom, datacom, industrial equipment and other applications.



Key Features & Benefits

- 5 x 8.5 x 1.61 Inch Form Factor (127 x 216 x 41 mm)
- Convection or Forced Air Cooling
- Universal input
- Current Sharing Option
- Peak Power Capability
- 5 VDC Stand by
- 12 V fan output
- Power Good / Power Fail Signal
- Suitable in POE applications
- Lesser than 1U high
- Having high voltage output range up to 58VDC
- N+1 redundant power supply
- Single wire current sharing
- Built in OR-ing diode / FET (- R suffix)

Applications

- Instrumentation
- Lighting
- Industrial Applications
- Applied Computing
- Renewable Energy
- Test and Measurement
- Robotics
- Wireless Communication



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

| MODEL NUMBER* | VOLTAGE | TYPE | MAX. LOAD (CONVECTION) | MAX. LOAD (300 LFM) | MIN. LOAD | RIPPLE & NOISE |
|---------------|---------|-----------|------------------------|---------------------|-----------|----------------|
| ABC800-1T12 | 12 V | U-Channel | 25 A | 33.33 A | 0.0 A | 2% |
| ABC800-1T15 | 15 V | U-Channel | 25 A | 33.33 A | 0.0 A | 2% |
| ABC800-1T24 | 24 V | U-Channel | 25 A | 33.33 A | 0.0 A | 2% |
| ABC800-1T30 | 30 V | U-Channel | 20 A | 26.66 A | 0.0 A | 2% |
| ABC800-1T48 | 48 V | U-Channel | 12.5 A | 16.66 A | 0.0 A | 2% |
| ABC800-1T58 | 58 V | U-Channel | 10.34 A | 13.78 A | 0.0 A | 2% |

* To order product without the redundancy diode option please add the suffix-Sxxx to your required part number. Please contact the factory for availability.

2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|---------------------|---|-----------------------------------|
| Input Voltage | Universal | 85 – 264 VAC / 120 – 390 VDC |
| Input Frequency | | 47 – 63 Hz |
| Input Current | 120 VAC: 240 VAC: | 8.00 A max. 3.46 A max. |
| Input Protection | In Live & Neutral both | F16 A / 250 V |
| No Load Power | Over entire input range with main output kept off using Remote ON/OFF | 3 W typ. |
| Inrush Current | 240 VAC: | 25 A max. |
| Leakage Current | 240 VAC / 50 Hz | 400 µA |
| Touch Current: | | < 100 µA |
| Power Factor | 120 VAC: 240 VAC: | 0.98 0.95 |
| Switching Frequency | PFC converter: Variable Resonant converter: Variable | 85 kHz typical 100 kHz typical |

3. OUTPUT SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|-----------------------------|--|--------------------------------|
| Output Power | Forced Air Cooling | Up to 800 W |
| Efficiency | 120 VAC: 240 VAC: | 88% Typical 93% |
| Hold-up Time | 120 VAC / 240 VAC: | 8 ms |
| Line Regulation | | +/-0.5% |
| Load Regulation | | +/-1.0% |
| Transient Response | 50% to 100% load change, 50 Hz, 50% duty cycle, 0.1 A/µs | < 10%, recovery time < 5 ms |
| Voltage Adjustment | | +/-3% |
| Set Point Tolerance | | +/-1% |
| Rise Time | | <100 ms |
| Over Current Protection | Hic-Up Type, autorecovery | 110% |
| Over Voltage Protection | Latch Type, AC Power to be recycled for recovery | 114% |
| Short Circuit Protection | Latch Type, AC Power to be recycled for recovery | |
| Over Temperature Protection | Autorecovery | 130 - 140°C primary heat sink |
| Current Share | Up to 3 supplies connected in parallel (optional) | |



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200


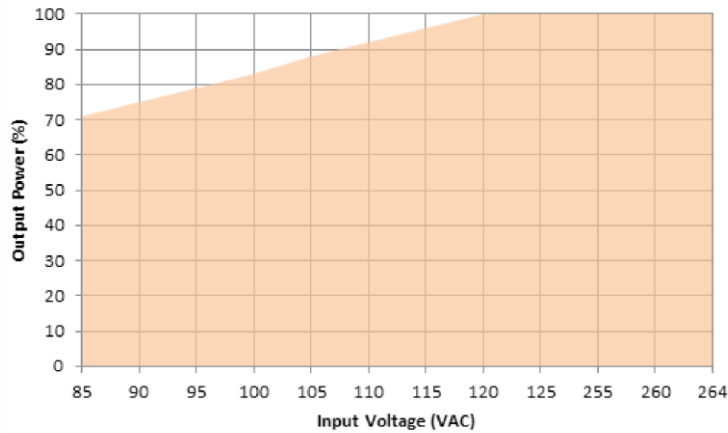



Figure 1. Power Derating w.r.t Input

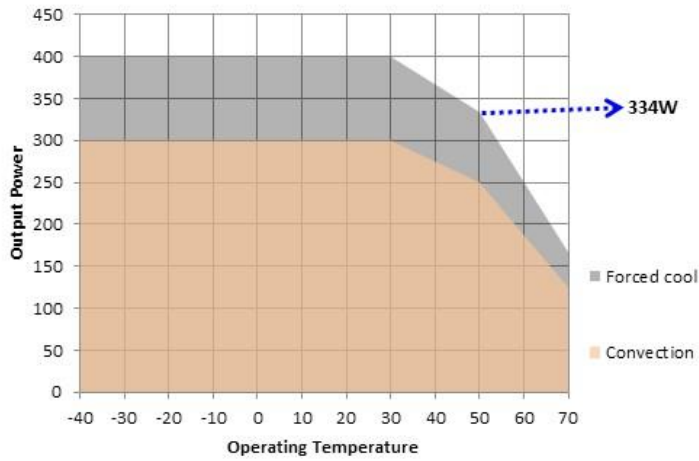

Convection load: 300 W up to 30 °C
 De-rate between 30-50 °C @ 0.833% per °C
 De-rate above 50 °C @ 2.5% per °C

Forced air cooled load: 400 W up to 30°C
 De-rate between 30-50 °C @ 0.825% per °C
 De-rate above 50 °C @ 2.5% per °C


Figure 2. Power Derating Curve 12 V

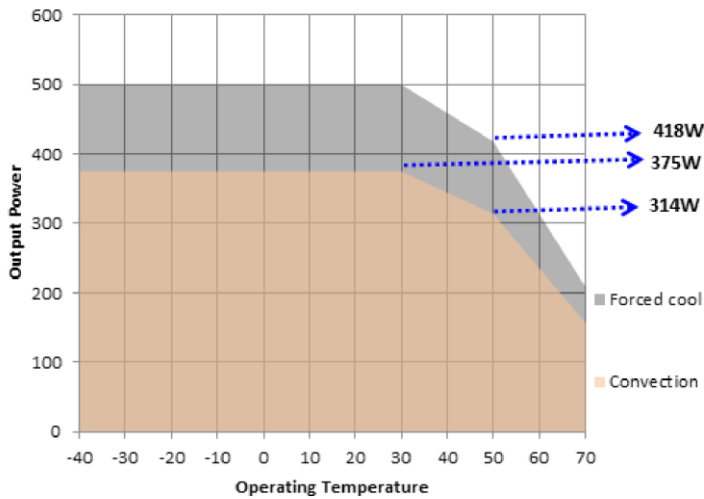

Convection load: 375 W up to 30 °C
 De-rate between 30-50 °C @ 0.8133% per °C
 De-rate above 50 °C @ 2.5% per °C

Forced air cooled load: 500 W up to 30°C
 De-rate between 30-50 °C @ 0.82% per °C
 De-rate above 50 °C @ 2.5% per °C

Figure 3. Power Derating Curve 15 V

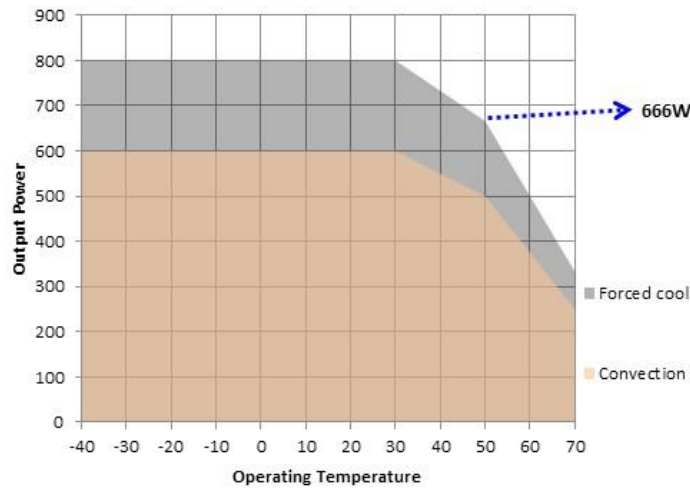

Convection load: 600 W up to 30 °C
 De-rate between 30-50 °C @ 0.833% per °C
 De-rate above 50 °C @ 2.5% per °C

Forced air cooled load: 800 W up to 30°C
 De-rate between 30-50 °C @ 0.8375% per °C
 De-rate above 50 °C @ 2.5% per °C

Figure 4. Power Derating Curve 24 V and above

4. ENVIRONMENTAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|-----------------------|------------------------------|--------------------------|
| Operating Temperature | Refer to derating curve | -40 to +70°C |
| Storage Temperature | | -40 to +85°C |
| Relative Humidity | Non-condensing | 95% Rh |
| Altitude | Operating: Non-operating: | 16,000 ft. 40,000 ft. |
| MTBF | Telcordia -SR332-issue 3 | 3.37 million hours |

5. EMC SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | CRITERIA |
|------------------------------------|-------------------------|---|
| Conducted Emissions | EN55032 | Class B |
| Radiated Emissions | EN 55032 | Class A (Class B with External king core K5B RC 25x12x15-M or equivalent) |
| Input Current Harmonics | EN 61000-3-2 | Class A |
| Voltage Fluctuation and Flicker | EN 61000-3-3 | Complies |
| ESD Immunity | EN 61000-4-2 | A |
| Radiated Field Immunity | EN 61000-4-3 | A |
| Electrical Fast Transient Immunity | EN 61000-4-4 | A |
| Surge Immunity | EN 61000-4-5 | A |
| Conducted Immunity | EN 61000-4-6 | A |
| Magnetic Field Immunity | EN 61000-4-8 | A |
| Voltage Dips, Interruptions | EN 61000-4-11 | A & B |



Asia-Pacific
 +86 755 298 85888

Europe, Middle East
 +353 61 225 977

North America
 +1 408 785 5200

6. SAFETY SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|--------------------|---|----------------------|
| Isolation Voltage | Input to Output Input to Earth | 4000 VDC 2500 VDC |
| Safety Standard(s) | IEC/EN 62368-1, ed. 2 UL62368-1, CSA C22.2 No. 62368-1 | |
| Agency Approvals | Nemko, UL, C-UL | |
| CE mark | Complies with LVD Directive | |

NOTES:

- For Ripple measurement minimum output power requirement is 25 W. Ripple is peak to peak with 20 MHz bandwidth and 10 μ F (Tantalum capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges. Please contact factory/ sales representative for minimum load required for ripple to be within specification.
- Combined output power of main output, fan supply and standby supply shall not exceed max. power rating.
- Standby output voltage 5 V / 1.5 A (convection) with tolerance including set point accuracy, line and load regulation is +/-10%. Ripple and noise is less than 5%.
- Specifications are for nominal input voltage, 25°C unless otherwise stated.
- Fan supply output voltage 12 V / 500 ma is +/-30% and ripple less than 10% to get 12 V output min 10% load on main output is required.

7. SIGNALS

| PARAMETER | DESCRIPTION / CONDITION |
|--------------------------|--|
| Power Good / Fail Signal | Power Good: Is a TTL signal which goes high after main output reaches 90% of its set value. The delay is 0.1 s to 0.5 s Power Fail: The same signal goes low at least 1ms before main output falls to 90% of set value at AC Power off |
| Remote Sense | Compensates for 200 mV drop |
| Remote On / Off | Pin 6 & Pin 7 of J3 can be used for Remote on/off. Shorting Pin 6 to Pin 7 enables main output while keeping the pins open disables main output |
| OCP Limit Set | Pin 8 & Pin 9 of J3 must be left open |

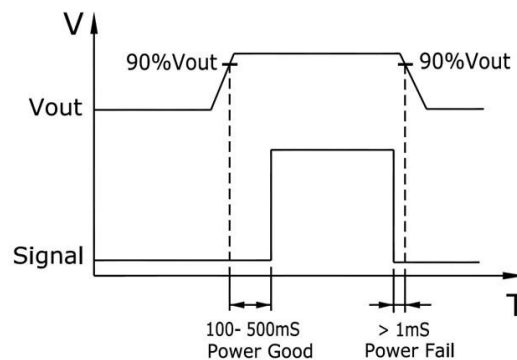


Figure 5. Power Good / Fail Signal Diagram


8. CONNECTOR & PIN DESCRIPTION

| CONNECTOR | PIN | DESCRIPTION / CONDITION | MANUFACTURER / PN |
|---------------------|-----------------|--|--|
| AC Input Connector | J1 | Pin 1 AC Line Pin 2 Neutral Pin 3 Earth | TE Connectivity: NC6-P107-03 |
| DC Output Connector | J2 | J2-A +VE J2-B -VE | 6-32 inches Screw Pan HD Mating: Designed to accept Ring Tongue Terminal AMP: 8-31886-1, wherein one 16 AWG (max) wire can be crimped. Note: One Ring Tongue Terminal with 16 AWG is recommended for current up to 11 A only. Use multiple tongue terminals with wire for more current. |
| Signal Connector | J3 ¹ | Pin 1 GND Pin 2 5V AUX Pin 3 PGPF Pin 4 VS - Pin 5 VS + Pin 6 GND Pin 7 RMT Pin 8 CL2 Pin 9 CL1 Pin 10 LS | Molex: 22-23-2101 Mating: 22-01-2107; Pins: 08-50-0113 |
| Fan Output | J10, J11 | Pin 1 +VE Pin 2 -VE | |

9. MECHANICAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION |
|------------|---|
| Weight | 1100 g |
| Dimensions | 127 x 216 x 41 mm (5.0 x 8.5 x 1.61 inches) |
| Cooling | Convection: 800 W (U-Channel) |

¹ PSU is supplied with J3, pin-6 and pin-7 shorted to enable main output without remote on/off feature.

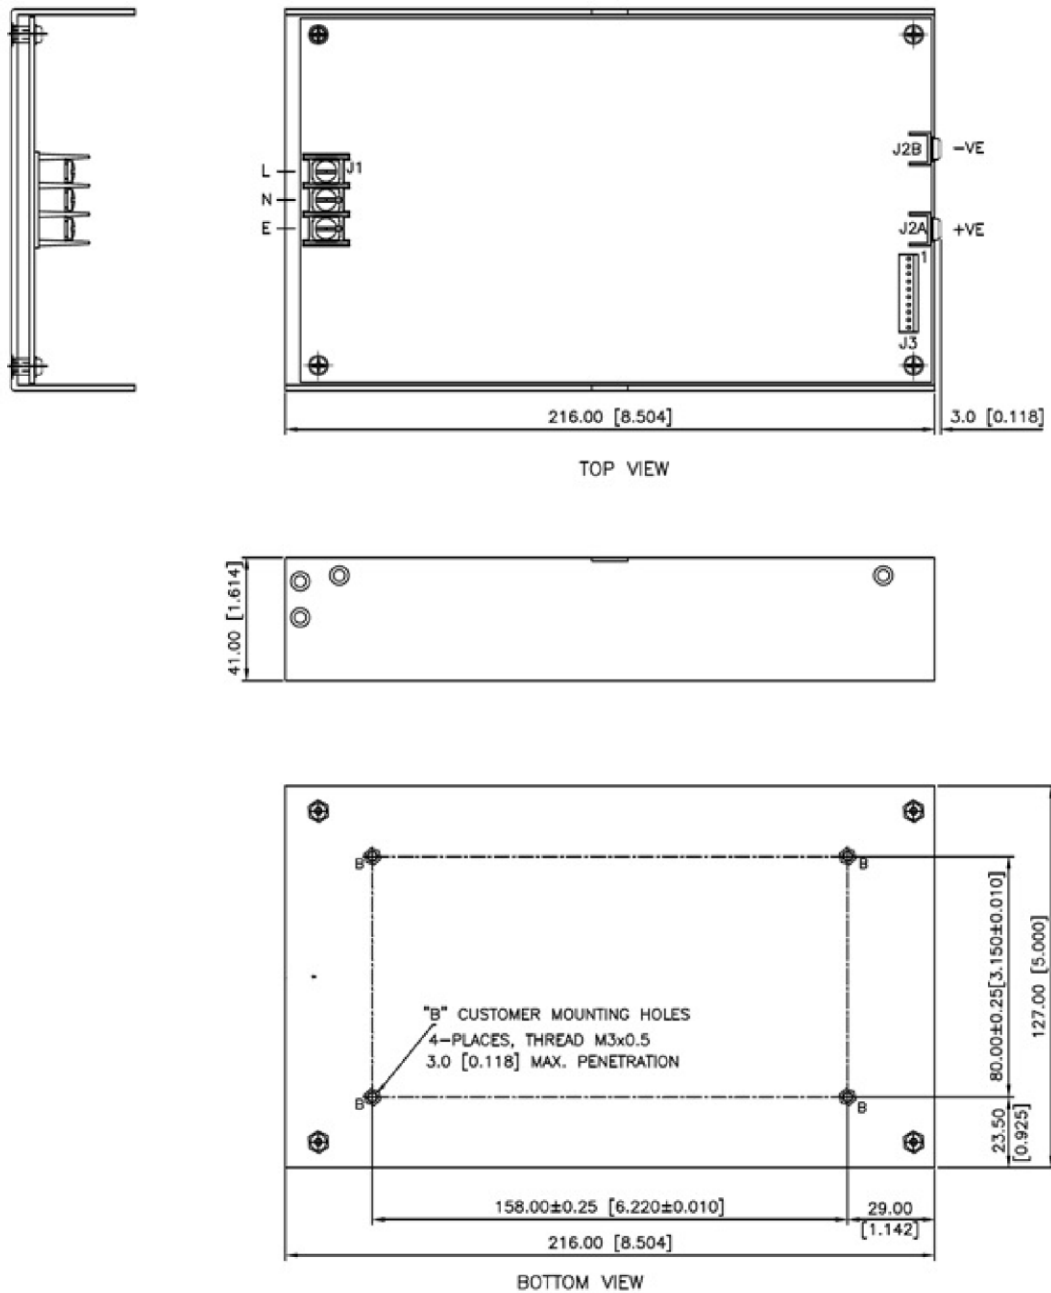

MECHANICAL OUTLINE DIMENSIONS
 ALL DIMENSIONS ARE IN MM [INCHES]
 GEN.TOLERANCE:±1.0 MM [±0.04]

Figure 6. Mechanical drawings

10. INSTALLTION INSTRUCTION FOR CURRENT SHARING

During the installation and setup of parallel supplies in a system it is important that a single remote sense point be used for all the supplies. The remote sense voltage between the supplies must be adjusted to within 1% to ensure the supplies are inside the 1% capture window. If the supplies are not initially adjusted inside the capture window the supplies will not current share satisfactorily.

SET-UP PROCEDURE:

1. Connect load cables to the outputs of each supply.
2. Connect the remote sense lines to the load in twisted style. (A common remote sense point must be used for all the supplies in parallel).
3. Connect all the "LS" signal (Pin 10) on the J3 connector between the supplies.
4. Adjust remote sense voltage of each supply to within 1% of rated output voltage or readjust to required set point. (Adjustment to be done with all other parallel supplies off).
5. Current sharing between the supplies can be verified by monitoring the output current of each supply with a hall effect DC current probe. The supplies should share to within 10% of the total load current.
6. The current share circuit has a capture window voltage of +/- 1% of the rated output voltage. If the output remote sense voltage of one of the supplies is adjusted outside the 1% window the supplies will not current share satisfactorily.

CURRENT SHARING BLOCK DIAGRAM

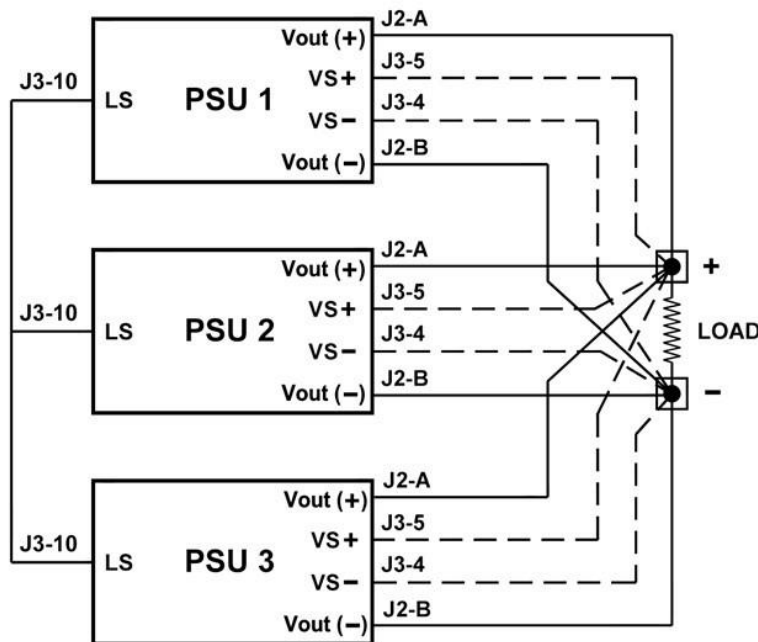


Figure 7. Current Sharing Block Diagram

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А