



Product Description

GRF2083 is a broadband, linear, ultra-low noise amplifier designed for small cell, wireless infrastructure and other high performance RF applications requiring ultra-low NF, high gain and linearity.

The device features an integrated shut down function which places the device into a high-isolation shut down state.

GRF2083 is a member of a family of pin compatible, ultra low noise devices which cover a wide range of frequency bands with industry leading NF and gain:

GRF2080: 0.4 to 1.5 GHz

GRF2081: 1.4 to 2.7 GHz

GRF2082: 1.9 to 3.8 GHz

GRF2083: 3.0 to 6.0 GHz

Consult with the GRF applications engineering team for application notes, custom tuning/evaluation board data and device s-parameters.


Features

Reference: 5V/70 mA/3.6 GHz

- Gain: 17.8 dB
- Eval Board NF: 0.65 dB
- OP1dB: 19.5 dBm
- OIP3: 36.5 dBm
- High Isolation Shut Down State
- Flexible Bias Voltage
- Process: GaAs pHEMT

Applications

- Cellular Infrastructure
- Small Cells and Cellular Repeaters
- Distributed Antenna Systems
- TDD Systems
- 802.11ac

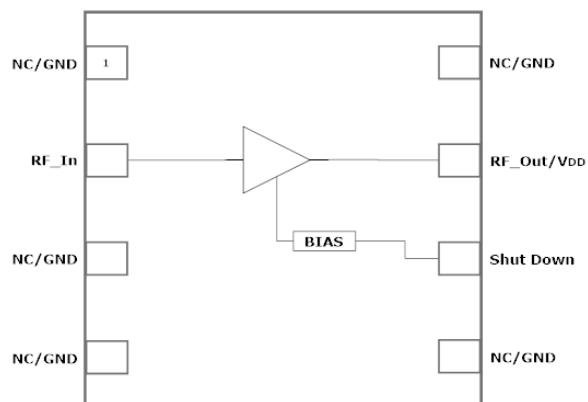

2.0 x 2.0 mm DFN-8



Preliminary

GRF2083

Ultra-LNA with Shutdown
Tuning Range: 3.0 to 6.0 GHz

Absolute Ratings:

| Parameter | Symbol | Min. | Max. | Unit |
|--|-----------------------|------|------|------|
| Supply Voltage | V _{DD} | 0 | 6.0 | V |
| RF Input Power CW: (Load VSWR < 2:1; V _D : 5.0 volts) | P _{IN MAX} | | 23 | dBm |
| Operating Temperature (Package Heat Sink) | T _{AMB} | -40 | 105 | °C |
| Maximum Channel Temperature (MTTF > 10 ⁶ Hours) | T _{MAX} | | 170 | °C |
| Maximum Dissipated Power | P _{DISS MAX} | | 500 | mW |
| Electrostatic Discharge: | | | | |
| Charged Device Model: | CDM | 1500 | | V |
| Human Body Model: | HBM | 500 | | V |
| Storage: | | | | |
| Storage Temperature | T _{STG} | -65 | 150 | °C |
| Moisture Sensitivity Level | MSL | | 1 | -- |



Caution! ESD Sensitive Device




Exceeding Absolute Maximum Rating conditions may cause permanent damage to the device.

Note: For package dimensions and manufacturing information, see the Guerrilla-RF.com website for the following document located on the GRF2083 landing page: **Manufacturing Note—MN-001 Product Tape and Reel, Solderability and Package Outline Specification.**

[Link to manufacturing note:](#)

Pin Out (Top View)

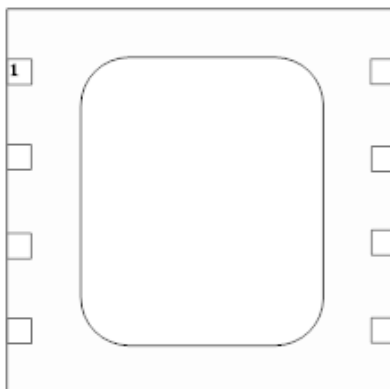

Pin Assignments:

| Pin | Name | Description | Note |
|-----------------|------------------------|------------------------|---|
| 1 | NC/GND | No Connect or Ground | No internal connection to die |
| 2 | RF_In | RF Input | External match must provide DC block |
| 3 | NC/GND | No Connect or Ground | No internal connection to die |
| 4 | NC/GND | No Connect or Ground | No internal connection to die |
| 5 | NC/GND | No Connect or Ground | No internal connection to die |
| 6 | Shut Down | Selects Shut Down Mode | See control logic truth table |
| 7 | RF_Out/V _{DD} | RF Out | Provide device V _{DD} via external bias inductor |
| 8 | NC/GND | No Connect or Ground | No internal connection to die |
| PKG BASE | GND | Ground | Provides DC and RF ground for LNA, as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page. |

Control Logic Truth Table:

| Mode | Description | V _{DD} | V _{SHUTDOWN} (pin 6) |
|-----------------|---------------------|-----------------|-------------------------------|
| High Gain | High LNA Gain | High | Low |
| Shutdown | High Insertion Loss | High | High |
| Logic Level "0" | Logic Low | 0.0V | 0.0V to 0.2V |
| Logic Level "1" | Logic High | >= 2.7V | 1.5V to V _{DD} |



Preliminary

GRF2083

Ultra-LNA with Shutdown
Tuning Range: 3.0 to 6.0 GHz

Nominal Operating Parameters:

| Parameter | Symbol | Specification | | | Unit | Condition |
|---|----------------|---------------|-------|------|---------------------------|--|
| | | Min. | Typ. | Max. | | |
| Gain Mode (Pin 6: < 0.2V) | | | | | | |
| Test Frequency | F_{TEST} | | 3600 | | MHz | $V_{DD} = 5.0\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$ 3400 to 3800 MHz Tune |
| Evaluation Board Gain | S21 | | 17.8 | | dB | |
| Evaluation Board Noise Figure | NF | | 0.65 | | dB | Evaluation Board SMA to SMA |
| Output 3rd Order Intercept Point | OIP3 | | 36.5 | | dBm | 4.0 dBm P_{OUT} per tone at 2 MHz Spacing (3599 and 3601 MHz) |
| Output 1dB Compression Point | OP1dB | | 19.5 | | dBm | |
| Switching Rise Time | T_{RISE} | | 100 | | ns | |
| Switching Fall Time | T_{FALL} | | 100 | | ns | |
| Supply Current | I_{DD} | | 70 | | mA | |
| Shutdown Mode (Pin 6: >1.5V) | | | | | | |
| Shutdown Gain | S(2,1) | | -18.5 | | dB | |
| Shutdown Current (Pin 6) | $I_{SHUTDOWN}$ | | 40 | | μA | $V_{SHUTDOWN}: 1.8\text{ V}$ |
| Leakage Current (Pin 7) | $I_{LEAKAGE}$ | | 3.2 | | mA | $V_{SHUTDOWN}: 1.8\text{ V}$ |
| Thermal Data | | | | | | |
| Thermal Resistance (measured via IR scan) | Θ_{jc} | | 60 | | $^\circ\text{C}/\text{W}$ | On standard evaluation board |
| Channel Temperature @ +85 C Reference (Package Heat Sink) | $T_{CHANNEL}$ | | 106 | | $^\circ\text{C}$ | $V_{DD}: 5.0\text{ V}$; $I_{DDQ}: 70\text{ mA}$; No RF; $P_{DISS}: 350\text{ mW}$ |





Preliminary

GRF2083

Ultra-LNA with Shutdown
Tuning Range: 3.0 to 6.0 GHz

GRF2083 Evaluation Board Data over Temperature:

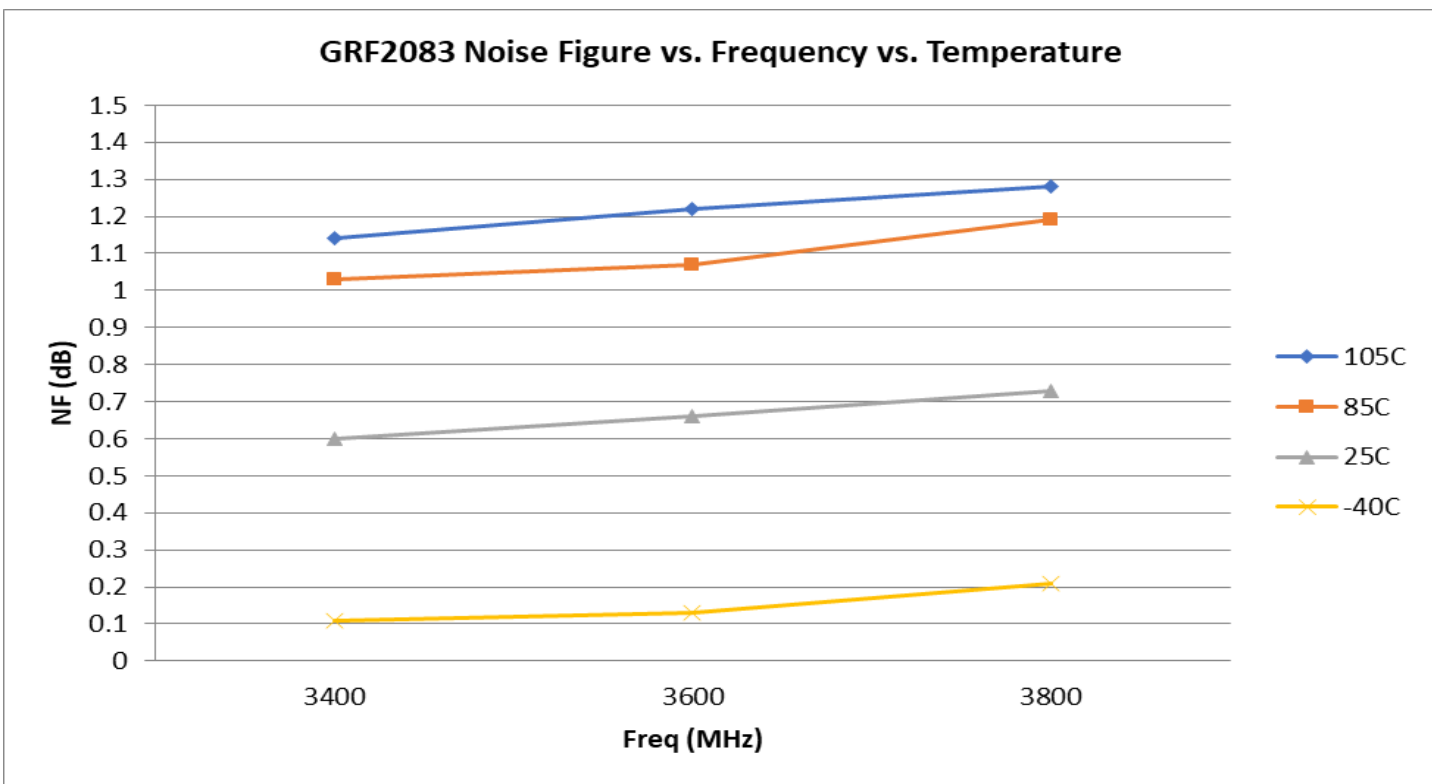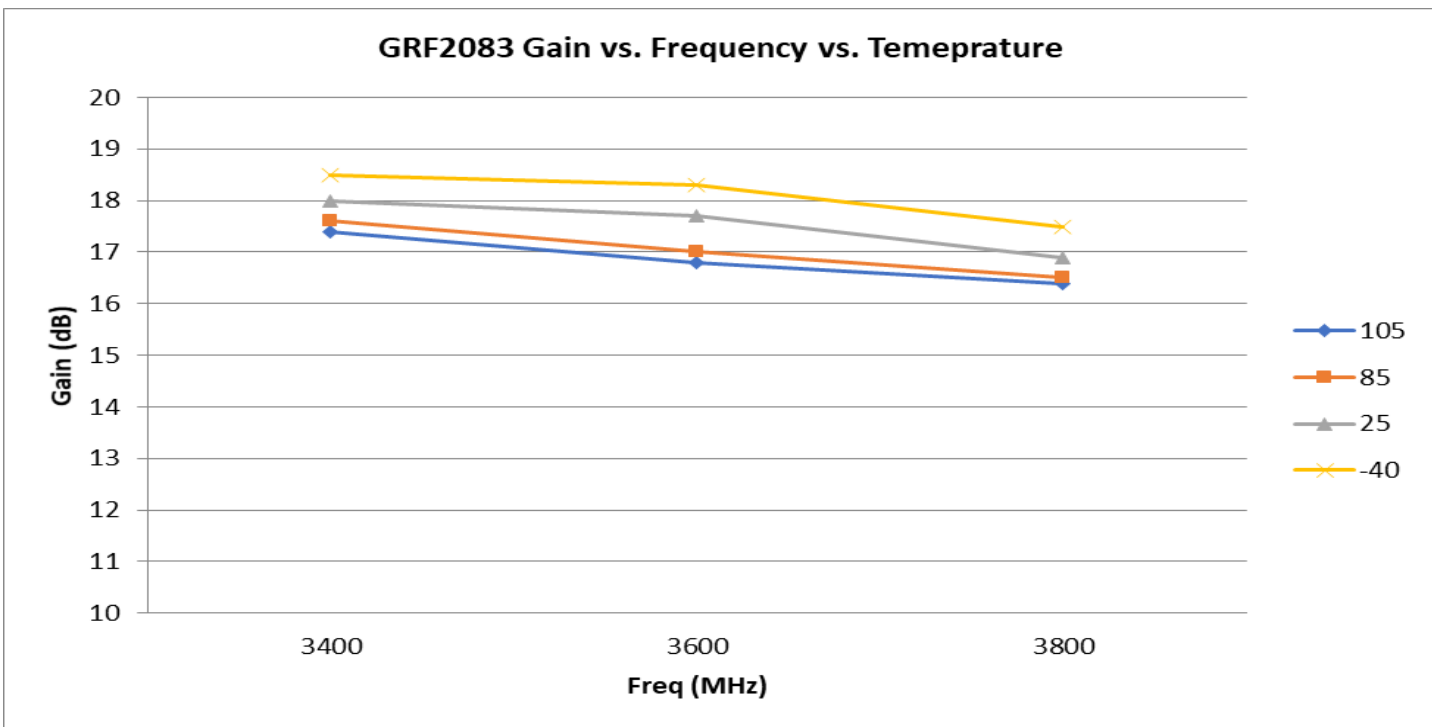





Preliminary

GRF2083

Ultra-LNA with Shutdown
Tuning Range: 3.0 to 6.0 GHz

GRF2083 Evaluation Board Data over Temperature:

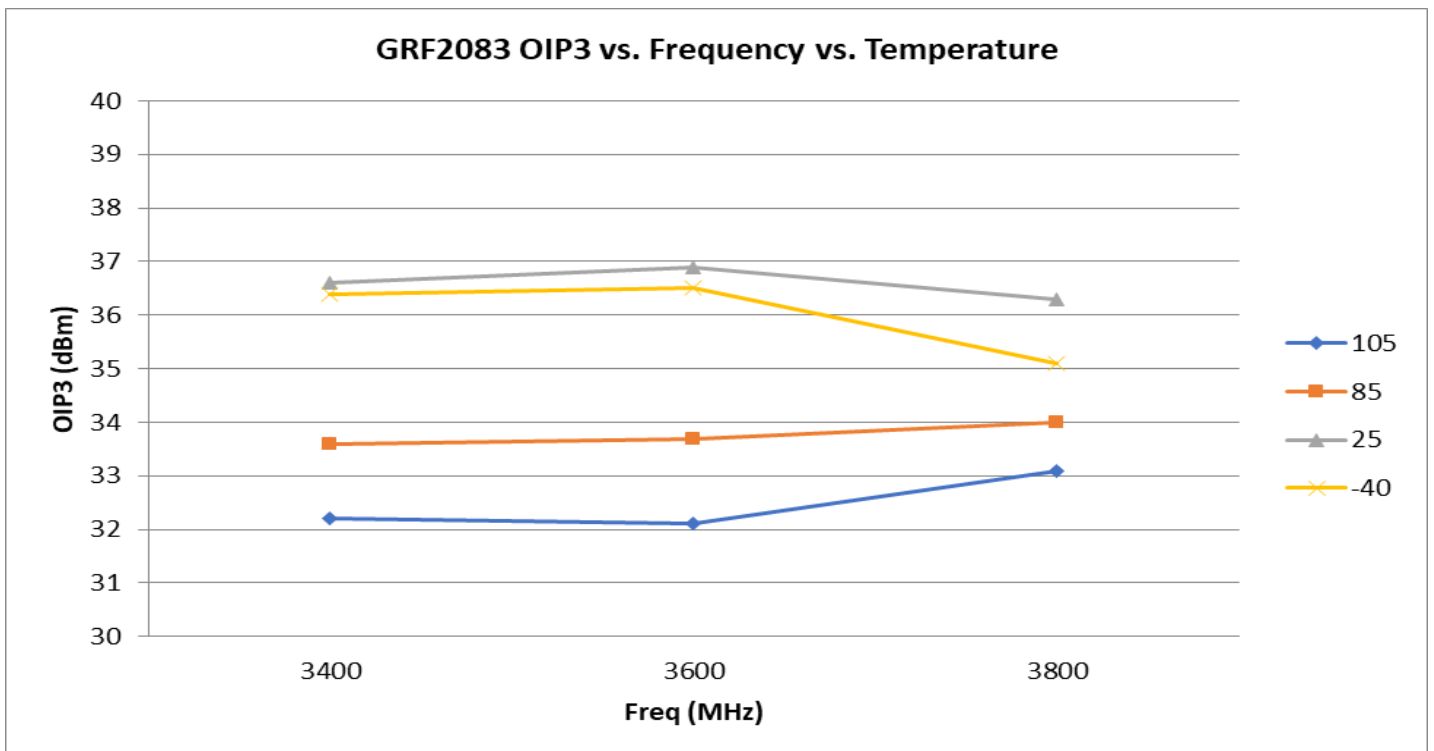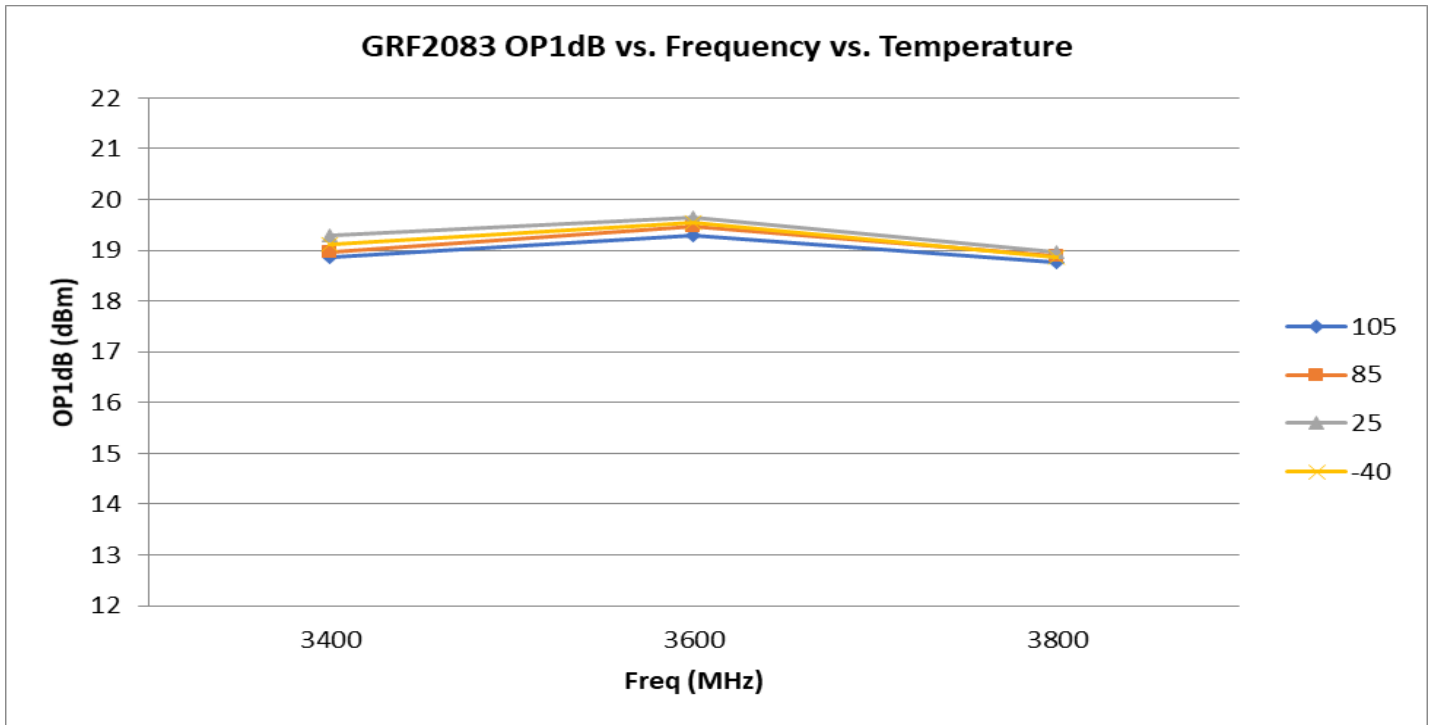




Preliminary


GRF2083

Ultra-LNA with Shutdown
Tuning Range: 3.0 to 6.0 GHz


GRF2083 Gain Mode S-Parms: (3.4 to 3.8 GHz Match)

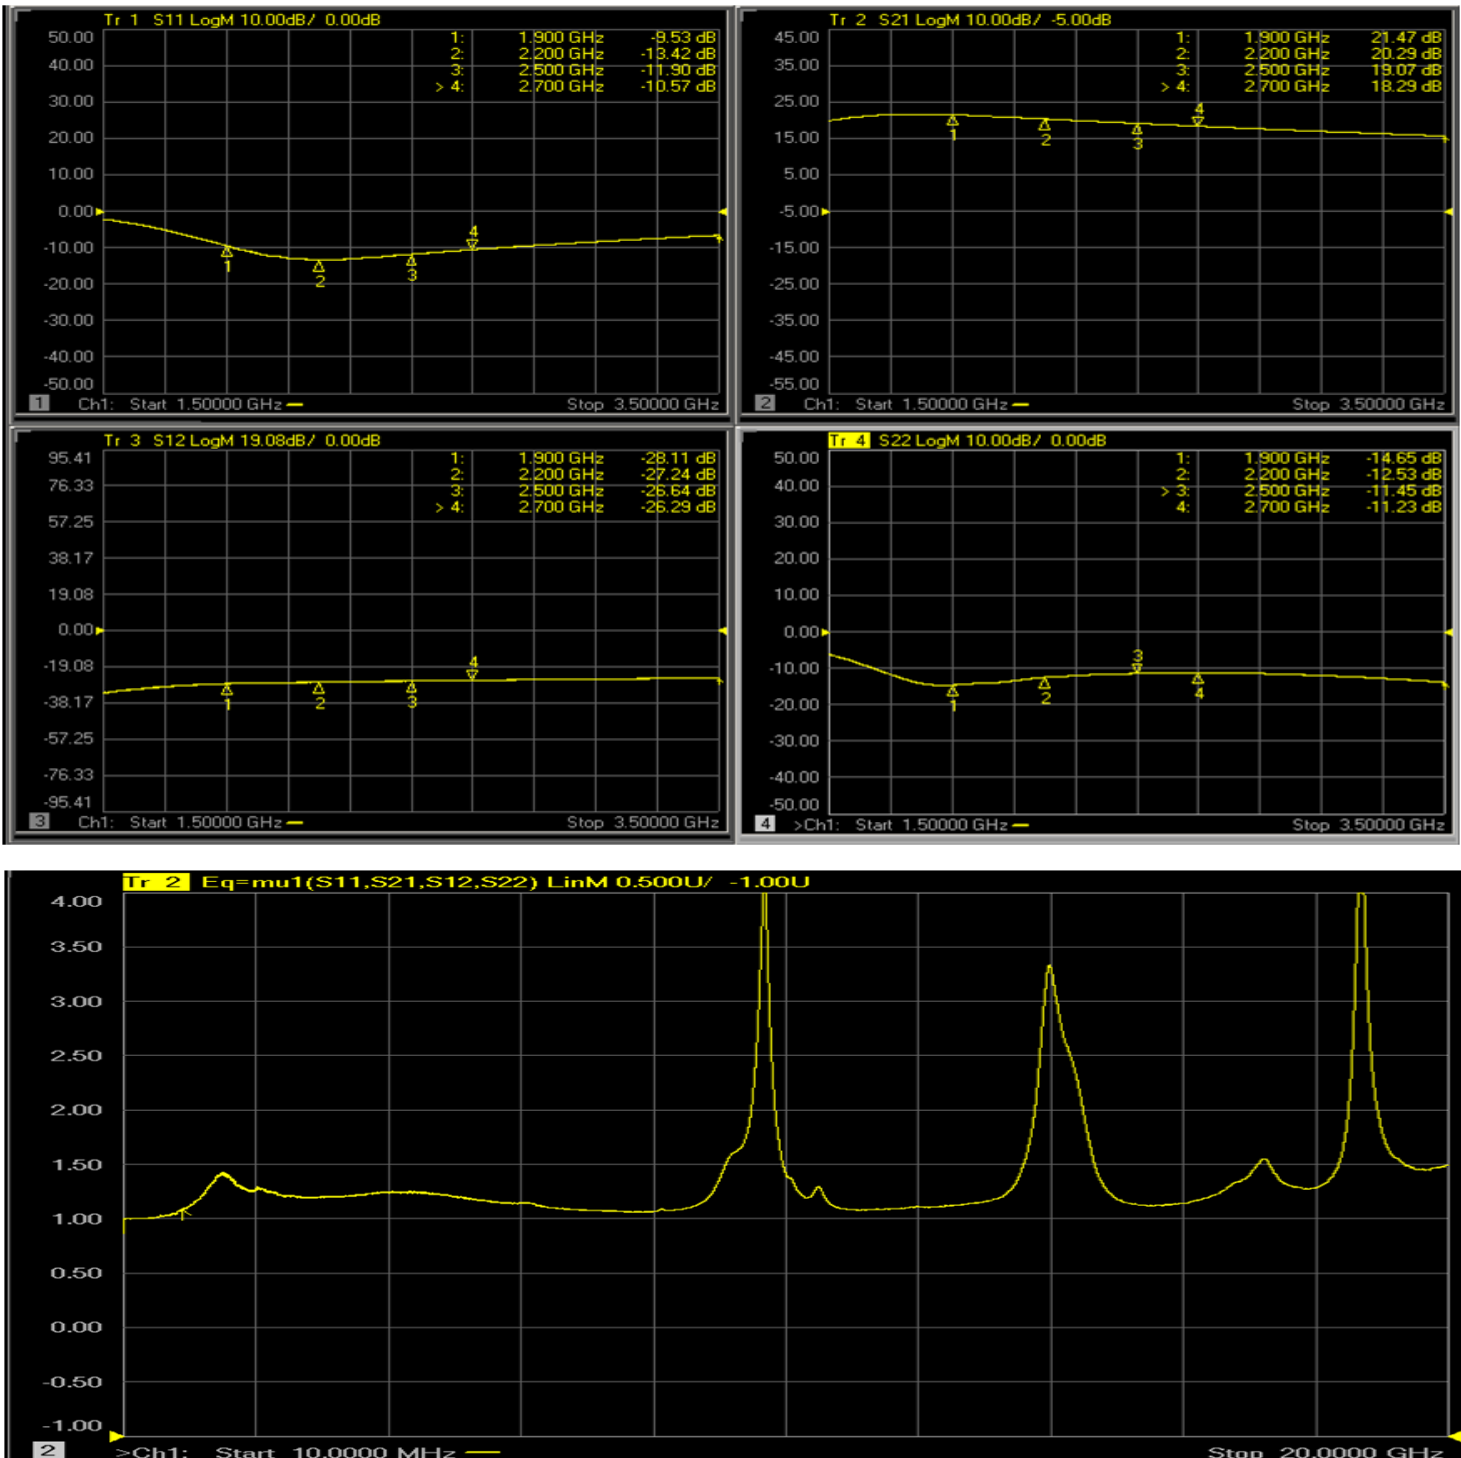

Note: Mu factor ≥ 1.0 implies unconditional stability.

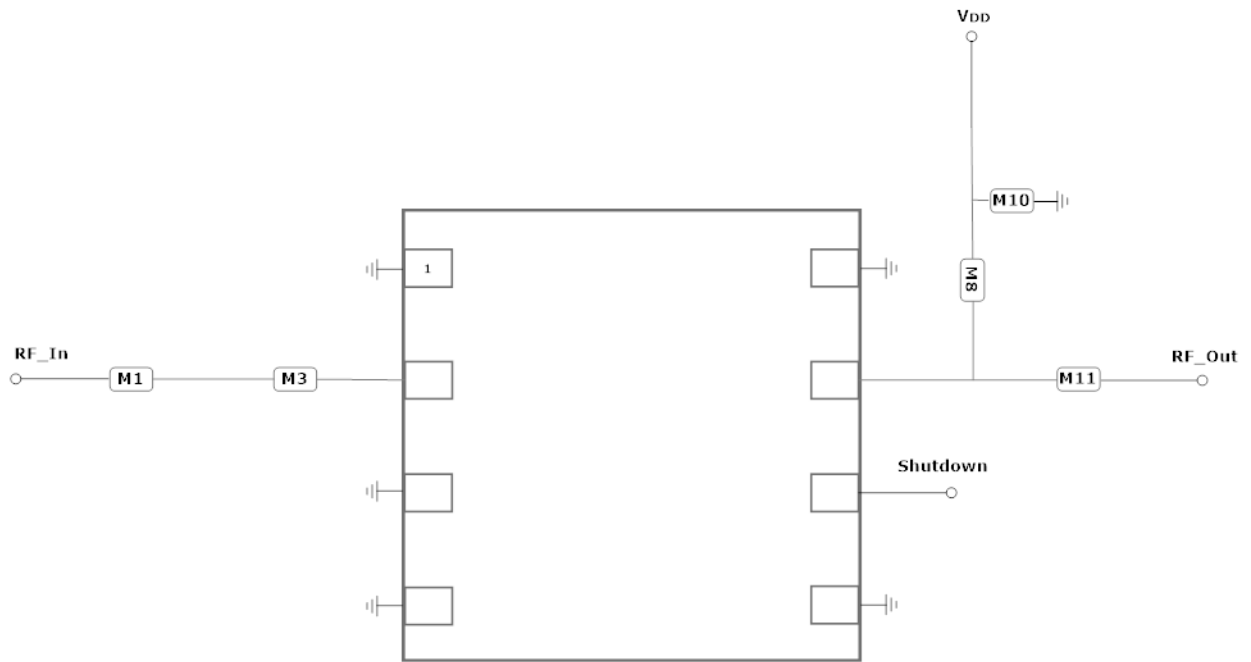

GRF2083 Application Schematic

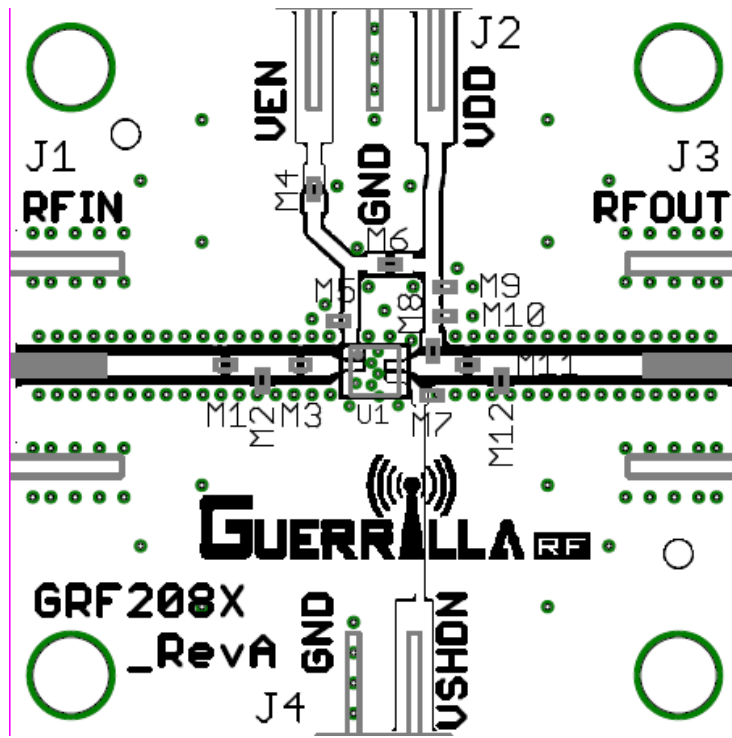

GRF2083 EVB Assembly Drawing



Preliminary

GRF2083

**Ultra-LNA with Shutdown
Tuning Range: 3.0 to 6.0 GHz**

GRF2082 Standard Evaluation Board BOM: (3.4 to 3.8 GHz Tune)

| Component | Type | Manufacturer | Family | Value | Package Size | Substitution |
|------------------|--------------|--------------|--------|--------|--------------|--------------|
| M1 | Capacitor | Murata | GJM | 1.2 pF | 0402 | Ok (high Q) |
| M3 | 0 Ohm Jumper | — | — | — | 0402 | — |
| M8 | Inductor | Murata | LQG | 1.8 nH | 0402 | ok |
| M9 | DNP | — | — | — | — | — |
| M10 | Capacitor | Murata | GRM | 0.1 uF | 0402 | ok |
| M11 | Capacitor | Murata | GRM | 5.1 pF | 0402 | ok |
| Evaluation Board | GRF208X_RevA | — | — | — | — | — |



Preliminary

GRF2083

Ultra-LNA with Shutdown
Tuning Range: 3.0 to 6.0 GHz

| Data Sheet Release Status: | Notes |
|----------------------------|---|
| Advance | S-parameter and NF data based on EM simulations for the fully packaged device using foundry supplied transistor s-parameters. Linearity estimates based on device size, bias condition and experience with related devices. |
| Preliminary | All data based on evaluation board measurements in the Guerrilla RF Applications Lab. |
| Released | All data based on device qualification data. Typically, this data is nearly identical to the data found in the preliminary version. Max and min values for key RF parameters are included. |

Information in this datasheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This datasheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this datasheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any datasheet, datasheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this datasheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, datasheets, and datasheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its datasheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATASHEETS AND DATASHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А