

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

General Description

The MAX5395 single, 256-tap volatile, low-voltage linear taper digital potentiometer offers three end-to-end resistance values of 10kΩ, 50kΩ, and 100kΩ. Potentiometer terminals are independent of supply for voltages up to 5.25V with single-supply operation from 1.7V to 5.5V (charge pump enabled). User-controlled shutdown modes allow the H, W, or L terminal to be opened with the wiper position set to zero-code, mid-code, full-code, or the value contained in the wiper register. Ultra-low-quiescent supply current (< 1μA) can be achieved for supply voltages between 2.6V and 5.5V by disabling the internal charge pump and not allowing potentiometer terminals to exceed the supply voltage by more than 0.3V. The MAX5395 provides a low 50ppm/°C end-to-end temperature coefficient and features an I²C serial interface.

The small package size, low operating supply voltage, low supply current, and automotive temperature range of the MAX5395 make the device uniquely suited for the portable consumer market, battery-backup industrial applications, and automotive market.

The MAX5395 is available in a lead-free, 8-pin TDFN (2mm x 2mm) package. The device operates over the -40°C to +125°C automotive temperature range.

Ordering Information appears at end of data sheet.


Features

- ◆ Single Linear Taper 256-Tap Positions
- ◆ 10kΩ, 50kΩ, and 100kΩ End-to-End Resistance
- ◆ 1.7V to 5.5V Extended Single Supply
- ◆ 0 to 5.25V H, W, L Operating Voltage Independent of V_{DD}
- ◆ 1μA (typ) Supply Current in Low-Power Mode
- ◆ ±1.0 LSB INL, ±0.5 LSB DNL (max) Wiper Accuracy
- ◆ Power-On Sets Wiper to Midscale
- ◆ 50ppm/°C End-to-End Temperature Coefficient
- ◆ 5ppm/°C Ratiometric Temperature Coefficient
- ◆ -40°C to +125°C Operating Temperature Range
- ◆ 2mm x 2mm, 8-Pin TDFN Package
- ◆ I²C-Compatible Serial Interface

Applications

Portable Electronics
System Calibration
Battery-Powered Systems
Automotive Electronics
Mechanical Potentiometer Replacement

Typical Operating Circuit

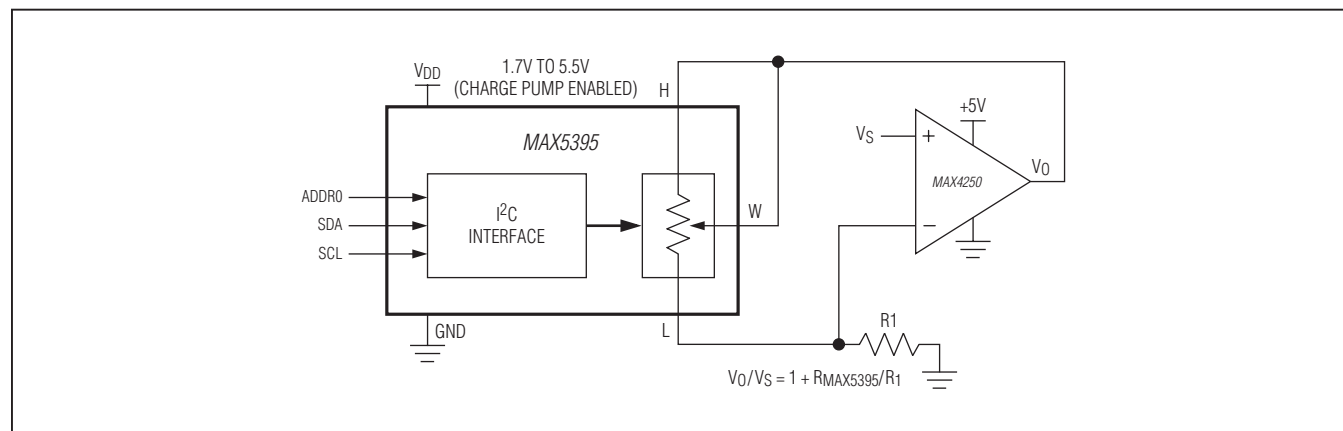

For related parts and recommended products to use with this part, refer to: www.maximintegrated.com/MAX5395.related

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maximintegrated.com.

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

ABSOLUTE MAXIMUM RATINGS

(All voltages referenced to GND.)

| | |
|-------------------------------------|---|
| V _{DD} | -0.3V to +6V |
| H, W, L (charge pump enabled) | -0.3V to +5.5V |
| H, W, L (charge pump disabled) | -0.3V to the lower of (V _{DD} + 0.3V) or +6V |
| ADDR0 | -0.3V to the lower of (V _{DD} + 0.3V) or +6V |
| All Other Pins | -0.3V to +6V |
| Continuous Current into H, W, and L | |
| MAX5395L | 5mA |
| MAX5395M | 2mA |

| | |
|---|-----------------|
| MAX5395N | 1mA |
| Maximum Current into Any Input | 50mA |
| Continuous Power Dissipation (T _A = +70°C) | |
| TDFN (derate 11.9mW/°C above +70°C) | 953.5mW |
| Operating Temperature Range | -40°C to +125°C |
| Storage Temperature Range | -65°C to +150°C |
| Junction Temperature | +150°C |
| Lead Temperature (soldering, 10s) | +300°C |
| Soldering Temperature (reflow) | +260°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

PACKAGE THERMAL CHARACTERISTICS (Note 1)

TDFN

Junction-to-Ambient Thermal Resistance (θ_{JA})83.9°C/W

Junction-to-Case Thermal Resistance (θ_{JC})37.0°C/W

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

ELECTRICAL CHARACTERISTICS

(V_{DD} = 1.7V to 5.5V, V_H = V_{DD}, V_L = GND, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at V_{DD} = 1.8V, T_A = +25°C.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-----------------|---|------|-----|------|--------|
| RESOLUTION | | | | | | |
| 256-Tap Family | N | | 256 | | | Tap |
| DC PERFORMANCE (Voltage-Divider Mode) | | | | | | |
| Integral Nonlinearity (Note 3) | INL | | -1.0 | | +1.0 | LSB |
| Differential Nonlinearity | DNL | (Note 3) | -0.5 | | +0.5 | LSB |
| Ratiometric Resistor Tempco | | (DV _W /V _W)/DT, V _H = V _{DD} , V _L = GND, No Load | | 5 | | ppm/°C |
| Full-Scale Error (Code FFh) | | Charge pump enabled, 1.7V < V _{DD} < 5.5V | -0.5 | | | LSB |
| | | Charge pump disabled, 2.6V < V _{DD} < 5.5V | -0.5 | | | |
| | | | -1.0 | | | |
| Zero-Scale Error (Code 00h) | | Charge pump enabled, 1.7V < V _{DD} < 5.5V | | | +0.5 | LSB |
| | | Charge pump disabled, 2.6V < V _{DD} < 5.5V | | | +0.5 | |
| | | | | | +1.0 | |
| DC PERFORMANCE (Variable Resistor Mode) | | | | | | |
| Integral Nonlinearity (Note 4) | R-INL | Charge pump enabled, 1.7V < V _{DD} < 5.5V | -1.0 | | +1.0 | LSB |
| | | Charge pump disabled, 2.6V < V _{DD} < 5.5V | -1.0 | | +1.0 | |
| | | | -1.5 | | +1.5 | |
| Differential Nonlinearity | R-DNL | (Note 4) | -0.5 | | +0.5 | LSB |
| Wiper Resistance (Note 5) | R _{WL} | Charge pump enabled, 1.7V < V _{DD} < 5.5V | | 25 | 50 | Ω |
| | | Charge pump disabled, 2.6V < V _{DD} < 5.5V | | | 200 | |

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

ELECTRICAL CHARACTERISTICS (continued)

(V_{DD} = 1.7V to 5.5V, V_H = V_{DD}, V_L = GND, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at V_{DD} = 1.8V, T_A = +25°C.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|---|----------------------------------|---|------------------------|-------|-----|---------------------|-------|
| DC PERFORMANCE (Resistor Characteristics) | | | | | | | |
| Terminal Capacitance | C _H , C _L | Measured to GND | | 10 | | pF | |
| Wiper Capacitance | C _W | Measured to GND | | 20 | | pF | |
| End-to-End Resistor Tempco | T _{CR} | No load | | 50 | | ppm/°C | |
| End-to-End Resistor Tolerance | | Wiper not connected | | -25 | | +25 | % |
| AC PERFORMANCE | | | | | | | |
| -3dB Bandwidth | BW | Code = 80h, 10pF load, V _{DD} = 1.8V | 10kΩ | 1600 | | kHz | |
| | | | 50kΩ | 340 | | | |
| | | | 100kΩ | 165 | | | |
| Total Harmonic Distortion Plus Noise | THD+N | (Note 6) | | 0.035 | | % | |
| Wiper Settling Time | t _S | (Note 7) | 10kΩ | 190 | | ns | |
| | | | 50kΩ | 400 | | | |
| | | | 100kΩ | 664 | | | |
| Charge-Pump Feedthrough at W | V _{RW} | | | 600 | | nV _{RMS} | |
| POWER SUPPLIES | | | | | | | |
| Supply Voltage Range | V _{DD} | | | 1.7 | | 5.5 | V |
| Terminal Voltage Range (H, W, L to GND) | | Charge pump enabled, 1.7V < V _{DD} < 5.5V | | 0 | | 5.25 | V |
| | | Charge pump disabled, 2.6V < V _{DD} < 5.5V | | 0 | | V _{DD} | |
| Supply Current (Note 8) | I _{VDD} | Charge pump disabled, 2.6V < V _{DD} < 5.5V | | 1 | | μA | |
| | | Charge pump enabled, 1.7V < V _{DD} < 5.5V | V _{DD} = 5.5V | 25 | | | |
| | | | V _{DD} = 1.7V | 20 | | | |
| DIGITAL INPUTS | | | | | | | |
| Minimum Input High Voltage | V _{IH} | 2.6V < V _{DD} < 5.5V | | 70 | | % x V _{DD} | |
| | | 1.7V < V _{DD} < 2.6V | | 80 | | | |
| Maximum Input Low Voltage | V _{IL} | 2.6V < V _{DD} < 5.5V | | 30 | | % x V _{DD} | |
| | | 1.7V < V _{DD} < 2.6V | | 20 | | | |
| Input Leakage Current | | | | -1 | | +1 | μA |
| Input Capacitance | | | | 5 | | pF | |
| ADDR0 Pullup/Pulldown Strength | R _{PUR} R _{PD} | (Note 9) | | 60 | | kΩ | |
| TIMING CHARACTERISTICS (Note 10) | | | | | | | |
| Maximum SCL Frequency | f _{SCL} | | | 400 | | kHz | |
| Setup Time for START Condition | t _{SU:STA} | | | 0.6 | | μs | |

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

ELECTRICAL CHARACTERISTICS (continued)

(V_{DD} = 1.7V to 5.5V, V_H = V_{DD}, V_L = GND, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at V_{DD} = 1.8V, T_A = +25°C.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|---------------------|------------|-----|-----|-----|-------|
| Hold Time for START Condition | t _{HD:STA} | | 0.6 | | | μs |
| SCL High Time | t _{HIGH} | | 0.6 | | | μs |
| SCL Low Time | t _{LOW} | | 1.3 | | | μs |
| Data Setup Time | t _{SU:DAT} | | 100 | | | ns |
| Data Hold Time | t _{HD:DAT} | | 0 | | | μs |
| SDA, SCL Rise Time | t _R | | | | 0.3 | μs |
| SDA, SCL Fall Time | t _F | | | | 0.3 | μs |
| Setup Time for STOP Conditions | t _{SU:STO} | | 0.6 | | | μs |
| Bus Free Time Between STOP and START Conditions | t _{BUF} | | 1.3 | | | μs |
| Pulse-Suppressed Spike Width | t _{SP} | | | 50 | | ns |
| Capacitive Load for Each Bus | C _B | | | 400 | | pF |

Note 2: All devices are production tested at T_A = +25°C and are guaranteed by design and characterization for T_A = -40°C to +125°C.

Note 3: DNL and INL are measured with the potentiometer configured as a voltage-divider with V_H = 5.25V (QP enabled) or V_{DD} (QP disabled) and V_L = GND. The wiper terminal is unloaded and measured with an ideal voltmeter.

Note 4: R-DNL and R-INL are measured with the potentiometer configured as a variable resistor (Figure 1). H is unconnected and L = GND.

For charge pump enabled, V_{DD} = 1.7V to 5.5V, the wiper terminal is driven with a source current of 400μA for the 10kΩ configuration, 80μA for the 50kΩ configuration, and 40μA for the 100kΩ configuration.

For charge pump disabled and V_{DD} = 5.5V, the wiper terminal is driven with a source current of 400μA for the 10kΩ configuration, 80μA for the 50kΩ configuration, and 40μA for the 100kΩ configuration.

For charge pump disabled and V_{DD} = 2.6V, the wiper terminal is driven with a source current of 200μA for the 10kΩ configuration, 40μA for the 50kΩ configuration, and 20μA for the 100kΩ configuration.

Note 5: The wiper resistance is the maximum value measured by injecting the currents given in Note 4 into W with L = GND.
 $R_W = (V_W - V_H)/I_W$.

Note 6: Measured at W with H driven with a 1kHz, 0V to V_{DD} amplitude tone and V_L = GND. Wiper at midscale with a 10pF load.

Note 7: Wiper-settling time is the worst-case 0-to-50% rise time, measured between tap 0 and tap 127. H = V_{DD}, L = GND, and the wiper terminal is loaded with 10pF capacitance to ground.

Note 8: Digital Inputs at V_{DD} or GND.

Note 9: An unconnected condition on the ADDR0 pin is sensed via a pullup and pulldown operation. For proper operation, the ADDR0 pin should be tied to V_{DD}, GND, or left unconnected with minimal capacitance.

Note 10: Digital timing is guaranteed by design and characterization, and is not production tested.

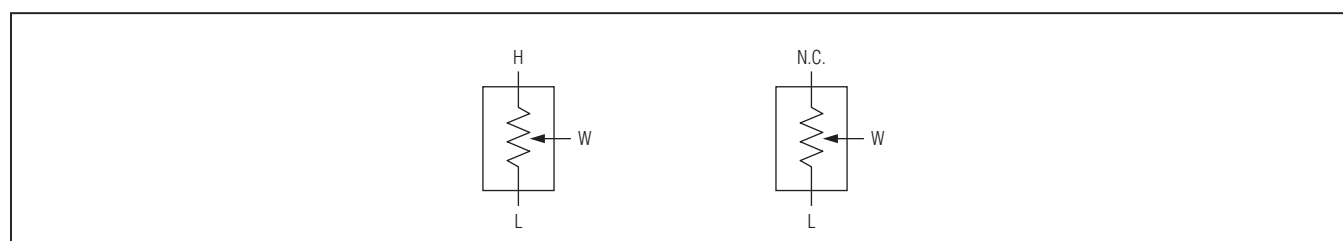











Figure 1. Voltage-Divider and Variable Resistor Configurations

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

Typical Operating Characteristics

($V_{DD} = 2.5V$, $T_A = 25^\circ C$, unless otherwise noted.)

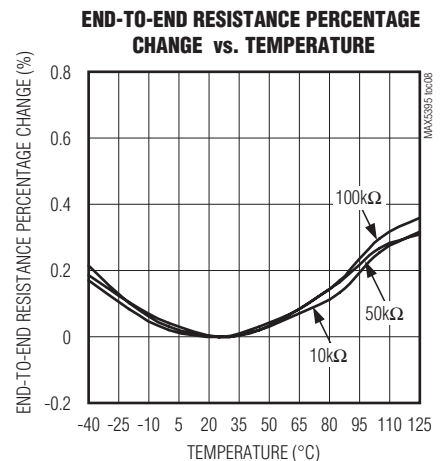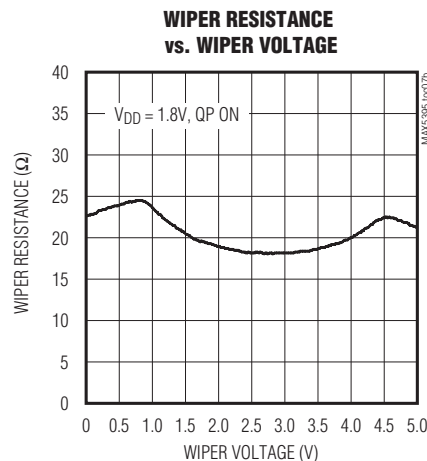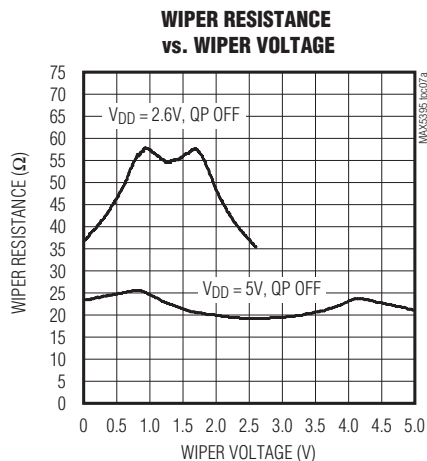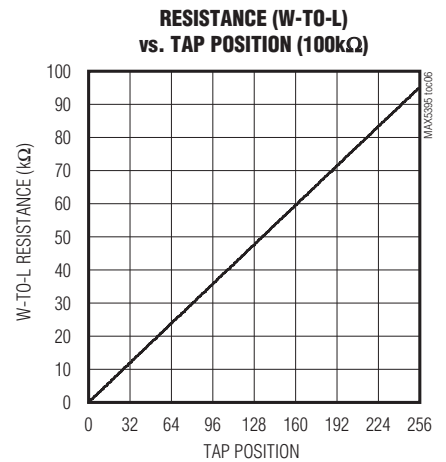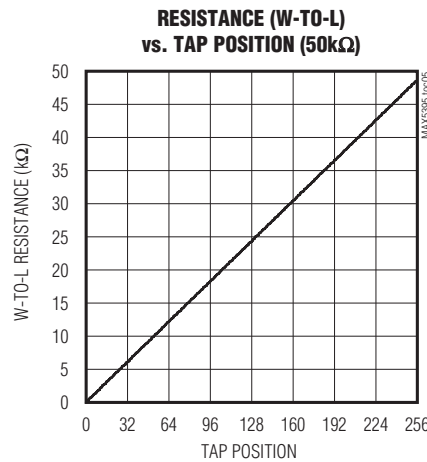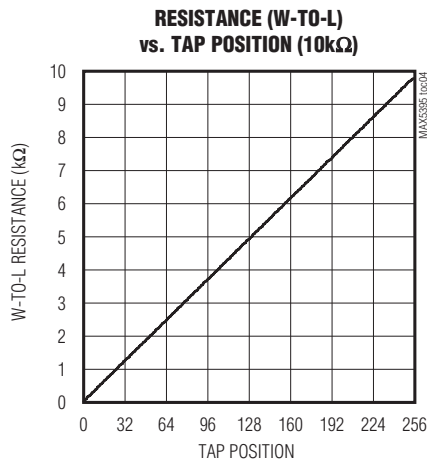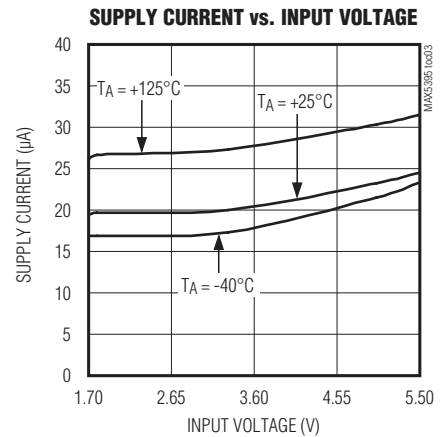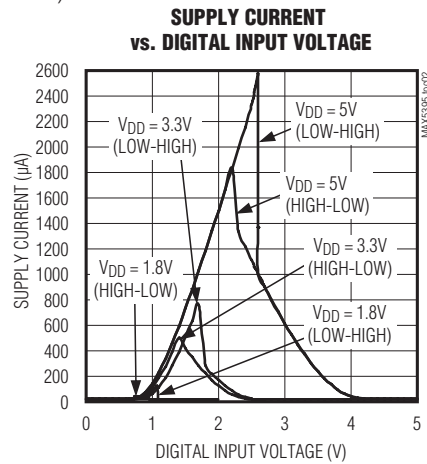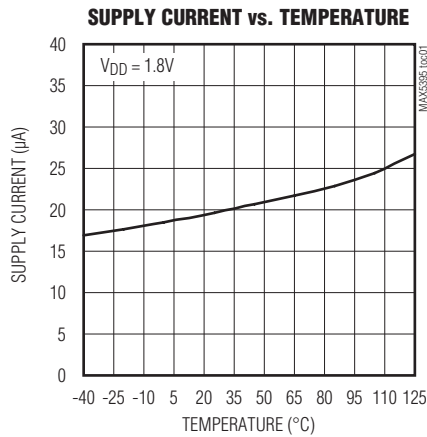


MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer


Typical Operating Characteristics (continued)

($V_{DD} = 1.8V$, $T_A = +25^\circ C$, unless otherwise noted.)


**TAP-TO-TAP SWITCHING TRANSIENT
(CODE 127 TO 128, 10k Ω)**

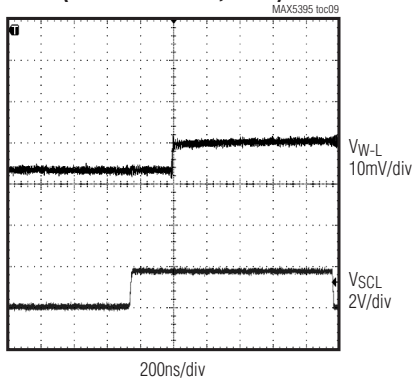


**TAP-TO-TAP SWITCHING TRANSIENT
(CODE 127 TO 128, 50k Ω)**

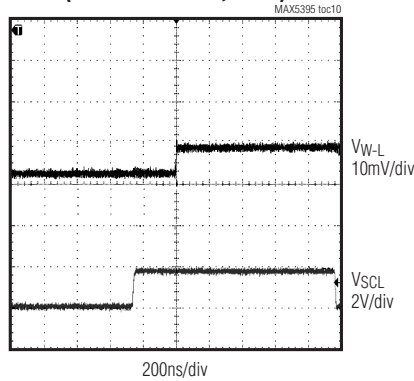


**TAP-TO-TAP SWITCHING TRANSIENT
(CODE 127 TO 128, 100k Ω)**

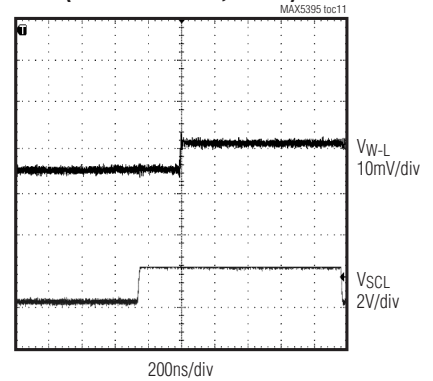


POWER-ON TRANSIENT (10k Ω)

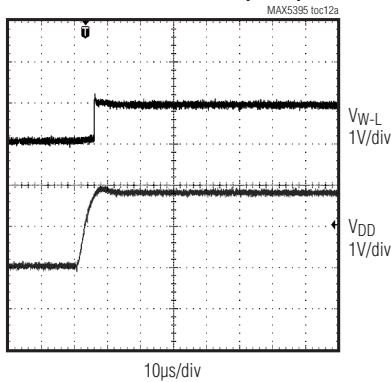


POWER-ON TRANSIENT (50k Ω)

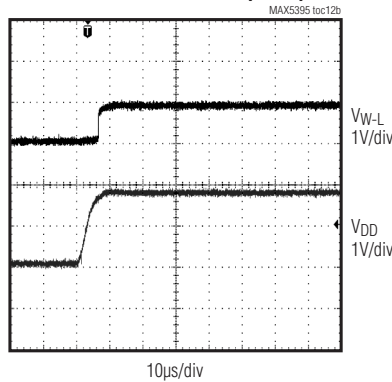


POWER-ON TRANSIENT (100k Ω)

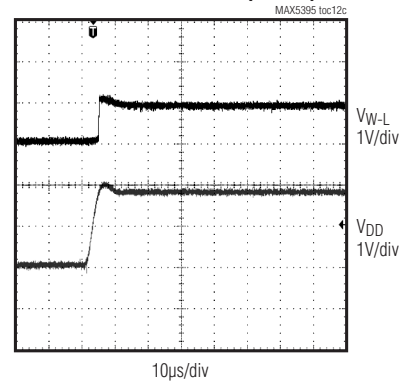


**MIDSCALE FREQUENCY
RESPONSE (10k Ω)**

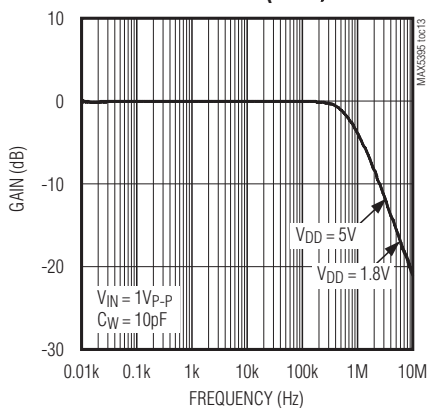

**MIDSCALE FREQUENCY
RESPONSE (50k Ω)**

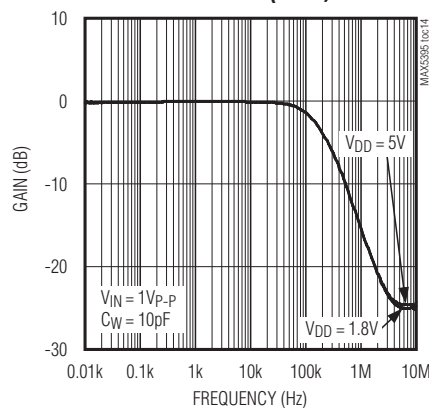

**MIDSCALE FREQUENCY
RESPONSE (100k Ω)**

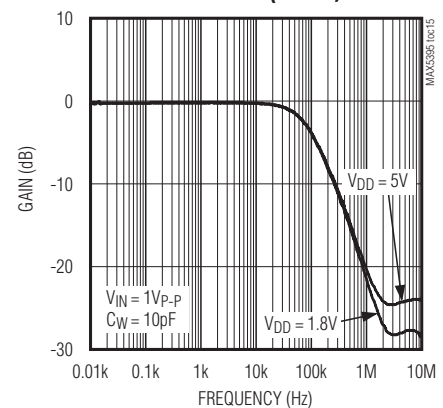


MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer


Typical Operating Characteristics (continued)

($V_{DD} = 1.8V$, $T_A = +25^\circ C$, unless otherwise noted.)


**TOTAL HARMONIC DISTORTION PLUS NOISE
vs. FREQUENCY**

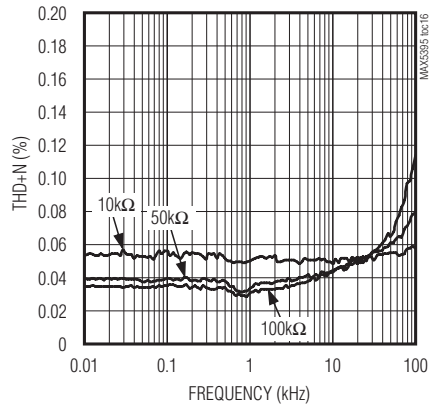


CHARGE-PUMP FEEDTHROUGH AT W

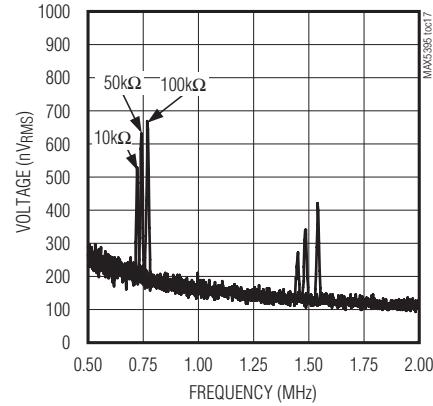


**VARIABLE-RESISTOR DNL
vs. TAP POSITION (10kΩ)**

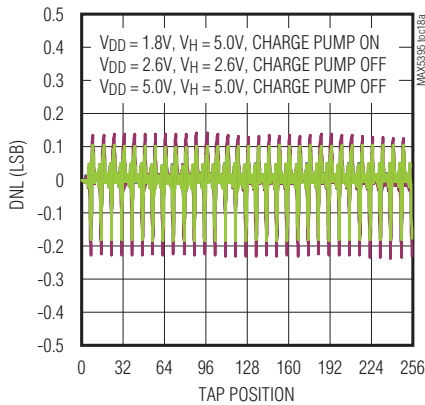


**VARIABLE-RESISTOR DNL
vs. TAP POSITION (50kΩ)**

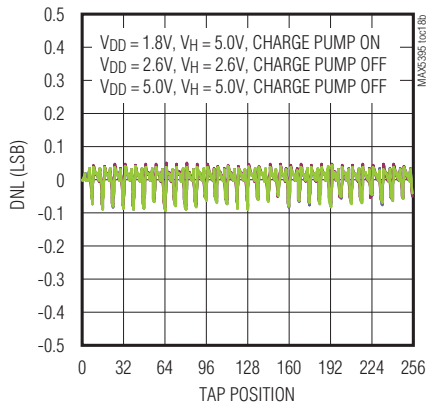


**VARIABLE-RESISTOR DNL
vs. TAP POSITION (100kΩ)**

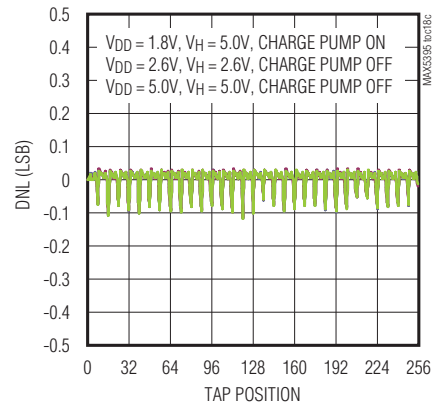


**VARIABLE-RESISTOR INL
vs. TAP POSITION (10kΩ)**

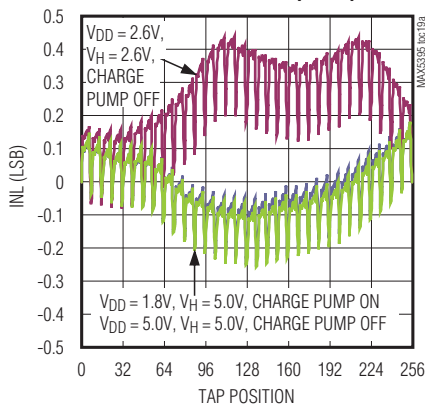

**VARIABLE-RESISTOR INL
vs. TAP POSITION (50kΩ)**

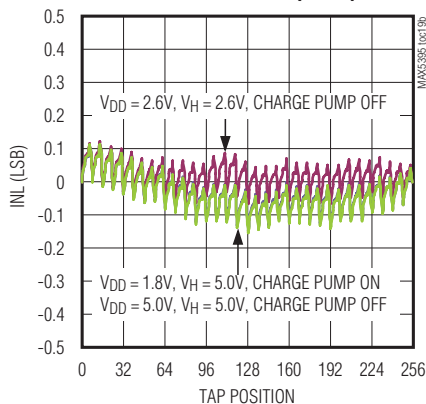

**VARIABLE-RESISTOR INL
vs. TAP POSITION (100kΩ)**






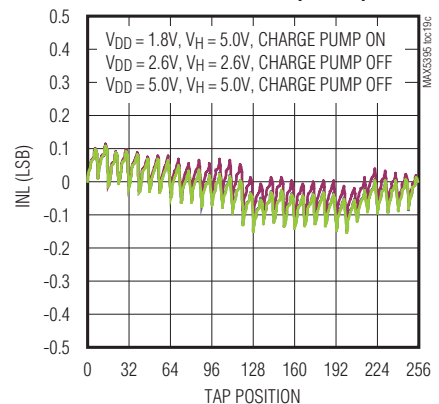


MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

Typical Operating Characteristics (continued)


($V_{DD} = 1.8V$, $T_A = +25^\circ C$, unless otherwise noted.)

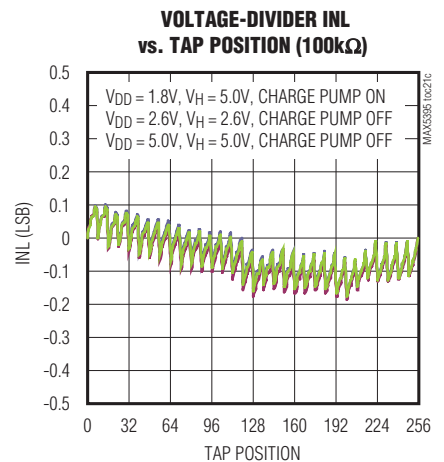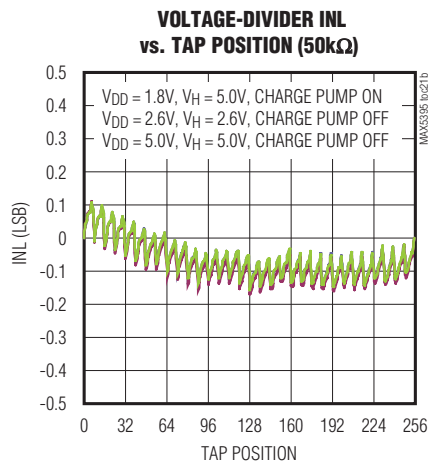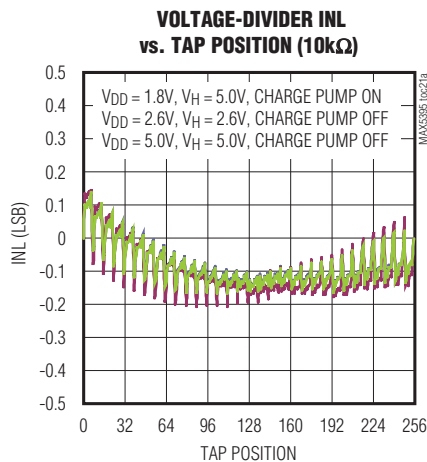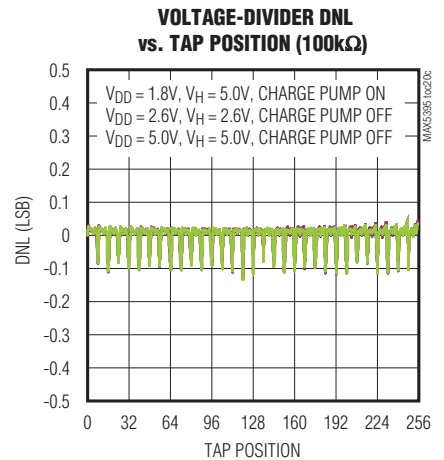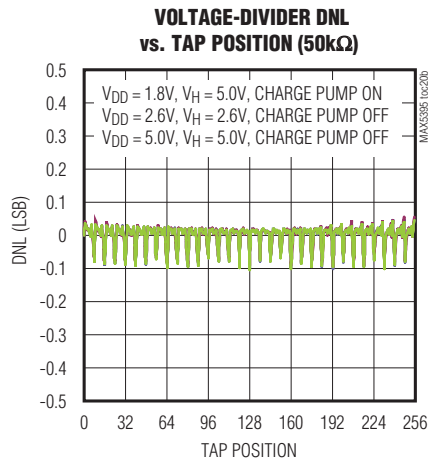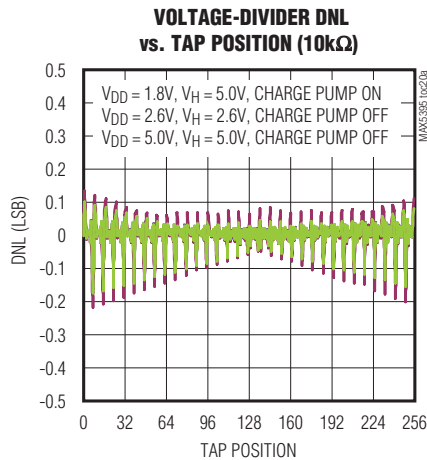

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

Pin Configuration

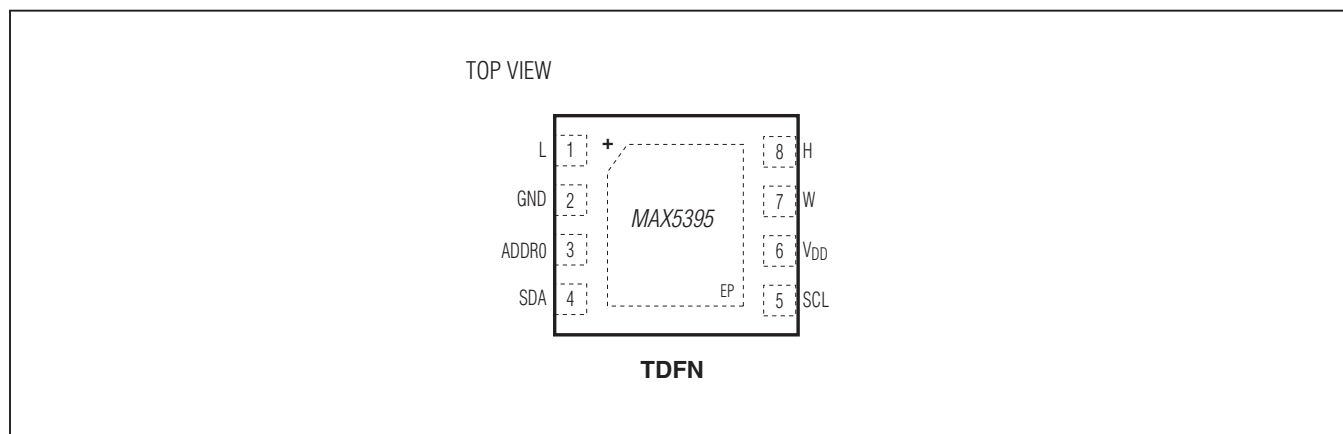


Pin Description

| PIN | NAME | FUNCTION |
|-----|-----------------|---|
| 1 | L | Low Terminal. The voltage at L can be greater than or less than the voltage at H. Current can flow into or out of L. |
| 2 | GND | Ground |
| 3 | ADDR0 | Address Input 0. Connected to V _{DD} , GND, or open. |
| 4 | SDA | I ² C Serial Data Input |
| 5 | SCL | I ² C Clock Input |
| 6 | V _{DD} | Power Supply |
| 7 | W | Wiper Terminal |
| 8 | H | High Terminal. The voltage at H can be greater than or less than the voltage at L. Current can flow into or out of H. |
| — | EP | Exposed Pad. Internally connected to GND. Connect to ground. |

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

Functional Diagram

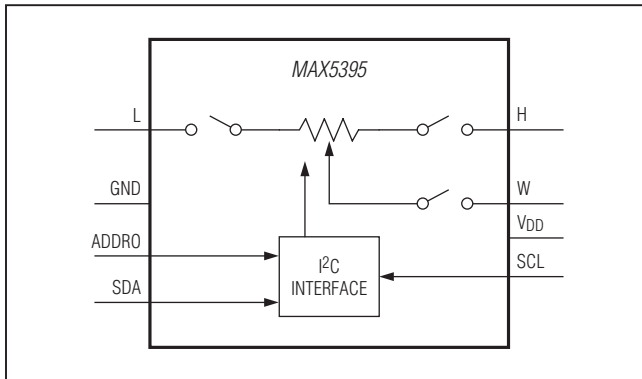

Detailed Description

The MAX5395 single, 256-tap volatile, low-voltage linear taper digital potentiometer offers three end-to-end resistance values of 10k Ω , 50k Ω , and 100k Ω . Potentiometer terminals are independent of supply for voltages up to +5.25V with single-supply operation from 1.7V to 5.5V (charge pump enabled). User-controlled shutdown modes allow the H, W, or L terminals to be opened with the wiper position set to zero-code, midcode, full-code, or the value contained in the wiper register. Ultra-low-quiescent supply current (< 1 μ A) can be achieved for supply voltages between 2.6V and 5.5V by disabling the internal charge pump and not allowing potentiometer terminals to exceed the supply voltage by more than 0.3V. The MAX5395 provides a low 50ppm/ $^{\circ}$ C end-to-end temperature coefficient and features a I²C serial interface.

The small package size, low supply operating voltage, low supply current, and automotive temperature range of the MAX5395 make the device uniquely suited for the portable consumer market, battery-backup industrial applications, and automotive market.

Charge Pump

The MAX5395 contains an internal charge pump that guarantees the maximum wiper resistance, R_{WL} , to be less than 50 Ω (25 Ω typ) for supply voltages down to 1.7V and allows pins H, W, and L to be driven between GND and 5.25V independent of V_{DD} . Minimal charge-pump feedthrough is present at the terminal outputs and is illustrated by the Charge-Pump Feedthrough at W vs. Frequency graph in the [Typical Operating](#)

[Characteristics](#). The charge pump is on by default but can be disabled with QP_OFF and enabled with the QP_ON commands ([Table 1](#)). The MAX5395 minimum supply voltage with charge pump disabled is limited to 2.6V and terminal voltage cannot exceed -0.3V to ($V_{DD} + 0.3V$).

I²C Interface

The MAX5395 feature an I²C/SMBus-compatible, 2-wire serial interface consisting of a serial data line (SDA) and a serial clock line (SCL). SDA and SCL enable communication between the MAX5395 and the master at clock rates up to 400kHz. [Figure 1](#) shows the 2-wire interface timing diagram. The master generates SCL and initiates data transfer on the bus. The master device writes data to the MAX5395 by transmitting the proper slave address followed by the command byte and then the data word. Each transmit sequence is framed by a START (S) or Repeated START (Sr) condition and a STOP (P) condition. Each word transmitted to the MAX5395 is 8 bits long and is followed by an acknowledge clock pulse. A master reading data from the MAX5395 must transmit the proper slave address followed by a series of nine SCL pulses for each byte of data requested. The MAX5395 transmit data on SDA in sync with the master-generated SCL pulses. The master acknowledges receipt of each byte of data. Each read sequence is framed by a START or Repeated START condition, a not acknowledge, and a STOP condition. SDA operates as both an input and an open-drain output. A pullup resistor, typically 4.7k Ω , is required on SDA. SCL operates only as an input. A pullup resistor, typically 4.7k Ω , is required on SCL if there are multiple masters on the bus, or if the single master has an open-drain SCL output.

Series resistors in line with SDA and SCL are optional. Series resistors protect the digital inputs of the MAX5395 from high voltage spikes on the bus lines and minimize crosstalk and undershoot of the bus signals. The MAX5395 can accommodate bus voltages higher than V_{DD} up to a limit of +5.5V. Bus voltages lower than V_{DD} are not recommended and may result in significantly increased interface currents and data corruption.

The MAX5395 with I²C interface contains a shift register that decodes the command and address bytes, routing the data to the register. Data written to a memory register immediately updates the wiper position. The wiper powers up in mid position, $D[7:0] = 0x80$ with charge pump enabled.

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

I²C START and STOP Conditions

SDA and SCL idle high when the bus is not in use. A master initiates communication by issuing a START condition. A START condition is a high-to-low transition on SDA with SCL high. A STOP condition is a low-to-high transition on SDA while SCL is high (Figure 2). A START condition from the master signals the beginning of a transmission to the MAX5395. The master terminates transmission and frees the bus, by issuing a STOP condition. The bus remains active if a Repeated START condition is generated instead of a STOP condition.

I²C Early STOP and Repeated START Conditions

The MAX5395 recognizes a STOP condition at any point during data transmission except if the STOP condition occurs in the same high pulse as a START condition. For proper operation, do not send a STOP condition during the same SCL high pulse as the START condition. Transmissions ending in an early STOP condition will not impact the internal device settings. If the STOP occurs during a readback byte, the transmission is terminated

and a later read mode request will begin transfer of the requested register data from the beginning. See Figure 3.

It is possible to interrupt a transmission to a MAX5395 with a new START (Repeated START) condition (perhaps addressing another device), which leaves the input registers with data that has not been transferred to the internal registers. The unused data will not be stored under these conditions. The aborted MAX5395 I²C sequence will have no effect on the part.

I²C Acknowledge

In write mode, the acknowledge bit (ACK) is a clocked 9th bit that the MAX5395 uses to handshake receipt of each byte of data as shown in Figure 4. The MAX5395 pulls down SDA during the entire master-generated 9th clock pulse if the previous byte is successfully received. Monitoring ACK allows for detection of unsuccessful data transfers. An unsuccessful data transfer occurs if a receiving device is busy or if a system fault has occurred. In the event of an unsuccessful data transfer, the bus master will retry communication.

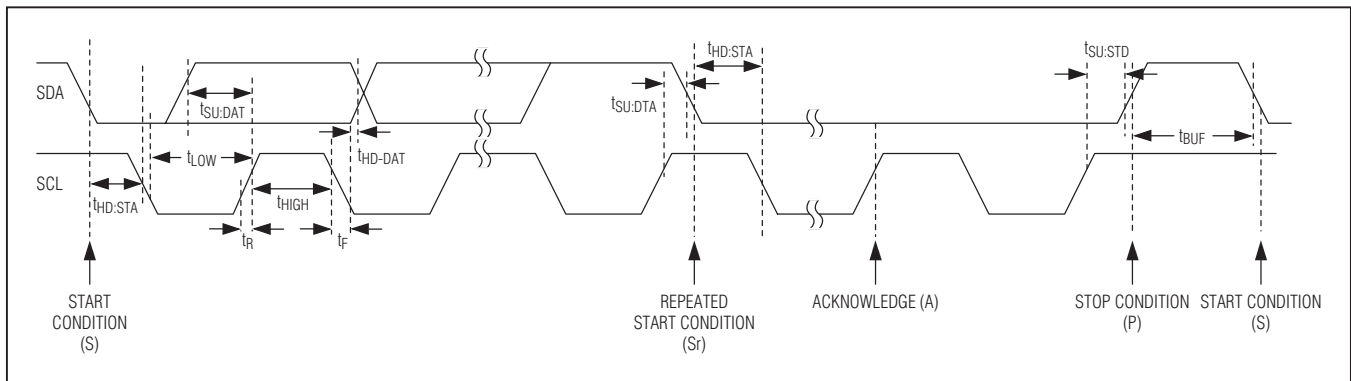


Figure 2. I²C Timing Diagram

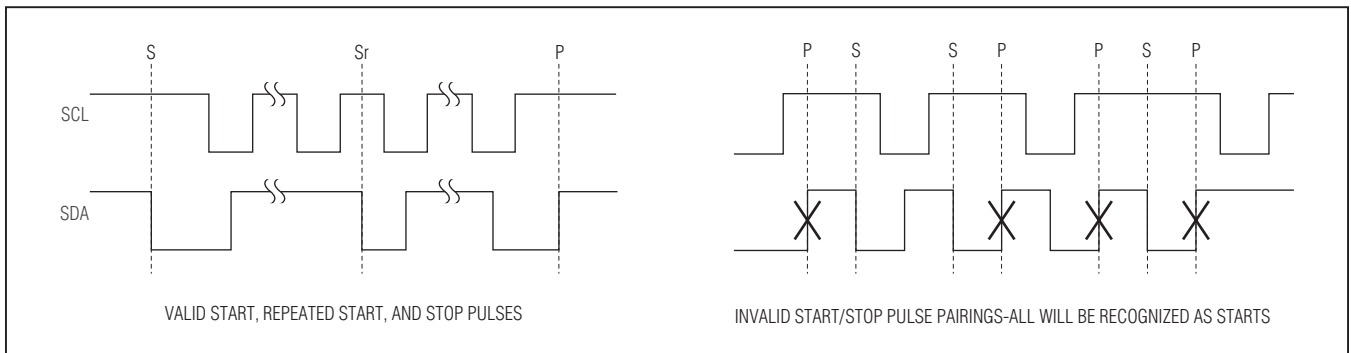


Figure 3. I²C START(s), Repeated START(S), and STOP(S) Conditions

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

In read mode, the master pulls down SDA during the 9th clock cycle to acknowledge receipt of data from the MAX5395. An acknowledge is sent by the master after each read byte to allow data transfer to continue. A not-acknowledge is sent when the master reads the final byte of data from the MAX5395, followed by a STOP condition.

I²C Slave Address

The slave address is defined as the seven most significant bits (MSBs) followed by the R/W bit. See [Figure 5](#) and [Figure 6](#). The five most significant bits are 01010 with the 3 LSBs determined ADDR0 as shown in [Table 1](#). Setting the R/W bit to 1 configures the MAX5395 for read mode. Setting the R/W bit to 0 configures the MAX5395 for write mode. The slave address is the first byte of information sent to the MAX5395 after the START condition.

The MAX5395 has the ability to detect an unconnected (N.C.) state on the ADDR0 input for additional address flexibility; if disconnecting the ADDR0 input, be certain to minimize all loading on the ADDR0 input (i.e. provide a landing for ADDR0, but do not allow any board traces).

I²C Message Format for Writing

A master device communicates with the MAX5395 by transmitting the proper slave address followed by command and data word. Each transmit sequence is framed

Table 1. I²C Slave Address LSBs

| ADDR0 | A1 | A0 | SLAVE ADDRESS |
|-----------------|----|----|---------------|
| GND | 0 | 0 | 0101000 |
| N.C. | 0 | 1 | 0101001 |
| V _{DD} | 1 | 1 | 0101011 |

N.C. = No connection.

by a START or Repeated START condition and a STOP condition as described above. Each word is 8 bits long and is always followed by an acknowledge clock (ACK) pulse as shown in [Figure 5](#). The first byte contains the address of the MAX5395 with R/W = 0 to indicate a write. The second byte contains the command to be executed and the third byte contains the data to be written.

I²C Message Format for Readback Operations

Each readback sequence is framed by a START or Repeated START condition and a STOP condition. Each word is 8 bits long and is followed by an acknowledge clock pulse as shown in [Figure 6](#). The first byte contains the address of the MAX5395 with R/W = 0 to indicate a write. The second byte contains the register that is to be read back. There is a Repeated START condition, followed by the device address with R/W = 1 to indicate

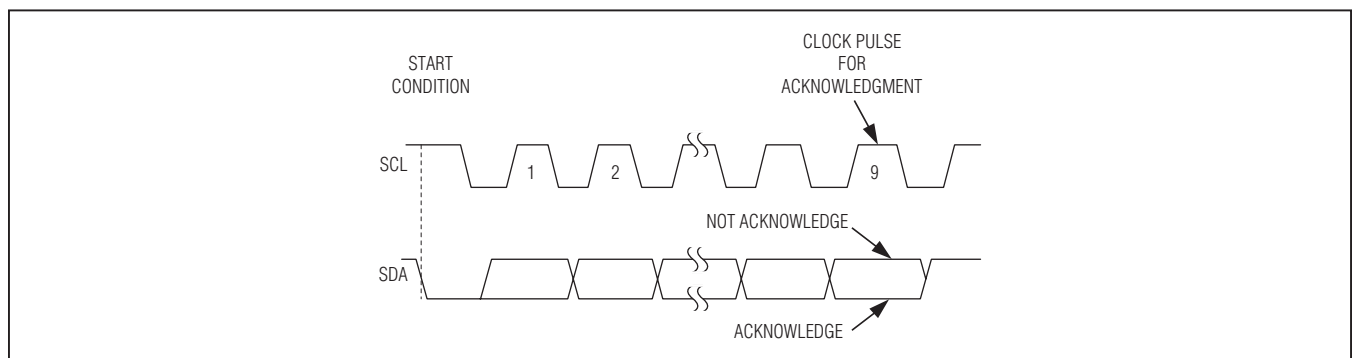


Figure 4. I²C Acknowledge

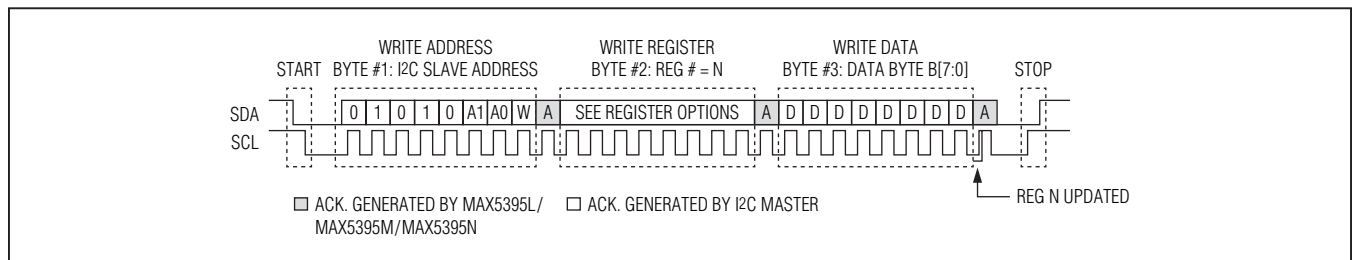


Figure 5. I²C Complete Write Serial Transmission

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

a read and an acknowledge clock. The master has control of the SCL line but the MAX5395 takes over the SDA line. The final byte in the frame contains the register data readback followed by a STOP condition. If additional bytes beyond those required to read back the requested data are provided, the MAX5395 will continue to read back ones.

The wiper register and the configuration register are the only two registers that support readback (Table 2). Readback of all other registers is not supported and results in the readback of ones.

D[7:0]: Wiper position

QP: Charge pump status, 1 is enabled, 0 is disabled.

HSW: H terminal switch status, 0 is closed, 1 is open

WSW: W terminal switch status, 0 is closed, 1 is open

LSW: L terminal switch status, 0 is closed, 1 is open

TSEL[1:0]: Tap select, 00- wiper is at contents of wiper register, 01 – wiper is at 0x00, 10 – wiper is at 0x80, 11 – wiper is at 0xFF.

General Call Support

The MAX5395 supports software reset through general call address 0x00 followed by R/W = 0, followed by 0x06 data. A software reset of the MAX5395 will return the part to the power-on default conditions. The MAX5395 will ACK the general call address and any command byte following, but will not support any general call features other than software reset.

Table 2. I²C READ Command Byte Summary

| REGISTER | COMMAND BYTE | | | | | | | | DATA BYTE | | | | | | | |
|----------|--------------|----|----|----|----|----|----|----|-----------|----|----|-----|-----|-----|-----------|----|
| | C7 | C6 | C5 | C4 | C3 | C2 | C1 | C0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| WIPER | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| CONFIG | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | QP | 0 | 0 | HSW | LSW | WSW | TSEL[1:0] | |

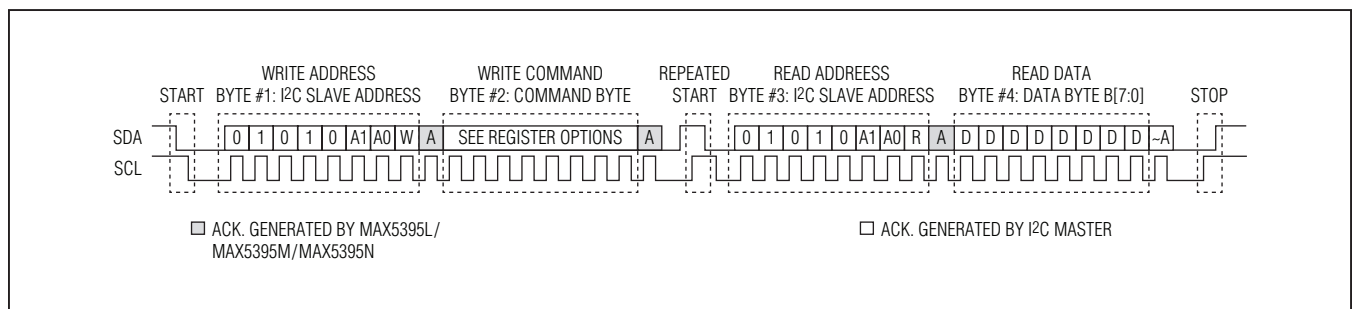


Figure 6. Standard I²C Register Read Sequence

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

Table 3. I²C Write Command Byte Summary

| COMMAND | ADDRESS BYTE | | | | | | | | COMMAND BYTE | | | | | | | | DATA BYTE | | | | | | | | | |
|-----------|----------------------|----|----|----|----|----|----|-----|--------------|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|---------------------|---|
| | A6 | A5 | A4 | A3 | A2 | A1 | A0 | R/W | C7 | C6 | C5 | C4 | C3 | C2 | C1 | C0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| WIPER | S See Table 1 | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | A Don't Care | P |
| SD_CLR | | | | | | | | | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | |
| SD_H_WREG | | | | | | | | | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | | | | | | | | | |
| SD_H_ZERO | | | | | | | | | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | | | | | | | | | |
| SD_H_MID | | | | | | | | | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | | | | | | | | | |
| SD_H_FULL | | | | | | | | | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | | | | | | | | | |
| SD_L_WREG | | | | | | | | | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | A | | | | | | | | |
| SD_L_ZERO | | | | | | | | | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | | | | | | | | | |
| SD_L_MID | | | | | | | | | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | | | | | | | | | |
| SD_L_FULL | | | | | | | | | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | | | | | | | | | |
| SD_W | | | | | | | | | 0 | 1 | 0 | 0 | 0 | 0 | 1 | X | X | | | | | | | | | |
| QP_OFF | | | | | | | | | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | |
| QP_ON | | | | | | | | | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | | | | | | | | | |
| RST | | | | | | | | | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | |

WIPER Command

The data byte writes to the wiper register and the potentiometer moves to the appropriate position. D[7:0] indicates the position of the wiper. D[7:0] = 0x00 moves the wiper to the position closest to L. D[7:0] = 0xFF moves the wiper closest to H. D[7:0] = 0x80 following power-on.

SD_CLR Command

Removes any existing shutdown condition. Connects all potentiometer terminals and returns the wiper to the value stored in the wiper register. The command does not affect the current status of the charge pump.

SD_H_WREG Command

Opens the H terminal and maintains the wiper at the wiper register location. Writes cannot be made to the wiper register while shutdown mode is engaged. Clearing shutdown mode will close the H terminal and allow the wiper register to be written. A RST will also deassert shutdown mode and return the wiper to midscale (0x80). This command does not affect the charge-pump status.

SD_H_ZERO Command

Moves wiper to zero-scale position (0x00) and opens the H terminal. The wiper register remains unaltered. Writes

cannot be made to the wiper register while shutdown mode is engaged. Clearing shutdown mode will return the wiper to the position contained in the wiper register and close the H terminal. A RST will also deassert shutdown mode and return the wiper to midscale (0x80). This command does not affect the charge-pump status.

SD_H_MID Command

Moves wiper to midscale position (0x80) and opens the H terminal. The wiper register remains unaltered. Writes cannot be made to the wiper register while shutdown mode is engaged. Clearing shutdown mode will return the wiper to the position contained in the wiper register and close the H terminal. A RST will also deassert shutdown mode and return the wiper to midscale (0x80). This command does not affect the charge-pump status.

SD_H_FULL Command

Moves wiper to full-scale position (0xFF) and opens the H terminal. The wiper register remains unaltered. Writes cannot be made to the wiper register while shutdown mode is engaged. Clearing shutdown mode will return the wiper to the position contained in the wiper register and close the H terminal. A RST will also deassert shutdown mode and return the wiper to midscale (0x80). This command does not affect the charge-pump status.

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

SD_L_WREG Command

Opens the L terminal and maintains the wiper at the wiper register location. Writes cannot be made to the wiper register while shutdown mode is engaged. Clearing shutdown mode will close the L terminal and allow wiper register to be written. A RST will also deassert shutdown mode and return the wiper to midscale (0x80). This command does not affect the charge-pump status.

SD_L_ZERO Command

Moves wiper to zero-scale position (0x00) and opens the L terminal. The wiper register remains unaltered. Writes cannot be made to the wiper register while shutdown mode is engaged. Clearing shutdown mode will return the wiper to the position contained in the wiper register and close the L terminal. A RST will also deassert shutdown mode and return the wiper to midscale (0x80). This command does not affect the charge-pump status.

SD_L_MID Command

Moves wiper to midscale position (0x80) and opens the L terminal. The wiper register remains unaltered. Writes cannot be made to the wiper register while shutdown mode is engaged. Clearing shutdown mode will return the wiper to the position contained in the wiper register and close the L terminal. A RST will also deassert shutdown mode and return the wiper to midscale (0x80). This command does not affect the charge-pump status.

SD_L_FULL Command

Moves wiper to full-scale position (0xFF) and opens the L terminal. The wiper register remains unaltered. Writes

cannot be made to the wiper register while shutdown mode is engaged. Clearing shutdown mode will return the wiper to the position contained in the wiper register and close the L terminal. A RST will also deassert shutdown mode and return the wiper to midscale (0x80). This command does not affect the charge-pump status.

SD_W Command

Opens the W terminal keeping the internal tap position the same as the wiper register. Writes cannot be made to the wiper registers while shutdown mode is engaged. Clearing shutdown mode will return the wiper to the position contained in the wiper register and close W terminal. A RST will also deassert shutdown mode and return the wiper to midscale (0x80). This command does not affect the charge-pump status.

QP_OFF Command

Disables the onboard charge pump and places device in low power mode. Low supply voltage is limited to 2.6V.

QP_ON Command

Enables the onboard charge pump to allow low-supply voltage operation. This is the power-on default condition. Low supply voltage is 1.7V.

RST Command

Returns the device to power-on default conditions. Resets the wiper register to midscale (0x80), enables charge pump, and deasserts any shutdown modes.

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

Ordering Information

| PART | PIN-PACKAGE | INTERFACE | TAPS | END-TO-END RESISTANCE (k Ω) |
|---------------|-------------|------------------|------|-------------------------------------|
| MAX5395LATA+T | 8 TDFN-EP* | I ² C | 256 | 10 |
| MAX5395MATA+T | 8 TDFN-EP* | I ² C | 256 | 50 |
| MAX5395NATA+T | 8 TDFN-EP* | I ² C | 256 | 100 |

Note: All devices operate over the -40°C to +125°C temperature range.

+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

*EP = Exposed pad.

Chip Information

PROCESS: BiCMOS

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO. | LAND PATTERN NO. |
|--------------|--------------|-------------------------|-------------------------|
| 8 TDFN-EP | T822+2 | 21-0168 | 90-0065 |

MAX5395

Single, 256-Tap Volatile, I²C, Low-Voltage Linear Taper Digital Potentiometer

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 0 | 7/12 | Initial release | — |
| 1 | 9/12 | Revised the <i>Absolute Maximum Ratings</i> | 2 |



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000

17

© 2012 Maxim Integrated Products, Inc. The Maxim logo and Maxim Integrated are trademarks of Maxim Integrated Products, Inc.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А