

## **SIOV metal oxide varistors**

SMD varistors standard series, CU types

**Series/Type:**      **B726\***

**Date:**              January 2018

© EPCOS AG 2018. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

**SMD**
**EPCOS type designation system for SMD varistor standard series**

<b>CU</b>	<b>4032</b>	<b>K</b>	<b>275</b>	<b>G2</b>
<b>Construction:</b> CU $\triangleq$ Encapsulated chip				
<b>Case sizes:</b> 3225 $\triangleq$ 32 x 25 4032 $\triangleq$ 40 x 32				
<b>Varistor voltage tolerance:</b> K $\triangleq$ $\pm 10\%$				
<b>Maximum RMS operating voltage (<math>V_{RMS}</math>):</b> 275 $\triangleq$ 275 V				
<b>Taping mode:</b> G2 $\triangleq$ Taped, 330-mm reel				



### SMD

#### Construction

- Cylindrical varistor element, encapsulated.
- Encapsulation: thermoplastic, flame-retardant to UL 94 V-0.
- Termination: tinned copper alloy, suitable for lead-free wave and reflow soldering, and compatible with tin/lead solder.

#### Features

- Electrical equivalents to leaded types SIOV-S05/S07
- Operating voltage up to 300 V<sub>RMS</sub>
- SMD plastic package
- RoHS-compatible
- Suitable for lead-free soldering
- PSpice models available

#### Approvals

- UL
- IEC
- CSA approved (types with voltages higher than 30 V<sub>RMS</sub>)

#### Delivery mode

- Blister tape, 330-mm reel
- Packing unit: 1000 pcs.

#### V/I characteristics and derating curves

V/I and derating curves are attached to the data sheet. The curves are sorted by V<sub>RMS</sub> and then by case size, which is included in the type designation.

#### General technical data

Maximum RMS operating voltage		V <sub>RMS</sub>	11 ... 300	V
Maximum DC operating voltage		V <sub>DC</sub>	14 ... 385	V
Maximum surge current	(8/20 μs) 1 time	i <sub>max</sub>	100 ... 1200	A
Maximum energy absorption	(2 ms)	W <sub>max</sub>	300 ... 23000	mJ
Maximum clamping voltage	(8/20 μs)	V <sub>c,max</sub>	36 ... 775	V
Operating temperature			-40/+85	°C
Storage temperature			-40/+125	°C



SMD varistors (CU types)

B726\*

Standard series

SMD

**Temperature derating**

Climatic category: -40/+85 °C




**SMD**
**Electrical specifications and ordering codes**
**Maximum ratings ( $T_A = 85\text{ }^\circ\text{C}$ )**

Type	Ordering code	$V_{RMS}$	$V_{DC}$	$i_{max}$ (8/20 $\mu\text{s}$ )	$I_n^{(1)}$ (8/20 $\mu\text{s}$ )	$W_{max}$ (2 ms)	$P_{max}$
		V	V	1 time A	15 times A	mJ	mW
CU3225K11G2	B72650M0110K072	11	14	100	50	300	10
CU4032K11G2	B72660M0110K072	11	14	250	100	800	20
CU3225K14G2	B72650M0140K072	14	18	100	50	400	10
CU4032K14G2	B72660M0140K072	14	18	250	100	900	20
CU3225K17G2	B72650M0170K072	17	22	100	50	500	10
CU4032K17G2	B72660M0170K072	17	22	250	100	1100	20
CU3225K20G2	B72650M0200K072	20	26	100	50	600	10
CU4032K20G2	B72660M0200K072	20	26	250	100	1300	20
CU3225K25G2	B72650M0250K072	25	31	100	50	700	10
CU4032K25G2	B72660M0250K072	25	31	250	100	1600	20
CU3225K30G2	B72650M0300K072	30	38	100	50	900	10
CU4032K30G2	B72660M0300K072	30	38	250	100	2000	20
CU3225K35G2	B72650M0350K072	35	45	100	50	1100	10
CU4032K35G2	B72660M0350K072	35	45	250	100	2500	20
CU3225K40G2	B72650M0400K072	40	56	100	50	1300	10
CU4032K40G2	B72660M0400K072	40	56	250	100	3000	20
CU3225K50G2	B72650M0500K072	50	65	400	150	1800	100
CU4032K50G2	B72660M0500K072	50	65	1200	500	4200	250
CU3225K60G2	B72650M0600K072	60	85	400	150	2200	100
CU4032K60G2	B72660M0600K072	60	85	1200	500	4800	250
CU3225K75G2	B72650M0750K072	75	100	400	150	2500	100
CU4032K75G2	B72660M0750K072	75	100	1200	500	5900	250
CU3225K95G2	B72650M0950K072	95	125	400	150	3400	100
CU4032K95G2	B72660M0950K072	95	125	1200	500	7600	250
CU3225K115G2	B72650M0111K072	115	150	400	150	3600	100
CU4032K115G2	B72660M0111K072	115	150	1200	500	8400	250
CU3225K130G2	B72650M0131K072	130	170	400	150	4200	100
CU4032K130G2	B72660M0131K072	130	170	1200	500	9500	250
CU3225K140G2	B72650M0141K072	140	180	400	150	4500	100
CU4032K140G2	B72660M0141K072	140	180	1200	500	10000	250
CU3225K150G2	B72650M0151K072	150	200	400	150	4900	100
CU4032K150G2	B72660M0151K072	150	200	1200	500	11000	250
CU3225K175G2	B72650M0171K072	175	225	400	150	5600	100
CU4032K175G2	B72660M0171K072	175	225	1200	500	13000	250

<sup>1)</sup> **Note:** Nominal discharge current  $I_n$ , according to UL 1449, 4<sup>th</sup> edition.


**SMD**
**Characteristics (T<sub>A</sub> = 25 °C)**

Type	V <sub>V</sub> (1 mA) V	ΔV <sub>V</sub> %	V <sub>c,max</sub> V	I <sub>c</sub> (8/20 μs) A	C <sub>typ</sub> (1 kHz, 1 V) pF
CU3225K11G2	18	±10	36	1.0	1750
CU4032K11G2	18	±10	36	2.5	2750
CU3225K14G2	22	±10	43	1.0	1450
CU4032K14G2	22	±10	43	2.5	2300
CU3225K17G2	27	±10	53	1.0	1200
CU4032K17G2	27	±10	53	2.5	1900
CU3225K20G2	33	±10	65	1.0	980
CU4032K20G2	33	±10	65	2.5	1600
CU3225K25G2	39	±10	77	1.0	850
CU4032K25G2	39	±10	77	2.5	1400
CU3225K30G2	47	±10	93	1.0	720
CU4032K30G2	47	±10	93	2.5	1200
CU3225K35G2	56	±10	110	1.0	620
CU4032K35G2	56	±10	110	2.5	1050
CU3225K40G2	68	±10	135	1.0	520
CU4032K40G2	68	±10	135	2.5	900
CU3225K50G2	82	±10	135	5.0	300
CU4032K50G2	82	±10	135	10.0	530
CU3225K60G2	100	±10	165	5.0	250
CU4032K60G2	100	±10	165	10.0	480
CU3225K75G2	120	±10	200	5.0	210
CU4032K75G2	120	±10	200	10.0	430
CU3225K95G2	150	±10	250	5.0	135
CU4032K95G2	150	±10	250	10.0	260
CU3225K115G2	180	±10	300	5.0	110
CU4032K115G2	180	±10	300	10.0	220
CU3225K130G2	205	±10	340	5.0	100
CU4032K130G2	205	±10	340	10.0	200
CU3225K140G2	220	±10	360	5.0	95
CU4032K140G2	220	±10	360	10.0	180
CU3225K150G2	240	±10	395	5.0	90
CU4032K150G2	240	±10	395	10.0	170
CU3225K175G2	270	±10	455	5.0	75
CU4032K175G2	270	±10	455	10.0	150


**SMD**
**Electrical specifications and ordering codes**
**Maximum ratings ( $T_A = 85\text{ }^\circ\text{C}$ )**

Type	Ordering code	$V_{RMS}$	$V_{DC}$	$i_{max}$ (8/20 $\mu\text{s}$ ) 1 time	$I_n^{(1)}$ (8/20 $\mu\text{s}$ ) 15 times	$W_{max}$ (2 ms)	$P_{max}$
		V	V	A	A	mJ	mW
CU3225K230G2	B72650M0231K072	230	300	400	150	7200	100
CU4032K230G2	B72660M0231K072	230	300	1200	500	17000	250
CU3225K250G2	B72650M0251K072	250	320	400	150	8200	100
CU4032K250G2	B72660M0251K072	250	320	1200	500	19000	250
CU3225K275G2	B72650M0271K072	275	350	400	150	8600	100
CU4032K275G2	B72660M0271K072	275	350	1200	500	21000	250
CU3225K300G2	B72650M0301K072	300	385	400	150	9600	100
CU4032K300G2	B72660M0301K072	300	385	1200	500	23000	250

<sup>1)</sup> **Note:** Nominal discharge current  $I_n$  according to UL 1449, 4<sup>th</sup> edition.

**Characteristics ( $T_A = 25\text{ }^\circ\text{C}$ )**

Type	$V_V$ (1 mA) V	$\Delta V_V$ %	$V_{c,max}$ V	$I_c$ (8/20 $\mu\text{s}$ ) A	$C_{typ}$ (1 kHz, 1 V) pF
CU3225K230G2	360	$\pm 10$	595	5.0	60
CU4032K230G2	360	$\pm 10$	595	10.0	115
CU3225K250G2	390	$\pm 10$	650	5.0	55
CU4032K250G2	390	$\pm 10$	650	10.0	105
CU3225K275G2	430	$\pm 10$	710	5.0	50
CU4032K275G2	430	$\pm 10$	710	10.0	95
CU3225K300G2	470	$\pm 10$	775	5.0	45
CU4032K300G2	470	$\pm 10$	775	10.0	90




**SMD varistors (CU types)**

**B726\***

**Standard series**

**SMD**


**Dimensional drawing**

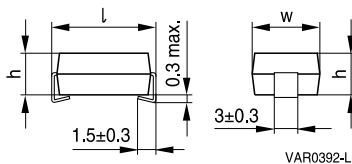

Dimensions in mm

Chip size EIA in mm	$V_{RMS,max}$	l	w	h
3225	11 ... 175	$8.0 \pm 0.3$	$6.3 \pm 0.3$	$3.2 \pm 0.3$
3225	230 ... 300	$8.0 \pm 0.3$	$6.3 \pm 0.3$	$4.5 \pm 0.3$
4032	11 ... 175	$10.2 \pm 0.3$	$8.0 \pm 0.3$	$3.2 \pm 0.3$
4032	230 ... 300	$10.2 \pm 0.3$	$8.0 \pm 0.3$	$4.5 \pm 0.3$

**Recommended solder pad layout**



Dimensions in mm

Chip size EIA in mm	A	B	C
3225	3.50	2.80	4.50
4032	3.50	2.80	6.50




**SMD**
**Delivery mode**

EIA case size	Taping	Reel size mm	Packing unit pcs.	Type	Ordering code
3225	Blister	330	1000	CU3225K115G2	B72650M0111K072
3225	Blister	330	1000	CU3225K11G2	B72650M0110K072
3225	Blister	330	1000	CU3225K130G2	B72650M0131K072
3225	Blister	330	1000	CU3225K140G2	B72650M0141K072
3225	Blister	330	1000	CU3225K14G2	B72650M0140K072
3225	Blister	330	1000	CU3225K150G2	B72650M0151K072
3225	Blister	330	1000	CU3225K175G2	B72650M0171K072
3225	Blister	330	1000	CU3225K20G2	B72650M0200K072
3225	Blister	330	1000	CU3225K230G2	B72650M0231K072
3225	Blister	330	1000	CU3225K250G2	B72650M0251K072
3225	Blister	330	1000	CU3225K25G2	B72650M0250K072
3225	Blister	330	1000	CU3225K275G2	B72650M0271K072
3225	Blister	330	1000	CU3225K300G2	B72650M0301K072
3225	Blister	330	1000	CU3225K30G2	B72650M0300K072
3225	Blister	330	1000	CU3225K35G2	B72650M0350K072
3225	Blister	330	1000	CU3225K40G2	B72650M0400K072
3225	Blister	330	1000	CU3225K50G2	B72650M0500K072
3225	Blister	330	1000	CU3225K60G2	B72650M0600K072
3225	Blister	330	1000	CU3225K75G2	B72650M0750K072
3225	Blister	330	1000	CU3225K95G2	B72650M0950K072
3225	Blister	330	1000	CU4032K11G2	B72660M0110K072
4032	Blister	330	1000	CU3225K17G2	B72650M0170K072
4032	Blister	330	1000	CU4032K115G2	B72660M0111K072
4032	Blister	330	1000	CU4032K130G2	B72660M0131K072
4032	Blister	330	1000	CU4032K140G2	B72660M0141K072
4032	Blister	330	1000	CU4032K14G2	B72660M0140K072
4032	Blister	330	1000	CU4032K150G2	B72660M0151K072
4032	Blister	330	1000	CU4032K175G2	B72660M0171K072
4032	Blister	330	1000	CU4032K17G2	B72660M0170K072
4032	Blister	330	1000	CU4032K20G2	B72660M0200K072
4032	Blister	330	1000	CU4032K230G2	B72660M0231K072
4032	Blister	330	1000	CU4032K250G2	B72660M0251K072
4032	Blister	330	1000	CU4032K25G2	B72660M0250K072
4032	Blister	330	1000	CU4032K275G2	B72660M0271K072
4032	Blister	330	1000	CU4032K300G2	B72660M0301K072
4032	Blister	330	1000	CU4032K30G2	B72660M0300K072
4032	Blister	330	1000	CU4032K35G2	B72660M0350K072
4032	Blister	330	1000	CU4032K40G2	B72660M0400K072
4032	Blister	330	1000	CU4032K50G2	B72660M0500K072
4032	Blister	330	1000	CU4032K60G2	B72660M0600K072
4032	Blister	330	1000	CU4032K75G2	B72660M0750K072
4032	Blister	330	1000	CU4032K95G2	B72660M0950K072



SMD varistors (CU types)

B726\*

Standard series

SMD

### Reliability data

**Note: For CU varistors mounted on PCB by reflow soldering.**

Test	Test methods/conditions	Requirement
Varistor voltage	The voltage between two terminals with the specified measuring current applied is called $V_V$ (1 mA <sub>DC</sub> @ 0.2 ... 2 s).	To meet the specified value
Clamping voltage	The maximum voltage between two terminals with the specified standard impulse current (8/20 $\mu$ s) applied.	To meet the specified value
Endurance at upper category temperature	1000 h at UCT After having continuously applied the maximum allowable AC voltage at UCT $\pm 2$ °C for 1000 h, the specimen shall be stored at room temperature and normal humidity for 1 to 2 h. Thereafter, the change of $V_V$ shall be measured.	$ \Delta V/V (1 \text{ mA})  \leq 10\%$
Surge current derating, 8/20 $\mu$ s	10 surge currents (8/20 $\mu$ s), unipolar, interval 30 s, amplitude corresponding to derating curve for 10 impulses at 20 $\mu$ s	$ \Delta V/V (1 \text{ mA})  \leq 10\%$ (measured in direction of surge current) No visible damage
Surge current derating, 2 ms	10 surge currents (2 ms), unipolar, interval 120 s, amplitude corresponding to derating curve for 10 impulses at 2 ms	$ \Delta V/V (1 \text{ mA})  \leq 10\%$ (measured in direction of surge current) No visible damage


**SMD**

Test	Test methods/conditions	Requirement
Climatic sequence	<p>The specimen shall be subjected to:</p> <p>a) dry heat at UCT, 16 h, IEC 60068-2-2, test Ba</p> <p>b) damp heat, 1st cycle: 55 °C, 93% r. H., 24 h, IEC 60068-2-30, test Db</p> <p>c) cold, LCT, 2 h, IEC 60068-2-1, test Aa</p> <p>d) damp heat, additional 5 cycles: 55 °C/25 °C, 93% r. H., 24 h/cycle, IEC 60068-2-30, test Db.</p> <p>Then the specimen shall be stored at room temperature and normal humidity for 1 to 2 h.</p> <p>Thereafter, the change of <math>V_V</math> shall be measured. Thereafter, insulation resistance <math>R_{ins}</math> shall be measured at <math>V = 500</math> V.</p>	$ \Delta V/V (1 \text{ mA})  \leq 10\%$ $R_{ins} \geq 100 \text{ M}\Omega$
Rapid change of temperature	IEC 60068-2-14, test Na, LCT/UCT, dwell time 30 min, 5 cycles	$ \Delta V/V (1 \text{ mA})  \leq 5\%$ No visible damage
Damp heat, steady state	IEC 60068-2-78, test Ca  The specimen shall be subjected to $40 \pm 2$ °C, 90 to 95% r. H. for 56 days without load / with 10% of the maximum continuous DC operating voltage $V_{DC}$ . Then stored at room temperature and normal humidity for 1 to 2 h. Thereafter, the change of $V_V$ shall be measured. Thereafter, insulation resistance $R_{ins}$ shall be measured at $V = 500$ V (insulated varistors only).	$ \Delta V/V (1 \text{ mA})  \leq 10\%$ $R_{ins} \geq 100 \text{ M}\Omega$
Solderability	IEC 60068-2-58, test Td1, method 1 - solder bath, Sn96, 5Ag3Cu0.5 $T = 245 \pm 3$ °C $t = 2$ s	The terminations shall be uniformly tinned for soldering test.
Resistance to soldering heat	IEC 60068-2-58, test Td2, method 1 - solder bath, Sn96, 5Ag3Cu0.5 $T = 260 \pm 5$ °C $d = 10 \pm 1$ s	$ \Delta V/V (1 \text{ mA})  \leq 5\%$ No visible damage


**SMD varistors (CU types)**
**B726\***
**Standard series**
**SMD**

Test	Test methods/conditions	Requirement
Robustness of termination	Substrate bending test IEC 60068-2-21, test Ue1 Deflection = 2 mm t = 60 s	$ \Delta V/V (1 \text{ mA})  \leq 10\%$ No visible damage
	Shear test IEC 60068-2-21, test Ue3 Force = 5 N t = 10 ± 1 s	$ \Delta V/V (1 \text{ mA})  \leq 10\%$ No visible damage
Vibration	IEC 60068-2-6, test Fc, method B4 Frequency range: 10 ... 55 Hz Amplitude: 0.75 mm or 98 m/s <sup>2</sup> Duration: 6 h (3 · 2 h) Pulse: sine wave  After repeatedly applying a single harmonic vibration according to the table above. The change of $V_V$ shall be measured and the specimen shall be visually examined.	$ \Delta V/V (1 \text{ mA})  \leq 5\%$ No visible damage
Bump	IEC 60068-2-27, test Ea Pulse duration: 6 ms Max. acceleration: 400 m/s <sup>2</sup> Number: 6 x 5000 shocks Pulse shape: half sine	$ \Delta V/V (1 \text{ mA})  \leq 5\%$ No visible damage
Fire hazard	IEC 60695-11-5 (needle flame test) Severity: vertical 10 s	5 s max.

**Note:**

UCT = Upper category temperature

LCT = Lower category temperature

 $R_{ins}$  = Insulation resistance



**SMD**

**V/I characteristics**



**CU3225 ...**



**SMD varistors (CU types)**

**B726\***

**Standard series**

**SMD**

**V/I characteristics**



**CU4032 ...**




**SMD**


**Derating curves for CU3225...**

Maximum surge current  $I_{surge,max} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.2

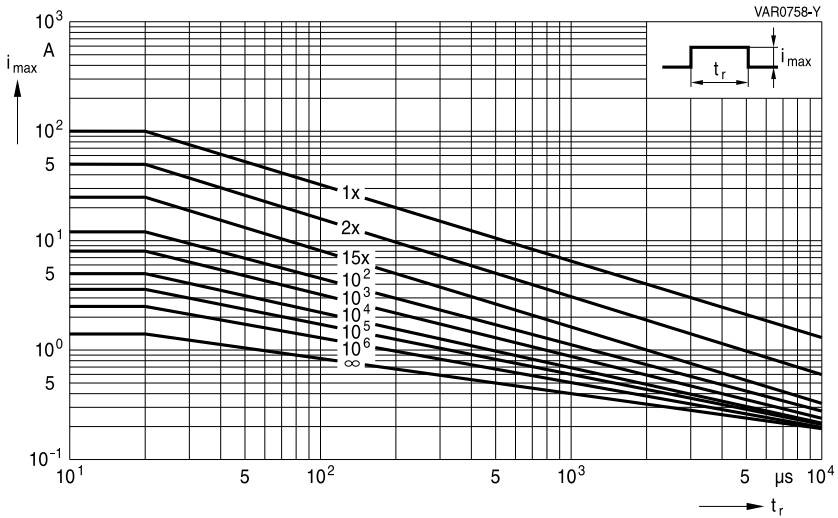

**CU3225K11G2 ... K40G2**

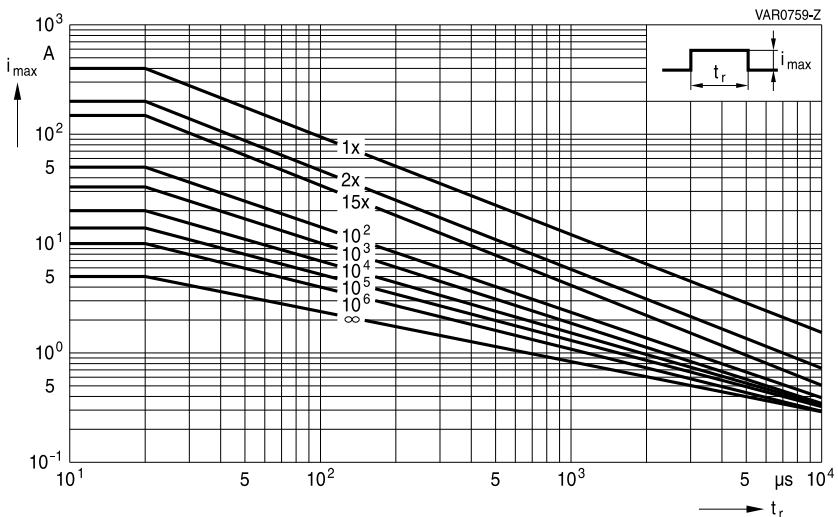

**CU3225K50G2 ... K300G2**



**SMD**

**Derating curves for CU4032...**

Maximum surge current  $I_{surge,max} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.2



**CU4032K11G2 ... K40G2**



**CU4032K50G2 ... K300G2**




**SMD**
**Taping and packing for CU varistors**
**Blister tape (taping to IEC 60286-3)**


KKE0053-C-E

**Dimensions in mm**

	Symbol	Case size		Tolerance
		3225	4032	
Compartment width	$A_0$	7.0	8.6	$\pm 0.20$
Compartment length	$B_0$	8.70	10.6	$\pm 0.20$
Thickness cover tape	$K_0$	5.00		max.
Overall thickness	$T_2$	5.50		max.
Thickness tape	$T$	0.30		max.
Sprocket hole diameter	$D_0$	1.50		$+0.10/-0$
Sprocket hole diameter	$D_1$	1.50		min.
Sprocket hole pitch	$P_0$	4.00		$\pm 0.10^{1)}$
Distance center hole to center compartment	$P_2$	2.00		$\pm 0.05$
Pitch of the component compartments	$P_1$	12.00		$\pm 0.10$
Tape width	$W$	16.00		$\pm 0.30$
Distance edge to center of hole	$E$	1.75		$\pm 0.10$
Distance center hole to center compartment	$F$	7.50		$\pm 0.05$
Distance compartment to edge	$G$	0.75		min.

 1)  $\leq 0.2$  mm over 10 sprocket holes



**SMD varistors (CU types)**

**B726\***

**Standard series**

**SMD**

**Additional taping information**

Reel material	Polystyrol (PS)
Tape material	Polystyrol (PS) or Polycarbonat (PC), PVC or PET
Tape break force	min. 10 N
Top cover tape strength	min. 10 N
Tape peel angle	Angle between top cover tape and the direction of feed during peel off: 165° to 180°
Cavity play	Each part rests in the cavity so that the angle between the part and cavity center line is no more than 20°

**Reel packing**

Packing material: Plastic

**Dimensions in mm**




		Dimension	Tolerance
Reel diameter	A	330	+0/-2.0
Reel width (inside)	W <sub>1</sub>	16.4	+1.5/-0
Reel width (outside)	W <sub>2</sub>	22.4	max.


**Packing unit: 1000 pcs./ reel**

**Leader, trailer**

Tape end (Trailer)

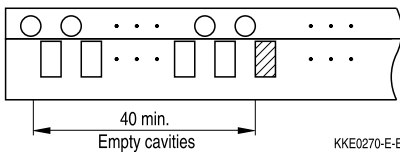

Leader part

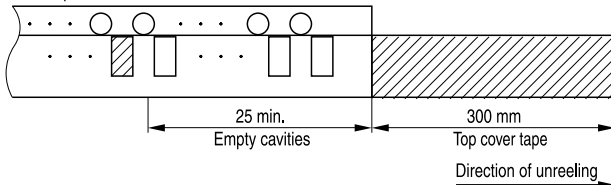





SMD varistors (CU types)

B726\*

Standard series

SMD

### Mounting

1. Potting, sealing or adhesive compounds can produce chemical reactions in the SIOV ceramic that will degrade the component's electrical characteristics.
2. Overloading SIOVs may result in ruptured packages and expulsion of hot materials. For this reason SIOVs should be physically shielded from adjacent components.

### Operation

1. Use SIOVs only within the specified temperature operating range.
2. Use SIOVs only within the specified voltage and current ranges.
3. Environmental conditions must not harm SIOVs. Use SIOVs only in normal atmospheric conditions. Avoid use in deoxidizing gases (chlorine gas, hydrogen sulfide gas, ammonia gas, sulfuric acid gas etc), corrosive agents, humid or salty conditions. Contact with any liquids and solvents should be prevented.

### Display of ordering codes for EPCOS products

The ordering code for one and the same EPCOS product can be represented differently in data sheets, data books, other publications, on the EPCOS website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under [www.epcos.com/orderingcodes](http://www.epcos.com/orderingcodes)


**SMD**
**Symbols and terms**

Symbol	Term
C	Capacitance
$C_{typ}$	Typical capacitance
i	Current
$i_c$	Current at which $V_{c, max}$ is measured
$I_{leak}$	Leakage current
$i_{max}$	Maximum surge current (also termed peak current)
$I_{max}$	Maximum discharge current
$I_n$	Nominal discharge current to UL 1449
LCT	Lower category temperature
$L_{typ}$	Typical inductance
$P_{max}$	Maximum average power dissipation
$R_{ins}$	Insulation resistance
$R_{min}$	Minimum resistance
$T_A$	Ambient temperature
$t_r$	Duration of equivalent rectangular wave
UCT	Upper category temperature
v	Voltage
$V_{clamp}$	Clamping voltage
$V_{c, max}$	Maximum clamping voltage at specified current $i_c$
$V_{DC}$	DC operating voltage
$V_{jump}$	Maximum jump start voltage
$V_{max}$	Maximum voltage
$V_{op}$	Operating voltage
$V_{RMS}$	AC operating voltage, root-mean-square value
$V_{RMS, op, max}$	Root-mean-square value of max. DC operating voltage incl. ripple current
$V_{surge}$	Super imposed surge voltage
$V_V$	Varistor voltage
$\Delta V_V$	Tolerance of varistor voltage
$W_{LD}$	Maximum load dump
$W_{max}$	Maximum energy absorption
$e$	Lead spacing

All dimensions are given in mm.

The commas used in numerical values denote decimal points.

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.tdk-electronics.tdk.com/material](http://www.tdk-electronics.tdk.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.  
  
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.
7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard**. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System**. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.

## Important notes

8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.tdk-electronics.tdk.com/trademarks](http://www.tdk-electronics.tdk.com/trademarks).

Release 2018-10

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## EPCOS / TDK:

[B72660M0151K093](#) [B72650M0140K093](#) [B72650M0151K093](#) [B72650M0251K093](#) [B72650M0271K093](#)  
[B72650M0301K093](#) [B72660M0271K093](#) [B72660M0301K093](#) [B72650M0250K093](#) [B72650M0271K094](#)  
[B72660M0141K093](#) [B72650M0301K094](#) [B72660M0600K093](#) [B72650M1170K093](#) [B72650M0141K093](#)  
[B72650M0350K093](#) [B72650M0170K093](#) [B72660M1140K093](#) [B72660M0300K093](#) [B72650M0231K093](#)  
[B72650M0500K093](#) [B72660M0500K093](#) [B72650M0131K093](#) [B72660M0200K093](#) [B72650M200K94](#)  
[B72660M251K93](#) [B72660M231K93](#) [B72660M0251K093](#) [B72660M0231K093](#) [B72670M1140K072](#) [B72660M151K93](#)  
[B72650M151K93](#) [B72660M271K93](#) [B72650M301K93](#) [B72650M271K93](#)

## TDK:

[B72650M0200K094](#)



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А