

# QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 611

## DUAL, SPREAD-SPECTRUM, LOW NOISE, INDUCTORLESS STEP DOWN DC/DC CONVERTER

LTC3252

### DESCRIPTION

Demonstration circuit 611 is a dual, spread-spectrum, step down charge pump DC/DC converter featuring the LTC®3252EDE. It produces regulated 1.5V and 1.2V output voltages at up to 250mA of output current each from 2.7V to 5.5V input. The unique spread spectrum architecture of the LTC3252 provides highly efficient and low noise operation. The circuit has a low external parts count and requires only five small surface mount capacitors and four tiny surface mount resistors. DC611 demonstrates

appropriate layout techniques for the LTC3252 inductorless DC-DC converter. This power supply circuit is ideally suited for space-constrained battery-powered applications that require small size and low operating current.

**Design files for this circuit board are available.  
Call the LTC factory.**

LTC is a registered trademark of Linear Technology Corporation.

### QUICK START PROCEDURE

Demonstration circuit 611 is easy to set up and evaluate the performance of the LTC3252. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

**NOTE:** When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the  $V_{IN}$ ,  $V_{OUT1}$  or  $V_{OUT2}$  and GND terminals. See Figure 2 for proper scope probe technique.

1. With power off, connect input power source to  $V_{IN}$  and GND terminals. Input voltage range is limited to between 2.7V and 5.5V for the 1.2V output and between 3.21V and 5.5V for the 1.5V output.
2. Place selector jumper JP1 in the ON position to enable  $V_{OUT1}$  (1.5V), and jumper JP2 in the ON position to enable  $V_{OUT2}$ .
3. If desired, loads may be connected from  $V_{OUT1}$  to GND and from  $V_{OUT2}$  to GND. The following  $V_{IN}$  (min) vs. load chart must be followed to ensure correct regulation of  $V_{OUT1}$  and  $V_{OUT2}$ :

**Table 1.**  $V_{IN}$  VS. LOAD CHART

$V_{IN}$ (min) vs load		
$V_{IN}$ (MIN)	$I_{OUT1}$	$I_{OUT2}$
3.5V	250mA	250mA
3.2V	100mA	250mA
3.1V	50mA	250mA
2.9V	---	250mA
2.7V	---	150mA

# QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 611

## DUAL, SPREAD-SPECTRUM, LOW NOISE, INDUCTORLESS STEP DOWN DC/DC CONVERTER

NOTE:  $V_{OUT1}$  is in dropout for  $V_{IN} < 3.0V$  and will cause the LTC3252 to operate in continuous mode instead of the more efficient burst mode. To monitor the actual performance of  $V_{OUT2}$  for  $V_{IN} < 3.1V$ ,  $V_{OUT1}$  should be disabled by placing jumper JP1 in the OFF position.

4. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed 5.5V.

5. Check for the proper output voltages.  $V_{OUT1} = 1.5V$  and

$V_{OUT2} = 1.2V$ . If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

6. Once the proper output voltages are established, adjust the loads up to 250mA and observe the output voltage regulation, input and output ripple voltage, efficiency and other parameters. Remember to follow the  $V_{IN}$  (min) vs. load chart for correct regulation of  $V_{OUT1}$  and  $V_{OUT2}$ .

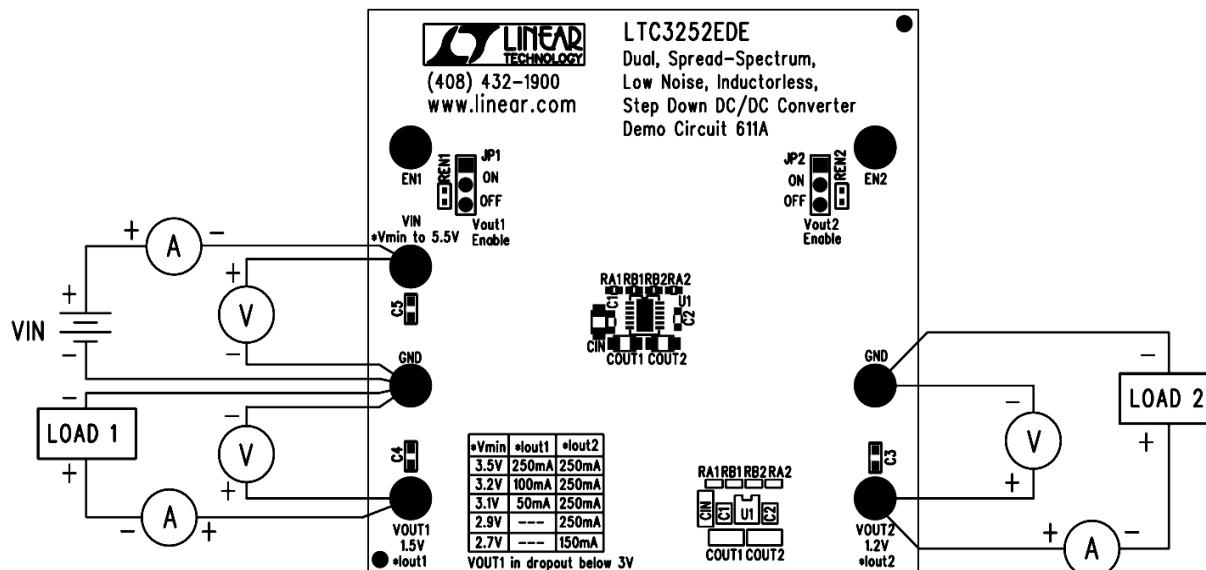


Figure 1. Proper Measurement Equipment Setup





Figure 2. Scope Probe Placement for Measuring Input or Output Ripple

# QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 611

## DUAL, SPREAD-SPECTRUM, LOW NOISE, INDUCTORLESS STEP DOWN DC/DC CONVERTER

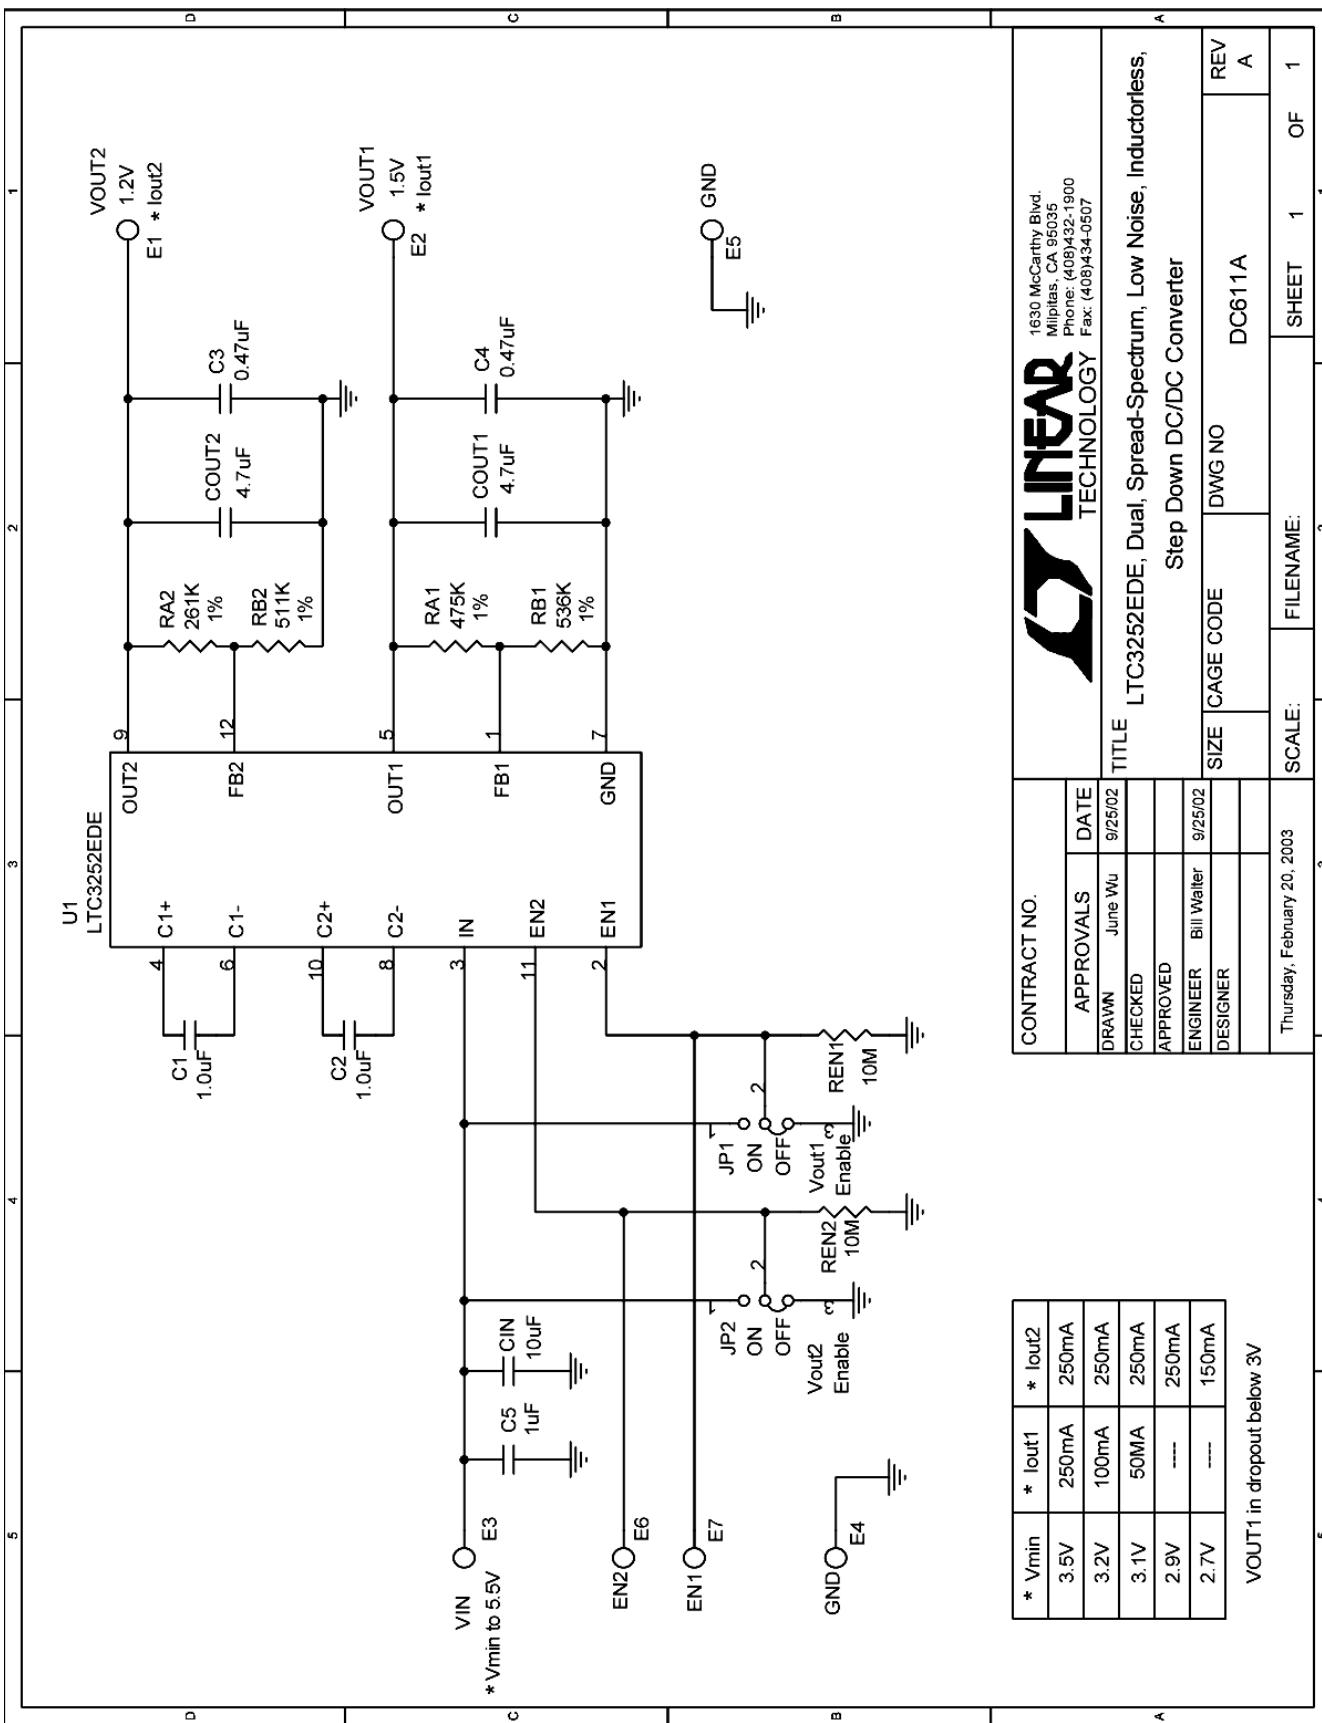

### CONTRACT NO.

APPROVALS	DATE
DRAWN June Wu	9/25/02
CHECKED	
APPROVED	
ENGINEER Bill Walter	9/25/02
DESIGNER	
Thursday, February 20, 2003	

**LTC** LINEAR TECHNOLOGY 1630 McCarthy Blvd.  
Milpitas, CA 95035  
Phone: (408)432-1900  
Fax: (408)434-0507

A TITLE LTC3252EDE, Dual, Spread-Spectrum, Low Noise, Inductorless,  
Step Down DC/DC Converter

SIZE	CAGE CODE	DWG NO	REV
SHEET 1	FILENAME:	DC611A	A
2			1



# OCEAN CHIPS

## Океан Электроники

### Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А