

### Features

- Passive Frequency Mixer
- Conversion Loss: 8 dB @ 12 GHz
- High IIP3: 23 dBm @ 12 GHz
- RF Frequency: 5 - 35 GHz
- LO Frequency: 3 - 33 GHz
- IF Frequency: DC - 4.5 GHz
- Lead-Free 1.5 x 1.2 mm TDFN 6-lead Package
- Halogen-Free “Green” Mold Compound
- RoHS\* Compliant

### Description

The MAMX-011021 is a passive mixer “engine” assembled in a 1.5 x 1.2 mm TDFN 6-lead plastic package. This device is designed for more linear applications such as high bit rate transmitters and receivers which may be used in Point-to-Point, Satcom or LAN applications. The mixer has 8 dB of conversion loss and 23 dBm of input intercept point (IIP3).

This mixer can be used for either lower sideband (LSB) or upper sideband (USB) mixing. Two of these mixers can be combined in a quadrature configuration for image rejection.


Positive bias voltage ( $< 1\text{ V}$ ) can be applied to the LO or the  $V_G$  (optional) pin to reduce LO drive requirements. The  $V_G$  pin is internally bypassed. Positive bias voltage ( $< 1\text{ V}$ ) can also be applied to the IF pin to optimize device linearity.

### Ordering Information<sup>1,2</sup>

Part Number	Package
MAMX-011021-TR1000	1000 piece reel
MAMX-011021-TR3000	3000 piece reel
MAMX-011021-SMB	Sample Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

### Functional Schematic

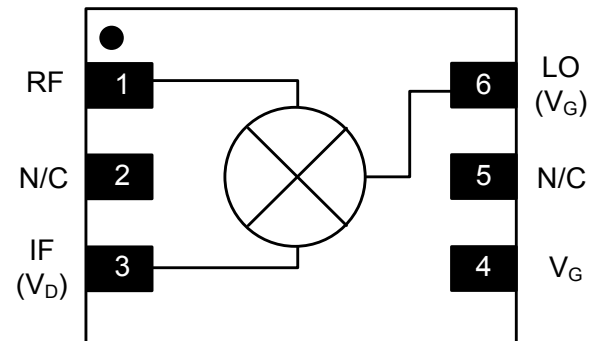

### Pin Configuration<sup>3</sup>

Pin No.	Pin Name	Description
1	RF	RF Port
2	N/C	No Connection
3	IF ( $V_D$ )	IF Port (optional Drain Voltage)
4	$V_G$	Gate Voltage (optional)
5	N/C	No Connection
6	LO ( $V_G$ )	LO Port (optional Gate Voltage)
7	Paddle <sup>4</sup>	Ground

3. MACOM recommends connecting No Connection pins to ground.
4. The exposed pad centered on the package bottom must be connected to RF, DC and thermal ground.

\* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

**Electrical Specifications:**  $T_A = +25^\circ\text{C}$ ,  $V_D = \text{open}$ ,  $V_G = \text{open}$ ,  $Z_0 = 50 \Omega$ ,  
IF Freq. = 2 GHz, LO Drive = 14 dBm @ 10 GHz, RF Freq. = 12 GHz

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Conversion Loss	6 GHz 12 GHz 30 GHz	dB	—	9.5 8.0 8.5	— 9.0 —
RF Return Loss	5 - 35 GHz	dB	—	8	—
LO Return Loss	5 - 35 GHz	dB	—	10	—
IF Return Loss	DC - 4.5 GHz	dB	—	12	—
Input P1dB	—	dBm	—	15	—
Input IP3	$P_{IN} = -15 \text{ dBm}$	dBm	—	23	—

### Absolute Maximum Ratings<sup>5,6</sup>

Parameter	Absolute Maximum
Input Power	22 dBm
Drain Voltage	2 V
Gate Voltage	1 V
Junction Temperature <sup>7</sup>	+150°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.
- Operating at nominal conditions with  $T_J \leq +150^\circ\text{C}$  will ensure  $\text{MTTF} > 1 \times 10^6$  hours.

### Handling Procedures

Please observe the following precautions to avoid damage:


### Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these Class 1A (HBM) devices.

## Application Information

The MAMX-011021 is designed to be an economical and easily used mixer. The ultra small size and passive structure allows easy placement on any system board.

## Recommended PCB Layout

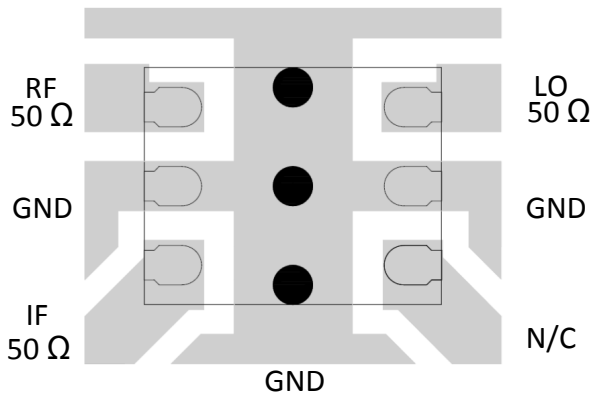

## Grounding

It is recommended that the total ground (common mode) inductance not exceed 0.03 nH. This is equivalent to three 8-mil (200  $\mu\text{m}$ ) diameter vias under the device on an 8-mil thick PC board combined with vias included in the ground plane around the package.


## Optional DC Biasing

As shown in the Application Schematic, the MAMX-011021 does not require DC biasing. The  $V_G$  pin should be left open if not used for biasing.


Optionally, applying up to 0.5 V bias through the  $V_G$  pin (or through the LO pin) can reduce the mixer LO drive requirement (in general, reducing LO drive will reduce input IP3). Any DC voltage applied through the  $V_G$  pin will appear on the LO pin, so when biasing  $V_G$  it may be necessary to have a DC blocking capacitor on the LO pin. See the Optional Biasing Schematic.

Input IP3 may be increased by applying small amounts of voltage ( $V_D < 1.0 \text{ V}$ ) to the IF pin. The IF pin will draw a small current (typically less than 20 mA) when  $V_D$  is positive so bias through an inductor or resistor (accounting for the voltage drop). The inductor or the resistor should have an impedance large compared to 50  $\Omega$  at the IF frequency (typically at least 200  $\Omega$ ).

## Application Schematic

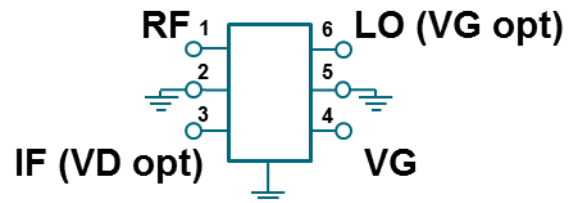

## Optional DC Biasing Schematic

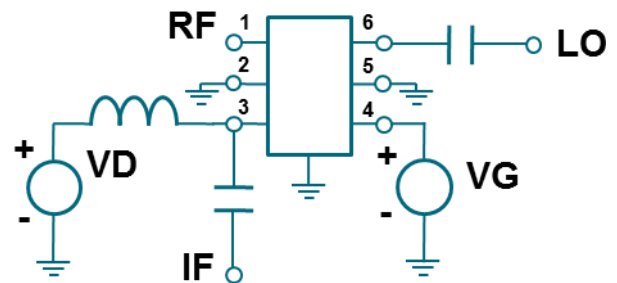


## High Linearity Mixer 5 - 35 GHz


Rev. V1

**Typical Performance Curves: Down Conversion,**  
 RF = -20 dBm, LO = 14 dBm, IF = 2 GHz,  $V_G$  = open,  $Z_O$  = 50  $\Omega$ , (unless otherwise noted)


**Conversion Gain (down)**

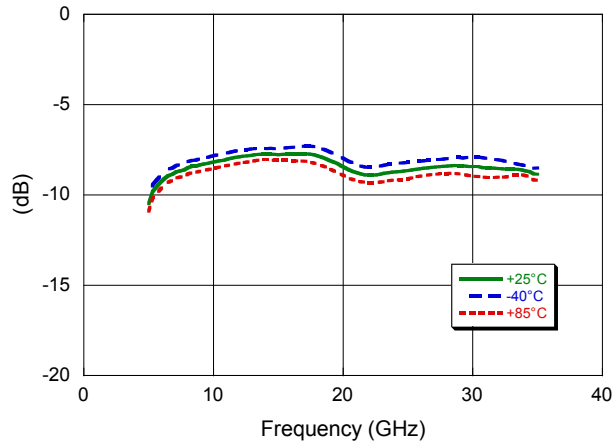


**Conversion Gain (up)**

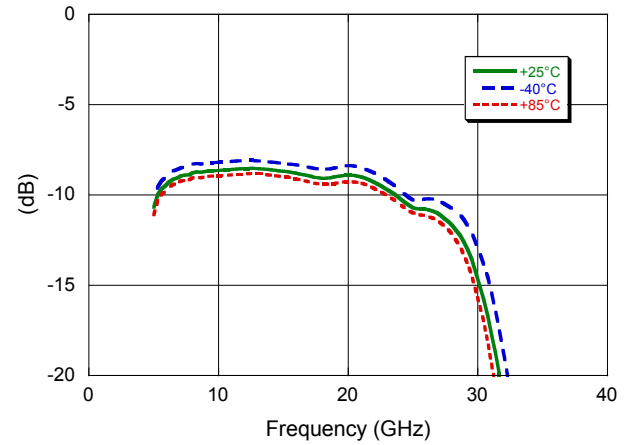


**Isolation**

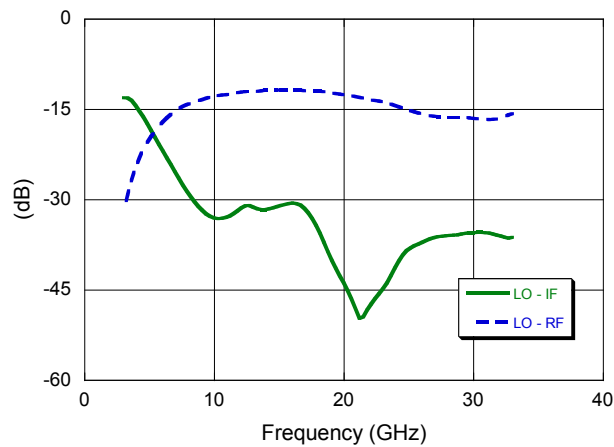


**Gain vs. IF Frequency**

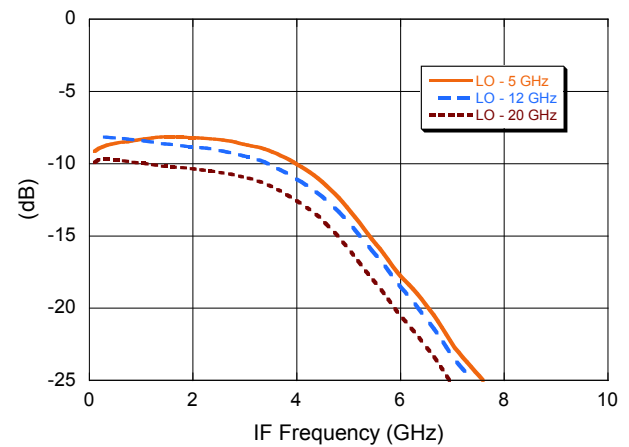

**Input IP3**

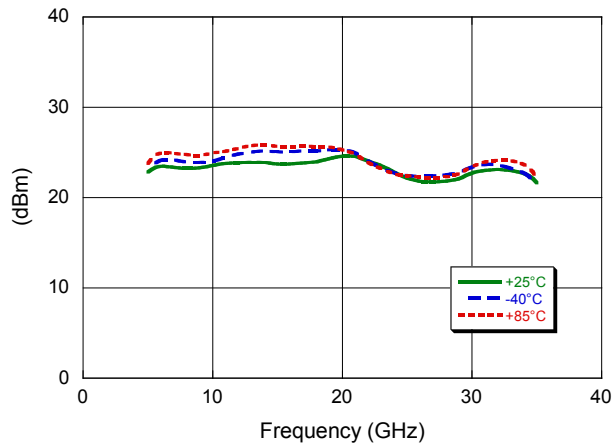

**Input P1dB**

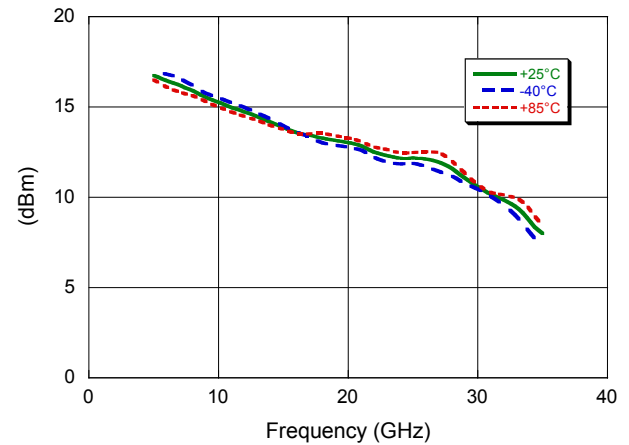


## High Linearity Mixer 5 - 35 GHz


Rev. V1

**Typical Performance Curves: Down Conversion,**  
**RF = -20 dBm, LO = 14 dBm, IF = 2 GHz,  $V_G$  = open,  $Z_O$  = 50  $\Omega$ , (unless otherwise noted)**


**Conversion Gain (LSB) vs. LO Drive**

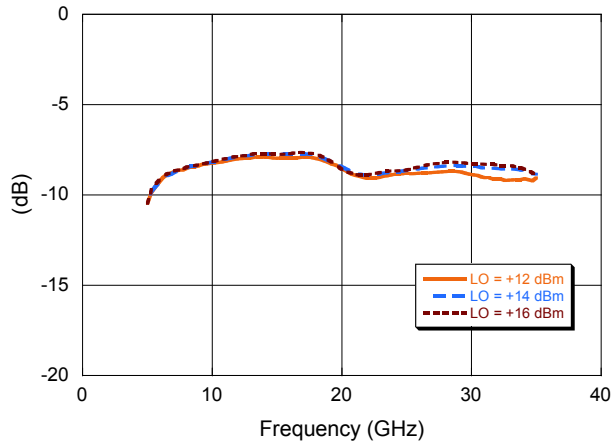


**Input IP2 vs. LO Drive**

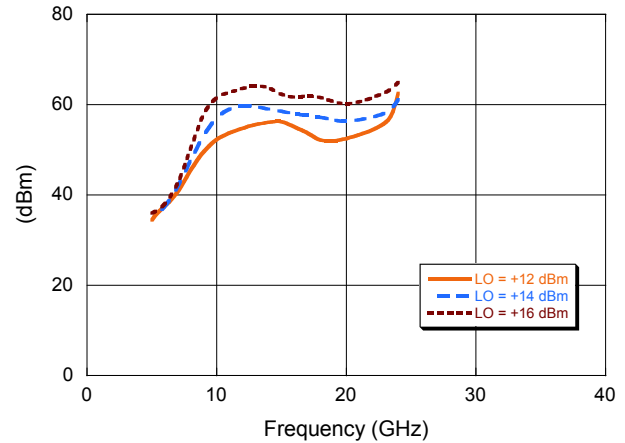


**Input P1dB vs. LO Drive**

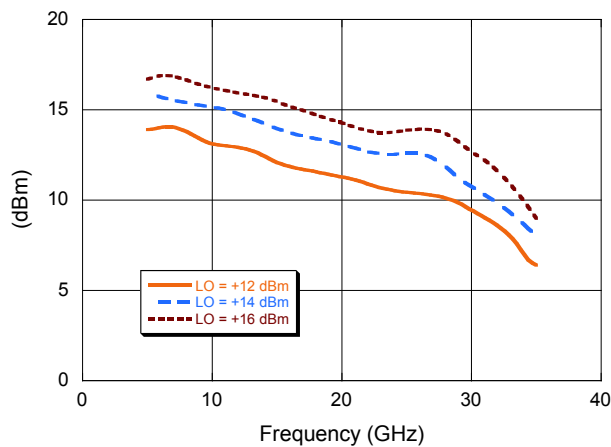


**Input IP3 vs. LO Drive**

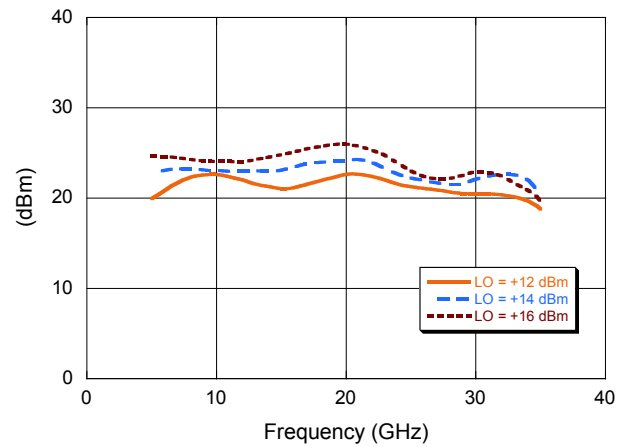

**Input IP3 over Temperature,  $V_D$  = 0.5 V**

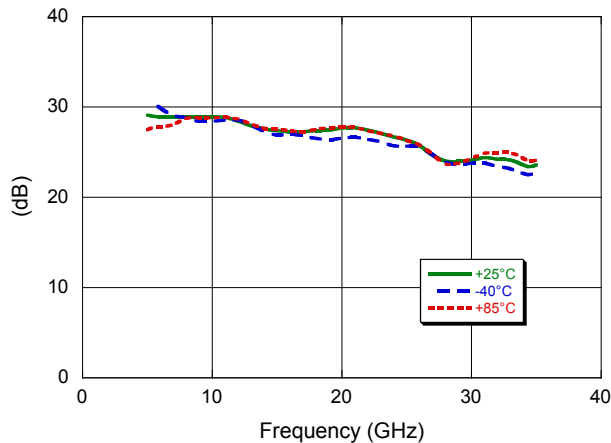

**Input IP3 vs. Optional  $V_D$**

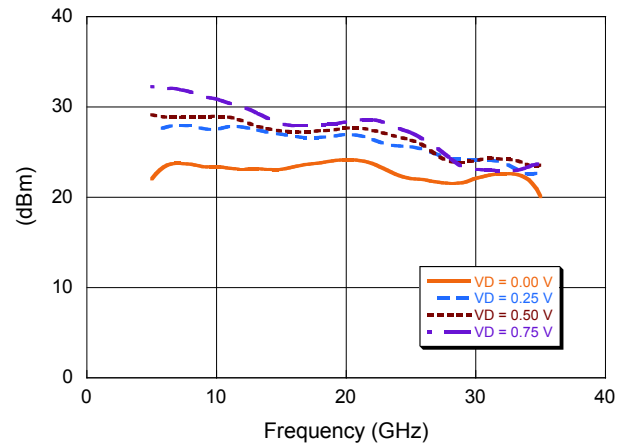


## High Linearity Mixer 5 - 35 GHz


Rev. V1

**Typical Performance Curves: Down Conversion,**  
 $T_A = +25^\circ\text{C}$ ,  $R_F = -20\text{ dBm}$ ,  $LO = 14\text{ dBm}$ ,  $IF = 2\text{ GHz}$ ,  $V_G = \text{open}$ ,  $Z_O = 50\ \Omega$ , (unless otherwise noted)


**RF Port Return Loss vs. Frequency**

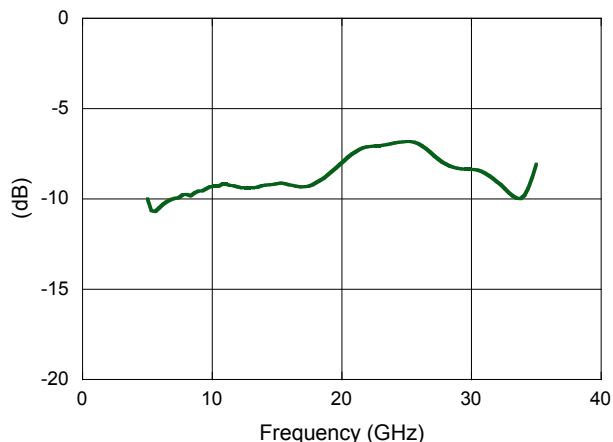


**LO Port Return Loss vs. Frequency**

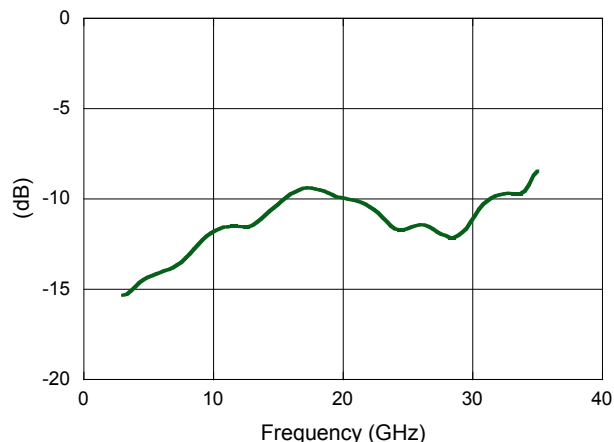


**IF Port Return Loss vs. Frequency**

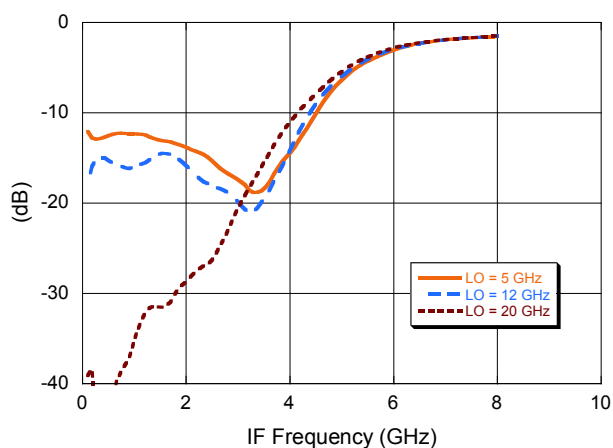

**Down Conversion Gain vs. LO Drive and Optional  $V_G$**

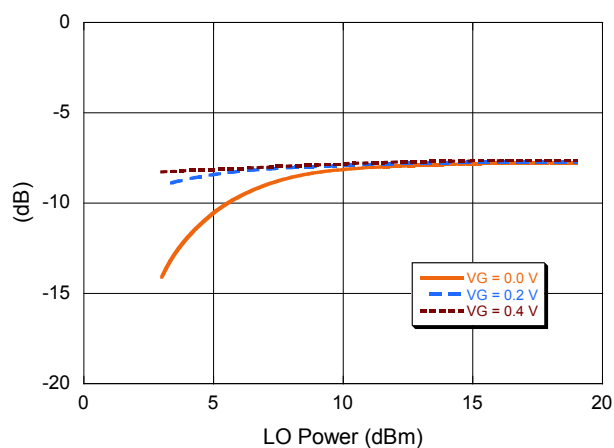


**Conversion Gain,  $LO = 1\text{ GHz}$ ,  $V_G = 0.28\text{ V}$**

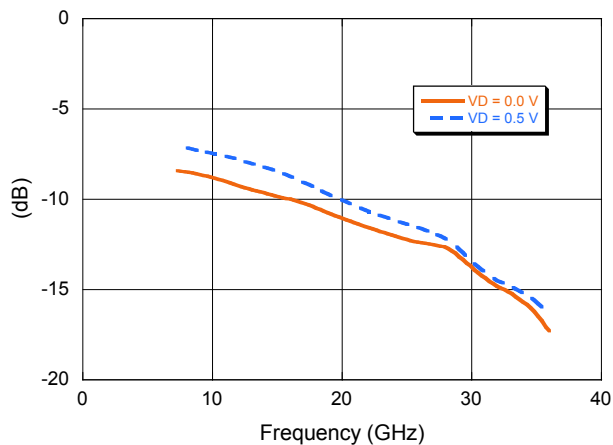

**$M \times N$  Spurious Rejection at IF Port (dBc IF)**

mRF	nLO				
	0	1	2	3	4
0	xx	-3	30	24	31
1	17	0	27	43	42
2	69	73	48	59	79
3	76	78	81	82	83
4	71	72	81	82	81

### Lead-Free 1.5 x 1.2 mm 6-Lead TDFN<sup>†</sup>

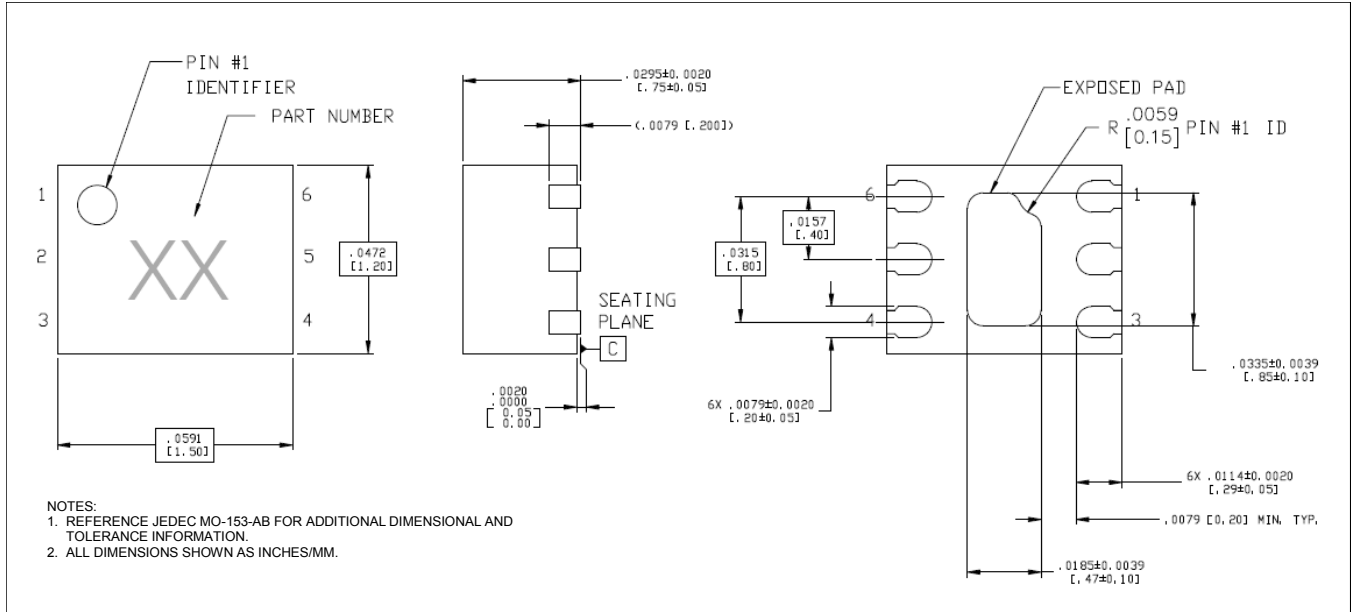

<sup>†</sup> Reference Application Note S2083 for lead-free solder reflow recommendations.  
 Meets JEDEC moisture sensitivity level 1 requirements.  
 Plating is 100% matte tin over copper.

## Applications Section

### System usage of this Mixer


The MAMX-011021 may be used in single ended, balanced, and image reject circuit configurations.

### Single Ended Mixer

Internally the MAMX-011021 is a single ended mixer. One disadvantage of a single ended mixer is the minimal LO rejection at the IF and RF ports. Multiple MAMX-011021 mixers can be combined with baluns or 90° hybrids to produce balanced mixers or image reject mixers. Generally these configurations will have an improved IP3 and greater rejection of unwanted frequencies.


### Balanced Mixer

The balanced mixer will improve mixer performance by cancelling the LO at the IF output and cancelling RF second order products. Linearity will be improved by using two mixers and RF loss will be limited to the 180° hybrid and transformer insertion losses. LO drive requirements will be increased 3dB by the need to drive a second mixer. Also, the 0° hybrid losses must be added to the LO drive. An LO buffer such as a MACOM MAAM-011100 or MAAM-011109 may be used to allow a lower power LO source.

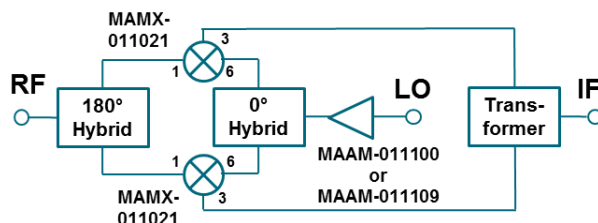

### Image Reject Mixer

An image reject mixer can be constructed from two MAMX-011021 mixers, a 0° hybrid and two 90° hybrids. The connection of the IF 90° hybrid ports determines if the upper or lower sideband RF signal is passed to the IF and the corresponding IF image is rejected. Similar to the balanced mixer a 3 dB LO power increase is required because of the second mixer. Buffer amplifiers such as a MACOM MAAM-011100 or MAAM-011109 may be used to provide the additional power.

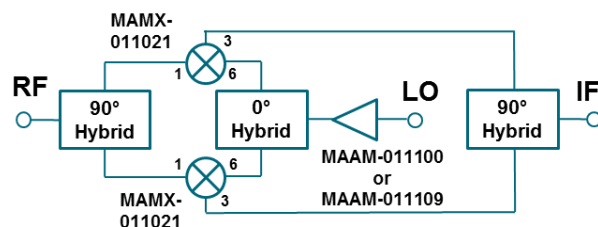



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А