

# Type 761M

## Metallized Polypropylene Film Capacitors

### Type 761M Axial Lead Pressed/Oval Profile Metallized Polypropylene Film Capacitors



### Specifications

**Capacitance Range:**

0.012 to 65.0  $\mu\text{F}$

**Capacitance Tolerance:**

$\pm 5\%$  and  $\pm 10\%$ , standard  
(tolerances as close as  $\pm 3\%$  available)

**Voltage Rating:**

160 to 630 VDC  
100 to 250 VAC

**Operating Temperature**

Units may be operated at full rated  
voltage from  $-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

**Voltage De-rating above  $+85^{\circ}\text{C}$ :**

Units may be operated up to a  
maximum of  $+105^{\circ}\text{C}$  provided the  
voltage is de-rated linearly to 50%  
of the  $+85^{\circ}\text{C}$  rating.

**\*Dissipation Factor:**

Varies with capacitance and  
frequency, please contact us for  
specific details.

**Insulation Resistance (measured at 100 VDC):**

At  $+25^{\circ}\text{C}$ : 400,000  $\text{M}\Omega$  for  $C \leq 0.5 \mu\text{F}$   
200,000  $\text{M}\Omega$ - $\mu\text{F}$  for  $C > 0.5 \mu\text{F}$   
At  $+85^{\circ}\text{C}$ : 20,000  $\text{M}\Omega$  for  $C \leq 0.5 \mu\text{F}$   
10,000  $\text{M}\Omega$ - $\mu\text{F}$  for  $C > 0.5 \mu\text{F}$

These are minimum ratings, call us if you  
have a more demanding requirement.

**Encapsulation:**

Wrapped with flame retardant polyester  
tape (meets UL510 specifications) and  
potted with flame retardant epoxy (meets  
UL94V-0 specifications).

**Lead Wire:**

Tinned Copper-Clad Steel for wire sizes:  
0.020 (0.5) diameter (#24 AWG)

Tinned Copper for wire sizes:  
0.025 (0.6) diameter (#22 AWG)  
0.032 (0.8) diameter (#20 AWG)  
0.040 (1.0) diameter (#18 AWG)

**Dielectric/Construction:**

Metallized Polypropylene film, single  
section design. Non-Inductively wound.

\* Although polypropylene film capacitors have a very low dissipation factor, as noted above it is dependent upon capacitance and operating frequency. Please refer to the application notes on pages 14 and 15 for additional details on thermal management issues. In addition we encourage you to contact us to further discuss your specific application.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

# Type 761M

## Metallized Polypropylene Film Capacitors

---

The 761M series is designed and manufactured for use in many demanding power applications. They are non-inductively wound using the most reliable metallized polypropylene film available. A wide range of capacitance values, voltage ratings, lead terminations and sizes offer the designer an array of options to best meet the form, fit and function requirements specified.

### Operating Temperature Range:

Standard operating temperature range is  $-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . Units may be operated at the full rated voltage within this temperature range.

The 761M series may be operated up to a maximum temperature of  $+105^{\circ}\text{C}$ , however the voltage must be linearly de-rated to 50% of the full rated voltage at  $+105^{\circ}\text{C}$ .

### Dielectric Withstanding Voltage:

Units shall withstand a DC potential of 200% of rated voltage applied between terminals for not more than 2 minutes.

### Lead Bend Test:

After 3 consecutive  $180^{\circ}$  bends. No damage.

### Lead Pull Test:

5 pounds (2.3 Kg) for one minute on lead axis. No damage.

### Humidity Testing:

Units subjected to 95% relative humidity for 250 hours with no voltage applied at  $+40^{\circ}\text{C}$ . After 4 hours of drying, minimum product of insulation resistance and capacitance shall be  $40,000\text{ M}\Omega\text{-}\mu\text{F}$ , but need not exceed  $80,000\text{ M}\Omega$  at  $+25^{\circ}\text{C}$ .

### DC Voltage Life Test:

1000 hours at  $+85^{\circ}\text{C}$  at 150% of rated voltage. After test; capacitance shall not have changed by more than  $\pm 2\%$  of initial value, insulation resistance shall not have decreased by more than 50% of initial value and dissipation factor shall not have increased to more than 0.12%. In addition, there shall be no open or short circuits, and no sign of visible damage.

### AC Voltage Life Test:

Minimum of 1000 hours at  $+85^{\circ}\text{C}$  at 60 Hz. AC test voltage applied at 110% of rated AC voltage. After test; capacitance shall not have changed by more than  $\pm 5\%$  of initial value, insulation resistance shall not have decreased by more than 50% of initial value and dissipation factor shall not have changed by more than 0.03%. In addition, there shall be no open or short circuits, and no sign of visible damage. All measurements made at 1 KHz.

### Dielectric Material/Construction:

The 761M series is manufactured using metallized polypropylene film as the dielectric. The capacitor element is non-inductively wound in a single section design.

Metallized polypropylene film utilizes a base film of polypropylene with a thin layer of aluminum vacuum deposited directly on the film as the electrode.


Metallized film exhibits a characteristic called “self-healing” or “self-clearing”, which is the ability to remove a fault or short circuit in the dielectric film by vaporizing (from high current density) the metallization near the defect. The metallization is so thin that negligible film damage occurs during the clearing process. The vaporized metal oxidizes over time, aiding in the isolation of a fault area.

### Additional Testing Notes:

Since it is not possible to list every detail of testing we perform we strongly encourage you to contact us with any specific question or requirement you may have. Thank you.

*CDE reserves the right to amend design data*

Ordering/Part Number Information

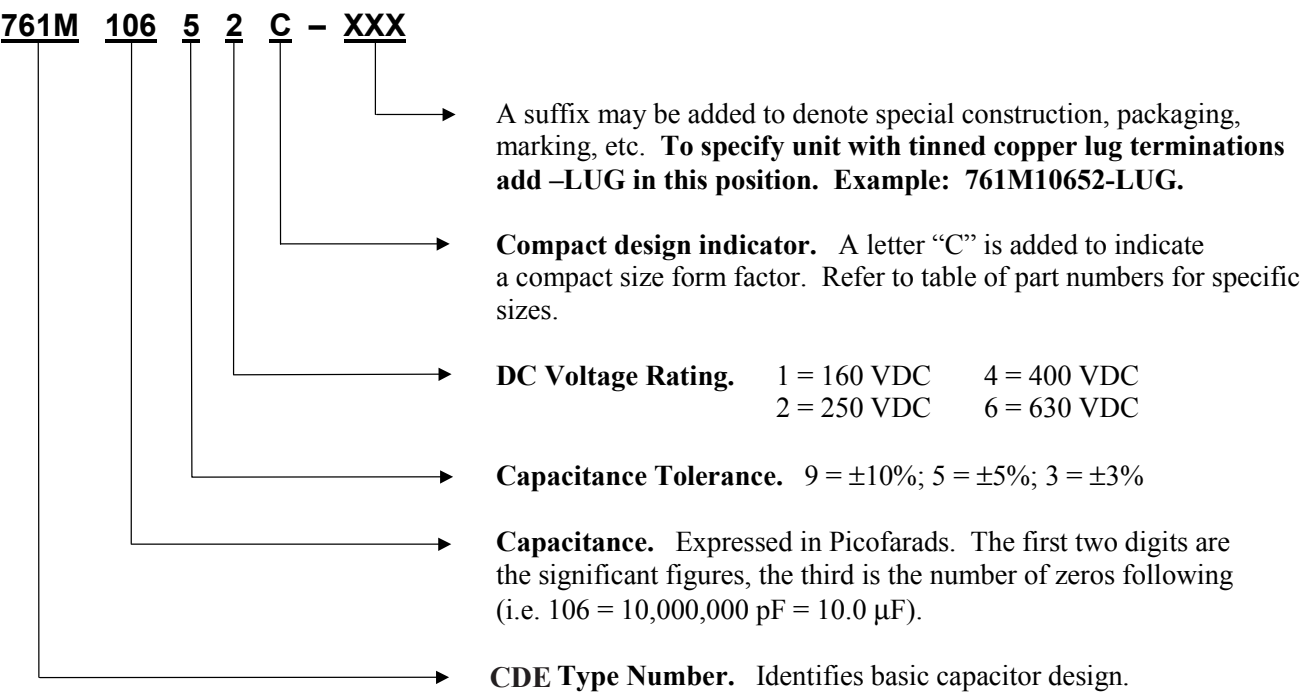


Standard Marking Format


| Sample Marking on unit | Description |                                                | Tolerance codes per EIA standards |      |
|------------------------|-------------|------------------------------------------------|-----------------------------------|------|
| CDE 761M(C)            | CDE         | - CDE Identification                           |                                   |      |
| 106J 250V              | 761M        | - Type Number. 761MC indicates compact design. | H                                 | ±3%  |
| 0145                   | 250V        | - DC Voltage Rating                            | J                                 | ±5%  |
|                        | 106J        | - Capacitance and Tolerance Code               | K                                 | ±10% |
|                        | 0145        | - Weekly Date Code (i.e. 45th week of 2001)    |                                   |      |

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

Dimension Outline

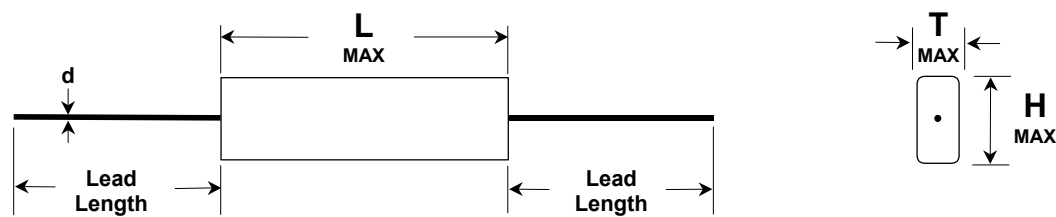

Wire Lead Termination (see lead length table below)

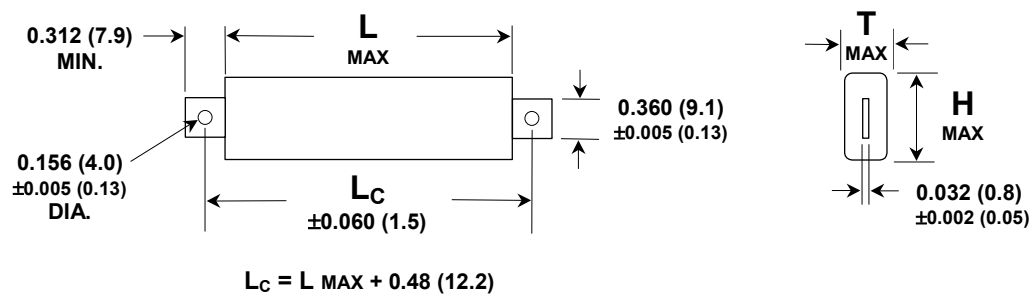

Tinned Solid Copper Lug Termination\*

**\*Please note:** Lug terminations are available on units 0.55 (14.0) or greater in Thickness. Please refer to Sizes and Ratings information for available values. If you have a specific requirement other than what you find shown here please contact us.

Lead Length Table

| L MAX dimension | Lead Length (Typical) |
|-----------------|-----------------------|
| 0.61 (15.5)     | 2.00 (50.8)           |
| 0.79 (20.1)     | 1.90 (48.3)           |
| 0.99 (25.1)     | 1.80 (45.7)           |
| 1.25 (31.8)     | 1.65 (41.9)           |
| 1.74 (44.2)     | 1.40 (35.6)           |
| 2.21 (56.1)     | 1.25 (31.8)           |

In all cases a MINIMUM lead length of 1.25 (31.8) will be met.

Lead Wire Size and Additional Termination Options

Standard lead wire sizes utilized in manufacturing range from 0.020 (0.5) diameter [#24 AWG] to 0.040 (1.0) diameter [#18 AWG]. We can also provide a variety of other wire sizes and material (i.e. heavier gauges, insulated wire, etc.). If the wire size or material listed on our standard items doesn't meet your specific requirements please contact us.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

# Type 761M

## Metallized Polypropylene Film Capacitors

### Type 761M Sizes and Ratings – 160 VDC/100 VAC

| Cap<br>(μF) | Base<br>Part # | Standard Dimensions/Ratings <sup>1</sup> |             |             |             | dV/dt<br>V/μsec | <sup>2</sup> ESR-mΩ<br>@100KHz | Compact Dimensions/Ratings <sup>1</sup> |             |             |             | dV/dt<br>V/μsec | <sup>2</sup> ESR-mΩ<br>@100KHz |
|-------------|----------------|------------------------------------------|-------------|-------------|-------------|-----------------|--------------------------------|-----------------------------------------|-------------|-------------|-------------|-----------------|--------------------------------|
|             |                | L MAX                                    | T MAX       | H MAX       | Wire (d)    |                 |                                | L MAX                                   | T MAX       | H MAX       | Wire (d)    |                 |                                |
| 0.15        | 761M15451      | 0.61 (15.5)                              | 0.17 (4.3)  | 0.27 (6.9)  | 0.020 (0.5) | 6               | 20.9                           |                                         |             |             |             |                 |                                |
| 0.18        | 761M18451      | 0.61 (15.5)                              | 0.19 (4.8)  | 0.29 (7.4)  | 0.020 (0.5) | 6               | 18.1                           |                                         |             |             |             |                 |                                |
| 0.2         | 761M20451      | 0.61 (15.5)                              | 0.20 (5.1)  | 0.30 (7.6)  | 0.020 (0.5) | 6               | 16.7                           |                                         |             |             |             |                 |                                |
| 0.22        | 761M22451      | 0.79 (20.1)                              | 0.16 (4.1)  | 0.26 (6.6)  | 0.020 (0.5) | 3               | 33.1                           | 0.61 (15.5)                             | 0.21 (0.5)  | 0.31 (7.9)  | 0.020 (0.5) | 9               | 15.6                           |
| 0.25        | 761M25451      | 0.79 (20.1)                              | 0.17 (4.3)  | 0.27 (6.9)  | 0.020 (0.5) | 3               | 29.6                           | 0.61 (15.5)                             | 0.23 (5.8)  | 0.33 (8.4)  | 0.020 (0.5) | 12              | 14.3                           |
| 0.27        | 761M27451      | 0.79 (20.1)                              | 0.18 (4.6)  | 0.28 (7.1)  | 0.020 (0.5) | 3               | 27.7                           | 0.61 (15.5)                             | 0.24 (6.1)  | 0.34 (8.6)  | 0.020 (0.5) | 15              | 13.6                           |
| 0.3         | 761M30451      | 0.79 (20.1)                              | 0.18 (4.6)  | 0.30 (7.6)  | 0.020 (0.5) | 3               | 25.5                           | 0.61 (15.5)                             | 0.25 (6.4)  | 0.35 (8.9)  | 0.020 (0.5) | 17              | 12.8                           |
| 0.33        | 761M33451      | 0.79 (20.1)                              | 0.19 (4.8)  | 0.31 (7.9)  | 0.020 (0.5) | 3               | 23.6                           | 0.61 (15.5)                             | 0.27 (6.9)  | 0.37 (9.4)  | 0.020 (0.5) | 19              | 12.1                           |
| 0.39        | 761M39451      | 0.79 (20.1)                              | 0.19 (4.8)  | 0.37 (9.4)  | 0.020 (0.5) | 6               | 21.2                           | 0.61 (15.5)                             | 0.26 (6.6)  | 0.44 (11.2) | 0.020 (0.5) | 32              | 11.7                           |
| 0.43        | 761M43451      | 0.99 (25.1)                              | 0.18 (4.6)  | 0.31 (7.9)  | 0.020 (0.5) | 2               | 34.4                           | 0.79 (20.1)                             | 0.22 (5.6)  | 0.34 (8.6)  | 0.025 (0.6) | 8               | 16.3                           |
| 0.47        | 761M47451      | 0.99 (25.1)                              | 0.18 (4.6)  | 0.33 (8.4)  | 0.020 (0.5) | 2               | 32.1                           | 0.79 (20.1)                             | 0.22 (5.6)  | 0.37 (9.4)  | 0.025 (0.6) | 9               | 15.0                           |
| 0.5         | 761M50451      | 0.99 (25.1)                              | 0.19 (4.8)  | 0.34 (8.6)  | 0.020 (0.5) | 3               | 30.5                           | 0.79 (20.1)                             | 0.23 (5.8)  | 0.38 (9.7)  | 0.025 (0.6) | 10              | 14.2                           |
| 0.56        | 761M56451      | 0.99 (25.1)                              | 0.20 (5.1)  | 0.35 (8.9)  | 0.025 (0.6) | 4               | 24.7                           | 0.79 (20.1)                             | 0.24 (6.1)  | 0.40 (10.2) | 0.025 (0.6) | 11              | 12.8                           |
| 0.6         | 761M60451      | 0.99 (25.1)                              | 0.21 (5.3)  | 0.36 (9.1)  | 0.025 (0.6) | 5               | 23.1                           | 0.79 (20.1)                             | 0.25 (6.4)  | 0.41 (10.4) | 0.025 (0.6) | 12              | 12.0                           |
| 0.68        | 761M68451      | 0.99 (25.1)                              | 0.22 (5.6)  | 0.38 (9.7)  | 0.025 (0.6) | 6               | 20.5                           | 0.79 (20.1)                             | 0.27 (6.9)  | 0.43 (10.9) | 0.032 (0.8) | 19              | 10.4                           |
| 0.75        | 761M75451      | 0.99 (25.1)                              | 0.24 (6.1)  | 0.39 (9.9)  | 0.025 (0.6) | 7               | 18.7                           | 0.79 (20.1)                             | 0.29 (7.4)  | 0.44 (11.2) | 0.032 (0.8) | 19              | 9.5                            |
| 0.82        | 761M82451      | 0.99 (25.1)                              | 0.25 (6.4)  | 0.40 (10.2) | 0.025 (0.6) | 8               | 17.2                           | 0.79 (20.1)                             | 0.30 (7.6)  | 0.46 (11.7) | 0.032 (0.8) | 20              | 8.8                            |
| 0.9         | 761M90451      | 0.99 (25.1)                              | 0.25 (6.4)  | 0.43 (10.9) | 0.025 (0.6) | 13              | 15.8                           | 0.79 (20.1)                             | 0.32 (8.1)  | 0.48 (12.2) | 0.032 (0.8) | 20              | 8.1                            |
| 1.0         | 761M10551      | 0.99 (25.1)                              | 0.27 (6.9)  | 0.45 (11.4) | 0.032 (0.8) | 13              | 14.0                           | 0.79 (20.1)                             | 0.34 (8.6)  | 0.50 (12.7) | 0.032 (0.8) | 20              | 7.4                            |
| 1.2         | 761M12551      | 1.25 (31.8)                              | 0.25 (6.4)  | 0.43 (10.9) | 0.025 (0.6) | 9               | 20.6                           | 0.99 (25.1)                             | 0.30 (7.6)  | 0.48 (12.2) | 0.032 (0.8) | 14              | 11.8                           |
| 1.5         | 761M15551      | 1.25 (31.8)                              | 0.28 (7.1)  | 0.47 (11.9) | 0.032 (0.8) | 10              | 16.3                           | 0.99 (25.1)                             | 0.34 (8.6)  | 0.52 (13.2) | 0.032 (0.8) | 14              | 9.7                            |
| 1.8         | 761M18551      | 1.25 (31.8)                              | 0.29 (7.4)  | 0.54 (13.7) | 0.032 (0.8) | 10              | 13.8                           | 0.99 (25.1)                             | 0.35 (8.9)  | 0.59 (15.0) | 0.032 (0.8) | 14              | 8.3                            |
| 2.0         | 761M20551      | 1.25 (31.8)                              | 0.31 (7.9)  | 0.56 (14.2) | 0.032 (0.8) | 10              | 12.5                           | 0.99 (25.1)                             | 0.37 (9.4)  | 0.62 (15.7) | 0.032 (0.8) | 15              | 7.6                            |
| 2.2         | 761M22551      | 1.25 (31.8)                              | 0.33 (8.4)  | 0.57 (14.5) | 0.032 (0.8) | 11              | 11.5                           | 0.99 (25.1)                             | 0.39 (9.9)  | 0.64 (16.3) | 0.032 (0.8) | 15              | 7.0                            |
| 2.5         | 761M25551      | 1.25 (31.8)                              | 0.35 (8.9)  | 0.60 (15.2) | 0.032 (0.8) | 11              | 10.3                           | 0.99 (25.1)                             | 0.42 (10.7) | 0.67 (17.0) | 0.032 (0.8) | 15              | 6.3                            |
| 2.7         | 761M27551      | 1.74 (44.2)                              | 0.28 (7.1)  | 0.53 (13.5) | 0.032 (0.8) | 7               | 21.4                           | 1.25 (31.8)                             | 0.37 (9.4)  | 0.62 (15.7) | 0.032 (0.8) | 11              | 9.6                            |
| 3.0         | 761M30551      | 1.74 (44.2)                              | 0.30 (7.6)  | 0.55 (14.0) | 0.032 (0.8) | 7               | 19.3                           | 1.25 (31.8)                             | 0.39 (9.9)  | 0.64 (16.3) | 0.032 (0.8) | 11              | 8.8                            |
| 3.3         | 761M33551      | 1.74 (44.2)                              | 0.32 (8.1)  | 0.57 (14.5) | 0.032 (0.8) | 7               | 17.7                           | 1.25 (31.8)                             | 0.42 (10.7) | 0.67 (17.0) | 0.032 (0.8) | 11              | 8.1                            |
| 3.6         | 761M36551      | 1.74 (44.2)                              | 0.34 (8.6)  | 0.59 (15.0) | 0.032 (0.8) | 7               | 16.3                           | 1.25 (31.8)                             | 0.44 (11.2) | 0.69 (17.5) | 0.032 (0.8) | 11              | 7.5                            |
| 3.9         | 761M39551      | 1.74 (44.2)                              | 0.35 (8.9)  | 0.60 (15.2) | 0.032 (0.8) | 7               | 15.1                           | 1.25 (31.8)                             | 0.46 (11.7) | 0.71 (18.0) | 0.032 (0.8) | 11              | 7.0                            |
| 4.7         | 761M47551      | 1.74 (44.2)                              | 0.40 (10.2) | 0.64 (16.3) | 0.032 (0.8) | 7               | 12.8                           | 1.25 (31.8)                             | 0.52 (13.2) | 0.76 (19.3) | 0.032 (0.8) | 11              | 6.1                            |
| 5.0         | 761M50551      | 1.74 (44.2)                              | 0.41 (10.4) | 0.66 (16.8) | 0.032 (0.8) | 7               | 12.1                           | 1.25 (31.8)                             | 0.53 (13.5) | 0.78 (19.8) | 0.032 (0.8) | 11              | 5.8                            |
| 5.6         | 761M56551      | 2.21 (56.1)                              | 0.34 (8.6)  | 0.65 (16.5) | 0.032 (0.8) | 5               | 19.1                           | 1.74 (44.2)                             | 0.39 (9.9)  | 0.76 (19.3) | 0.032 (0.8) | 7               | 11.0                           |
| 6.0         | 761M60551      | 2.21 (56.1)                              | 0.36 (9.1)  | 0.67 (17.0) | 0.032 (0.8) | 5               | 17.9                           | 1.74 (44.2)                             | 0.41 (10.4) | 0.78 (19.8) | 0.032 (0.8) | 7               | 10.4                           |
| 6.8         | 761M68551      | 2.21 (56.1)                              | 0.39 (9.9)  | 0.69 (17.5) | 0.032 (0.8) | 5               | 15.9                           | 1.74 (44.2)                             | 0.44 (11.2) | 0.81 (20.6) | 0.032 (0.8) | 7               | 9.4                            |
| 7.0         | 761M70551      | 2.21 (56.1)                              | 0.39 (9.9)  | 0.70 (17.8) | 0.032 (0.8) | 5               | 15.5                           | 1.74 (44.2)                             | 0.45 (11.4) | 0.82 (20.8) | 0.032 (0.8) | 7               | 9.1                            |
| 7.5         | 761M75551      | 2.21 (56.1)                              | 0.41 (10.4) | 0.72 (18.3) | 0.032 (0.8) | 5               | 14.6                           | 1.74 (44.2)                             | 0.47 (11.9) | 0.84 (21.3) | 0.032 (0.8) | 7               | 8.6                            |
| 8.0         | 761M80551      | 2.21 (56.1)                              | 0.43 (10.9) | 0.74 (18.8) | 0.032 (0.8) | 5               | 13.8                           | 1.74 (44.2)                             | 0.49 (12.4) | 0.86 (21.8) | 0.032 (0.8) | 7               | 8.2                            |
| 9.0         | 761M90551      | 2.21 (56.1)                              | 0.46 (11.7) | 0.77 (19.6) | 0.032 (0.8) | 5               | 12.4                           | 1.74 (44.2)                             | 0.52 (13.2) | 0.90 (22.9) | 0.032 (0.8) | 7               | 7.5                            |
| 10.0        | 761M10651      | 2.21 (56.1)                              | 0.49 (12.4) | 0.80 (20.3) | 0.032 (0.8) | 5               | 11.3                           | 1.74 (44.2)                             | 0.56 (14.2) | 0.93 (23.6) | 0.032 (0.8) | 7               | 6.9                            |
| 12.0        | 761M12651      | 2.21 (56.1)                              | 0.55 (14.0) | 0.86 (21.8) | 0.040 (1.0) | 5               | 9.2                            | 1.74 (44.2)                             | 0.63 (16.0) | 1.00 (25.4) | 0.040 (1.0) | 7               | 5.5                            |
| 15.0        | 761M15651      | 2.21 (56.1)                              | 0.60 (15.2) | 0.97 (24.6) | 0.040 (1.0) | 5               | 7.6                            | 1.74 (44.2)                             | 0.72 (18.3) | 1.09 (27.7) | 0.040 (1.0) | 7               | 4.7                            |
| 18.0        | 761M18651      | 2.21 (56.1)                              | 0.67 (17.0) | 1.04 (26.4) | 0.040 (1.0) | 5               | 6.6                            | 1.74 (44.2)                             | 0.80 (20.3) | 1.17 (29.7) | 0.040 (1.0) | 7               | 4.1                            |
| 20.0        | 761M20651      | 2.21 (56.1)                              | 0.71 (18.0) | 1.08 (27.4) | 0.040 (1.0) | 5               | 6.0                            | 1.74 (44.2)                             | 0.85 (21.6) | 1.22 (31.0) | 0.040 (1.0) | 8               | 3.9                            |
| 22.0        | 761M22651      | 2.21 (56.1)                              | 0.75 (19.1) | 1.12 (28.4) | 0.040 (1.0) | 6               | 5.6                            | 1.74 (44.2)                             | 0.90 (22.9) | 1.27 (32.3) | 0.040 (1.0) | 8               | 3.7                            |
| 25.0        | 761M25651      | 2.21 (56.1)                              | 0.81 (20.6) | 1.18 (30.0) | 0.040 (1.0) | 6               | 5.1                            | 1.74 (44.2)                             | 0.97 (24.6) | 1.34 (34.0) | 0.040 (1.0) | 8               | 3.4                            |
| 30.0        | 761M30651      | 2.21 (56.1)                              | 0.90 (22.9) | 1.28 (32.5) | 0.040 (1.0) | 6               | 4.5                            | 1.74 (44.2)                             | 1.08 (27.4) | 1.45 (36.8) | 0.040 (1.0) | 8               | 3.2                            |
| 35.0        | 761M35651      | 2.21 (56.1)                              | 0.99 (25.1) | 1.36 (34.5) | 0.040 (1.0) | 6               | 4.1                            | 1.74 (44.2)                             | 1.18 (30.0) | 1.55 (39.4) | 0.040 (1.0) | 8               | 3.0                            |
| 40.0        | 761M40651      | 2.21 (56.1)                              | 1.07 (27.2) | 1.44 (36.6) | 0.040 (1.0) | 6               | 3.8                            | 1.74 (44.2)                             | 1.27 (32.3) | 1.65 (41.9) | 0.040 (1.0) | 8               | 2.9                            |
| 45.0        | 761M45651      | 2.21 (56.1)                              | 1.14 (29.0) | 1.52 (38.6) | 0.040 (1.0) | 6               | 3.6                            | 1.74 (44.2)                             | 1.36 (34.5) | 1.73 (43.9) | 0.040 (1.0) | 8               | 2.8                            |
| 50.0        | 761M50651      | 2.21 (56.1)                              | 1.22 (31.0) | 1.59 (40.4) | 0.040 (1.0) | 6               | 3.5                            |                                         |             |             |             |                 |                                |
| 55.0        | 761M55651      | 2.21 (56.1)                              | 1.28 (32.5) | 1.65 (41.9) | 0.040 (1.0) | 6               | 3.3                            |                                         |             |             |             |                 |                                |
| 60.0        | 761M60651      | 2.21 (56.1)                              | 1.35 (34.3) | 1.72 (43.7) | 0.040 (1.0) | 6               | 3.2                            |                                         |             |             |             |                 |                                |
| 65.0        | 761M65651      | 2.21 (56.1)                              | 1.41 (35.8) | 1.78 (45.2) | 0.040 (1.0) | 6               | 3.2                            |                                         |             |             |             |                 |                                |

<sup>1</sup> Please refer to Ordering/Part Number page for specific part numbering details.

<sup>2</sup> ESR ratings listed are Maximum. Please contact us for additional ESR data.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

# Type 761M

## Metallized Polypropylene Film Capacitors

### Type 761M Sizes and Ratings – 250 VDC/175 VAC

| Cap<br>(µF) | Base<br>Part # | Standard Dimensions/Ratings <sup>1</sup> |             |             |             | dV/dt <sup>2</sup> ESR-mΩ |         | Compact Dimensions/Ratings <sup>1</sup> |             |             |             | dV/dt <sup>2</sup> ESR-mΩ |         |
|-------------|----------------|------------------------------------------|-------------|-------------|-------------|---------------------------|---------|-----------------------------------------|-------------|-------------|-------------|---------------------------|---------|
|             |                | L MAX                                    | T MAX       | H MAX       | Wire (d)    | V/µsec                    | @100KHz | L MAX                                   | T MAX       | H MAX       | Wire (d)    | V/µsec                    | @100KHz |
| 0.068       | 761M68352      | 0.61 (15.5)                              | 0.17 (4.3)  | 0.27 (6.9)  | 0.020 (0.5) | 9                         | 31.0    |                                         |             |             |             |                           |         |
| 0.075       | 761M75352      | 0.61 (15.5)                              | 0.18 (4.6)  | 0.27 (6.9)  | 0.020 (0.5) | 9                         | 28.5    |                                         |             |             |             |                           |         |
| 0.082       | 761M82352      | 0.61 (15.5)                              | 0.19 (4.8)  | 0.29 (7.4)  | 0.020 (0.5) | 9                         | 26.5    |                                         |             |             |             |                           |         |
| 0.1         | 761M10452      | 0.79 (20.1)                              | 0.16 (4.1)  | 0.26 (6.6)  | 0.020 (0.5) | 5                         | 48.5    | 0.61 (15.5)                             | 0.21 (5.3)  | 0.31 (7.9)  | 0.020 (0.5) | 13                        | 22.5    |
| 0.12        | 761M12452      | 0.79 (20.1)                              | 0.18 (4.6)  | 0.28 (7.1)  | 0.020 (0.5) | 5                         | 41.0    | 0.61 (15.5)                             | 0.24 (6.1)  | 0.34 (8.6)  | 0.020 (0.5) | 21                        | 19.6    |
| 0.15        | 761M15452      | 0.79 (20.1)                              | 0.20 (5.1)  | 0.30 (7.6)  | 0.025 (0.6) | 5                         | 31.1    | 0.61 (15.5)                             | 0.27 (6.9)  | 0.37 (9.4)  | 0.020 (0.5) | 29                        | 16.7    |
| 0.18        | 761M18452      | 0.79 (20.1)                              | 0.21 (5.3)  | 0.34 (8.6)  | 0.025 (0.6) | 9                         | 26.1    | 0.61 (15.5)                             | 0.26 (6.6)  | 0.45 (11.4) | 0.020 (0.5) | 48                        | 15.5    |
| 0.2         | 761M20452      | 0.99 (25.1)                              | 0.20 (5.1)  | 0.30 (7.6)  | 0.025 (0.6) | 4                         | 45.8    | 0.79 (20.1)                             | 0.23 (5.8)  | 0.33 (8.4)  | 0.025 (0.6) | 12                        | 23.6    |
| 0.22        | 761M22452      | 0.99 (25.1)                              | 0.20 (5.1)  | 0.32 (8.1)  | 0.025 (0.6) | 4                         | 41.8    | 0.79 (20.1)                             | 0.24 (6.1)  | 0.36 (9.1)  | 0.025 (0.6) | 14                        | 21.6    |
| 0.25        | 761M25452      | 0.99 (25.1)                              | 0.21 (5.3)  | 0.34 (8.6)  | 0.025 (0.6) | 7                         | 36.9    | 0.79 (20.1)                             | 0.26 (6.6)  | 0.38 (9.7)  | 0.032 (0.8) | 17                        | 18.8    |
| 0.27        | 761M27452      | 0.99 (25.1)                              | 0.22 (5.6)  | 0.35 (8.9)  | 0.025 (0.6) | 8                         | 34.2    | 0.79 (20.1)                             | 0.27 (6.9)  | 0.39 (9.9)  | 0.032 (0.8) | 18                        | 17.5    |
| 0.3         | 761M30452      | 0.99 (25.1)                              | 0.24 (6.1)  | 0.36 (9.1)  | 0.025 (0.6) | 10                        | 30.9    | 0.79 (20.1)                             | 0.28 (7.1)  | 0.41 (10.4) | 0.032 (0.8) | 20                        | 15.8    |
| 0.33        | 761M33452      | 0.99 (25.1)                              | 0.25 (6.4)  | 0.37 (9.4)  | 0.025 (0.6) | 11                        | 28.2    | 0.79 (20.1)                             | 0.30 (7.6)  | 0.42 (10.7) | 0.032 (0.8) | 21                        | 14.4    |
| 0.39        | 761M39452      | 0.99 (25.1)                              | 0.26 (6.6)  | 0.41 (10.4) | 0.032 (0.8) | 13                        | 23.7    | 0.79 (20.1)                             | 0.31 (7.9)  | 0.47 (11.9) | 0.032 (0.8) | 30                        | 12.4    |
| 0.43        | 761M43452      | 0.99 (25.1)                              | 0.27 (6.9)  | 0.43 (10.9) | 0.032 (0.8) | 20                        | 21.6    | 0.79 (20.1)                             | 0.33 (8.4)  | 0.49 (12.4) | 0.032 (0.8) | 30                        | 11.3    |
| 0.47        | 761M47452      | 0.99 (25.1)                              | 0.29 (7.4)  | 0.44 (11.2) | 0.032 (0.8) | 20                        | 19.8    | 0.79 (20.1)                             | 0.35 (8.9)  | 0.50 (12.7) | 0.032 (0.8) | 31                        | 10.4    |
| 0.5         | 761M50452      | 1.25 (31.8)                              | 0.27 (6.9)  | 0.39 (9.9)  | 0.032 (0.8) | 9                         | 32.1    | 0.99 (25.1)                             | 0.30 (7.6)  | 0.45 (11.4) | 0.032 (0.8) | 20                        | 18.7    |
| 0.56        | 761M56452      | 1.25 (31.8)                              | 0.27 (6.9)  | 0.42 (10.7) | 0.032 (0.8) | 10                        | 28.8    | 0.99 (25.1)                             | 0.32 (8.1)  | 0.47 (11.9) | 0.032 (0.8) | 21                        | 16.8    |
| 0.6         | 761M60452      | 1.25 (31.8)                              | 0.28 (7.1)  | 0.43 (10.9) | 0.032 (0.8) | 15                        | 26.9    | 0.99 (25.1)                             | 0.33 (8.4)  | 0.49 (12.4) | 0.032 (0.8) | 21                        | 15.7    |
| 0.68        | 761M68452      | 1.25 (31.8)                              | 0.29 (7.4)  | 0.47 (11.9) | 0.032 (0.8) | 15                        | 23.9    | 0.99 (25.1)                             | 0.34 (8.6)  | 0.53 (13.5) | 0.032 (0.8) | 21                        | 14.0    |
| 0.75        | 761M75452      | 1.25 (31.8)                              | 0.30 (7.6)  | 0.49 (12.4) | 0.032 (0.8) | 15                        | 21.7    | 0.99 (25.1)                             | 0.36 (9.1)  | 0.55 (14.0) | 0.032 (0.8) | 21                        | 12.8    |
| 0.82        | 761M82452      | 1.25 (31.8)                              | 0.32 (8.1)  | 0.51 (13.0) | 0.032 (0.8) | 16                        | 20.0    | 0.99 (25.1)                             | 0.38 (9.7)  | 0.57 (14.5) | 0.032 (0.8) | 22                        | 11.8    |
| 0.9         | 761M90452      | 1.25 (31.8)                              | 0.34 (8.6)  | 0.52 (13.2) | 0.032 (0.8) | 16                        | 18.3    | 0.99 (25.1)                             | 0.40 (10.2) | 0.59 (15.0) | 0.032 (0.8) | 22                        | 10.9    |
| 1.0         | 761M10552      | 1.25 (31.8)                              | 0.33 (8.4)  | 0.58 (14.7) | 0.032 (0.8) | 16                        | 16.6    | 0.99 (25.1)                             | 0.43 (10.9) | 0.61 (15.5) | 0.032 (0.8) | 22                        | 9.9     |
| 1.2         | 761M12552      | 1.74 (44.2)                              | 0.28 (7.1)  | 0.53 (13.5) | 0.032 (0.8) | 10                        | 31.8    | 1.25 (31.8)                             | 0.37 (9.4)  | 0.62 (15.7) | 0.032 (0.8) | 16                        | 14.0    |
| 1.5         | 761M15552      | 1.74 (44.2)                              | 0.33 (8.4)  | 0.57 (14.5) | 0.032 (0.8) | 10                        | 25.6    | 1.25 (31.8)                             | 0.42 (10.7) | 0.67 (17.0) | 0.032 (0.8) | 17                        | 11.5    |
| 1.8         | 761M18552      | 1.74 (44.2)                              | 0.36 (9.1)  | 0.61 (15.5) | 0.032 (0.8) | 10                        | 21.6    | 1.25 (31.8)                             | 0.47 (11.9) | 0.72 (18.3) | 0.032 (0.8) | 17                        | 9.8     |
| 2.0         | 761M20552      | 1.74 (44.2)                              | 0.39 (9.9)  | 0.63 (16.0) | 0.032 (0.8) | 11                        | 19.5    | 1.25 (31.8)                             | 0.50 (12.7) | 0.75 (19.1) | 0.032 (0.8) | 17                        | 9.0     |
| 2.2         | 761M22552      | 2.21 (56.1)                              | 0.34 (8.6)  | 0.59 (15.0) | 0.032 (0.8) | 8                         | 31.7    | 1.74 (44.2)                             | 0.36 (9.1)  | 0.73 (18.5) | 0.032 (0.8) | 11                        | 18.0    |
| 2.5         | 761M25552      | 2.21 (56.1)                              | 0.37 (9.4)  | 0.62 (15.7) | 0.032 (0.8) | 8                         | 28.0    | 1.74 (44.2)                             | 0.39 (9.9)  | 0.76 (19.3) | 0.032 (0.8) | 11                        | 16.0    |
| 2.7         | 761M27552      | 2.21 (56.1)                              | 0.39 (9.9)  | 0.63 (16.0) | 0.032 (0.8) | 8                         | 26.0    | 1.74 (44.2)                             | 0.41 (10.4) | 0.78 (19.8) | 0.032 (0.8) | 11                        | 14.9    |
| 3.0         | 761M30552      | 2.21 (56.1)                              | 0.38 (9.7)  | 0.69 (17.5) | 0.032 (0.8) | 8                         | 23.6    | 1.74 (44.2)                             | 0.44 (11.2) | 0.81 (20.6) | 0.032 (0.8) | 11                        | 13.6    |
| 3.3         | 761M33552      | 2.21 (56.1)                              | 0.41 (10.4) | 0.72 (18.3) | 0.032 (0.8) | 8                         | 21.6    | 1.74 (44.2)                             | 0.47 (11.9) | 0.84 (21.3) | 0.032 (0.8) | 11                        | 12.5    |
| 3.6         | 761M36552      | 2.21 (56.1)                              | 0.43 (10.9) | 0.74 (18.8) | 0.032 (0.8) | 8                         | 19.9    | 1.74 (44.2)                             | 0.49 (12.4) | 0.86 (21.8) | 0.032 (0.8) | 11                        | 11.6    |
| 3.9         | 761M39552      | 2.21 (56.1)                              | 0.45 (11.4) | 0.76 (19.3) | 0.032 (0.8) | 8                         | 18.5    | 1.74 (44.2)                             | 0.52 (13.2) | 0.89 (22.6) | 0.032 (0.8) | 11                        | 10.8    |
| 4.7         | 761M47552      | 2.21 (56.1)                              | 0.51 (13.0) | 0.82 (20.8) | 0.040 (1.0) | 8                         | 15.2    | 1.74 (44.2)                             | 0.58 (14.7) | 0.95 (24.1) | 0.040 (1.0) | 11                        | 8.8     |
| 5.0         | 761M50552      | 2.21 (56.1)                              | 0.53 (13.5) | 0.84 (21.3) | 0.040 (1.0) | 8                         | 14.3    | 1.74 (44.2)                             | 0.60 (15.2) | 0.97 (24.6) | 0.040 (1.0) | 11                        | 8.3     |
| 5.6         | 761M56552      | 2.21 (56.1)                              | 0.56 (14.2) | 0.87 (22.1) | 0.040 (1.0) | 8                         | 12.9    | 1.74 (44.2)                             | 0.65 (16.5) | 1.02 (25.9) | 0.040 (1.0) | 11                        | 7.6     |
| 6.0         | 761M60552      | 2.21 (56.1)                              | 0.59 (15.0) | 0.90 (22.9) | 0.040 (1.0) | 8                         | 12.1    | 1.74 (44.2)                             | 0.67 (17.0) | 1.04 (26.4) | 0.040 (1.0) | 11                        | 7.1     |
| 6.8         | 761M68552      | 2.21 (56.1)                              | 0.60 (15.2) | 0.97 (24.6) | 0.040 (1.0) | 8                         | 10.8    | 1.74 (44.2)                             | 0.73 (18.5) | 1.10 (27.9) | 0.040 (1.0) | 11                        | 6.5     |
| 7.0         | 761M70552      | 2.21 (56.1)                              | 0.61 (15.5) | 0.99 (25.1) | 0.040 (1.0) | 8                         | 10.6    | 1.74 (44.2)                             | 0.74 (18.8) | 1.11 (28.2) | 0.040 (1.0) | 11                        | 6.3     |
| 7.5         | 761M75552      | 2.21 (56.1)                              | 0.64 (16.3) | 1.01 (25.7) | 0.040 (1.0) | 8                         | 10.0    | 1.74 (44.2)                             | 0.71 (18.0) | 1.21 (30.7) | 0.040 (1.0) | 11                        | 6.0     |
| 8.0         | 761M80552      | 2.21 (56.1)                              | 0.67 (17.0) | 1.04 (26.4) | 0.040 (1.0) | 8                         | 9.4     | 1.74 (44.2)                             | 0.74 (18.8) | 1.24 (31.5) | 0.040 (1.0) | 11                        | 5.8     |
| 9.0         | 761M90552      | 2.21 (56.1)                              | 0.72 (18.3) | 1.09 (27.7) | 0.040 (1.0) | 8                         | 8.5     | 1.74 (44.2)                             | 0.80 (20.3) | 1.29 (32.8) | 0.040 (1.0) | 11                        | 5.3     |
| 10.0        | 761M10652      | 2.21 (56.1)                              | 0.76 (19.3) | 1.13 (28.7) | 0.040 (1.0) | 8                         | 7.8     | 1.74 (44.2)                             | 0.85 (21.6) | 1.35 (34.3) | 0.040 (1.0) | 11                        | 4.9     |
| 12.0        | 761M12652      | 2.21 (56.1)                              | 0.85 (21.6) | 1.22 (31.0) | 0.040 (1.0) | 8                         | 6.7     | 1.74 (44.2)                             | 0.95 (24.1) | 1.45 (36.8) | 0.040 (1.0) | 11                        | 4.4     |
| 15.0        | 761M15652      | 2.21 (56.1)                              | 0.97 (24.6) | 1.34 (34.0) | 0.040 (1.0) | 8                         | 5.7     | 1.74 (44.2)                             | 1.09 (27.7) | 1.59 (40.4) | 0.040 (1.0) | 11                        | 3.9     |
| 18.0        | 761M18652      | 2.21 (56.1)                              | 1.08 (27.4) | 1.45 (36.8) | 0.040 (1.0) | 8                         | 5.1     | 1.74 (44.2)                             | 1.22 (31.0) | 1.71 (43.4) | 0.040 (1.0) | 11                        | 3.6     |
| 20.0        | 761M20652      | 2.21 (56.1)                              | 1.14 (29.0) | 1.52 (38.6) | 0.040 (1.0) | 8                         | 4.8     | 1.74 (44.2)                             | 1.30 (33.0) | 1.79 (45.5) | 0.040 (1.0) | 11                        | 3.5     |
| 22.0        | 761M22652      | 2.21 (56.1)                              | 1.21 (30.7) | 1.58 (40.1) | 0.040 (1.0) | 8                         | 4.5     |                                         |             |             |             |                           |         |
| 25.0        | 761M25652      | 2.21 (56.1)                              | 1.30 (33.0) | 1.67 (42.4) | 0.040 (1.0) | 8                         | 4.2     |                                         |             |             |             |                           |         |

<sup>1</sup> Please refer to Ordering/Part Number page for specific part numbering details.

<sup>2</sup> ESR ratings listed are Maximum. Please contact us for additional ESR data.

# Type 761M

## Metallized Polypropylene Film Capacitors

### Type 761M Sizes and Ratings – 400 VDC/220 VAC

| Cap<br>(µF) | Base<br>Part # | Standard Dimensions/Ratings <sup>1</sup> |             |             |             | dV/dt<br>V/µsec | <sup>2</sup> ESR-mΩ<br>@100KHz | Compact Dimensions/Ratings <sup>1</sup> |             |             |             | dV/dt<br>V/µsec | <sup>2</sup> ESR-mΩ<br>@100KHz |
|-------------|----------------|------------------------------------------|-------------|-------------|-------------|-----------------|--------------------------------|-----------------------------------------|-------------|-------------|-------------|-----------------|--------------------------------|
|             |                | L MAX                                    | T MAX       | H MAX       | Wire (d)    |                 |                                | L MAX                                   | T MAX       | H MAX       | Wire (d)    |                 |                                |
| 0.033       | 761M33354      | 0.61 (15.5)                              | 0.17 (4.3)  | 0.27 (6.9)  | 0.020 (0.5) | 14              | 42.3                           |                                         |             |             |             |                 |                                |
| 0.036       | 761M36354      | 0.61 (15.5)                              | 0.18 (4.6)  | 0.28 (7.1)  | 0.020 (0.5) | 14              | 39.1                           |                                         |             |             |             |                 |                                |
| 0.039       | 761M39354      | 0.61 (15.5)                              | 0.19 (4.8)  | 0.29 (7.4)  | 0.020 (0.5) | 14              | 36.5                           |                                         |             |             |             |                 |                                |
| 0.043       | 761M43354      | 0.61 (15.5)                              | 0.20 (5.1)  | 0.30 (7.6)  | 0.020 (0.5) | 14              | 33.5                           |                                         |             |             |             |                 |                                |
| 0.047       | 761M47354      | 0.79 (20.1)                              | 0.15 (3.8)  | 0.25 (6.4)  | 0.020 (0.5) | 8               | 70.3                           | 0.61 (15.5)                             | 0.21 (5.3)  | 0.31 (7.9)  | 0.020 (0.5) | 16              | 31.0                           |
| 0.05        | 761M50354      | 0.79 (20.1)                              | 0.16 (4.1)  | 0.25 (6.4)  | 0.020 (0.5) | 8               | 66.3                           | 0.61 (15.5)                             | 0.22 (5.6)  | 0.31 (7.9)  | 0.020 (0.5) | 21              | 29.4                           |
| 0.056       | 761M56354      | 0.79 (20.1)                              | 0.16 (4.1)  | 0.26 (6.6)  | 0.020 (0.5) | 8               | 59.6                           | 0.61 (15.5)                             | 0.23 (5.8)  | 0.33 (8.4)  | 0.020 (0.5) | 29              | 26.8                           |
| 0.062       | 761M62354      | 0.79 (20.1)                              | 0.17 (4.3)  | 0.27 (6.9)  | 0.020 (0.5) | 8               | 54.2                           | 0.61 (15.5)                             | 0.24 (6.1)  | 0.34 (8.6)  | 0.020 (0.5) | 35              | 24.7                           |
| 0.068       | 761M68354      | 0.79 (20.1)                              | 0.18 (4.6)  | 0.28 (7.1)  | 0.020 (0.5) | 8               | 49.8                           | 0.61 (15.5)                             | 0.26 (6.6)  | 0.35 (8.9)  | 0.020 (0.5) | 40              | 23.0                           |
| 0.075       | 761M75354      | 0.99 (25.1)                              | 0.17 (4.3)  | 0.26 (6.6)  | 0.020 (0.5) | 5               | 88.5                           | 0.79 (20.1)                             | 0.19 (4.8)  | 0.29 (7.4)  | 0.025 (0.6) | 8               | 43.0                           |
| 0.082       | 761M82354      | 0.99 (25.1)                              | 0.16 (4.1)  | 0.29 (7.4)  | 0.020 (0.5) | 5               | 81.4                           | 0.79 (20.1)                             | 0.19 (4.8)  | 0.32 (8.1)  | 0.025 (0.6) | 8               | 39.4                           |
| 0.1         | 761M10454      | 0.99 (25.1)                              | 0.18 (4.6)  | 0.31 (7.9)  | 0.020 (0.5) | 5               | 67.6                           | 0.79 (20.1)                             | 0.22 (5.6)  | 0.34 (8.6)  | 0.025 (0.6) | 15              | 32.5                           |
| 0.12        | 761M12454      | 0.99 (25.1)                              | 0.20 (5.1)  | 0.32 (8.1)  | 0.025 (0.6) | 7               | 54.3                           | 0.79 (20.1)                             | 0.24 (6.1)  | 0.37 (9.4)  | 0.025 (0.6) | 21              | 27.3                           |
| 0.15        | 761M15454      | 0.99 (25.1)                              | 0.21 (5.3)  | 0.37 (9.4)  | 0.025 (0.6) | 12              | 43.6                           | 0.79 (20.1)                             | 0.27 (6.9)  | 0.40 (10.2) | 0.032 (0.8) | 27              | 21.7                           |
| 0.18        | 761M18454      | 0.99 (25.1)                              | 0.24 (6.1)  | 0.39 (9.9)  | 0.025 (0.6) | 15              | 36.6                           | 0.79 (20.1)                             | 0.28 (7.1)  | 0.46 (11.7) | 0.032 (0.8) | 42              | 18.3                           |
| 0.2         | 761M20454      | 0.99 (25.1)                              | 0.25 (6.4)  | 0.41 (10.4) | 0.025 (0.6) | 17              | 33.0                           | 0.79 (20.1)                             | 0.30 (7.6)  | 0.48 (12.2) | 0.032 (0.8) | 43              | 16.6                           |
| 0.22        | 761M22454      | 0.99 (25.1)                              | 0.25 (6.4)  | 0.44 (11.2) | 0.025 (0.6) | 27              | 30.2                           | 0.79 (20.1)                             | 0.31 (7.9)  | 0.50 (12.7) | 0.032 (0.8) | 43              | 15.1                           |
| 0.25        | 761M25454      | 1.25 (31.8)                              | 0.23 (5.8)  | 0.41 (10.4) | 0.025 (0.6) | 11              | 46.6                           | 0.99 (25.1)                             | 0.27 (6.9)  | 0.46 (11.7) | 0.032 (0.8) | 28              | 26.3                           |
| 0.27        | 761M27454      | 1.25 (31.8)                              | 0.24 (6.1)  | 0.42 (10.7) | 0.025 (0.6) | 12              | 43.2                           | 0.99 (25.1)                             | 0.26 (6.6)  | 0.51 (13.0) | 0.032 (0.8) | 28              | 24.5                           |
| 0.3         | 761M30454      | 1.25 (31.8)                              | 0.25 (6.4)  | 0.44 (11.2) | 0.025 (0.6) | 20              | 39.0                           | 0.99 (25.1)                             | 0.28 (7.1)  | 0.53 (13.5) | 0.032 (0.8) | 28              | 22.2                           |
| 0.33        | 761M33454      | 1.25 (31.8)                              | 0.27 (6.9)  | 0.45 (11.4) | 0.032 (0.8) | 20              | 35.2                           | 0.99 (25.1)                             | 0.29 (7.4)  | 0.54 (13.7) | 0.032 (0.8) | 29              | 20.2                           |
| 0.39        | 761M39454      | 1.25 (31.8)                              | 0.27 (6.9)  | 0.52 (13.2) | 0.032 (0.8) | 21              | 30.0                           | 0.99 (25.1)                             | 0.33 (8.4)  | 0.57 (14.5) | 0.032 (0.8) | 30              | 17.3                           |
| 0.43        | 761M43454      | 1.25 (31.8)                              | 0.29 (7.4)  | 0.53 (13.5) | 0.032 (0.8) | 21              | 27.3                           | 0.99 (25.1)                             | 0.35 (8.9)  | 0.59 (15.0) | 0.032 (0.8) | 30              | 15.8                           |
| 0.47        | 761M47454      | 1.25 (31.8)                              | 0.30 (7.6)  | 0.55 (14.0) | 0.032 (0.8) | 21              | 25.1                           | 0.99 (25.1)                             | 0.37 (9.4)  | 0.61 (15.5) | 0.032 (0.8) | 30              | 14.5                           |
| 0.5         | 761M50454      | 1.25 (31.8)                              | 0.31 (7.9)  | 0.56 (14.2) | 0.032 (0.8) | 21              | 23.6                           | 0.99 (25.1)                             | 0.38 (9.7)  | 0.63 (16.0) | 0.032 (0.8) | 30              | 13.7                           |
| 0.56        | 761M56454      | 1.25 (31.8)                              | 0.34 (8.6)  | 0.58 (14.7) | 0.032 (0.8) | 22              | 21.2                           | 0.99 (25.1)                             | 0.41 (10.4) | 0.65 (16.5) | 0.032 (0.8) | 31              | 12.4                           |
| 0.6         | 761M60454      | 1.74 (44.2)                              | 0.27 (6.9)  | 0.52 (13.2) | 0.032 (0.8) | 13              | 46.5                           | 1.25 (31.8)                             | 0.35 (8.9)  | 0.60 (15.2) | 0.032 (0.8) | 22              | 19.9                           |
| 0.68        | 761M68454      | 1.74 (44.2)                              | 0.29 (7.4)  | 0.54 (13.7) | 0.032 (0.8) | 13              | 41.1                           | 1.25 (31.8)                             | 0.38 (9.7)  | 0.63 (16.0) | 0.032 (0.8) | 22              | 17.7                           |
| 0.75        | 761M75454      | 1.74 (44.2)                              | 0.31 (7.9)  | 0.55 (14.0) | 0.032 (0.8) | 13              | 37.4                           | 1.25 (31.8)                             | 0.40 (10.2) | 0.65 (16.5) | 0.032 (0.8) | 22              | 16.1                           |
| 0.82        | 761M82454      | 1.74 (44.2)                              | 0.32 (8.1)  | 0.57 (14.5) | 0.032 (0.8) | 14              | 34.3                           | 1.25 (31.8)                             | 0.42 (10.7) | 0.67 (17.0) | 0.032 (0.8) | 23              | 14.9                           |
| 0.9         | 761M90454      | 1.74 (44.2)                              | 0.34 (8.6)  | 0.59 (15.0) | 0.032 (0.8) | 14              | 31.3                           | 1.25 (31.8)                             | 0.45 (11.4) | 0.69 (17.5) | 0.032 (0.8) | 23              | 13.7                           |
| 1.0         | 761M10554      | 1.74 (44.2)                              | 0.36 (9.1)  | 0.61 (15.5) | 0.032 (0.8) | 14              | 28.3                           | 1.25 (31.8)                             | 0.48 (12.2) | 0.72 (18.3) | 0.032 (0.8) | 23              | 12.5                           |
| 1.2         | 761M12554      | 2.21 (56.1)                              | 0.34 (8.6)  | 0.58 (14.7) | 0.032 (0.8) | 10              | 43.0                           | 1.74 (44.2)                             | 0.38 (9.7)  | 0.69 (17.5) | 0.032 (0.8) | 14              | 23.9                           |
| 1.5         | 761M15554      | 2.21 (56.1)                              | 0.38 (9.7)  | 0.63 (16.0) | 0.032 (0.8) | 10              | 34.6                           | 1.74 (44.2)                             | 0.44 (11.2) | 0.74 (18.8) | 0.032 (0.8) | 14              | 19.4                           |
| 1.8         | 761M18554      | 2.21 (56.1)                              | 0.43 (10.9) | 0.68 (17.3) | 0.032 (0.8) | 10              | 29.1                           | 1.74 (44.2)                             | 0.49 (12.4) | 0.80 (20.3) | 0.032 (0.8) | 15              | 16.4                           |
| 2.0         | 761M20554      | 2.21 (56.1)                              | 0.46 (11.7) | 0.70 (17.8) | 0.032 (0.8) | 11              | 26.3                           | 1.74 (44.2)                             | 0.52 (13.2) | 0.83 (21.1) | 0.032 (0.8) | 15              | 14.9                           |
| 2.2         | 761M22554      | 2.21 (56.1)                              | 0.45 (11.4) | 0.76 (19.3) | 0.032 (0.8) | 11              | 24.1                           | 1.74 (44.2)                             | 0.55 (14.0) | 0.86 (21.8) | 0.032 (0.8) | 15              | 13.7                           |
| 2.5         | 761M25554      | 2.21 (56.1)                              | 0.49 (12.4) | 0.80 (20.3) | 0.032 (0.8) | 11              | 21.4                           | 1.74 (44.2)                             | 0.59 (15.0) | 0.90 (22.9) | 0.032 (0.8) | 15              | 12.3                           |
| 2.7         | 761M27554      | 2.21 (56.1)                              | 0.51 (13.0) | 0.82 (20.8) | 0.040 (1.0) | 11              | 19.5                           | 1.74 (44.2)                             | 0.62 (15.7) | 0.93 (23.6) | 0.040 (1.0) | 15              | 11.0                           |
| 3.0         | 761M30554      | 2.21 (56.1)                              | 0.55 (14.0) | 0.86 (21.8) | 0.040 (1.0) | 11              | 17.6                           | 1.74 (44.2)                             | 0.63 (16.0) | 1.00 (25.4) | 0.040 (1.0) | 15              | 10.0                           |
| 3.3         | 761M33554      | 2.21 (56.1)                              | 0.58 (14.7) | 0.89 (22.6) | 0.040 (1.0) | 11              | 16.1                           | 1.74 (44.2)                             | 0.67 (17.0) | 1.04 (26.4) | 0.040 (1.0) | 15              | 9.2                            |
| 3.6         | 761M36554      | 2.21 (56.1)                              | 0.61 (15.5) | 0.92 (23.4) | 0.040 (1.0) | 11              | 14.9                           | 1.74 (44.2)                             | 0.70 (17.8) | 1.08 (27.4) | 0.040 (1.0) | 15              | 8.6                            |
| 3.9         | 761M39554      | 2.21 (56.1)                              | 0.64 (16.3) | 0.95 (24.1) | 0.040 (1.0) | 11              | 13.8                           | 1.74 (44.2)                             | 0.74 (18.8) | 1.11 (28.2) | 0.040 (1.0) | 15              | 8.0                            |
| 4.7         | 761M47554      | 2.21 (56.1)                              | 0.68 (17.3) | 1.06 (26.9) | 0.040 (1.0) | 11              | 11.7                           | 1.74 (44.2)                             | 0.83 (21.1) | 1.20 (30.5) | 0.040 (1.0) | 15              | 6.9                            |
| 5.0         | 761M50554      | 2.21 (56.1)                              | 0.71 (18.0) | 1.08 (27.4) | 0.040 (1.0) | 11              | 11.1                           | 1.74 (44.2)                             | 0.86 (21.8) | 1.23 (31.2) | 0.040 (1.0) | 15              | 6.6                            |
| 5.6         | 761M56554      | 2.21 (56.1)                              | 0.76 (19.3) | 1.13 (28.7) | 0.040 (1.0) | 11              | 10.0                           | 1.74 (44.2)                             | 0.92 (23.4) | 1.29 (32.8) | 0.040 (1.0) | 15              | 6.1                            |
| 6.0         | 761M60554      | 2.21 (56.1)                              | 0.79 (20.1) | 1.16 (29.5) | 0.040 (1.0) | 11              | 9.5                            | 1.74 (44.2)                             | 0.89 (22.6) | 1.39 (35.3) | 0.040 (1.0) | 15              | 5.8                            |
| 6.8         | 761M68554      | 2.21 (56.1)                              | 0.85 (21.6) | 1.22 (31.0) | 0.040 (1.0) | 11              | 8.5                            | 1.74 (44.2)                             | 0.96 (24.4) | 1.46 (37.1) | 0.040 (1.0) | 15              | 5.3                            |
| 7.0         | 761M70554      | 2.21 (56.1)                              | 0.87 (22.1) | 1.24 (31.5) | 0.040 (1.0) | 11              | 8.3                            | 1.74 (44.2)                             | 0.98 (24.9) | 1.48 (37.6) | 0.040 (1.0) | 15              | 5.2                            |
| 7.5         | 761M75554      | 2.21 (56.1)                              | 0.90 (22.9) | 1.28 (32.5) | 0.040 (1.0) | 11              | 7.9                            | 1.74 (44.2)                             | 1.02 (25.9) | 1.52 (38.6) | 0.040 (1.0) | 15              | 5.0                            |
| 8.0         | 761M80554      | 2.21 (56.1)                              | 0.94 (23.9) | 1.31 (33.3) | 0.040 (1.0) | 11              | 7.5                            | 1.74 (44.2)                             | 1.06 (26.9) | 1.56 (39.6) | 0.040 (1.0) | 15              | 4.8                            |
| 9.0         | 761M90554      | 2.21 (56.1)                              | 1.01 (25.7) | 1.38 (35.1) | 0.040 (1.0) | 11              | 6.9                            | 1.74 (44.2)                             | 1.14 (29.0) | 1.64 (41.7) | 0.040 (1.0) | 15              | 4.5                            |
| 10.0        | 761M10654      | 2.21 (56.1)                              | 1.07 (27.2) | 1.44 (36.6) | 0.040 (1.0) | 11              | 6.3                            | 1.74 (44.2)                             | 1.21 (30.7) | 1.71 (43.4) | 0.040 (1.0) | 15              | 4.3                            |
| 12.0        | 761M12654      | 2.21 (56.1)                              | 1.19 (30.2) | 1.56 (39.6) | 0.040 (1.0) | 11              | 5.6                            |                                         |             |             |             |                 |                                |
| 15.0        | 761M15654      | 2.21 (56.1)                              | 1.35 (34.3) | 1.72 (43.7) | 0.040 (1.0) | 11              | 4.9                            |                                         |             |             |             |                 |                                |

<sup>1</sup> Please refer to Ordering/Part Number page for specific part numbering details.

<sup>2</sup> ESR ratings listed are Maximum. Please contact us for additional ESR data.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

# Type 761M

## Metallized Polypropylene Film Capacitors

### Type 761M Sizes and Ratings – 630 VDC/250 VAC

| Cap<br>(µF) | Base<br>Part # | Standard Dimensions/Ratings <sup>1</sup> |             |             |             | dV/dt <sup>2</sup> ESR-mΩ |         | Compact Dimensions/Ratings <sup>1</sup> |             |             |             | dV/dt <sup>2</sup> ESR-mΩ |         |
|-------------|----------------|------------------------------------------|-------------|-------------|-------------|---------------------------|---------|-----------------------------------------|-------------|-------------|-------------|---------------------------|---------|
|             |                | L MAX                                    | T MAX       | H MAX       | Wire (d)    | V/µsec                    | @100KHz | L MAX                                   | T MAX       | H MAX       | Wire (d)    | V/µsec                    | @100KHz |
| 0.012       | 761M12356      | 0.61 (15.5)                              | 0.17 (4.3)  | 0.27 (6.9)  | 0.020 (0.5) | 25                        | 72.5    |                                         |             |             |             |                           |         |
| 0.015       | 761M15356      | 0.61 (15.5)                              | 0.19 (4.8)  | 0.29 (7.4)  | 0.020 (0.5) | 25                        | 58.8    |                                         |             |             |             |                           |         |
| 0.018       | 761M18356      | 0.61 (15.5)                              | 0.21 (5.3)  | 0.31 (7.9)  | 0.020 (0.5) | 32                        | 49.8    |                                         |             |             |             |                           |         |
| 0.02        | 761M20356      | 0.79 (20.1)                              | 0.15 (3.8)  | 0.25 (6.4)  | 0.020 (0.5) | 13                        | 101.4   | 0.61 (15.5)                             | 0.22 (5.6)  | 0.32 (8.1)  | 0.020 (0.5) | 46                        | 45.3    |
| 0.022       | 761M22356      | 0.79 (20.1)                              | 0.16 (4.1)  | 0.26 (6.6)  | 0.020 (0.5) | 13                        | 92.6    | 0.61 (15.5)                             | 0.23 (5.8)  | 0.33 (8.4)  | 0.020 (0.5) | 58                        | 41.6    |
| 0.025       | 761M25356      | 0.79 (20.1)                              | 0.17 (4.3)  | 0.27 (6.6)  | 0.020 (0.5) | 13                        | 81.9    | 0.61 (15.5)                             | 0.25 (6.4)  | 0.35 (8.9)  | 0.020 (0.5) | 71                        | 37.2    |
| 0.027       | 761M27356      | 0.79 (20.1)                              | 0.18 (4.6)  | 0.28 (7.1)  | 0.020 (0.5) | 13                        | 76.1    | 0.61 (15.5)                             | 0.26 (6.6)  | 0.36 (9.1)  | 0.020 (0.5) | 79                        | 34.9    |
| 0.03        | 761M30356      | 0.99 (25.1)                              | 0.15 (3.8)  | 0.28 (7.1)  | 0.020 (0.5) | 8                         | 136.9   | 0.79 (20.1)                             | 0.18 (4.6)  | 0.31 (7.9)  | 0.020 (0.5) | 13                        | 69.1    |
| 0.033       | 761M33356      | 0.99 (25.1)                              | 0.16 (4.1)  | 0.29 (7.4)  | 0.020 (0.5) | 8                         | 124.8   | 0.79 (20.1)                             | 0.19 (4.8)  | 0.32 (8.1)  | 0.025 (0.6) | 13                        | 60.5    |
| 0.036       | 761M36356      | 0.99 (25.1)                              | 0.17 (4.3)  | 0.29 (7.4)  | 0.020 (0.5) | 8                         | 114.8   | 0.79 (20.1)                             | 0.20 (5.1)  | 0.33 (8.4)  | 0.025 (0.6) | 17                        | 55.6    |
| 0.039       | 761M39356      | 0.99 (25.1)                              | 0.18 (4.6)  | 0.30 (7.6)  | 0.020 (0.5) | 8                         | 106.3   | 0.79 (20.1)                             | 0.21 (5.3)  | 0.34 (8.6)  | 0.025 (0.6) | 22                        | 51.4    |
| 0.043       | 761M43356      | 0.99 (25.1)                              | 0.19 (4.8)  | 0.31 (7.9)  | 0.020 (0.5) | 8                         | 96.8    | 0.79 (20.1)                             | 0.22 (5.6)  | 0.35 (8.9)  | 0.025 (0.6) | 28                        | 46.7    |
| 0.047       | 761M47356      | 0.99 (25.1)                              | 0.18 (4.6)  | 0.34 (8.6)  | 0.020 (0.5) | 8                         | 89.2    | 0.79 (20.1)                             | 0.21 (5.3)  | 0.40 (10.2) | 0.025 (0.6) | 34                        | 42.9    |
| 0.05        | 761M50356      | 0.99 (25.1)                              | 0.19 (4.8)  | 0.34 (8.6)  | 0.020 (0.5) | 11                        | 84.1    | 0.79 (20.1)                             | 0.22 (5.6)  | 0.41 (10.4) | 0.025 (0.6) | 37                        | 40.4    |
| 0.056       | 761M56356      | 0.99 (25.1)                              | 0.20 (5.1)  | 0.36 (9.1)  | 0.025 (0.6) | 15                        | 72.5    | 0.79 (20.1)                             | 0.24 (6.1)  | 0.42 (10.7) | 0.025 (0.6) | 42                        | 36.2    |
| 0.062       | 761M62356      | 0.99 (25.1)                              | 0.20 (5.1)  | 0.39 (9.9)  | 0.025 (0.6) | 18                        | 65.7    | 0.79 (20.1)                             | 0.25 (6.4)  | 0.44 (11.2) | 0.025 (0.6) | 67                        | 32.8    |
| 0.068       | 761M68356      | 0.99 (25.1)                              | 0.21 (5.3)  | 0.40 (10.2) | 0.025 (0.6) | 21                        | 60.0    | 0.79 (20.1)                             | 0.27 (6.9)  | 0.45 (11.4) | 0.032 (0.8) | 68                        | 29.7    |
| 0.075       | 761M75356      | 0.99 (25.1)                              | 0.23 (5.8)  | 0.41 (10.4) | 0.025 (0.6) | 24                        | 54.5    | 0.79 (20.1)                             | 0.28 (7.1)  | 0.47 (11.9) | 0.032 (0.8) | 70                        | 27.0    |
| 0.082       | 761M82356      | 0.99 (25.1)                              | 0.24 (6.1)  | 0.42 (10.7) | 0.025 (0.6) | 27                        | 49.9    | 0.79 (20.1)                             | 0.30 (7.6)  | 0.48 (12.2) | 0.032 (0.8) | 71                        | 24.8    |
| 0.10        | 761M10456      | 0.99 (25.1)                              | 0.27 (6.9)  | 0.45 (11.4) | 0.032 (0.8) | 44                        | 40.8    | 0.79 (20.1)                             | 0.34 (8.6)  | 0.52 (13.2) | 0.032 (0.8) | 73                        | 20.5    |
| 0.12        | 761M12456      | 1.25 (31.8)                              | 0.25 (6.4)  | 0.43 (10.9) | 0.025 (0.6) | 30                        | 61.0    | 0.99 (25.1)                             | 0.27 (6.9)  | 0.52 (13.2) | 0.032 (0.8) | 45                        | 34.2    |
| 0.15        | 761M15456      | 1.25 (31.8)                              | 0.26 (6.6)  | 0.50 (12.7) | 0.032 (0.8) | 32                        | 48.8    | 0.99 (25.1)                             | 0.31 (7.9)  | 0.56 (14.2) | 0.032 (0.8) | 47                        | 27.6    |
| 0.18        | 761M18456      | 1.25 (31.8)                              | 0.29 (7.4)  | 0.53 (13.5) | 0.032 (0.8) | 33                        | 40.8    | 0.99 (25.1)                             | 0.35 (8.9)  | 0.60 (15.2) | 0.032 (0.8) | 48                        | 23.2    |
| 0.2         | 761M20456      | 1.25 (31.8)                              | 0.30 (7.6)  | 0.55 (14.0) | 0.032 (0.8) | 34                        | 36.8    | 0.99 (25.1)                             | 0.37 (9.4)  | 0.62 (15.7) | 0.032 (0.8) | 49                        | 21.0    |
| 0.22        | 761M22456      | 1.25 (31.8)                              | 0.32 (8.1)  | 0.57 (14.5) | 0.032 (0.8) | 34                        | 33.6    | 0.99 (25.1)                             | 0.39 (9.9)  | 0.64 (16.3) | 0.032 (0.8) | 49                        | 19.2    |
| 0.25        | 761M25456      | 1.74 (44.2)                              | 0.27 (6.9)  | 0.51 (13.0) | 0.032 (0.8) | 20                        | 71.2    | 1.25 (31.8)                             | 0.33 (8.4)  | 0.64 (16.3) | 0.032 (0.8) | 35                        | 29.7    |
| 0.27        | 761M27456      | 1.74 (44.2)                              | 0.28 (7.1)  | 0.52 (13.2) | 0.032 (0.8) | 20                        | 66.0    | 1.25 (31.8)                             | 0.34 (8.6)  | 0.65 (16.5) | 0.032 (0.8) | 35                        | 27.6    |
| 0.3         | 761M30456      | 1.74 (44.2)                              | 0.30 (7.6)  | 0.54 (13.7) | 0.032 (0.8) | 21                        | 59.5    | 1.25 (31.8)                             | 0.37 (9.4)  | 0.68 (17.3) | 0.032 (0.8) | 35                        | 25.0    |
| 0.33        | 761M33456      | 1.74 (44.2)                              | 0.31 (7.9)  | 0.56 (14.2) | 0.032 (0.8) | 21                        | 54.1    | 1.25 (31.8)                             | 0.39 (9.9)  | 0.70 (17.8) | 0.032 (0.8) | 36                        | 22.8    |
| 0.39        | 761M39456      | 1.74 (44.2)                              | 0.35 (8.9)  | 0.59 (15.0) | 0.032 (0.8) | 21                        | 46.0    | 1.25 (31.8)                             | 0.43 (10.9) | 0.74 (18.8) | 0.032 (0.8) | 36                        | 19.5    |
| 0.43        | 761M43456      | 1.74 (44.2)                              | 0.34 (8.6)  | 0.65 (16.5) | 0.032 (0.8) | 22                        | 41.9    | 1.25 (31.8)                             | 0.46 (11.7) | 0.77 (19.6) | 0.032 (0.8) | 36                        | 17.9    |
| 0.47        | 761M47456      | 1.74 (44.2)                              | 0.36 (9.1)  | 0.67 (17.0) | 0.032 (0.8) | 22                        | 38.4    | 1.25 (31.8)                             | 0.48 (12.2) | 0.79 (20.1) | 0.032 (0.8) | 36                        | 16.5    |
| 0.5         | 761M50456      | 1.74 (44.2)                              | 0.37 (9.4)  | 0.68 (17.3) | 0.032 (0.8) | 22                        | 36.2    | 1.25 (31.8)                             | 0.50 (12.7) | 0.81 (20.6) | 0.032 (0.8) | 37                        | 15.6    |
| 0.56        | 761M56456      | 1.74 (44.2)                              | 0.40 (10.2) | 0.71 (18.0) | 0.032 (0.8) | 22                        | 32.5    | 1.25 (31.8)                             | 0.54 (13.7) | 0.84 (21.3) | 0.032 (0.8) | 37                        | 14.1    |
| 0.6         | 761M60456      | 2.21 (56.1)                              | 0.34 (8.6)  | 0.65 (16.5) | 0.032 (0.8) | 16                        | 55.5    | 1.74 (44.2)                             | 0.39 (9.9)  | 0.76 (19.3) | 0.032 (0.8) | 22                        | 30.4    |
| 0.68        | 761M68456      | 2.21 (56.1)                              | 0.37 (9.4)  | 0.68 (17.3) | 0.032 (0.8) | 16                        | 49.1    | 1.74 (44.2)                             | 0.42 (10.7) | 0.80 (20.3) | 0.032 (0.8) | 22                        | 27.0    |
| 0.75        | 761M75456      | 2.21 (56.1)                              | 0.39 (9.9)  | 0.70 (17.8) | 0.032 (0.8) | 16                        | 44.6    | 1.74 (44.2)                             | 0.45 (11.4) | 0.82 (20.8) | 0.032 (0.8) | 23                        | 24.7    |
| 0.82        | 761M82456      | 2.21 (56.1)                              | 0.41 (10.4) | 0.72 (18.3) | 0.032 (0.8) | 16                        | 40.9    | 1.74 (44.2)                             | 0.48 (12.2) | 0.85 (21.6) | 0.032 (0.8) | 23                        | 22.7    |
| 0.9         | 761M90456      | 2.21 (56.1)                              | 0.44 (11.2) | 0.75 (19.1) | 0.032 (0.8) | 16                        | 37.4    | 1.74 (44.2)                             | 0.51 (13.0) | 0.88 (22.4) | 0.032 (0.8) | 23                        | 20.8    |
| 1.0         | 761M10556      | 2.21 (56.1)                              | 0.44 (11.2) | 0.81 (20.6) | 0.032 (0.8) | 16                        | 33.9    | 1.74 (44.2)                             | 0.54 (13.7) | 0.91 (23.1) | 0.032 (0.8) | 23                        | 18.9    |
| 1.2         | 761M12556      | 2.21 (56.1)                              | 0.50 (12.7) | 0.87 (22.1) | 0.040 (1.0) | 16                        | 28.0    | 1.74 (44.2)                             | 0.60 (15.2) | 0.98 (24.9) | 0.040 (1.0) | 23                        | 15.5    |
| 1.5         | 761M15556      | 2.21 (56.1)                              | 0.57 (14.5) | 0.94 (23.9) | 0.040 (1.0) | 17                        | 22.6    | 1.74 (44.2)                             | 0.69 (17.5) | 1.06 (26.9) | 0.040 (1.0) | 23                        | 12.7    |
| 1.8         | 761M18556      | 2.21 (56.1)                              | 0.64 (16.3) | 1.01 (25.7) | 0.040 (1.0) | 17                        | 19.1    | 1.74 (44.2)                             | 0.71 (18.0) | 1.21 (30.7) | 0.040 (1.0) | 23                        | 10.9    |
| 2.0         | 761M20556      | 2.21 (56.1)                              | 0.68 (17.3) | 1.05 (26.7) | 0.040 (1.0) | 17                        | 17.3    | 1.74 (44.2)                             | 0.76 (19.3) | 1.26 (32.0) | 0.040 (1.0) | 23                        | 9.9     |
| 2.2         | 761M22556      | 2.21 (56.1)                              | 0.72 (18.3) | 1.09 (27.7) | 0.040 (1.0) | 17                        | 15.8    | 1.74 (44.2)                             | 0.81 (20.6) | 1.30 (33.0) | 0.040 (1.0) | 23                        | 9.2     |
| 2.5         | 761M25556      | 2.21 (56.1)                              | 0.77 (19.6) | 1.15 (29.2) | 0.040 (1.0) | 17                        | 14.1    | 1.74 (44.2)                             | 0.88 (22.4) | 1.37 (34.8) | 0.040 (1.0) | 23                        | 8.3     |
| 2.7         | 761M27556      | 2.21 (56.1)                              | 0.81 (20.6) | 1.18 (30.0) | 0.040 (1.0) | 17                        | 13.2    | 1.74 (44.2)                             | 0.92 (23.4) | 1.41 (35.8) | 0.040 (1.0) | 23                        | 7.8     |
| 3.0         | 761M30556      | 2.21 (56.1)                              | 0.86 (21.8) | 1.23 (31.2) | 0.040 (1.0) | 17                        | 12.0    | 1.74 (44.2)                             | 0.98 (24.9) | 1.47 (37.3) | 0.040 (1.0) | 24                        | 7.2     |
| 3.3         | 761M33556      | 2.21 (56.1)                              | 0.91 (23.1) | 1.28 (32.5) | 0.040 (1.0) | 17                        | 11.1    | 1.74 (44.2)                             | 1.04 (26.4) | 1.53 (38.9) | 0.040 (1.0) | 24                        | 6.7     |
| 3.6         | 761M36556      | 2.21 (56.1)                              | 0.96 (24.4) | 1.33 (33.8) | 0.040 (1.0) | 17                        | 10.3    | 1.74 (44.2)                             | 1.09 (27.7) | 1.59 (40.4) | 0.040 (1.0) | 24                        | 6.3     |
| 3.9         | 761M39556      | 2.21 (56.1)                              | 1.01 (25.7) | 1.38 (35.1) | 0.040 (1.0) | 17                        | 9.6     | 1.74 (44.2)                             | 1.15 (29.2) | 1.64 (41.7) | 0.040 (1.0) | 24                        | 6.0     |
| 4.7         | 761M47556      | 2.21 (56.1)                              | 1.12 (28.4) | 1.49 (37.8) | 0.040 (1.0) | 17                        | 8.3     | 1.74 (44.2)                             | 1.28 (32.5) | 1.77 (45.0) | 0.040 (1.0) | 24                        | 5.3     |
| 5.0         | 761M50556      | 2.21 (56.1)                              | 1.16 (29.5) | 1.53 (38.9) | 0.040 (1.0) | 17                        | 7.9     |                                         |             |             |             |                           |         |
| 5.6         | 761M56556      | 2.21 (56.1)                              | 1.24 (31.5) | 1.61 (40.9) | 0.040 (1.0) | 17                        | 7.3     |                                         |             |             |             |                           |         |
| 6.0         | 761M60556      | 2.21 (56.1)                              | 1.29 (32.8) | 1.66 (42.2) | 0.040 (1.0) | 17                        | 6.9     |                                         |             |             |             |                           |         |
| 6.8         | 761M68556      | 2.21 (56.1)                              | 1.38 (35.1) | 1.75 (44.5) | 0.040 (1.0) | 17                        | 6.4     |                                         |             |             |             |                           |         |
| 7.0         | 761M70556      | 2.21 (56.1)                              | 1.40 (35.6) | 1.78 (45.2) | 0.040 (1.0) | 17                        | 6.3     |                                         |             |             |             |                           |         |

<sup>1</sup> Please refer to Ordering/Part Number page for specific part numbering details.



<sup>2</sup> ESR ratings listed are Maximum. Please contact us for additional ESR data.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

# Type 761M

## Metallized Polypropylene Film Capacitors

RMS Voltage vs. Frequency @ +85°C, in still air\*

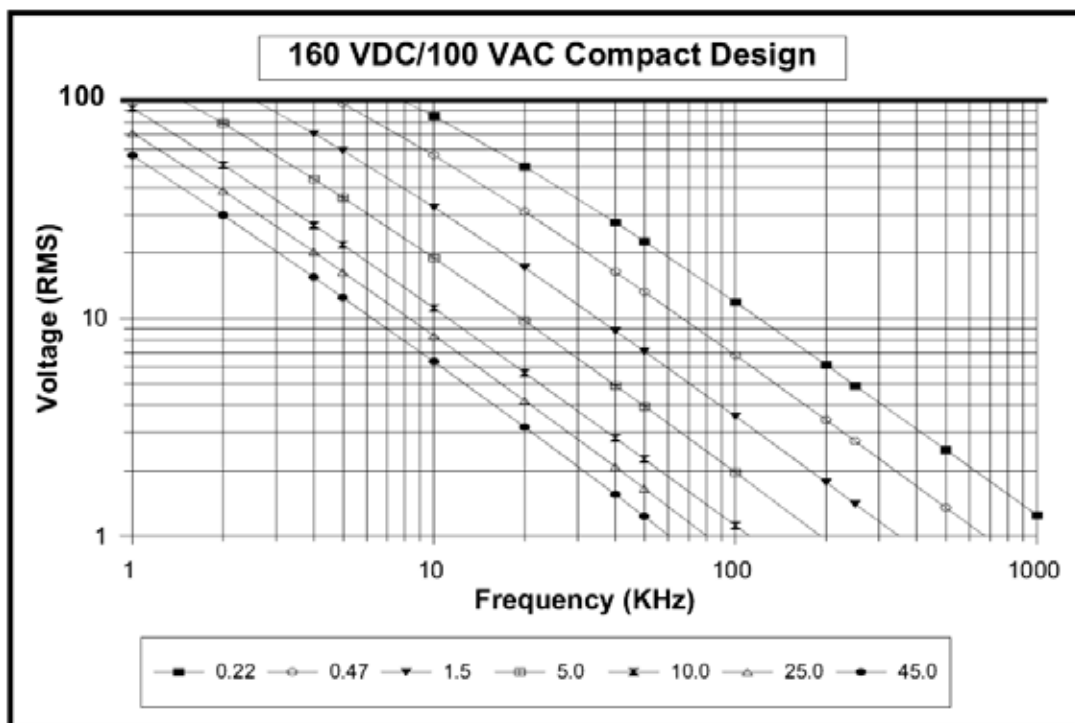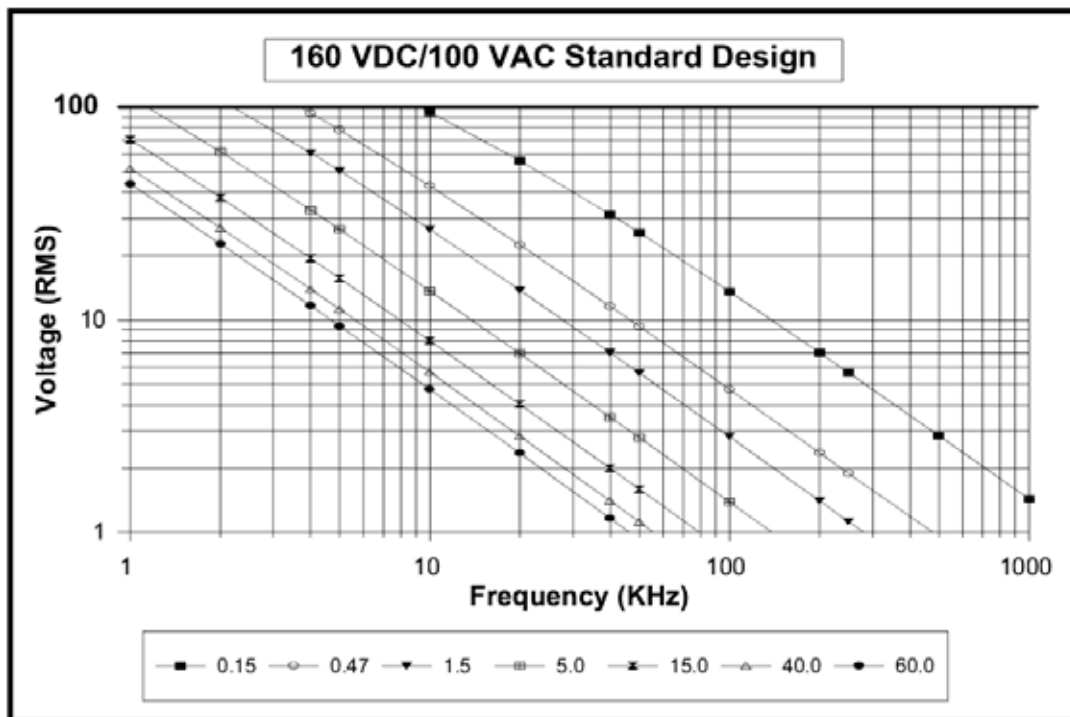



\* For additional information regarding these performance curves and their interpretation please refer to our Thermal Management application note.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

# Type 761M

## Metallized Polypropylene Film Capacitors

RMS Voltage vs. Frequency @ +85°C, in still air\*

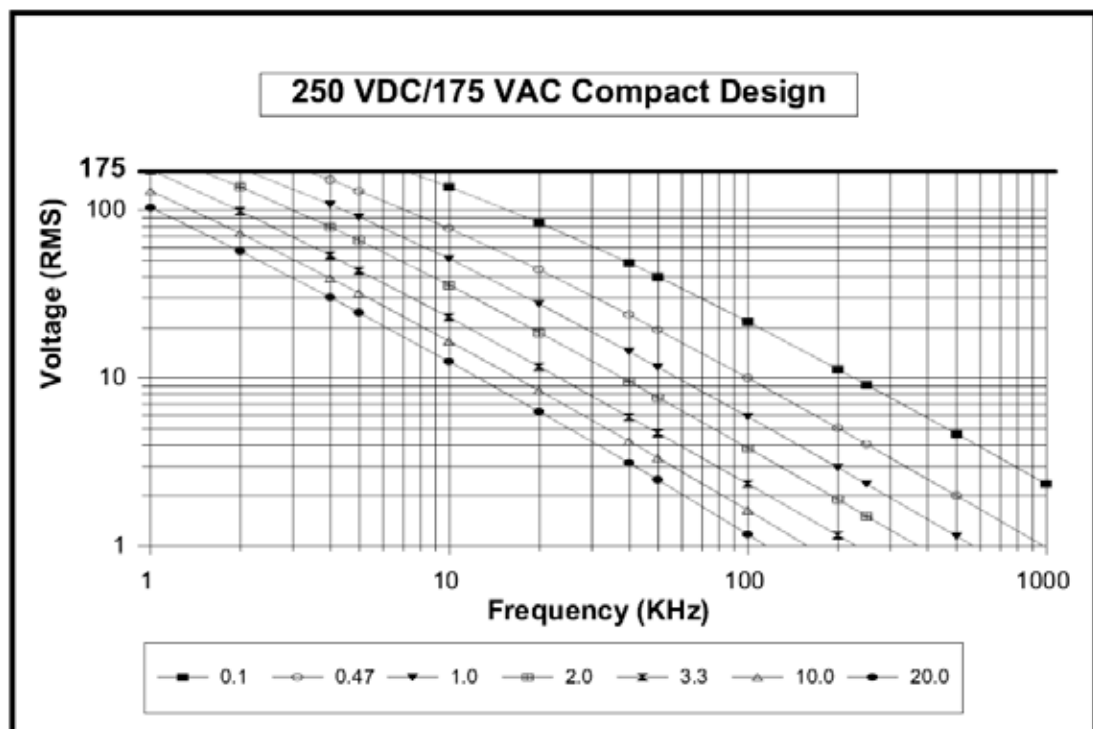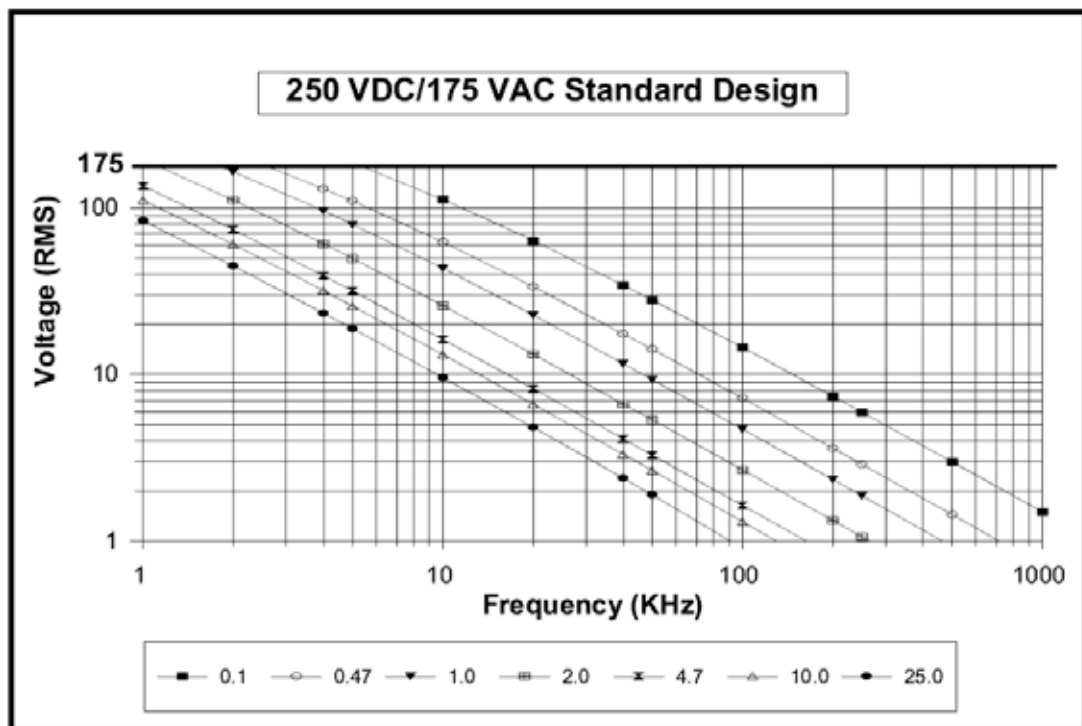



\* For additional information regarding these performance curves and their interpretation please refer to our Thermal Management application note.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

# Type 761M

## Metallized Polypropylene Film Capacitors

RMS Voltage vs. Frequency @ +85°C, in still air\*

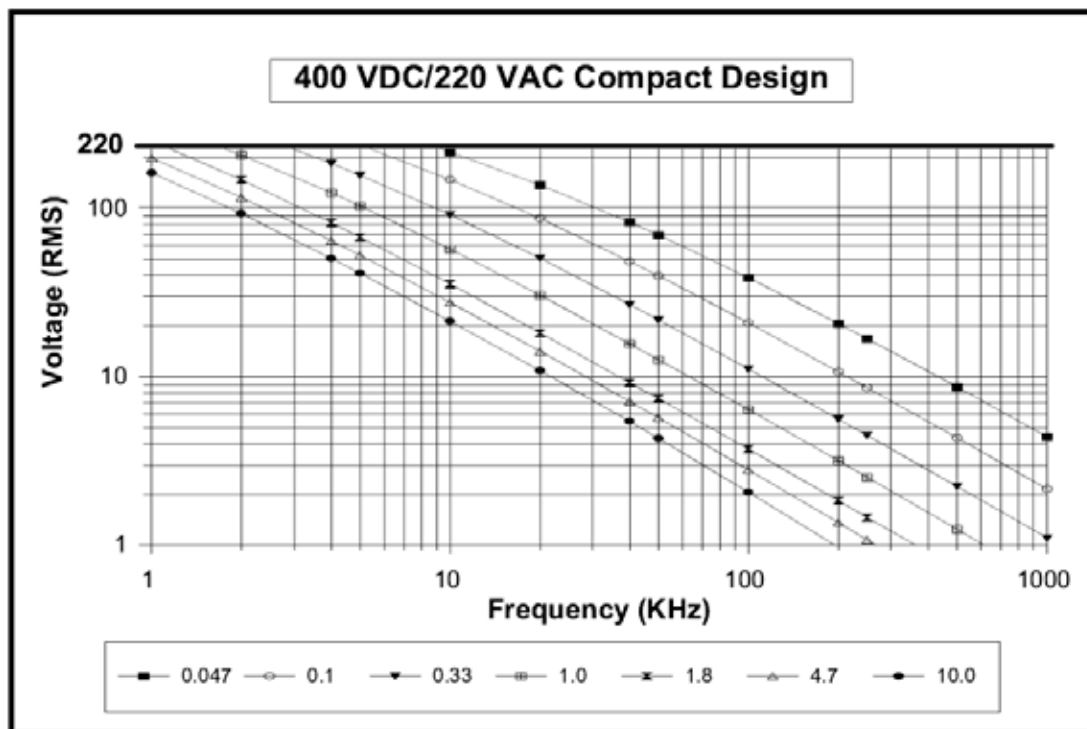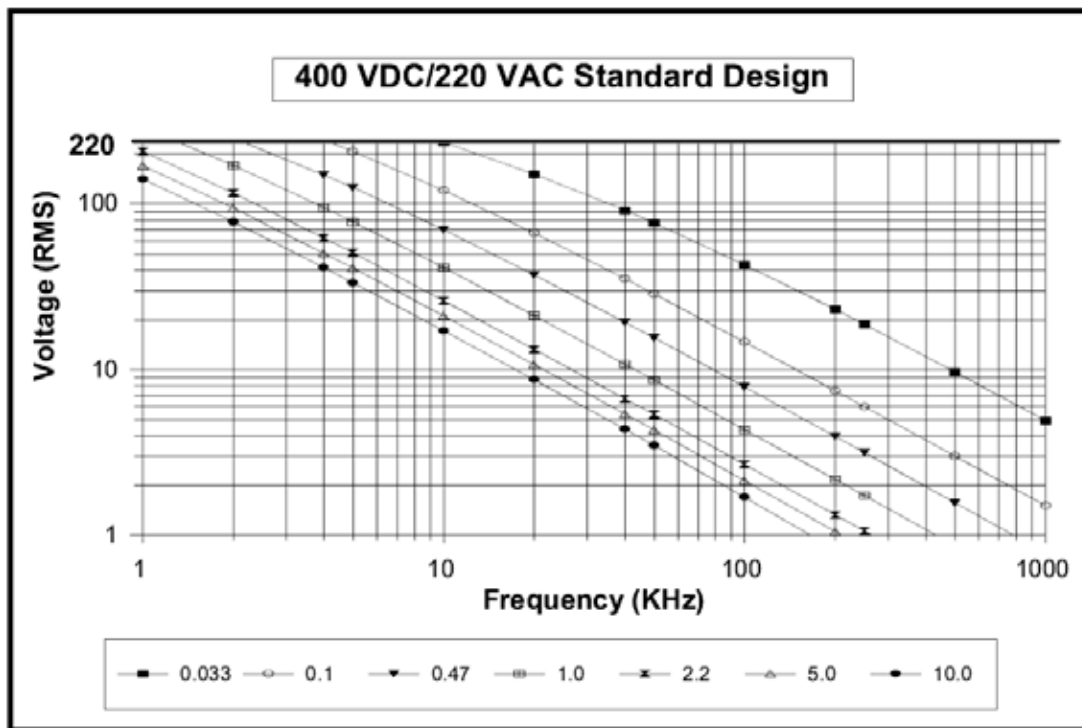



\* For additional information regarding these performance curves and their interpretation please refer to our Thermal Management application note.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

# Type 761M

## Metallized Polypropylene Film Capacitors

RMS Voltage vs. Frequency @ +85°C, in still air\*

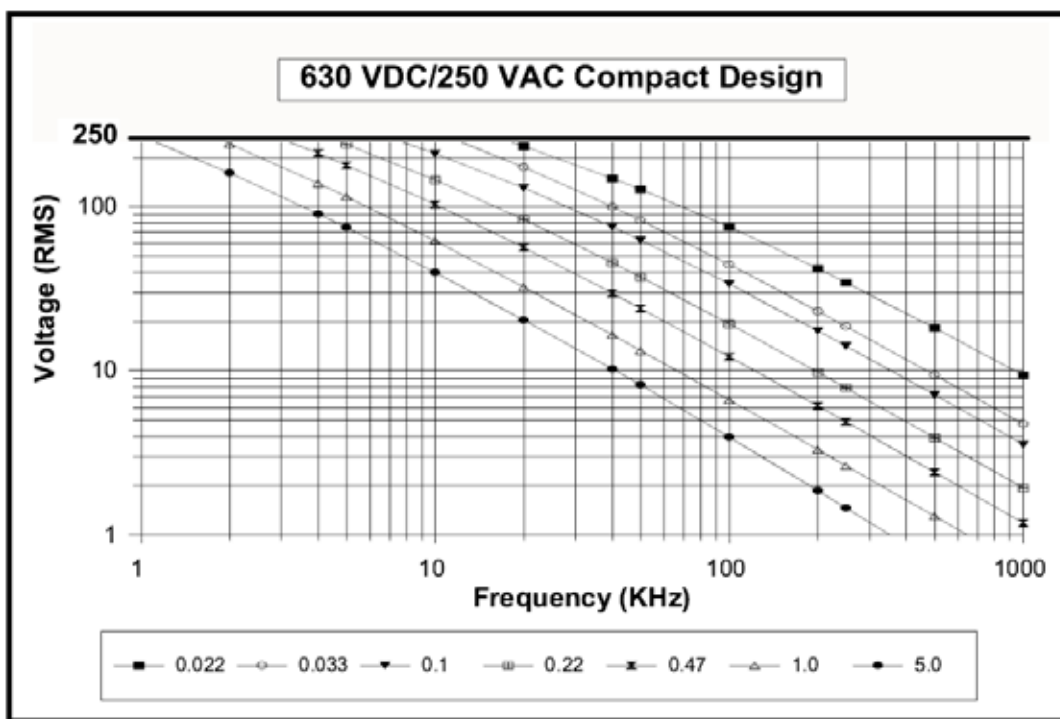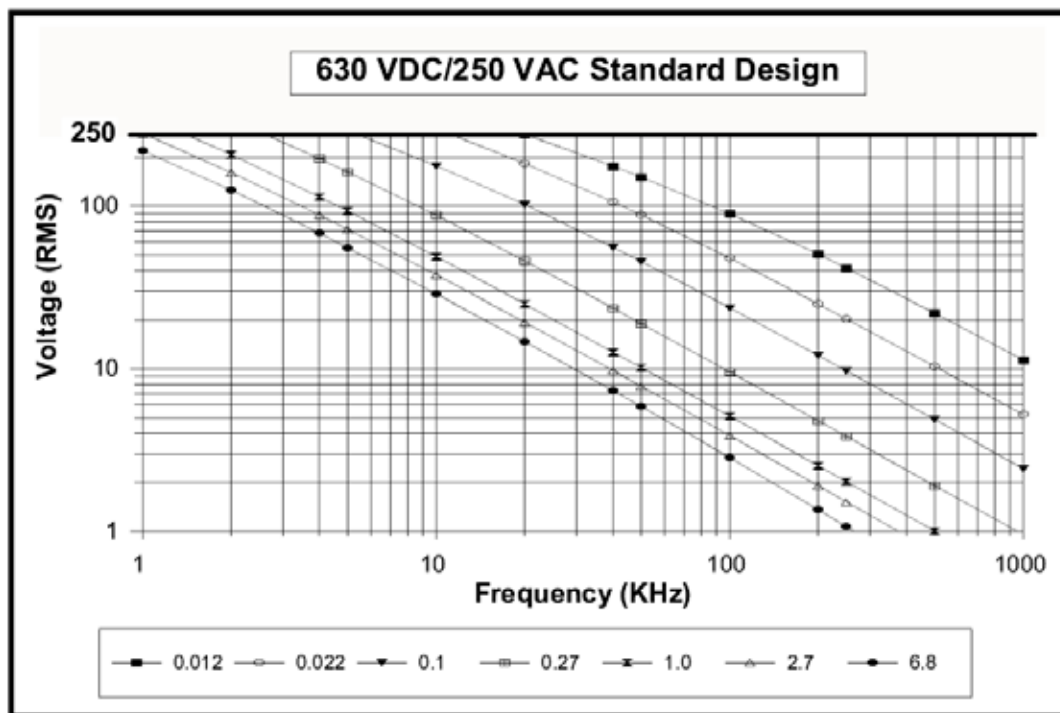

\* For additional information regarding these performance curves and their interpretation please refer to our Thermal Management application note.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А