

SOT-227 Power Module

Insulated Standard Recovery Rectifier, 220 A



SOT-227

FEATURES

- Two fully independent diodes
- Fully insulated package
- High voltage rectifiers optimized for very low forward voltage drop
- Industry standard outline
- UL pending
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

DESCRIPTION / APPLICATIONS

These devices are intended for use in main rectification. Single or three phase bridge.

PRIMARY CHARACTERISTICS

$I_{F(AV)}$ per module	220 A, $T_C = 88\text{ }^{\circ}\text{C}$
V_{FM} typical at 110 A	1.13 V
Type	Modules - diode, high voltage
Package	SOT-227
Circuit configuration	Two separate diodes, parallel pin-out

MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	VALUES	UNITS
$I_{F(AV)}$	90 $^{\circ}\text{C}$	108	A
$I_{F(RMS)}$		173	
I_{FSM}	50 Hz	1170	
	60 Hz	1225	
I^2t	50 Hz	6840	A^2s
	60 Hz	6225	
$I^2\sqrt{t}$		68 440	$\text{A}^2\sqrt{\text{s}}$
V_{RRM}		1200	V
T_J		-55 to +150	$^{\circ}\text{C}$

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS

TYPE NUMBER	VOLTAGE CODE	V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I_{RRM} TYPICAL AT 150 $^{\circ}\text{C}$ mA
VS-RA220FA120	120	1200	1300	1.0

**FORWARD CONDUCTION**

PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNITS
Maximum average forward current at case temperature per leg	$I_{F(AV)}$	180° conduction, half sine wave, 90 °C			108	A
Maximum RMS forward current per leg	$I_{F(RMS)}$	DC at 94 °C case temperature			173	A
Maximum peak, one-cycle forward, non-repetitive surge current per leg	I_{FSM}	t = 10 ms	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	1170	
		t = 8.3 ms			1225	
		t = 10 ms	100 % V_{RRM} reapplied		985	
		t = 8.3 ms			1030	
Maximum I^2t for fusing per leg	I^2t	t = 10 ms	No voltage reapplied		6840	A ² s
		t = 8.3 ms			6225	
		t = 10 ms	100 % V_{RRM} reapplied		4840	
		t = 8.3 ms			4400	
Maximum $I^2\sqrt{t}$ for fusing per leg	$I^2\sqrt{t}$	t = 0.1 ms to 10 ms, no voltage reapplied			68 440	A ² √s
Low level of threshold voltage per leg	$V_{F(TO)1}$	(16.7 % x π x $I_{F(AV)}$), $T_J = T_J$ maximum			0.75	V
Low level value of forward slope resistance	r_{f1}				4.93	mΩ
High level of threshold voltage per leg	$V_{F(TO)2}$	(l > π x $I_{F(AV)}$), $T_J = T_J$ maximum			0.84	V
High level value of forward slope resistance	r_{f2}				4.85	mΩ
Maximum forward voltage drop per leg	V_{FM}	$I_{FM} = 110$ A, $T_J = 25$ °C			1.31	V
		$I_{FM} = 110$ A, $T_J = 150$ °C			1.24	

BLOCKING

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum peak reverse leakage current per leg	I_{RRM}	$T_J = 25$ °C	150	μA
		$T_J = 150$ °C	1.5	mA
RMS insulation voltage	V_{INS}	$T_J = 25$ °C, any terminal to case, t = 1 minute	2500	V

THERMAL - MECHANICAL SPECIFICATIONS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS
Thermal resistance, junction to case	R_{thJC}	-	-	0.2	°C/W
		-	-	0.1	
Thermal resistance, case to heatsink	R_{thCS}	-	0.1	-	
Weight		-	30	-	g
Mounting torque to terminal		-	-	1.1 (9.7)	Nm (lbf. in)
Mounting torque to heatsink		-	-	1.8 (15.9)	Nm (lbf. in)
Case style		SOT-227			

ΔR CONDUCTION PER JUNCTION

DEVICE	SINE HALF WAVE CONDUCTION					RECTANGULAR WAVE CONDUCTION					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
VS-RA220FA120	0.06	0.037	0.082	0.116	0.188	0.039	0.066	0.087	0.121	0.19	°C/W

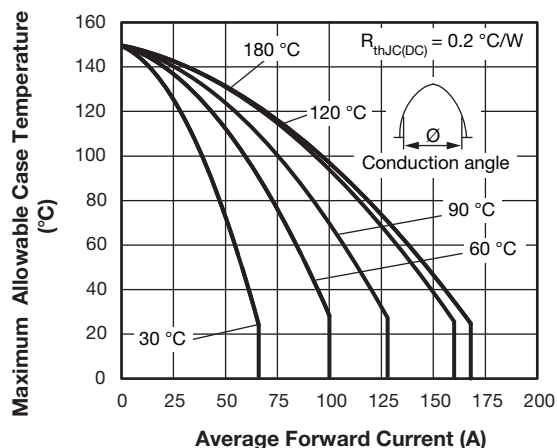


Fig. 1 - Current Ratings Characteristics (A)

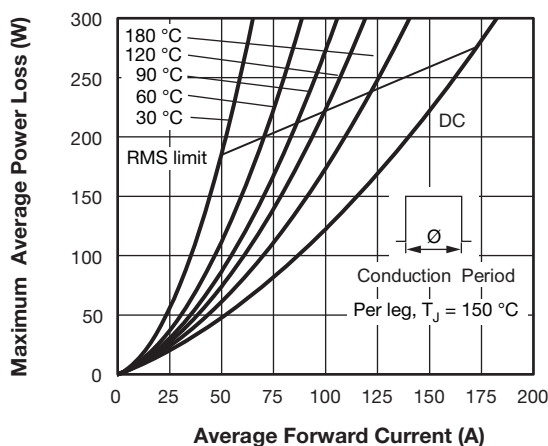


Fig. 4 - Forward Power Loss Characteristics

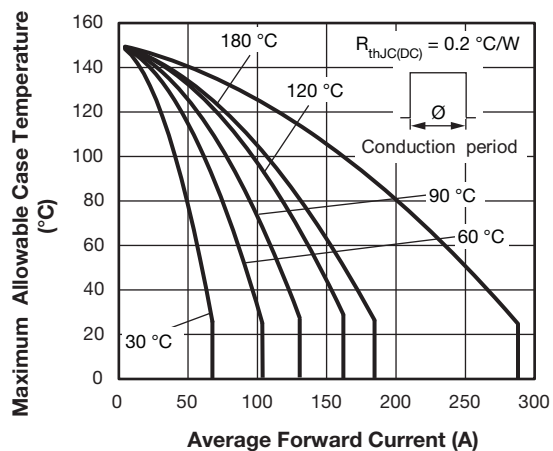


Fig. 2 - Current Ratings Characteristics (A)

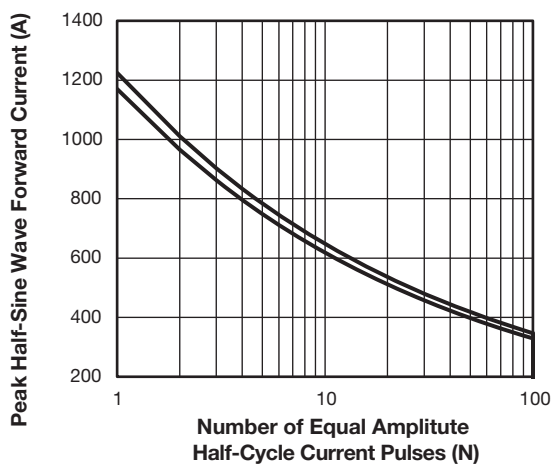


Fig. 5 - Maximum Non-Repetitive Surge Current

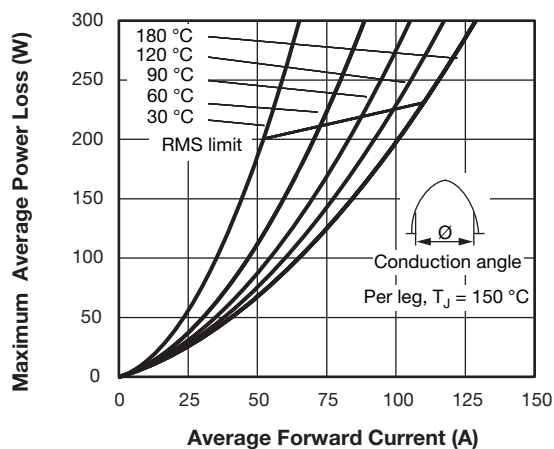


Fig. 3 - Forward Power Loss Characteristics

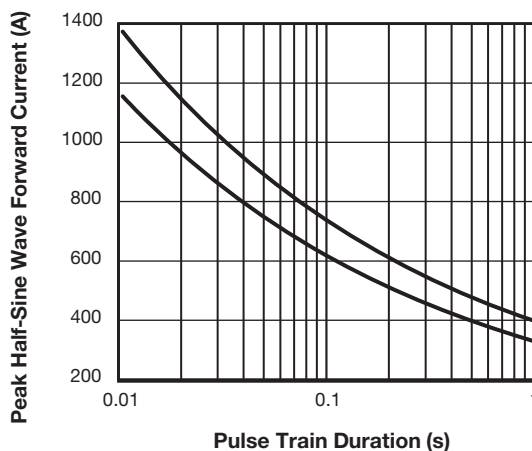


Fig. 6 - Maximum Non-Repetitive Surge Current

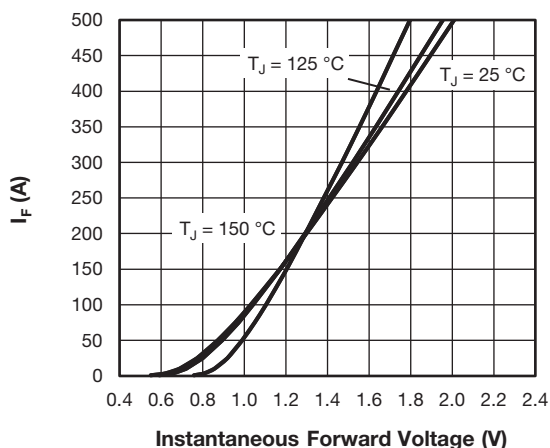


Fig. 7 - Typical Forward Voltage Characteristics

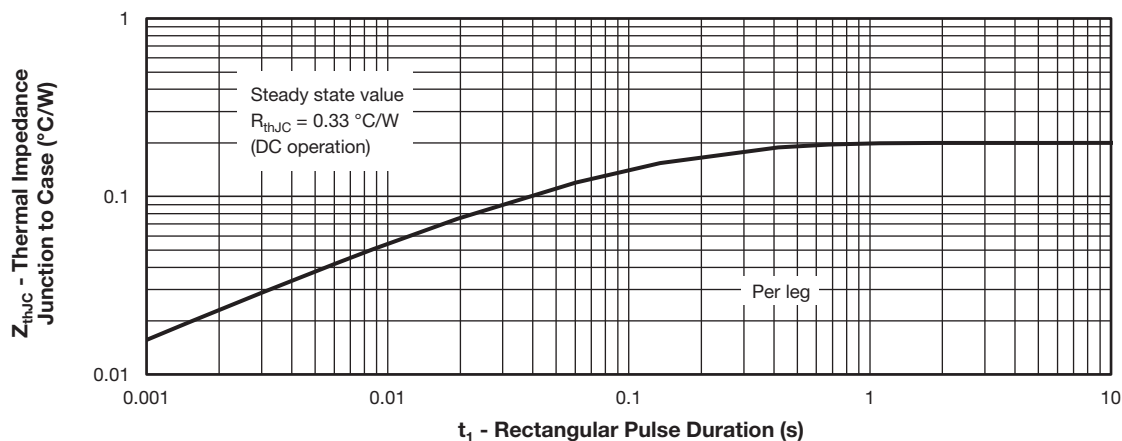




Fig. 8 - Thermal Impedance $Z_{th,IG}$ Characteristics

ORDERING INFORMATION TABLE

Device code	VS-	R	A	220	F	A	120
	1	2	3	4	5	6	7

1	-	Vishay Semiconductors product
2	-	Standard recovery diode
3	-	Present silicon generation
4	-	Current rating (220 = 220 A)
5	-	Circuit configuration (2 separate diodes, p
6	-	Package indicator (SOT-227 standard ins
7	-	Voltage rating (120 = 1200 V)




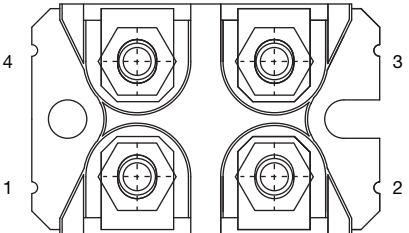CIRCUIT CONFIGURATION		
CIRCUIT	CIRCUIT CONFIGURATION CODE	CIRCUIT DRAWING
Two separate diodes, parallel pin-out	F	 Lead Assignment 

LINKS TO RELATED DOCUMENTS	
Dimensions	www.vishay.com/doc?95423
Packaging information	www.vishay.com/doc?95425

SOT-227 Generation 2

DIMENSIONS in millimeters (inches)

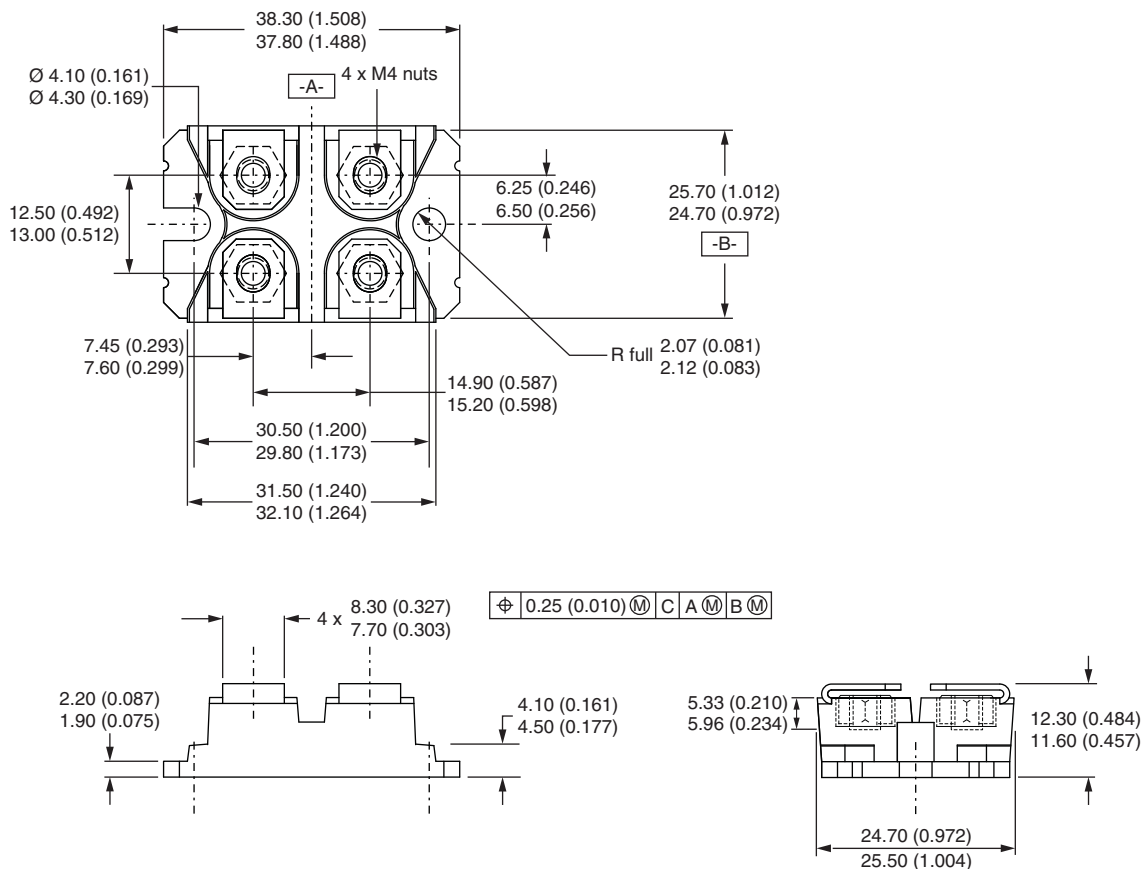

Note

- Controlling dimension: millimeter



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А