

# HIGH POWER 8C-30C SERIES

## 8kV to 30kV High Voltage Cap-Charging Supplies

This High Power line of high-voltage regulated DC to DC converters is an extension of the C Series, directly addressing the high power density needs of >30 watt applications. High Power 8C - 30C units provide up to 60/125/250 watts. This high power density is especially suited to high-energy systems with large capacitances, fast repetition rates, or high continuous-DC-power requirements. See Application Note 10 for more changing information. Typical applications for the High Power 8C-30C Series include the following: laser, cap-charger, pulse generators, Q-switch, and TDR test equipment.

- 7 models from 0 to 8kV through 0 to 30kV
- 60, 125, or 250 watts of output power
- Maximum Iout capability down to 0 Volts
- Maximum Iout during charge/rise time
- Output short-circuit protection
- Very fast rise with very low overshoot



- High efficiency
- High power to voltage density
- Very low profile
- Output current & voltage monitors
- >200,000 hour MTBF @65°C
- Fixed-frequency, low-stored-energy design
- UL/cUL Recognized Component; CE Mark (LVD & RoHS)

| PARAMETER                  | CONDITIONS                              | ALL TYPES                                                              |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | UNITS       |        |        |       |
|----------------------------|-----------------------------------------|------------------------------------------------------------------------|----------|----------|-------------|----------|----------|-------------|----------|---------|-------------|----------|---------|-------------|---------|---------|-------------|---------|--------|-------------|--------|--------|-------|
| INPUT                      |                                         |                                                                        |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        |             |        |        |       |
| Voltage Range              | Full Power                              | + 23 to 30                                                             |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | VDC         |        |        |       |
| Voltage Range              | Derated Power Range                     | 60W, 125W: + 11 to 30, 250W: 15-30                                     |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | VDC         |        |        |       |
| Current                    | Standby / Disable                       | < 40                                                                   |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | mA          |        |        |       |
| Current                    | No Load, Max Eout                       | 8C to 15C < 500, 20C to 25C < 600                                      |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | mA          |        |        |       |
| Current                    | Max Load, Max Eout                      | 60W: 3.25, 125W: 6.5, 250W: 13                                         |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | A           |        |        |       |
| AC Ripple Current          | Nominal Input, Full Load                | < 50                                                                   |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | mA p-p      |        |        |       |
| OUTPUT                     |                                         | 8C                                                                     |          |          | 10C         |          |          | 12C         |          |         | 15C         |          |         | 20C         |         |         | 25C         |         |        | 30C         |        |        |       |
| Voltage Range              | Nominal Input                           | 0 to 8,000                                                             |          |          | 0 to 10,000 |          |          | 0 to 12,000 |          |         | 0 to 15,000 |          |         | 0 to 20,000 |         |         | 0 to 25,000 |         |        | 0 to 30,000 |        |        | VDC   |
| Power                      | Nominal Input, Max Eout                 | 60                                                                     | 125      | 250      | 60          | 125      | 250      | 60          | 125      | 250     | 60          | 125      | 250     | 60          | 125     | 250     | 60          | 125     | 250    | 60          | 125    | 250    | Watts |
| Current                    | Iout, Entire Output Voltage Range       | 7.5                                                                    | 15.5     | 31.2     | 6           | 12.5     | 25       | 5           | 10.5     | 20.8    | 4           | 8.3      | 16.7    | 3           | 6.25    | 12.5    | 2.4         | 5       | 10     | 2           | 4.17   | 8.33   | mA    |
| Current Scale Factor       | Full Load                               | 4.7                                                                    | 14.2     | 6.25     | 4.1         | 10.9     | 5        | 4.0         | 7.4      | 4.17    | 4.0         | 7.5      | 3.33    | .65         | .653    | 2.5     | .65         | .650    | 2      | .65         | .642   | 1.67   | mA/V  |
| Voltage Monitor Scaling    |                                         | 60W & 125W Models - 1000:1 ± 2% into 10MΩ; 250W Models - 10,000:1 ± 2% |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | -           |        |        |       |
| Internal Capacitance       | Capacitance / 95% Decay (50Meg Load)    | 4400/659                                                               | 2200/330 | 1500/225 | 2933/439    | 1467/220 | 1500/225 | 2933/439    | 1467/220 | 750/112 | 2200/330    | 1100/165 | 750/112 | 1320/200    | 880/132 | 750/112 | 1100/165    | 733/110 | 500/75 | 825/125     | 550/85 | 500/75 | pF/mS |
| Ripple                     | Full Load, Max Eout                     | < 1%                                                                   |          |          |             |          |          |             |          |         |             |          |         | < 1%        |         |         |             |         |        | V p-p       |        |        |       |
| Rise Time                  | Max Iout, Various C Loads & Eout        | Figure A                                                               |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | -           |        |        |       |
| Storage Capacitance        | Internal                                | 4400                                                                   | 2200     | 1500     | 2933        | 1467     | 1500     | 2933        | 1467     | 750     | 2200        | 1100     | 750     | 1320        | 880     | 750     | 1100        | 733     | 500    | 825         | 550    | 500    | pF    |
| Overshoot                  | C Load, 0 Eout to Full Eout             | < 1%                                                                   |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | V pk        |        |        |       |
| Line Regulation            | Nom. Input, Max Eout, Full Power        | < 0.01%                                                                |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | VDC         |        |        |       |
| Static Load Regulation     | No Load to Full Load, Max Eout          | < 0.01%                                                                |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | VDC         |        |        |       |
| Stability                  | 30 Min. warmup, per 8 hr/ per day       | < 0.01% / < 0.02%                                                      |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | VDC         |        |        |       |
| PROGRAMMING & CONTROLS     |                                         | ALL TYPES                                                              |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        |             |        |        |       |
| Input Impedance            | Nominal Input                           | + Output Models 1.1MΩ to GND, - Output Models 1.1MΩ to +5 Vref         |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | MΩ          |        |        |       |
| Adjust Resistance          | Typical Potentiometer Values            | 10K to 100K (Pot across Vref. & Signal GND, Wiper to Adjust)           |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | Ω           |        |        |       |
| Adjust Logic               | 0 to +5 for +Out, +5 to 0 for - Out     | +4.64 VDC for +Output or +0.36 for -Output = Nominal Eout              |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | -           |        |        |       |
| Output Voltage & Impedance | T=+25°C                                 | + 5.00VDC ± 1%, Zout = 464Ω ± 1%                                       |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | -           |        |        |       |
| Enable/Disable             |                                         | 0 to +0.8V Disable, +2.0 to 32 Enable (Default = Enable)               |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | VDC         |        |        |       |
| ENVIRONMENTAL              |                                         | ALL TYPES                                                              |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        |             |        |        |       |
| Operating                  | Full Load, Max E out, Case Temperature  | -40 to +65                                                             |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | °C          |        |        |       |
| Coefficient                | Over the Specified Temperature          | ±50 (±25 Optional)                                                     |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | PPM/°C      |        |        |       |
| Thermal Shock              | Mil-Std-810, Method 503-4, Proc. II     | -40 to +65                                                             |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | °C          |        |        |       |
| Storage                    | Non-Operating, Case Temp.               | -55 to +105                                                            |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | °C          |        |        |       |
| Humidity                   | All Conditions, Standard Package        | 0 to 95% non-condensing                                                |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | -           |        |        |       |
| Altitude                   | Standard Package, All Conditions        | Sea Level through 70,000                                               |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | ft          |        |        |       |
| Shock                      | Mil-Std-810, Method 516.5, Proc. IV     | 20                                                                     |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | G's         |        |        |       |
| Vibration                  | Mil-Std-810, Method 514.5, Fig.514.5C-3 | 10                                                                     |          |          |             |          |          |             |          |         |             |          |         |             |         |         |             |         |        | G's         |        |        |       |

C = uF  
V = Volts  
I = mA  
T = mS

$$T = \frac{C \times V}{I}$$

C = uF  
V = kV  
I = mA  
F = Hz

$$I = C \times V \times F$$

C = uF  
V = kV  
I = mA  
F = Hz

$$F = \frac{I}{C \times V}$$

Specifications subject to change without notice.

C = uF  
E² = kV  
J = Ws

$$J = \frac{C \times E^2}{2}$$

Figure A - Rise Time Formulas

NOTES: Capacitance must include HVPS internal Capacitance.



**Making High Voltage Easier!®**


**Higher Service, Higher Performance, Higher Reliability**

©2011, UltraVolt Inc. All rights reserved.


# HIGH POWER 8C-30C SERIES

8kV to 30kV High Voltage Cap-Charging Supplies

8C TO 15C - 60/125W

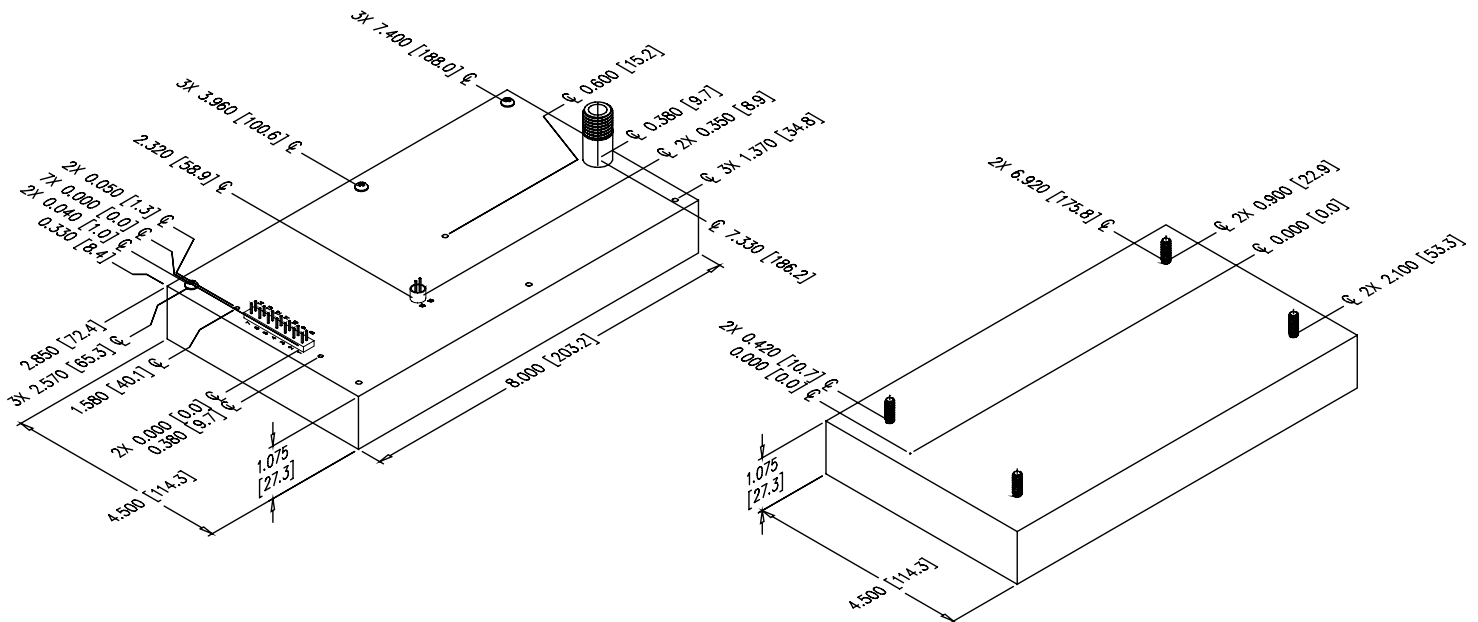

20C TO 30C - 60/125W

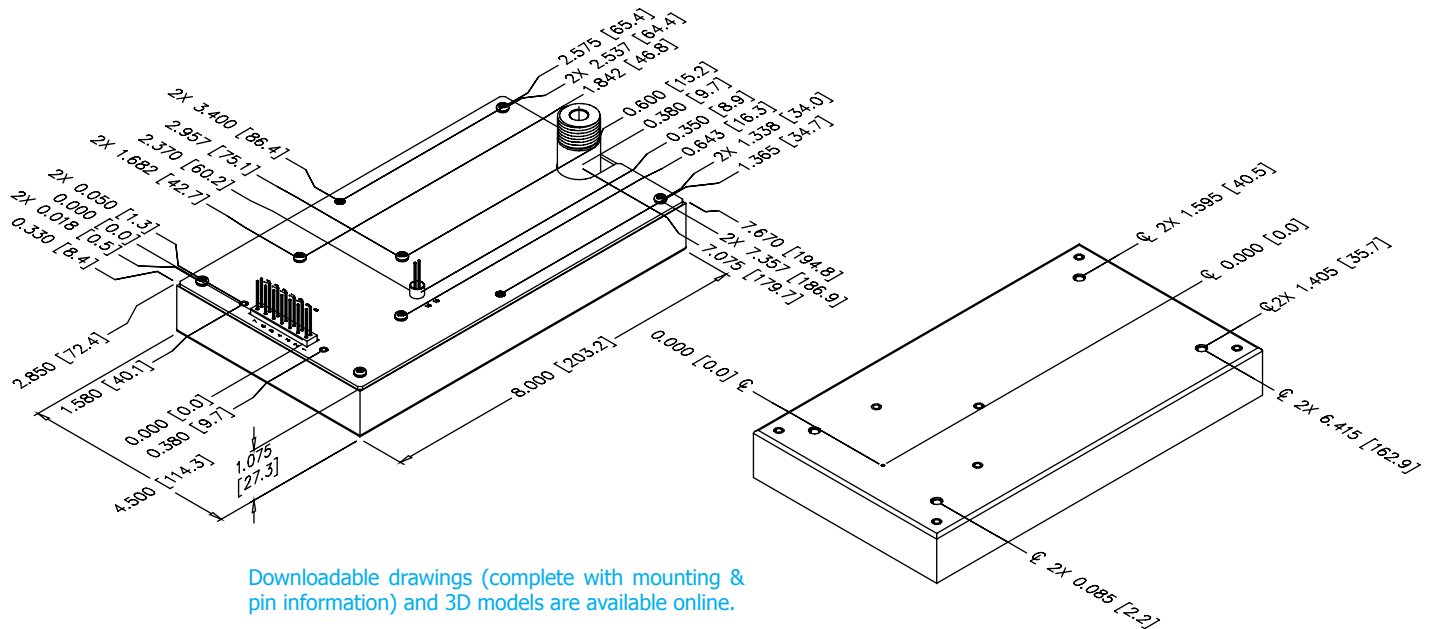

Downloadable drawings (complete with mounting & pin information) and 3D models are available online.




*Making High Voltage Easier!®*

1800 Ocean Avenue, Ronkonkoma, NY 11779  
Phone: 1-631-471-4444 Fax: 1-631-471-4696 [www.ultravolt.com](http://www.ultravolt.com)

# HIGH POWER 8C-30C SERIES

8kV to 30kV High Voltage Cap-Charging Supplies

8C TO 30C - 250W (PRELIMINARY)

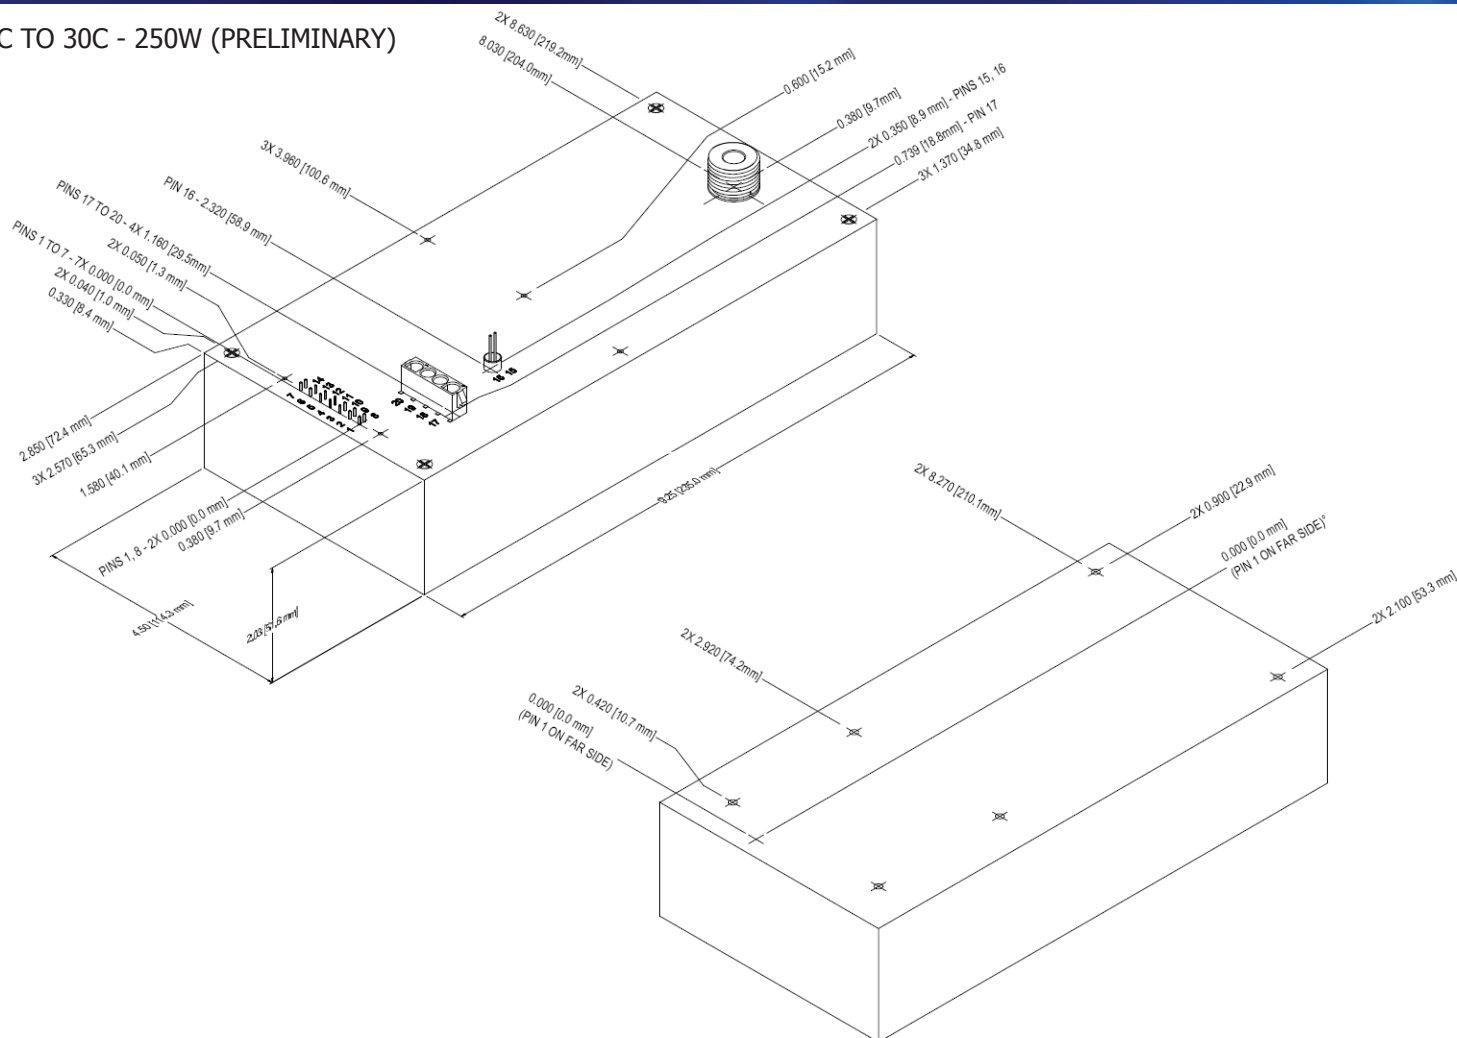

## CONSTRUCTION

Epoxy-filled Aluminum Box  
Chem film per MIL-A-8625 Type II (Anodizing)

## SIZE - 60 & 125W MODELS

Volume 38.7 in<sup>3</sup> (634cc)  
Weight 2.6 lbs. (1.18kg)

## SIZE - 250W MODELS

Volume 84.5 in<sup>3</sup> (1386cc)  
Weight 5.6 lbs. (2.54kg)

## TOLERANCE

Overall  $\pm 0.025"$  (0.64)  
Pin to Pin  $\pm 0.015"$  (0.38)  
Hole to hole location  $\pm 0.025"$  (0.64)

## PINS

Gold-plated 0.025 (0.64) sq.

The center of the pins and mounting holes are located from the center of pin 1

Pins 1 thru 14 spacing 0.100 (2.54) x 0.200 (5.08) on center, height from cover 0.280 (7.11) min

Pins 15 and 16 spacing 0.100 (2.54) on center, height from cover 0.450 (11.43) min

## HV OUTPUT CONNECTION

Unit requires an LGH flying lead connector for proper operation:

8C to 15C (60W & 125W Models) = CA-20KV-1000

20C to 30C (60W & 125W Models) = CA-40KV-1000

8C to 30C (250W Models) = CA-40KV-1000



*Making High Voltage Easier!®*

1800 Ocean Avenue, Ronkonkoma, NY 11779  
Phone: 1-631-471-4444 Fax: 1-631-471-4696 [www.ultravolt.com](http://www.ultravolt.com)

# HIGH POWER 8C-30C SERIES

8kV to 30kV High Voltage Cap-Charging Supplies


| CONNECTIONS  |                            |
|--------------|----------------------------|
| PIN          | FUNCTION                   |
| 1 & 8        | Input-Power Ground Return  |
| 2 & 9        | Positive Power Input       |
| 3            | Iout Monitor               |
| 4            | Enable/Disable             |
| 5            | Signal Ground Return       |
| 6            | Remote Adjust Input        |
| 7            | +5VDC Reference Output     |
| 10           | N/C (or Arc Detect option) |
| 11, 12, & 13 | N/C                        |
| 14           | Eout Monitor               |
| 15 & 16      | HV Ground Return           |

All grounds joined internally. Power-supply mounting points isolated from internal grounds by >100k $\Omega$ , .01 $\mu$ F / 500V (Max).

| ORDERING INFORMATION |                                   |        |
|----------------------|-----------------------------------|--------|
| Type                 | 0 to 8,000 VDC Output             | 8C     |
|                      | 0 to 10,000 VDC Output            | 10C    |
|                      | 0 to 12,000 VDC Output            | 12C    |
|                      | 0 to 15,000 VDC Output            | 15C    |
|                      | 0 to 20,000 VDC Output            | 20C    |
|                      | 0 to 25,000 VDC Output            | 25C    |
|                      | 0 to 30,000 VDC Output            | 30C    |
| Input                | 24VDC Nominal                     | 24     |
| Polarity             | Positive Output                   | -P     |
|                      | Negative Output                   | -N     |
| Power                | 60 Watts Output                   | 60     |
|                      | 125 Watts Output                  | 125    |
|                      | 250 Watts Output                  | 250    |
| Heat Sink            | .400" High (sized to fit case)    | -H     |
| PCB Support          | (5) 0.187" standoffs on top cover | -Z11   |
| Enhanced Interface   | 5V Controls and Monitors          | -I5    |
|                      | 10V Control and Monitors          | -I10   |
| Options              | Arc Detect                        | -AD    |
|                      | Arc Quench                        | -AQ    |
|                      | 25PPM Temperature Coefficient     | -25PPM |

Note: For more information on the enhanced interface options, download the [I5/I10 Option datasheet](#).

Example: 8C24-P125

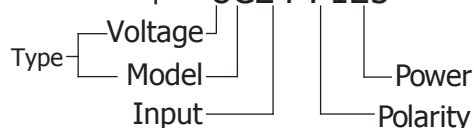

Popular accessories ordered with this product include CONN-KIT-HP, BR-7 and BR-8 mounting bracket kits and our full range of high voltage output connectors (see Accessories & Connectors datasheet).



Non-RoHS compliant units are available. Please contact the factory for more information.

Manufactured in USA



*Making High Voltage Easier!®*

1800 Ocean Avenue, Ronkonkoma, NY 11779  
Phone: 1-631-471-4444 Fax: 1-631-471-4696 [www.ultravolt.com](http://www.ultravolt.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А