

G9ED-1-B-AQ

DC Power Relay (150A type)

Capable of Interrupting High-voltage, High-current Loads

- A compact relay (L73 x W36x H67.2mm) capable of switching DC400V, 150A. (Max. 300A can be applied)
- The switching section and driving section are gas-injected and hermetically sealed, allowing these compact relays to interrupt high-current. The sealed construction also achieves no arc space, space saving, and helps to ensure safe applications. In addition, the contacts have a high contact reliability that is unaffected by ambient atmosphere.
- Downsizing of parts and optimum design allow no restrictions on the mounting direction.



■ Type standard

G9ED-□-□-□-□
① ② ③ ④

	Classification	Symbol	Symbol Meaning of the symbol
①	Number of contact poles	1	1 pole
②	Contact structure	Blank	1a contact
③	Coil terminal form	B	M3.5 screw terminal
		Blank	Lead wires
④	Automotive use	AQ	Available for automotive use

■ Classification

Classification	Terminal form		Contact structure	Rated coil voltage	Type name
	Coil terminals	Contact terminals			
Switching / current conduction type	Screw terminals	Screw terminals	1a	DC12V DC24V	G9ED-1-B-AQ
	Lead wires				G9ED-1-AQ

Note:1. Come with two M6 screws for main terminals(contacts).
2. Come with two M3.5 screws for screw-type coil terminal products.
3. If you are interested in a connector joint for F-coil terminal, please contact our sales representatives.

■ Ratings

● Operation coil

Rated voltage (V)	Rated current (mA)	Coil resistance (Ω)	Operating voltage (V)	Release voltage (V)	Maximum voltage (V)	Power consumption (W)
DC 12	333	36.0	75% or less of rated voltage	8% or more of rated voltage	130% of rated voltage (at 23°C within 10min.)	Approx. 4
DC 24	167	144.0				

Note:1. Values of the rated current and the coil resistance are at coil temperature of +23°C, and have a tolerance of ±10%.
2. The figures for the operating characteristics are at a coil temperature of 23°C.
3. Value of the maximum voltage is the maximum voltage that can be applied to the relay coil.

● Switching area

Item	Resistance load
	G9ED-1(-B)-AQ
Rated load	DC400V 150A
Rated current	150A
Maximum switching voltage	400V
Maximum switching current	150A

Please confirm Omron Safety Precautions for all automotive relays first.
Omron can not guarantee automotive relays before finish making a contract with product specifications.

■ Performance

Item		G9ED-1(-B)-AQ
Contact resistance *1		30 mΩ or less (Typ. 0.2 mΩ)
Contact voltage drop		0.1V or less (at 150A)
Operating time		50 ms or less
Release time		30 ms or less
Insulation resistance*2	Between coil and contacts	1,000 MΩ or more
	Between homopolar contacts	1,000 MΩ or more
Withstand voltage	Between coil and contacts	AC2,500V for 1min.
	Between homopolar contacts	AC2,500V for 1min.
Vibration tolerance	Durability	5 to 200 to 5Hz Single amplitude 0.75mm (Acceleration: 2.94 to 88.9m/s²)
	Malfunction	5 to 200 to 5Hz Single amplitude 0.75mm (Acceleration: 2.94 to 88.9m/s²)
Shock resistance	Durability	490 m/s²
	Malfunction	100 m/s²
Mechanical endurance *3		200,000 times or more
Electrical endurance *4	Resistance load	DC400V 150A 50 times or more
		DC400V 30A 3,000 times or more
Short time carry current		300A (for 3 min)
		180A (for 20 min)
Maximum interruption current		DC300V 750A (10 times)
Overload interruption		DC400V 300A (20 times or more)
Reverse polarity interruption		DC200V -125A (200 times or more)
Minimum load current		1A
Ambient temperature		-40 to +85°C (with no icing or condensation)
Ambient humidity		5% to 85%RH
Weight (including accessories)		Approx. 320g

Note: All values above are in early time under an ambient temperature of +23°C unless stated.

- *1. Measurement condition: By voltage drop method at DC5V 1A.
- *2. Measurement condition: By insulation resistance at DC500V.
- *3. Test condition / Switching frequency: 3,600 times/hour.
- *4. Test condition / Switching frequency: 60 times/hour.

G9ED-1-B-AQ


DC Power Relay (150A type)

■ Dimensions (Unit: mm)


●Relay with Screw Terminals G9ED-1-B-AQ



Size (mm)	Tolerance (mm)
to 10	±0.3
10 to 50	±0.5
50 to	±1


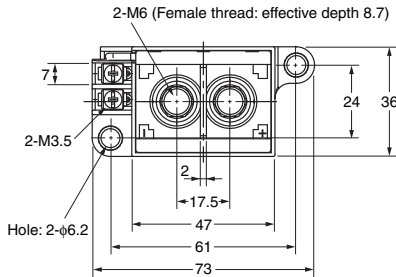


Terminal arrangement / Internal connections (BOTTOM VIEW)



Note: Be sure to connect terminals with the correct polarity. Coils do not have polarity.


Mounting holes (BOTTOM VIEW)

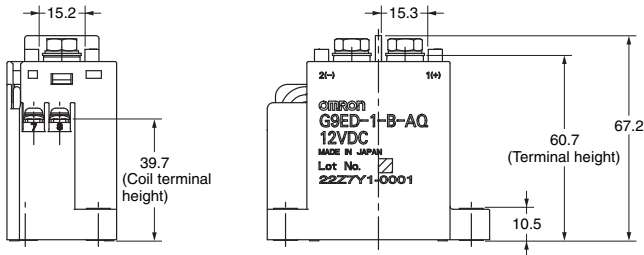


●Relay with Lead Wires G9ED-1-AQ



Size (mm)	Tolerance (mm)
to 10	±0.3
10 to 50	±0.5
50 to	±1


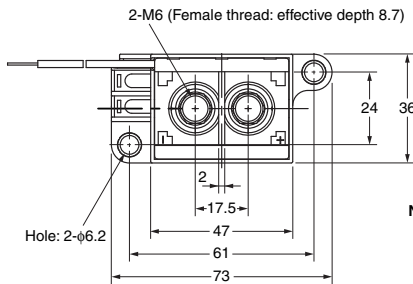


Terminal arrangement / Internal connections (BOTTOM VIEW)



Note: Be sure to connect terminals with the correct polarity. Coils do not have polarity.

Mounting holes (BOTTOM VIEW)

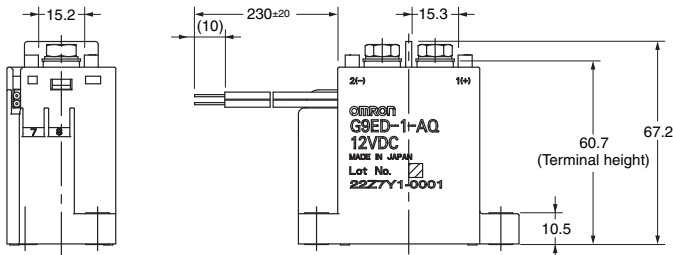

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А