

END P1
CABLE CONNECTOR
CXP (PASSIVE) PLUG

END P2
CABLE CONNECTOR
CXP (PASSIVE) PLUG

VIEW A

VIEW A

2X(9.81)
2X14.60 MAX
2X16.21 MAX


2X28.45±0.13

CABLE


55±5mm
HEAT SHRINK

100±15mm

LABEL
SEE NOTES 5

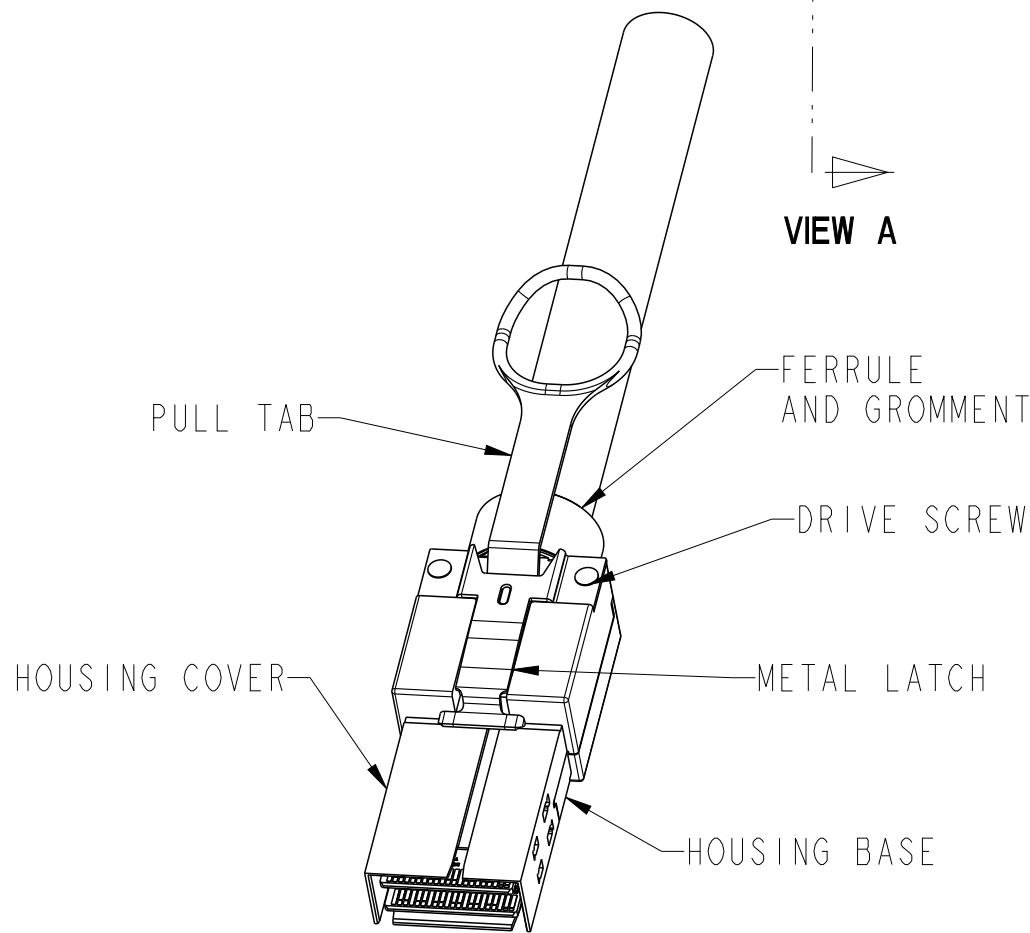

P1
ISOMETRIC VIEW
SCALE 2:1

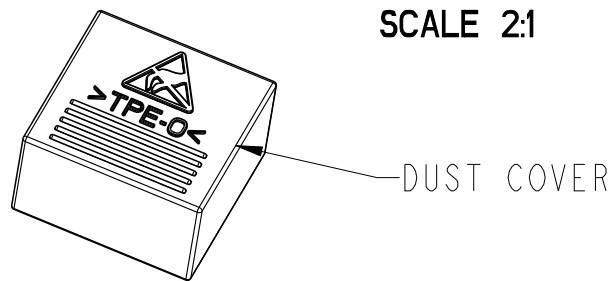


spec ref	-	dr	Deborah Ingram	2011/04/15	projection	MM	size	A2	scale	1:2
tolerance std	ASME Y14.5	eng	Ya Li	2015/08/05	chr	-	ecn no	ELX-N-21586-1	rel level	Released
surface	✓	appr	Frank Mao	2015/08/05	product family	-	cat. no.	-	Product - Customer Drw	sheet 1 of 3
linear	0.X ±Y 0.XX ±Y 0.XXX ±Y	angular	0° ±Y°	title FINAL ASSEMBLY - STANDARD CXP PASSIVE CABLE ASSEMBLY						
ASME Y14.5	0° ±Y°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 1 of 3	rev	C		

PDS: Rev :C

STATUS:Released

Printed: Aug 05, 2015

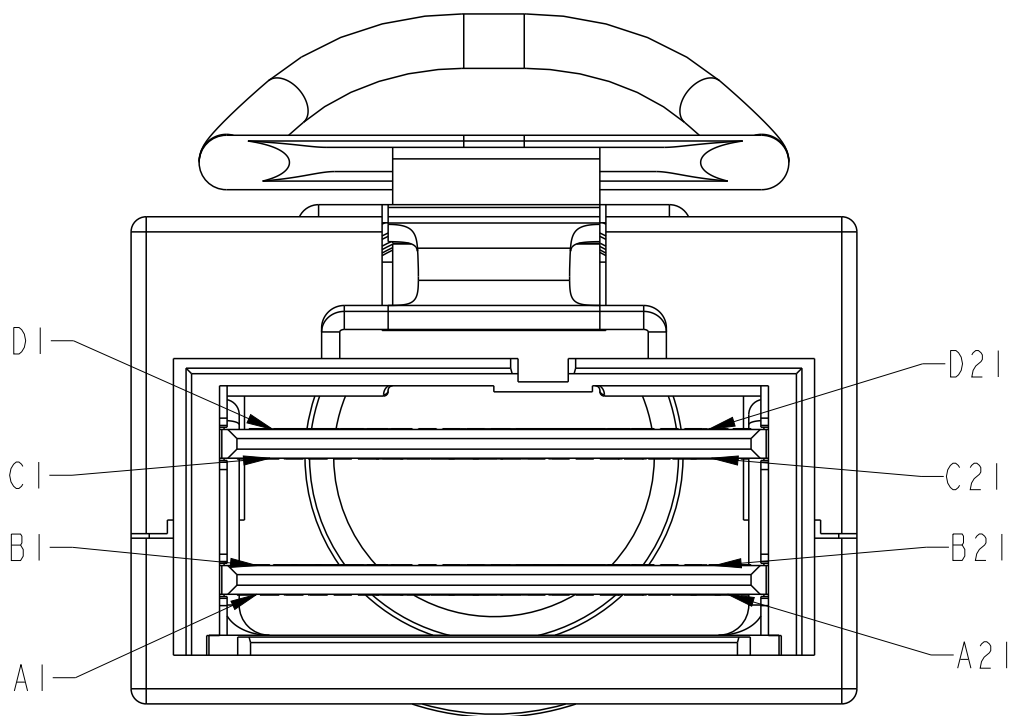

VIEW A-A
PIN ASSIGNMENTS
SCALE 4:1

P1				P2		
PIN	F	SIGNAL	TYPE	PIN	F	SIGNAL
B1	L	GND	C C	D1	L	GND
B2	S	Tx0p	---->	D2	S	Rx0p
B3	S	Tx0n	---->	D3	S	Rx0n
B4	L	GND	C C	D4	L	GND
B5	S	Tx2p	---->	D5	S	Rx2p
B6	S	Tx2n	---->	D6	S	Rx2n
B7	L	GND	C C	D7	L	GND
B8	S	Tx4p	---->	D8	S	Rx4p
B9	S	Tx4n	---->	D9	S	Rx4n
B10	L	GND	C C	D10	L	GND
B11	S	Tx6p	---->	D11	S	Rx6p
B12	S	Tx6n	---->	D12	S	Rx6n
B13	L	GND	C C	D13	L	GND
B14	S	Tx8p	---->	D14	S	Rx8p
B15	S	Tx8n	---->	D15	S	Rx8n
B16	L	GND	C C	D16	L	GND
B17	S	Tx10p	---->	D17	S	Rx10p
B18	S	Tx10n	---->	D18	S	Rx10n
B19	L	GND	C C	D19	L	GND
B20	S	VCC3.3-Tx	□ □	D20	M	VCC3.3-Rx
B21	S	VCC12-Tx	□ □	D21	M	VCC12-Rx
A1	L	GND	C C	C1	L	GND
A2	S	Tx1p	---->	C2	S	Rx1p
A3	S	Tx1n	---->	C3	S	Rx1n
A4	L	GND	C C	C4	L	GND
A5	S	Tx3p	---->	C5	S	Rx3p
A6	S	Tx3n	---->	C6	S	Rx3n
A7	L	GND	C C	C7	L	GND
A8	S	Tx5p	---->	C8	S	Rx5p
A9	S	Tx5n	---->	C9	S	Rx5n
A10	L	GND	C C	C10	L	GND
A11	S	Tx7p	---->	C11	S	Rx7p
A12	S	Tx7n	---->	C12	S	Rx7n
A13	L	GND	C C	C13	L	GND
A14	S	Tx9p	---->	C14	S	Rx9p
A15	S	Tx9n	---->	C15	S	Rx9n
A16	L	GND	C C	C16	L	GND
A17	S	Tx11p	---->	C17	S	Rx11p
A18	S	Tx11n	---->	C18	S	Rx11n
A19	L	GND	C C	C19	L	GND
A20	S	SCL	□ □	C20	S	PRSNT_L
A21	S	SDA	□ □	C21	S	Int_L/Reset_L

P1				P2		
PIN	F	SIGNAL	TYPE	PIN	F	SIGNAL
C1	L	GND	C C	A1	L	GND
C2	S	Rx1p	<----	A2	S	Tx1p
C3	S	Rx1n	<----	A3	S	Tx1n
C4	L	GND	C C	A4	L	GND
C5	S	Rx3p	<----	A5	S	Tx3p
C6	S	Rx3n	<----	A6	S	Tx3n
C7	L	GND	C C	A7	L	GND
C8	S	Rx5p	<----	A8	S	Tx5p
C9	S	Rx5n	<----	A9	S	Tx5n
C10	L	GND	C C	A10	L	GND
C11	S	Rx7p	<----	A11	S	Tx7p
C12	S	Rx7n	<----	A12	S	Tx7n
C13	L	GND	C C	A13	L	GND
C14	S	Rx9p	<----	A14	S	Tx9p
C15	S	Rx9n	<----	A15	S	Tx9n
C16	L	GND	C C	A16	L	GND
C17	S	Rx11p	<----	A17	S	Tx11p
C18	S	Rx11n	<----	A18	S	Tx11n
C19	L	GND	C C	A19	L	GND
C20	S	PRSNT_L	□ □	A20	S	SCL
C21	S	Int_L/Reset_L	□ □	A21	S	SDA
D1	L	GND	C C	B1	L	GND
D2	S	Rx0p	<----	B2	S	Tx0p
D3	S	Rx0n	<----	B3	S	Tx0n
D4	L	GND	C C	B4	L	GND
D5	S	Rx2p	<----	B5	S	Tx2p
D6	S	Rx2p	<----	B6	S	Tx2n
D7	L	GND	C C	B7	L	GND
D8	S	Rx4p	<----	B8	S	Tx4p
D9	S	Rx4n	<----	B9	S	Tx4n
D10	L	GND	C C	B10	L	GND
D11	S	Rx6p	<----	B11	S	Tx6p
D12	S	Rx6n	<----	B12	S	Tx6n
D13	L	GND	C C	B13	L	GND
D14	S	Rx8p	<----	B14	S	Tx8p
D15	S	Rx8n	<----	B15	S	Tx8n
D16	L	GND	C C	B16	L	GND
D17	S	Rx10p	<----	B17	S	Tx10p
D18	S	Rx10n	<----	B18	S	Tx10n
D19	L	GND	C C	B19	L	GND
D20	S	VCC3.3-Rx	□ □	B20	M	VCC3.3-Tx
D21	S	VCC12-Rx	□ □	B21	M	VCC12-Tx

PIN OUT CHART (WIRING) SEE NOTE 6

spec ref	-	dr	Deborah Ingram	2011/04/15	projection	MM	size	A2	scale	1:2
tolerance std	ASME Y14.5	eng	Ya Li	2015/08/05	chr	-	ecn no	ELX-N-21586-1	rel level	Released
surface	✓	appr	Frank Mao	2015/08/05	product family	-	title	FINAL ASSEMBLY - STANDARD	dwg no	10116951
ASME Y14.5	linear	angular	0°	±Y°	0.X	±Y	0.XX	±Y	0.XXX	±Y
www.fci.com	cat. no.	-	Product	-	Customer Drw	sheet 2 of 3	rev	C		

NOTES:

1. MATERIAL:
COVERS: ZINC ALLOY
PULL STRAP: THERMOPLASTIC
LATCH: STAINLESS STEEL
FERRULE: BRASS
PIN: STAINLESS STEEL
(LOCTITE) EPOXY
SPLIT GROMMET: POLYURETHANE
PADDLE CARD: PRINTED CIRCUIT SUBSTRATE - FR4
CABLE JACKETS TO BE CL2 RATED - UL94-0
2. THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN
ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2002/95/EC)
3. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
4. UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE IS TO BE:
"DIM L" < 1 METER = ± 25mm
"DIM L" = 1 METER TO 5 METERS = ± 2% OF "DIM L"

5. CONTENTS OF LABEL ARE TO BE:
LABEL DETAILS:

FCI CHINA
FCI P/N
REVISION:C
SN: CNYWWCA * * * #####
|||||
(the first * present cable length, eg:05--0.5m, 15--1.5m...)
(the 2nd * present cable wire guage, eg:2--30awg, 4--26awg...)
(the 3th * present L--lead free or H--halongen free .)
(the #### present serial number, eg: 0001, 0002...)
(barcode content is CNYWWCA * * * ##### in 128 code)

FONT SHALL BE CLEARLY VISIBLE AND BLACK IN COLOR.

6. ALL CABLE ASSEMBLIES SHALL BE 100% TESTED FOR CONTINUITY AS DEFINED IN WIRING LIST.
7. OTHER TESTING PERFORMED AS REQUIRED BY PRODUCT SPECIFICATION: GS-12-0943.
8. PACKAGING OF LEAD FREE PRODUCTS MEETS LABELING AND PACKAGING PER SPECIFICATION GS-14-920.
PACKAGE CABLE ASSEMBLIES PER GS-14-1272. DUST COVERS ARE TO BE PLACED ON ASSEMBLIES PRIOR TO PACKAGING.
9. IMPEDANCE: 100Ω DIFFERENTIAL.
10. A " " SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED
WITH THE CURRENT DRAWING REVISION. THE CURRENT REVISION WILL BE SHOWN IN THE SYMBOL.

Prduct number (LEAD FREE)	"DIM L" LENGTH METERS	AWG	NOTES
10116951-2005LF	0.5	30	
10116951-2010LF	1.0	30	
10116951-2015LF	1.5	30	
10116951-2020LF	2.0	30	
10116951-2025LF	2.5	30	
10116951-2030LF	3.0	30	
10116951-4005LF	0.5	26	
10116951-4010LF	1.0	26	
10116951-4015LF	1.5	26	
10116951-4020LF	2.0	26	
10116951-4025LF	2.5	26	
10116951-4030LF	3.0	26	
10116951-4035LF	3.5	26	
10116951-4040LF	4.0	26	
10116951-4042LF	4.25	26	
10116951-4045LF	4.5	26	
10116951-4050LF	5.0	26	

Prduct number (HALOGEN FREE)	"DIM L" LENGTH METERS	AWG	NOTES
10116951-2005HLF	0.5	30	
10116951-2010HLF	1.0	30	
10116951-2015HLF	1.5	30	
10116951-2020HLF	2.0	30	
10116951-2025HLF	2.5	30	
10116951-2030HLF	3.0	30	
10116951-4005HLF	0.5	26	
10116951-4010HLF	1.0	26	
10116951-4015HLF	1.5	26	
10116951-4020HLF	2.0	26	
10116951-4025HLF	2.5	26	
10116951-4030HLF	3.0	26	
10116951-4035HLF	3.5	26	
10116951-4040HLF	4.0	26	
10116951-4042HLF	4.25	26	
10116951-4045HLF	4.5	26	
10116951-4050HLF	5.0	26	

Performance Level	Unequalized cable length/AWG*					
	1M	2M	2.5M	3M	4M	4.25M
Infiniband-QDR	30AWG	30AWG	30AWG	26AWG	26AWG	26AWG
IEEE 802.3ba	30AWG	30AWG	30AWG	TBD	TBD	

*MINIMUM RECOMENDED CABLE AWG IS SHOWN

spec ref -		dr Deborah Ingram		2011/04/15	projection  MM 	size A2	scale 1:2
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng Ya Li		2015/08/05		ecn no ELX-N-21586-1	
		chr -				rel level Released	
		appr Frank Mao		2015/08/05		product family -	
surface 		linear	0.X ±Y 0.XX ±Y 0.XXX ±Y	 title FINAL ASSEMBLY - STANDARD CXP PASSIVE CABLE ASSEMBLY	dwg no 10116951	rev C	
ASME Y14.5	angular 0°	±Y°					
		www.fci.com		cat. no. -	Product - Customer Drw		sheet 3 of 3

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А