


Receptacles

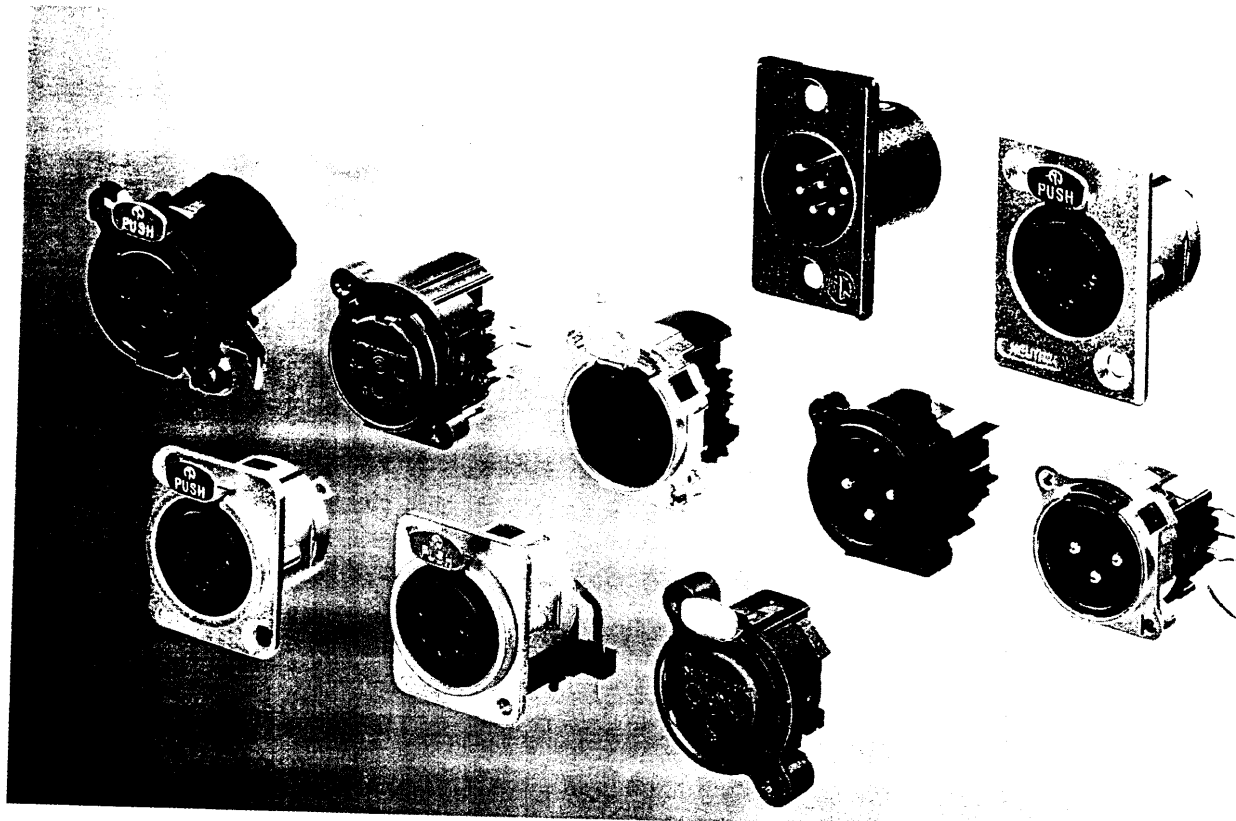

WE ARE SETTING STANDARDS

- *Eight different series to cover all conceivable applications*
- *From the world largest and most innovative XLR-manufacturer*
- *Easy to assemble, simple to use*
- *Reliable, robust with a worldwide reputation*


PRODUCT FEATURES

DIMENSIONAL DRAWINGS



(PCB layouts and dimensional drawings on request)

P Series


Smallest available hard wiring "CLASSICS"
Large solder cups.



NC3FP




NC3MP





DL Series


Unified metal shell for male and female. RF-protected.
Solder cups, or PCB terminations (4 & 5 pole only).





NC3FDL



NC*FDM3-H



NC3MDL




NC*MDM3-H



* = 4-5 pole

D Series


Unified metal shell for male and female. Insert premounted to PCB, shell to enclosure, front locked / unlocked.
RF-protected.





NC3FD-V



NC3FD-H




NC3MD-V





NC3MD-H

K Series


Extremely versatile and cost effective concept.
Metal brackets secure the socket to the PCB, machine insertable.
M3-thread screw holes with panel-ground contacts.





NC3FK-V



NC3FK-H




NC3MK-V





NC3MK-H

R Series


Small size, low cost.
XLR-sockets without ground contact, available with or without latch. Gold contacts on female.



NC3FPR-H




NC3MPR-H





E Series



Minimum weight, direct to the PCB, right angle sockets.
Escutcheon available. Gold contacts on female.



NC3FE




NC3ME





NHE

A and B Series


The new "State of the Art" receptacle.
Smallest size / highest packing density.
New designed contacts with polished contact areas and hard gold plating. TF-contacts.
Variety of shell and chassis grounding facilities, direct "Pin 1" to chassis ground connection available.
Special B series version with additional ground contacts for better RF-protection available.





NC3F*V



NC3F*H



NC3M*V





NC3M*H

* = A or B

Assembly distances
for

H, V and Y


HL and HR



Type Nr. CODING				SPECIAL VERSIONS/ REMARKS	SPECIFICATIONS																									
SHELL	CONT.	FEMALE	MALE		TYPE SPECIFIC	COMMON																								
Nickel	Silver	NC*FP	NC**MP	Compatibility: Switchcraft* DxM, DxF Cannon XLRx31, XLRx32 Dimensionally with D series *: 6-pole version with Switch- craft contact arrangement (6 FS/MS) available: contact factory	ELECTRICAL Number of contacts: 3-7 (except MP: 3-6) Rated current: see chart under common specs. MATERIALS Shell: ZnAlCu1, gal Ni or black chromium (Cr) plating Contacts - female (4-7 pole) & male: CuZn39Pb3 Contact surface: gal 2 µm Ag or gal 0.3 µm Au hard alloy over 2 µm Ni	ELECTRICAL Rated voltage: 250 V ac Dielectric strength: 1500 V dc Contact resistance: ≤ 5 mΩ Insulation resistance (Initial): >2·10 ⁹ Ω Insulation resistance after damp heat test: >1·10 ⁹ Ω																								
Black Cr	Gold	NC*FP-B	NC**MP-B																											
	Silver	NC3FP-BAG	NC3MP-BAG																											
* = 3-7 pole ** = 3-6 pole																														
Nickel	Silver	NC*FDL	NC*MDL	PCB versions (4 & 5 pole): horizontal PCB mounting, fastening by chassis mounting holes with M3 threads or by self tapping PT® screws with thread 2.9x1.06 (tri-rondular) direct to PCB		P-, DL-Series: <table><tr><th>x</th><th>I (A)</th><th>□ (mm²/ AWG)</th><th>C (pF)</th></tr><tr><td>3</td><td>16</td><td>2.5/14</td><td>≤ 4</td></tr><tr><td>4</td><td>10</td><td>1.5/16</td><td>≤ 7</td></tr><tr><td>5</td><td>7.5</td><td>1.0/18</td><td>≤ 7</td></tr><tr><td>6</td><td>7.5</td><td>1.0/18</td><td>≤ 7</td></tr><tr><td>7</td><td>5</td><td>1.0/18</td><td>≤ 9</td></tr></table> x ... No. of contacts I ... Rated current per contact □ ... Max. wire size C ... Capacitance between contacts	x	I (A)	□ (mm²/ AWG)	C (pF)	3	16	2.5/14	≤ 4	4	10	1.5/16	≤ 7	5	7.5	1.0/18	≤ 7	6	7.5	1.0/18	≤ 7	7	5	1.0/18	≤ 9
x	I (A)	□ (mm²/ AWG)	C (pF)																											
3	16	2.5/14	≤ 4																											
4	10	1.5/16	≤ 7																											
5	7.5	1.0/18	≤ 7																											
6	7.5	1.0/18	≤ 7																											
7	5	1.0/18	≤ 9																											
Black Cr	Gold	NC*FDL-B	NC*MDL-B																											
	Silver	NC*FDL-BAG	NC*MDL-BAG																											
Nickel	Silver	NC+MDM3-H	NC+MDM3-H																											
Black Cr	Silver	NC+MDM3-H-BAG	NC+MDM3-H-BAG																											
+ = 4 or 5 pole																														
Nickel	Silver	NC3FD-V	NC3MD-V	Mounting holes with M3 threads: add suffix "-M3" Females: Retention spring instead of latch: add suffix "-0"	ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell: ZnAl4Cu1, gal Ni or black Cr plating Contacts: - male: CuZn39Pb3 Contact surface: gal 2 µm Ag or gal 0.3 µm Au hard alloy over 2 µm Ni																									
Black Cr	Gold	NC3FD-V-B	NC3MD-V-B																											
	Silver	NC3FD-V-BAG	NC3MD-V-BAG																											
Nickel	Silver	NC3FD-H	NC3MD-H																											
Black Cr	Gold	NC3FD-H-B	NC3MD-H-B																											
	Silver	NC3FD-H-BAG	NC3MD-H-BAG																											
PA 6.6 GR	Silver	-	NC3MK-V	Version without brackets: contact factory Compatibility: Cannon XLB Switchcraft PQG	ELECTRICAL Number of contacts: 3 Rated current: 6 A MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	MECHANICAL Insertion / withdrawal force: ≤ 20 N / ≤ 10 N Retention method: - standard: latch lock - "-0" version: retention spring Separating force: ≥ 20 N																								
	Gold	NC3FK-V	-																											
	Silver	-	NC3MK-H																											
	Gold	NC3FK-H	-																											
PA 6.6 GR	Silver	-	NC3MPR-H	Females: Retention spring instead of latch: add suffix "-0" Vertical versions: contact factory	ELECTRICAL Number of contacts: 3 MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	ENVIRONMENTAL Temperature range: -30°C to +80°C Flammability: UL 94HB Solderability: complies with IEC 68-2-20																								
	Gold	NC3FPR-H	-																											
PA 6.6 GR	Silver	-	NC3ME-H	Accessory: Snap on escutcheon NHE with mounting holes for selftapping screws PT-K30 Compatibility: Switchcraft RAPC series	ELECTRICAL Number of contacts: 3 MATERIALS Shell (Insert): PA 6.6 30% GR Contacts: - male, CuZn35Pb2 Contact surface: - female: 0.5 µm Au cladded - male: gal 2 µm Ag	MATERIALS Insert: PA 6.6 30% GR (glass reinforced) Contacts: - female (3-pole): CuSn6 Latch lock & spring: CK 67 steel, treated																								
	Gold	NC3FE-H	-																											
				</																										

CONTACT ARRANGEMENTS

FEMALE: Mating side
MALE: Wiring side

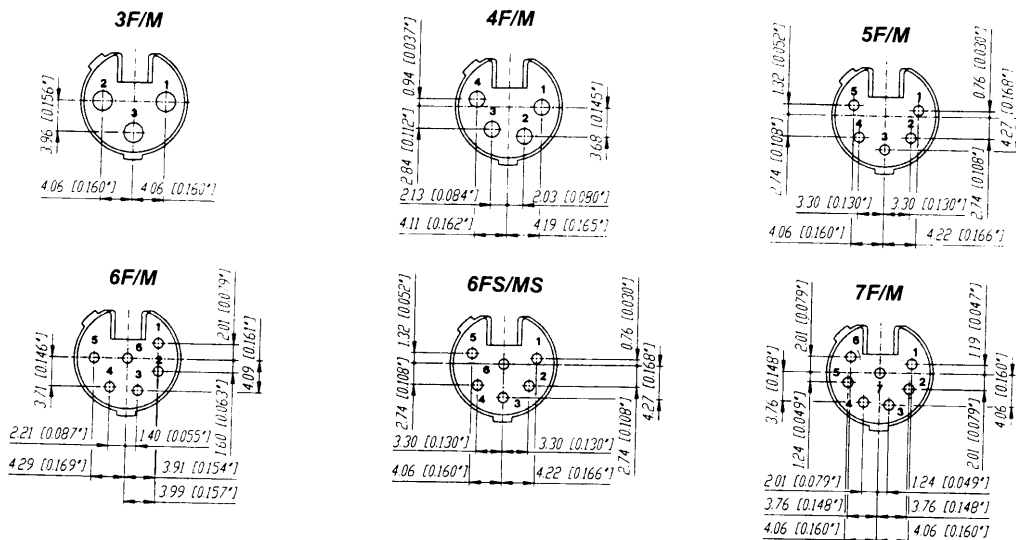

NEUTRIK "THE CONNECTOR INNOVATORS"

The "Chuck Principle" Strain Relief
The Helicon® Contact
The first Unified Male-Female XLR Receptacle
The first Rear Mount XLR Receptacle
The first direct to PCB XLR Receptacle
The Screwless Cable Connector
The Smallest Cable Connector
The first Locking Phone Jack
The first Fully Modular Connecting System
The first Die-Cast Phone Plug
The first Heavy Duty Waterproof XLR Connector
The first Safety-Proof & AVC-Proof Speaker-Amplifier Connecting System
The first Fully Crimped 1/4" Plug
The first "Ground Before Signal" Phono Plug
The Smallest XLR Socket
The first 1/4" Jack with separated retention
The first Bantam Plug with separated retention and gold contacts
The first combined Jack-XLR Receptacle
The smallest and most universal XLR Receptacle

(C Series et al.)	1975
(D Series)	1975
(D Series)	1980
(D Series)	1980
(D Series)	1980
(X Series)	1981
(X Series)	1981
(J Series)	1981
(NEUTRICON®)	1982
(P Series)	1983
(HD Series)	1986
(SPEAKON®)	1987
(KIK)	1988
(PROFI)	1989
(R Series)	1990
(J Series)	1990
(TT Series)	1991
(Combo)	1992
(A/B Series)	1995


Neutrik AG
Liechtenstein
Tel.: 075/237 24 24
Fax.: 075/232 53 93

Neutrik USA INC.
USA
Tel.: 908/901 9488
Fax.: 908/901 9608

Neutrik UK
Great Britain
Tel.: 019 83/811 441
Fax.: 019 83/811 439

Neutrik Zürich AG
Switzerland
Tel.: 01/734 0400
Fax.: 01/734 3891

REPRESENTED AND SERVICED BY:

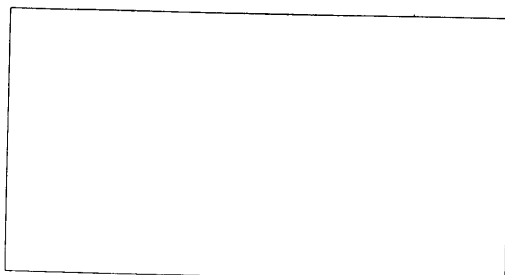

NEUTRIK
CONNECTING THE WORLD

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А