

The Vitreous Enamelled Resistors are available in a range from 30 to 625 watts. The nickel-chrome winding is protected by several coats of enamel, which has been fired to produce a high reliability resistor, capable of withstanding adverse conditions.

The Vitreous Enamelled Resistor is RoHS Compliant and can be supplied unmounted or with a variety of mounting styles.

H - Horizontal mounting      V - Vertical mounting  
TB - Through bolt mounting    C - Ferrule clips



## General Notes

### Ohmic Values

The range of ohmic values available are shown below. You may select any ohmic value between the max and min values.

### Low Inductance Windings

Ayrton Perry windings are available for resistors which are required to have substantially lower inductance.

### Thermal cut-outs

Cut-outs can be fitted to certain resistors which will operate a contact to disconnect the resistor to prevent overload damage.

### Electrical Data Power Rating - Continuous Duty

The two power ratings given to each type of resistor in the table are based on temperature rises of 280°C and 380°C\* respectively and relate to single resistors mounted in free air. \* V & VT only.

## Ordering Procedure

Unless otherwise specified resistors will be supplied ready for a mechanical connection.

Fixed Resistors To specify: Type, Mounting, Ohmic Value, Tolerance, e.g.: V130H 400R J

Adjustable Resistors To specify add ADJ, e.g.: V180H 350R K ADJ

Tapped Resistors To specify add TAPPED, e.g.: V130H 400R K TAPPED

Faston Terminals To specify add FASTON TAGS, e.g.: V40 200R J FASTON TAGS

Ferrule Ended Resistors To specify add F dead or WF for live, e.g.: V180 F 450R K or V90L WF 27R K

Corrugated Tape Resistors To specify prefix VT, e.g.: VT130H 2R5 K

## Ohmic Value Range and Tolerances (other values and tolerances are available on request)

| Size                |                  | 30          | 40          | 45          | 60          | 90         | 130        | 150        | 180         | 220         | 320         | 380         |                                    |
|---------------------|------------------|-------------|-------------|-------------|-------------|------------|------------|------------|-------------|-------------|-------------|-------------|------------------------------------|
| Type                | Range            | Ohmic Value |             |             |             |            |            |            |             |             |             |             | Tolerance                          |
| V<br>Fixed Wire     | Min<br>Max       | 2R2<br>5K0  | 4R7<br>10K  | 4R7<br>10K  | 4R7<br>15K  | 10R<br>30K | 10R<br>60K | 12R<br>70K | 22R<br>100K | 22R<br>120K | 33R<br>120K | 47R<br>125K | Over 10R ± 5%<br>10R or less ± 10% |
| VT<br>Fixed Tape    | Min<br>Max       | 0R02<br>2R0 | 0R15<br>4R5 | 0R2<br>4R5  | 0R2<br>4R5  | 0R3<br>9R0 | 0R7<br>9R0 | 0R8<br>10R | 1R0<br>20R  | 1R0<br>20R  | 1R5<br>30R  | 1R5<br>30R  | ±10%                               |
| NI<br>Non Inductive | Min<br>Max       | 1R0<br>500R | 2R0<br>500R | 2R0<br>500R | 3R0<br>500R | 3R0<br>1K0 | 5R0<br>1K5 | 6R0<br>1K5 | 7R0<br>1K5  | 10R<br>1K5  | 25R<br>2K0  | 30R<br>2K5  | ±10%                               |
| ADJ<br>Adjustable   | Min<br>Max       | 2R2<br>1K3  | 2R2<br>3K9  | 4R7<br>2K2  | 4R7<br>3K9  | 8R2<br>6K2 | 15R<br>11K | 16R<br>13K | 20R<br>16K  | 27R<br>22K  | 36R<br>22K  | 43R<br>22K  | ±10%                               |
| V Rating<br>Watts   | @280°C<br>@380°C | 30<br>35    | 40<br>65    | 45<br>65    | 60<br>75    | 90<br>125  | 130<br>175 | 150<br>195 | 180<br>230  | 220<br>285  | 320<br>420  | 380<br>500  |                                    |
| VT Rating<br>Watts  | @280°C<br>@380°C | 35<br>44    | 50<br>80    | 55<br>80    | 75<br>90    | 110<br>185 | 160<br>215 | 185<br>245 | 220<br>285  | 275<br>400  | 400<br>560  | 476<br>625  |                                    |

ARCOL UK Limited,  
Threemilestone Ind. Estate,  
Truro, Cornwall, TR4 9LG, UK.  
T +44 (0) 1872 277431  
F +44 (0) 1872 222002  
E sales@arcolresistors.com

[www.arcolresistors.com](http://www.arcolresistors.com)

The information contained herein does not form part of a contract and is subject to change without notice. Arcol operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask Arcol.

# Open Wire Wound Resistors



The Open Wire Wound Resistors are close wound with oxidised resistance wire and each resistor is fitted with an adjustable nickel silver tapping clip as standard. Extra tapings can be provided on request.

The Open Wire Wound Resistor is RoHS Compliant and can be supplied unmounted or with a variety of mounting styles.

H - Horizontal mounting      V - Vertical mounting  
TB - Through bolt mounting    C - Ferrule clips



## General Notes

### Ohmic Values

The range of ohmic values available are show below. You may select any ohmic value between the max and min values.

### Power Ratings - Continuous Duty

Open wound resistors are designed to operate at a maximum temperature rise of 280°C. If a lower surface temperature is required, please contact ARCOL.

### Resistance Tolerance

The standard tolerance on resistance for open wound resistors is  $\pm 10\%$  when fitted with one tapping clip.

## Ordering Procedure

Unless otherwise specified resistors will be supplied ready for a mechanical connection.

Fixed Resistors To specify fixed: Type, Mounting, Ohmic Value, Tolerance, e.g.: O130H 400R K

Adjustable Resistors To specify add ADJ, e.g.: O180H 350R K ADJ

Additional Tap Resistors To specify add Tapped, e.g.: O130H 400R K TAP

Faston Terminals To specify add FASTON TAGS, e.g.: O40 200R K FASTON TAGS

Ferrule Ended Resistors To specify add F dead or WF for live, e.g.: O180 F 450R K or O90L WF 27R K

## Standard Ohmic Values and Tolerances

| Size               |        | 30          | 40  | 45   | 60L | 60S | 90L | 90S | 130 | 150 | 180 | 220 | 320 | 380 |                        |
|--------------------|--------|-------------|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------------------------|
| Type               | Range  | Ohmic Value |     |      |     |     |     |     |     |     |     |     |     |     | Tolerance              |
| O with one tapping | Min    | 0R2         | 0R5 | 0R5  | 0R5 | 0R4 | 0R5 | 0R4 | 0R4 | 0R5 | 0R7 | 0R7 | 1R0 | 1R2 | $\pm 10\%$ as standard |
|                    | Max    | 510R        | 1KR | 720R | 1K3 | 1K3 | 2K1 | 3K2 | 3K2 | 4K0 | 5K2 | 6K8 | 9K8 | 9K8 |                        |
| O Rating Watts     | @280°C | 30          | 40  | 45   | 60  | 60  | 90  | 90  | 130 | 150 | 180 | 220 | 320 | 380 |                        |


ARCOL UK Limited,  
Threemilestone Ind. Estate,  
Truro, Cornwall, TR4 9LG, UK.  
T +44 (0) 1872 277431  
F +44 (0) 1872 222002  
E sales@arcolresistors.com

[www.arcolresistors.com](http://www.arcolresistors.com)


The information contained herein does not form part of a contract and is subject to change without notice. Arcol operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask Arcol.


## Termination Styles




Type V  
Standard resistor  
with untinned  
terminals.




Type V (Tapped)  
Tapped resistor.



Type V (ADJ)  
Adjustable resistor.




Type VT  
Corrugated tape  
wound resistor.




Type V --- F and WF  
Resistor with live and  
dead ferrule ends.

## H and HR Mounting

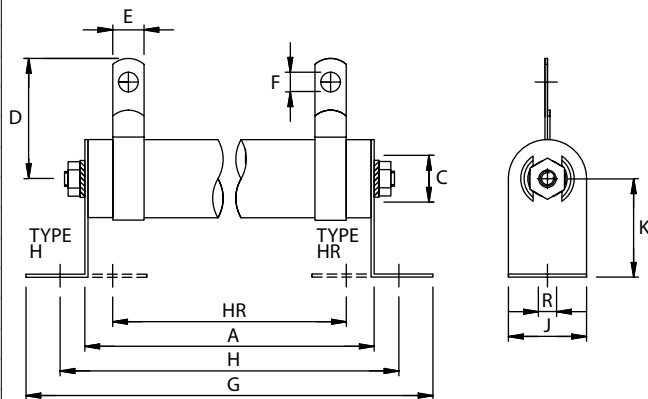

## V Mounting

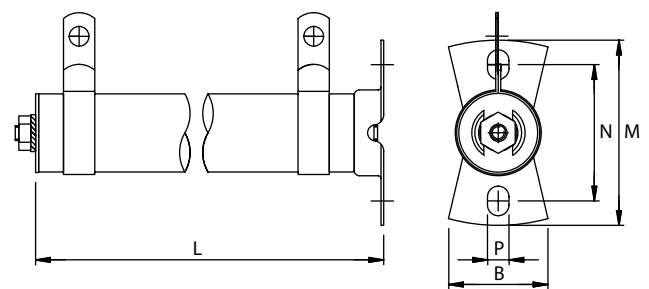


## Dimensions (mm)

| Type        | Size | Watts<br>280°C | Watts<br>380°C* | A   | B  | C    | D  | E   | F | G   | H   | HR  | J  | K  | L   | M  | N  | P   | R    |
|-------------|------|----------------|-----------------|-----|----|------|----|-----|---|-----|-----|-----|----|----|-----|----|----|-----|------|
| O & V<br>VT | 30   | 30<br>35       | 35<br>44        | 51  | 19 | 9.5  | 25 | 6.3 | 4 | 72  | 62  | 42  | 16 | 20 | 64  | 38 | 25 | 4x6 | 4x6  |
| O & V<br>VT | 40   | 40<br>50       | 65<br>80        | 102 | 19 | 9.5  | 25 | 6.3 | 4 | 123 | 113 | 93  | 16 | 20 | 114 | 38 | 25 | 4x6 | 4x6  |
| O & V<br>VT | 45   | 45<br>55       | 65<br>80        | 51  | 32 | 19   | 37 | 6.3 | 4 | 91  | 75  | 30  | 28 | 27 | 64  | 54 | 41 | 5x8 | 5x13 |
| O & V<br>VT | 60L  | 60<br>75       | 75<br>90        | 89  | 22 | 12.6 | 30 | 6.3 | 4 | 117 | 103 | 77  | 20 | 27 | 102 | 45 | 32 | 4x6 | 5x8  |
| O & V<br>VT | 60S  | 60<br>75       | 75<br>90        | 70  | 32 | 19   | 37 | 6.3 | 4 | 110 | 94  | 48  | 28 | 27 | 83  | 54 | 41 | 5x8 | 5x13 |
| O & V<br>VT | 90L  | 90<br>110      | 125<br>185      | 165 | 22 | 12.6 | 30 | 6.3 | 4 | 193 | 179 | 153 | 20 | 27 | 178 | 45 | 32 | 4x6 | 5x8  |
| O & V<br>VT | 90S  | 90<br>110      | 125<br>185      | 102 | 32 | 19   | 37 | 9.5 | 6 | 142 | 126 | 80  | 28 | 27 | 114 | 54 | 41 | 5x8 | 5x13 |
| O & V<br>VT | 130  | 130<br>160     | 175<br>215      | 152 | 32 | 19   | 37 | 9.5 | 6 | 192 | 176 | 130 | 28 | 27 | 165 | 54 | 41 | 5x8 | 5x13 |
| O & V<br>VT | 150  | 150<br>180     | 195<br>245      | 178 | 32 | 19   | 37 | 9.5 | 6 | 218 | 202 | 156 | 28 | 27 | 191 | 54 | 41 | 5x8 | 5x13 |
| O & V<br>VT | 180  | 180<br>220     | 230<br>285      | 216 | 32 | 19   | 37 | 9.5 | 6 | 256 | 240 | 194 | 28 | 27 | 229 | 54 | 41 | 5x8 | 5x13 |
| O & V<br>VT | 220  | 220<br>275     | 285<br>400      | 267 | 32 | 19   | 37 | 9.5 | 6 | 307 | 291 | 245 | 28 | 27 | 279 | 54 | 41 | 5x8 | 5x13 |
| O & V<br>VT | 320  | 320<br>400     | 420<br>560      | 267 | 45 | 28   | 43 | 9.5 | 6 | 318 | 291 | 248 | 44 | 51 | -   | -  | -  | -   | 7x14 |
| O & V<br>VT | 380  | 380<br>476     | 500<br>625      | 305 | 45 | 28   | 43 | 9.5 | 6 | 356 | 327 | 286 | 44 | 51 | -   | -  | -  | -   | 7x14 |

VT Resistors - Dimension 'B' may vary up to 10mm greater, depending on the resistance value specified. \*380°C applies to vitreous resistors only.

F and WF Mounting

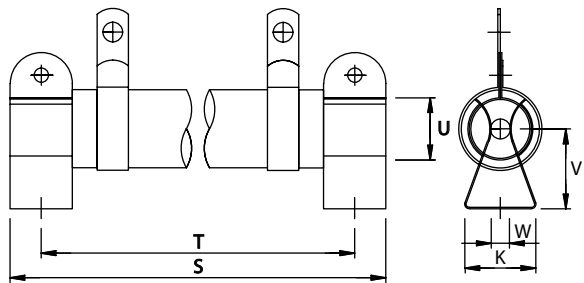

Dimensions (mm)


| Type        | Size | Watts<br>280°C | Watts<br>380°C* | S   | T   | U  | V  | W |
|-------------|------|----------------|-----------------|-----|-----|----|----|---|
| O & V<br>VT | 30   | 30<br>35       | 35<br>44        | 76  | 65  | 14 | 19 | 4 |
| O & V<br>VT | 40   | 40<br>50       | 65<br>80        | 127 | 116 | 14 | 19 | 4 |
| O & V<br>VT | 45   | 45<br>55       | 65<br>80        | 83  | 70  | 27 | 32 | 6 |
| O & V<br>VT | 60L  | 60<br>75       | 75<br>90        | 121 | 108 | 21 | 32 | 5 |
| O & V<br>VT | 60S  | 60<br>75       | 75<br>90        | 102 | 90  | 27 | 32 | 6 |
| O & V<br>VT | 90L  | 90<br>110      | 150<br>185      | 197 | 184 | 21 | 32 | 5 |
| O & V<br>VT | 90S  | 90<br>110      | 125<br>185      | 133 | 121 | 27 | 32 | 6 |
| O & V<br>VT | 130  | 130<br>160     | 175<br>215      | 184 | 171 | 27 | 32 | 6 |
| O & V<br>VT | 180  | 180<br>220     | 230<br>285      | 248 | 235 | 27 | 32 | 6 |
| O & V<br>VT | 220  | 220<br>275     | 285<br>400      | 298 | 286 | 27 | 32 | 6 |

\*380°C applies to vitreous enamelled resistors only.

Temperature Rise and Power Dissipation


Power Rating - Continuous Duty

Where it is desirable to limit the surface temperature of the resistor, refer to this graph.

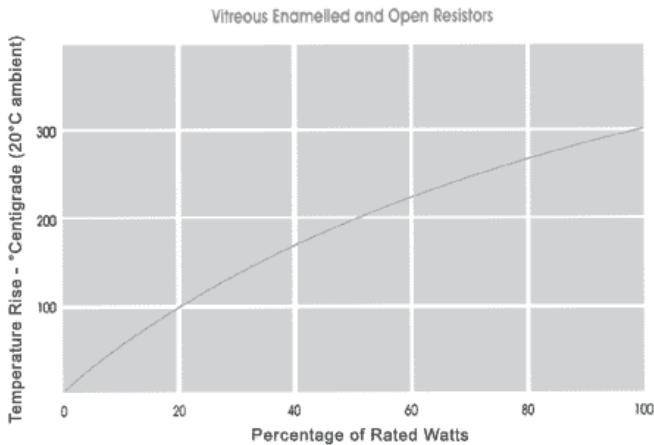


Operation in High Ambient Temperatures

When the ambient temperature is above 20°C resistors should be de-rated as shown on the graph below.

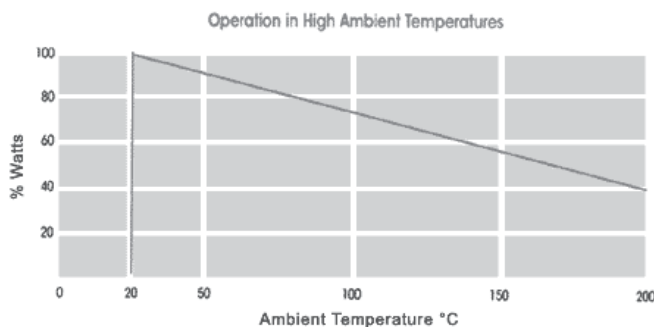

Power Rating - Short Time

In cases where resistors are only required to be operated intermittently, a higher short time rating may be considered. Where it is desirable to limit the surface temperature of the resistor, refer to this graph. The graph shows loading against time assuming a cooling time of at least 20 minutes between duty cycles.

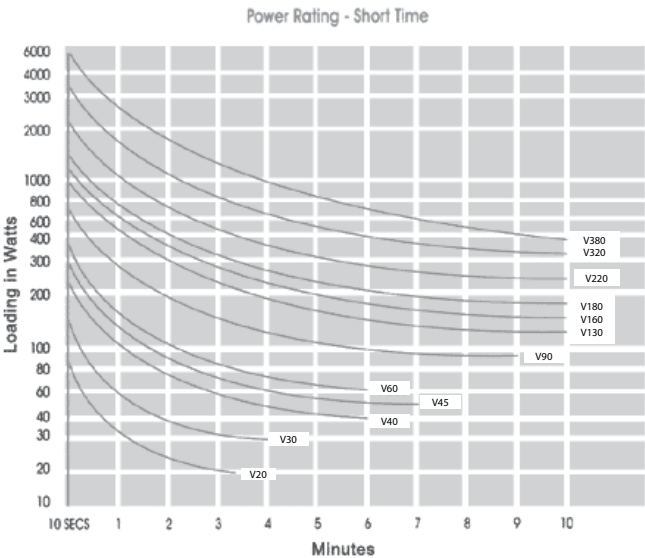

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А