

R15

Industrial Electromagnetic Relays



- Contacts AgNi
- For plug-in sockets, 35 mm rail mount or on panel mounting.
- Cadmium-free contacts-R15 DPDT, R15 3PDT, R15 4PDT relays
- WT (mechanical indicator and lockable front test button) - standard features of R15 DPDT, R15 3PDT relays in cover, for plug-in sockets.
- Relays may be provided with the test buttons (no latching) and plugs (see page 115).
- AUCOTEAM, GmbH Berlin - railway standards.



Contact Data

| Number and type of contacts | | DPDT | 3PDT | 4PDT |
|-----------------------------------|------|---|---|---|
| Contact material | | AgNi | AgNi | AgCdO |
| Rated / max. switching voltage AC | | 250 V / 440 V | 250 V / 440 V | 250 V / 440 V |
| Min. switching voltage | | 10 V | 10 V | 10 V |
| Rated load (capacity) | AC1 | 10 A / 250 V AC; 10 A / 277 V AC UL 508 | 10 A / 250 V AC; 10 A / 277 V AC UL 508 | 10 A / 250 V AC; 10 A / 277 V AC UL 508 |
| | AC15 | 3 A / 120 V; 1.5 A / 240 V (B300) | 3 A / 120 V; 1.5 A / 240 V (B300) | 3 A / 120 V; 1.5 A / 240 V (B300) |
| | AC3 | 370 W (single-phase motor. 1/2 HP / 240 V AC UL 508) | 370 W (single-phase motor. 1/2 HP / 240 V AC UL 508) | 370 W (single-phase motor. 1/2 HP / 240 V AC UL 508) |
| | DC1 | 10 A / 24 V DC (see Fig. 3) | 10 A / 24 V DC (see Fig. 3) | 10 A / 24 V DC (see Fig. 3) |
| | DC13 | 0.22 A / 120 V; 0.1 A / 250 V (R300) | 0.22 A / 120 V; 0.1 A / 250 V (R300) | 0.22 A / 120 V; 0.1 A / 250 V (R300) |
| Min. switching current | | 5 mA | 5 mA | 10 mA |
| Max. inrush current | | 20 A | 20 A | 20 A |
| Rated current | | 10A | 10A | 10A |
| Max. breaking capacity AC1 | | 2500 VA | 2500 VA | 2500 VA |
| Min. breaking capacity | | 0.3 W | 0.3 W | 0.5 W |
| Contact resistance | | ≤ 100 mΩ | ≤ 100 mΩ | ≤ 100 mΩ |
| Max. operating frequency | | | | |
| • at rated load AC1 | | 1200 cycles/hour | 1200 cycles/hour | 1200 cycles/hour |
| • no load | | 12000 cycles/hour | 12000 cycles/hour | 12000 cycles/hour |

Coil Data

| | | | | |
|-----------------------------------|-------------|--|--|--|
| Rated voltage | 50/60 Hz AC | 6 ... 240 V | 6 ... 240 V | 6 ... 240 V |
| | DC | 6 ... 220 V | 6 ... 220 V | 6 ... 220 V |
| Must release voltage | | AC: ≥ 0.15 U _n ; DC: ≥ 0.1 U _n | AC: ≥ 0.15 U _n ; DC: ≥ 0.1 U _n | AC: ≥ 0.15 U _n ; DC: ≥ 0.1 U _v |
| Operating range of supply voltage | | see page 68 | see page 68 | see page 68 |
| Rated power consumption | | AC: 2.8 VA 50 Hz; 2.5 VA 60 Hz; DC: 1.5 W | AC: 2.8 VA 50 Hz; 2.5 VA 60 Hz; DC: 1.5 W | AC: 2.8 VA 50 Hz; 2.5 VA 60 Hz; DC: 1.5 W |

Insulation

| | | | | |
|-----------------------------|--|---|---|---|
| Insulation rated voltage | | 250 V AC | 250 V AC | 250 V AC |
| Rated surge voltage | | 2500 V 1.2 / 50 μs | 2500 V 1.2 / 50 μs | 2500 V 1.2 / 50 μs |
| Overvoltage category | | III | III | III |
| Insulation pollution degree | | 3 | 3 | 3 |
| Dielectric strength | | | | |
| • between coil and contacts | | 2500 V AC type of insulation: basic | 2500 V AC type of insulation: basic | 2500 V AC type of insulation: basic |
| • contact clearance | | 1500 V AC type of clearance: micro-disco. | 1500 V AC type of clearance: micro-disco. | 1500 V AC type of clearance: micro-disco. |
| • pole - pole | | 2000 V AC type of insulation: basic | 2000 V AC type of insulation: basic | 2000 V AC type of insulation: basic |
| Contact - coil distance | | | | |
| • clearance | | ≥ 3 mm | ≥ 3 mm | ≥ 3 mm |
| • creepage | | ≥ 4.2 mm | ≥ 4.2 mm | ≥ 3.2 mm |

General Data

| | | | | |
|------------------------------------|--|--|--|--|
| Operating / release time (typical) | | AC: 12 ms / 10 ms; DC: 18 ms / 7 ms | AC: 12 ms / 10 ms; DC: 18 ms / 7 ms | AC: 12 ms / 10 ms; DC: 18 ms / 7 ms |
| Electrical life | | | | |
| • resistive AC1 | | > 2 x 10 ⁵ ; 10 A. 250 V AC | > 2 x 10 ⁵ ; 10 A. 250 V AC | > 2 x 10 ⁵ ; 10 A. 250 V AC |
| • cos | | see Fig. 2 | see Fig. 2 | see Fig. 2 |
| Mechanical life (cycles) | | > 2 x 10 ⁷ | > 2 x 10 ⁷ | > 2 x 10 ⁷ |
| Dimensions (L x W x H) | | 35 x 35 x 54.4 mm | 35 x 35 x 54.4 mm | 35 x 42.5 x 54.5 mm |
| Weight | | 83 g | 83 g | 95 g |
| Ambient temperature | | | | |
| • storage | | -40...+85 °C | -40...+85 °C | -40...+85 °C |
| • operating | | AC: -40...+55 °C DC: -40...+70 °C | AC: -40...+55 °C DC: -40...+70 °C | AC: -40...+55 °C DC: -40...+70 °C |
| Cover protection category | | IP 40 PN-EN 60529 | IP 40 PN-EN 60529 | IP 40 PN-EN 60529 |
| Environmental protection | | RTI PN-EN 116000-3 | RTI PN-EN 116000-3 | RTI PN-EN 116000-3 |
| Shock resistance | | 10 g | 10 g | 10 g |
| Vibration resistance | | 5 g 10...150 Hz | 5 g 10...150 Hz | 5 g 10...150 Hz |
| Solder bath temperature | | max. 270 °C | max. 270 °C | max. 270 °C |
| Soldering time | | max. 5 s | max. 5 s | max. 5 s |

DPDT

CONNECTION DIAGRAM




DIMENSIONS



3PDT

CONNECTION DIAGRAM




DIMENSIONS



4PDT

CONNECTION DIAGRAM



DIMENSIONS



LOAD CHARTS

Electrical life at AC resistive load. Switching frequency: 1200 cycles/hour Fig. 1



Electrical life reduction factor at AC inductive load Fig. 2



Max. DC breaking capacity A - resistive load DC1 B - inductive load L/R = 40 ms Fig. 3



R15

Industrial Electromagnetic Relays

R15 DPDT AC 50/60Hz & DC coil

| Part Number | Coil Voltage (V) | Coil Type | Coil resistance at 20 °C in Ω | Coil operating range | | Options* | | |
|-------------------------------|------------------|------------|-------------------------------|----------------------|----------------|----------|----|-----|
| | | | | min. (at 20°C) | max. (at 55°C) | - | WT | WTL |
| ▶ R15-2012-23-1012 | 12 | DC | 110 | 9.6 | 13.2 | x | | |
| R15-2012-23-1012-WT | 12 | DC | 110 | 9.6 | 13.2 | | x | |
| R15-2012-23-1012-WTL | 12 | DC | 110 | 9.6 | 13.2 | | | x |
| ▶ R15-2012-23-1024 | 24 | DC | 430 | 19.2 | 26.4 | x | | |
| R15-2012-23-1024-WT | 24 | DC | 430 | 19.2 | 26.4 | | x | |
| ▶ R15-2012-23-1024-WTL | 24 | DC | 430 | 19.2 | 26.4 | | | x |
| R15-2012-23-1110 | 110 | DC | 9200 | 88.0 | 121.0 | x | | |
| R15-2012-23-1110-WT | 110 | DC | 9200 | 88.0 | 121.0 | | x | |
| R15-2012-23-1110-WTL | 110 | DC | 9200 | 88.0 | 121.0 | | | x |
| ▶ R15-2012-23-5024 | 24 | AC 50/60Hz | 75 | 19.2 | 26.4 | x | | |
| R15-2012-23-5024-WT | 24 | AC 50/60Hz | 75 | 19.2 | 26.4 | | x | |
| R15-2012-23-5024-WTL | 24 | AC 50/60Hz | 75 | 19.2 | 26.4 | | | x |
| ▶ R15-2012-23-5120 | 120 | AC 50/60Hz | 1910 | 96.0 | 132.0 | x | | |
| R15-2012-23-5120-WT | 120 | AC 50/60Hz | 1910 | 96.0 | 132.0 | | x | |
| ▶ R15-2012-23-5120-WTL | 120 | AC 50/60Hz | 1910 | 96.0 | 132.0 | | | x |
| ▶ R15-2012-23-5230 | 230 | AC 50/60Hz | 7080 | 184.0 | 253.0 | x | | |
| R15-2012-23-5230-WT | 230 | AC 50/60Hz | 7080 | 184.0 | 253.0 | | x | |
| R15-2012-23-5230-WTL | 230 | AC 50/60Hz | 7080 | 184.0 | 253.0 | | | x |

R15 3PDT AC 50/60Hz & DC coil

| Part Number | Coil Voltage (V) | Coil Type | Coil resistance at 20 °C in Ω | Coil operating range | | Options* | | |
|-------------------------------|------------------|------------|-------------------------------|----------------------|----------------|----------|----|-----|
| | | | | min. (at 20°C) | max. (at 55°C) | - | WT | WTL |
| ▶ R15-2013-23-1012 | 12 | DC | 110 | 9.6 | 13.2 | x | | |
| R15-2013-23-1012-WT | 12 | DC | 110 | 9.6 | 13.2 | | x | |
| R15-2013-23-1012-WTL | 12 | DC | 110 | 9.6 | 13.2 | | | x |
| ▶ R15-2013-23-1024 | 24 | DC | 430 | 19.2 | 26.4 | x | | |
| R15-2013-23-1024-WT | 24 | DC | 430 | 19.2 | 26.4 | | x | |
| ▶ R15-2013-23-1024-WTL | 24 | DC | 430 | 19.2 | 26.4 | | | x |
| R15-2013-23-1110 | 110 | DC | 9200 | 88.0 | 121.0 | x | | |
| R15-2013-23-1110-WT | 110 | DC | 9200 | 88.0 | 121.0 | | x | |
| R15-2013-23-1110-WTL | 110 | DC | 9200 | 88.0 | 121.0 | | | x |
| ▶ R15-2013-23-5024 | 24 | AC 50/60Hz | 75 | 19.2 | 26.4 | x | | |
| R15-2013-23-5024-WT | 24 | AC 50/60Hz | 75 | 19.2 | 26.4 | | x | |
| R15-2013-23-5024-WTL | 24 | AC 50/60Hz | 75 | 19.2 | 26.4 | | | x |
| ▶ R15-2013-23-5120 | 120 | AC 50/60Hz | 1910 | 96.0 | 132.0 | x | | |
| R15-2013-23-5120-WT | 120 | AC 50/60Hz | 1910 | 96.0 | 132.0 | | x | |
| ▶ R15-2013-23-5120-WTL | 120 | AC 50/60Hz | 1910 | 96.0 | 132.0 | | | x |
| ▶ R15-2013-23-5230 | 230 | AC 50/60Hz | 7080 | 184.0 | 253.0 | x | | |
| R15-2013-23-5230-WT | 230 | AC 50/60Hz | 7080 | 184.0 | 253.0 | | x | |
| R15-2013-23-5230-WTL | 230 | AC 50/60Hz | 7080 | 184.0 | 253.0 | | | x |

R15 4PDT AC 50/60Hz & DC coil

| Part Number | Coil Voltage (V) | Coil Type | Coil resistance at 20 °C in Ω | Coil operating range | | Options* | | | |
|-----------------------------|------------------|-----------|-------------------------------|----------------------|----------------|----------|---|----|-----|
| | | | | min. (at 20°C) | max. (at 55°C) | - | K | WT | WTL |
| R15-1014-23-1012 | 12 | DC | 110 | 9.6 | 13.2 | x | | | |
| R15-1014-23-1012-K | 12 | DC | 110 | 9.6 | 13.2 | | x | | |
| R15-1014-23-1012-L | 12 | DC | 110 | 9.6 | 13.2 | | | x | |
| R15-1014-23-1012-D | 12 | DC | 110 | 9.6 | 13.2 | | | | x |
| R15-1014-23-1024 | 24 | DC | 430 | 19.2 | 26.4 | x | | | |
| R15-1014-23-1024-K | 24 | DC | 430 | 19.2 | 26.4 | | x | | |
| ▶ R15-1014-23-1024-L | 24 | DC | 430 | 19.2 | 26.4 | | | x | |
| R15-1014-23-1024-D | 24 | DC | 430 | 19.2 | 26.4 | | | | x |
| R15-1014-23-1110 | 110 | DC | 9200 | 88.0 | 121.0 | x | | | |
| R15-1014-23-1110-K | 110 | DC | 9200 | 88.0 | 121.0 | | x | | |
| R15-1014-23-1110-L | 110 | DC | 9200 | 88.0 | 121.0 | | | x | |
| R15-1014-23-1110-D | 110 | DC | 9200 | 88.0 | 121.0 | | | | x |
| R15-1014-23-3024 | 24 | AC 50Hz | 72 | 19.2 | 26.4 | x | | | |
| R15-1014-23-3024-K | 24 | AC 50Hz | 72 | 19.2 | 26.4 | | x | | |
| R15-1014-23-3024-L | 24 | AC 50Hz | 72 | 19.2 | 26.4 | | | x | |
| R15-1014-23-3024-D | 24 | AC 50Hz | 72 | 19.2 | 26.4 | | | | x |
| R15-1014-23-3120 | 120 | AC 50Hz | 2300 | 96.0 | 132.0 | x | | | |
| R15-1014-23-3120-K | 120 | AC 50Hz | 2300 | 96.0 | 132.0 | | x | | |
| R15-1014-23-3120-L | 120 | AC 50Hz | 2300 | 96.0 | 132.0 | | | x | |
| R15-1014-23-3120-D | 120 | AC 50Hz | 2300 | 96.0 | 132.0 | | | | x |
| R15-1014-23-3230 | 230 | AC 50Hz | 7900 | 184.0 | 253.0 | x | | | |
| R15-1014-23-3230-K | 230 | AC 50Hz | 7900 | 184.0 | 253.0 | | x | | |
| R15-1014-23-3230-L | 230 | AC 50Hz | 7900 | 184.0 | 253.0 | | | x | |
| R15-1014-23-3230-D | 230 | AC 50Hz | 7900 | 184.0 | 253.0 | | | | x |
| R15-1014-23-6120 | 120 | AC 60Hz | 2000 | 96.0 | 132.0 | x | | | |
| R15-1014-23-6120-K | 120 | AC 60Hz | 2000 | 96.0 | 132.0 | | x | | |
| ▶ R15-1014-23-6120-L | 120 | AC 60Hz | 2000 | 96.0 | 132.0 | | | x | |
| R15-1014-23-6120-D | 120 | AC 60Hz | 2000 | 96.0 | 132.0 | | | | x |
| R15-1014-23-6230 | 230 | AC 60Hz | 7000 | 184.0 | 253.0 | x | | | |
| R15-1014-23-6230-K | 230 | AC 60Hz | 7000 | 184.0 | 253.0 | | x | | |
| R15-1014-23-6230-L | 230 | AC 60Hz | 7000 | 184.0 | 253.0 | | | x | |
| R15-1014-23-6230-D | 230 | AC 60Hz | 7000 | 184.0 | 253.0 | | | | x |

WT = with mechanical indicator + lockable front test button; WTL = with mechanical indicator + lockable front test button + light indicator (LED)
 K = with test button without block function; L = with light indicator (LED); D = with surge suppression element (diode); other options available upon request

▶ **BOLD** - Regular stocked items.

GZP8 for R15 DPDT

Screw terminals
 Max. tightening moment for the terminal: 0.5 Nm
 35 mm rail mount
 acc. to PN-EN 60715
 or on panel mounting
 73 x 38.2 x 27.2 mm Two poles
 12 A, 300 V AC



GZP8

CONNECTION DIAGRAM



DIMENSIONS



E22891



Time module COM3T



GZP-0035



GZP-0054

PZ8 for R15 DPDT

Screw terminals
 Max. tightening moment for the terminal: : 0.7 Nm
 35 mm rail mount
 acc. to PN-EN 60715
 or on panel mounting
 68.2 x 38 x 24.2 mm
 Two poles
 10 A, 250 V AC



PZ8

CONNECTION DIAGRAM



DIMENSIONS



E105728



PZ11 0031


GZP11 for R15 3PDT

Screw terminals
 Max. tightening moment for the terminal: : 0,5 Nm
 35 mm rail mount
 acc. to PN-EN 60715
 or on panel mounting
 73 x 38.2 x 27.2 mm
 Three poles
 12 A, 300 V AC



GZP11

CONNECTION DIAGRAM



DIMENSIONS



E22891



Time module COM3T



GZP-0035



GZP-0054

All accessories are sold separately.

R15

Industrial Electromagnetic Relays - Plug-in Sockets and Accessories

PZ11 for R15 3PDT

Screw terminals
 Max. tightening moment
 for the terminal: : 0.7 Nm
 35 mm rail mount
 acc. to PN-EN 60715
 or on panel mounting
 68.2 x 38 x 24.2 mm
 Three poles
 10 A, 250 V AC



PZ11



PZ11 0031

CONNECTION DIAGRAM



DIMENSIONS



E105728

GZ14U for R15 4PDT

Screw terminals
 Max. tightening moment
 for the terminal: : 0.7 Nm
 35 mm rail mount
 acc. to PN-EN 60715
 96.8 x 46.2 x 33.3 mm
 Four poles
 10 A, 250 V AC



GZ14ZU



GZ14 0737


CONNECTION DIAGRAM



DIMENSIONS



See Relay Socket Combinations on pages 104-109

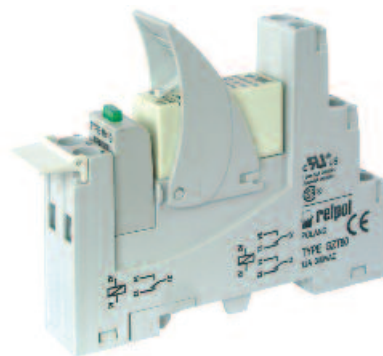

All accessories are sold separately.

Altech Custom Assemblies



Altech provides quick turnaround and competitive prices on assemblies.
For complete assemblies contact Altech.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А