


OptiMOS® P-Power-Transistor
Features

- single P-Channel in SO8
- Qualified according JEDEC for target applications
- 150°C operating temperature
- Super Logic Level (2.5V rated)
- Pb-free plating; RoHS compliant, Halogen-free according to IEC61249-2-21

Product Summary

V_{DS}		-20	V
$R_{DS(on),max}$	$V_{GS}=4.5\text{ V}$	21	mΩ
	$V_{GS}=2.5\text{ V}$	34	
I_D		-8.9	A



Type	Package	Marking	Lead free	Halogen free	Packing
BSO203SP H	PG-DSO-8	203SP	Yes	Yes	dry

Maximum ratings, at $T_j=25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value		Unit
			10 secs	steady state	
Continuous drain current ¹⁾	I_D	$V_{GS} = -4.5\text{ V}$, $T_A = 25\text{ °C}$	-8.9	-7.0	A
		$V_{GS} = -4.5\text{ V}$, $T_A = 70\text{ °C}$	-7.1	-5.8	
		$V_{GS} = -2.5\text{ V}$, $T_A = 25\text{ °C}$	-7.0	-5.7	
		$V_{GS} = -2.5\text{ V}$, $T_A = 70\text{ °C}$	-5.6	-4.5	
Pulsed drain current ²⁾	$I_{D,pulse}$	$T_A = 25\text{ °C}$	-35.6		
Avalanche energy, single pulse	E_{AS}	$I_D = -8.9\text{ A}$, $R_{GS} = 25\text{ Ω}$	97		mJ
Gate source voltage	V_{GS}		±12		V
Power dissipation ¹⁾	P_{tot}	$T_A = 25\text{ °C}$	2.5	1.6	W
Operating and storage temperature	T_j, T_{stg}		-55 ... 150		°C
ESD class		JESD22-A114 HBM	1B (500V - 1 kV)		
Soldering temperature			260		°C
IEC climatic category; DIN IEC 68-1			55/150/56		

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Thermal characteristics

Thermal resistance, junction - soldering point	R_{thJS}		-	-	35	K/W
Thermal resistance, junction - ambient	R_{thJA}	minimal footprint, $t_p \leq 10$ s	-	-	110	
		minimal footprint, steady state	-	-	150	
		6 cm ² cooling area ¹⁾ , $t_p \leq 10$ s	-	-	53	
		6 cm ² cooling area ¹⁾ , steady state	-	-	80	

Electrical characteristics, at $T_j=25$ °C, unless otherwise specified

Static characteristics

Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0$ V, $I_D = -0.25$ mA	-20	-	-	V
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$, $I_D = -100$ μ A	-0.6	-0.9	-1.2	
Zero gate voltage drain current	I_{DSS}	$V_{DS} = -20$ V, $V_{GS}=0$ V, $T_j=25$ °C	-	-	-1	μ A
		$V_{DS} = -20$ V, $V_{GS}=0$ V, $T_j=150$ °C	-	-	-100	
Gate-source leakage current	I_{GSS}	$V_{GS} = -12$ V, $V_{DS}=0$ V	-	-	-100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS}=2.5$ V, $I_D=-7$ A	-	22	34	m Ω
		$V_{GS}=4.5$ V, $I_D=-8.9$ A	-	15	21	
Gate resistance	R_G		-	3.3	-	Ω
Transconductance	g_{fs}	$ V_{DS} > 2 I_D R_{DS(on)max}$, $I_D=-7.1$ A	18	33	-	S

¹⁾ Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μ m thick) copper area for drain connection. PCB is vertical in still air.

²⁾ See figure 3 for more detailed information

³⁾ See figure 13 for more detailed information

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic characteristics

Input capacitance	C_{iss}	$V_{GS}=0\text{ V}, V_{DS}=15\text{ V},$ $f=1\text{ MHz}$	-	2500	3750	pF
Output capacitance	C_{oss}		-	820	1230	
Reverse transfer capacitance	C_{rss}		-	680	1020	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=-10\text{ V}, V_{GS}=-$ $4.5\text{ V}, I_D=-8.9\text{ A}, R_G=$ $6\ \Omega$	-	16	24	ns
Rise time	t_r		-	55	83	
Turn-off delay time	$t_{d(off)}$		-	45	68	
Fall time	t_f		-	74	111	

Gate Charge Characteristics⁴⁾

Gate to source charge	Q_{gs}	$V_{DD}=-10\text{ V}, I_D=-8.9\text{ A},$ $V_{GS}=0\text{ to }4.5\text{ V}$	-	-4	-6	nC
Gate charge at threshold	$Q_{g(th)}$		-	-4	-6	
Gate to drain charge	Q_{gd}		-	-11	-17	
Switching charge	Q_{sw}		-	-12	-18	
Gate charge total	Q_g		-	-26	-39	
Gate plateau voltage	$V_{plateau}$		-	-1.6	-	V
Output charge	Q_{oss}	$V_{DD}=-10\text{ V}, V_{GS}=0\text{ V}$	-	16	21	nC


Reverse Diode

Diode continuous forward current	I_S	$T_A=25\text{ }^\circ\text{C}$	-	-	-3	A
Diode pulse current	$I_{S,pulse}$		-	-	-35.6	
Diode forward voltage	V_{SD}	$V_{GS}=0\text{ V}, I_F=-8.9\text{ A},$ $T_j=25\text{ }^\circ\text{C}$	-	-	1.1	V
Reverse recovery time	t_{rr}	$V_R=10\text{ V}, I_F=I_S,$ $di_F/dt=100\text{ A}/\mu\text{s}$	-	26	39	ns
Reverse recovery charge	Q_{rr}	$V_R=10\text{ V}, I_F=I_D,$ $di_F/dt=100\text{ A}/\mu\text{s}$	-	14	21	nC

⁴⁾ See figure 16 for gate charge parameter definition

1 Power dissipation


$$P_{\text{tot}} = f(T_A); t_p \leq 10 \text{ s}$$

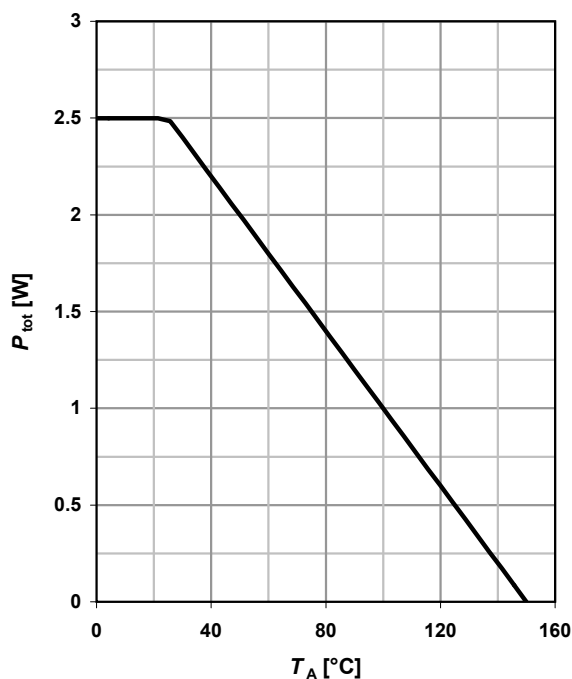

2 Drain current

$$I_D = f(T_A); t_p \leq 10 \text{ s}$$


parameter: V_{GS}

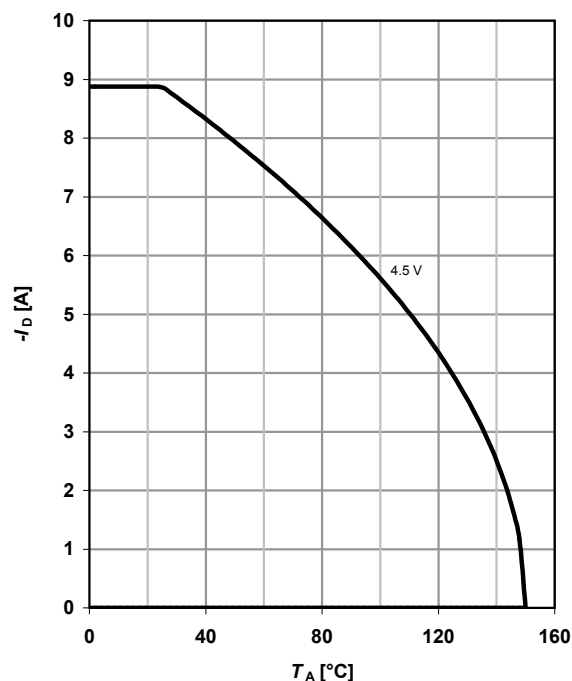

3 Safe operating area

$$I_D = f(V_{DS}); T_A = 25^\circ\text{C}^{(1)}; D = 0$$


parameter: t_p

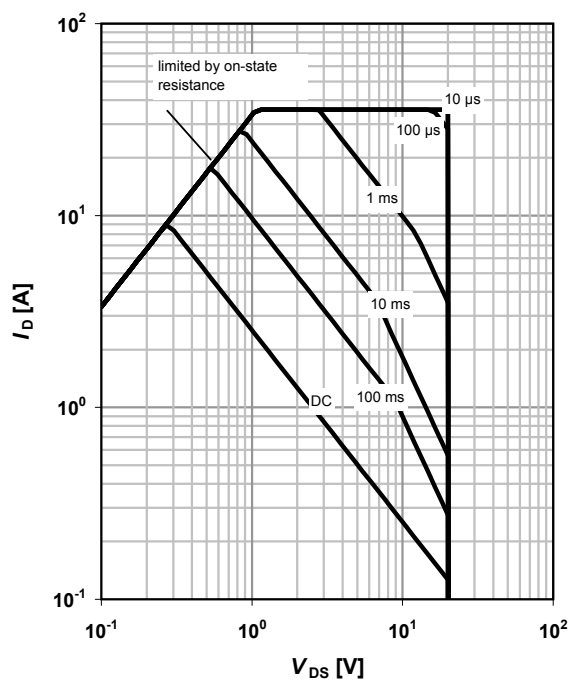

4 Max. transient thermal impedance

$$Z_{\text{thJA}} = f(t_p)^{(1)}$$


parameter: $D = t_p / T$

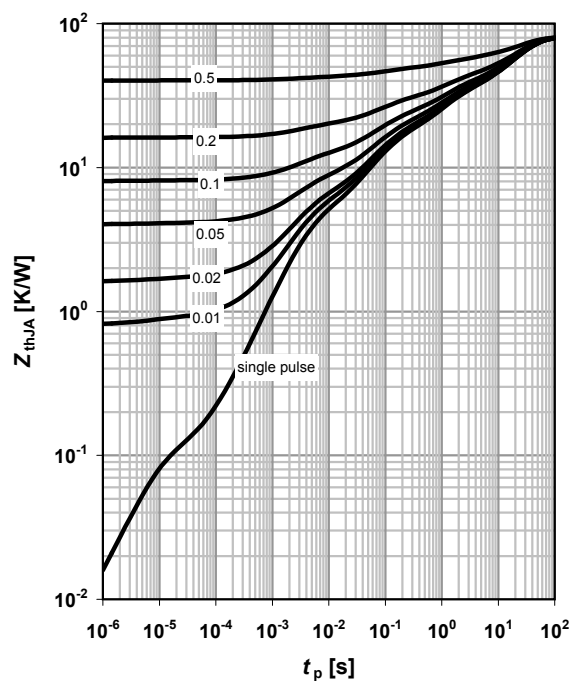

5 Typ. output characteristics

$$I_D = f(V_{DS}); T_j = 25^\circ\text{C}$$


parameter: V_{GS}

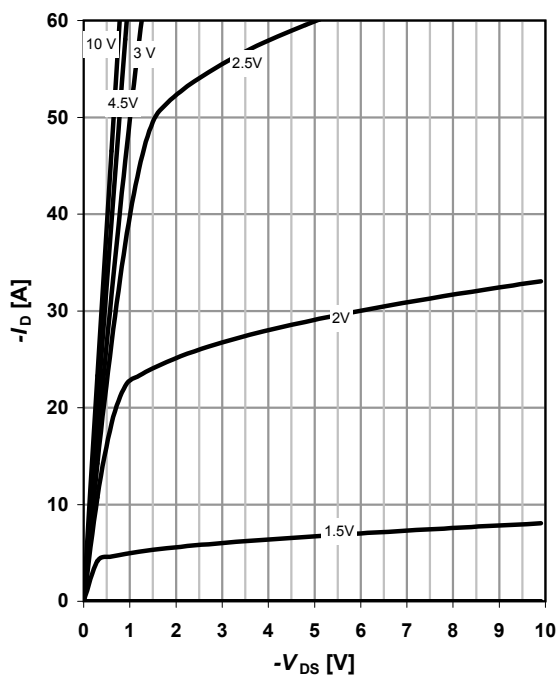

6 Typ. drain-source on resistance

$$R_{DS(on)} = f(I_D); T_j = 25^\circ\text{C}$$


parameter: V_{GS}

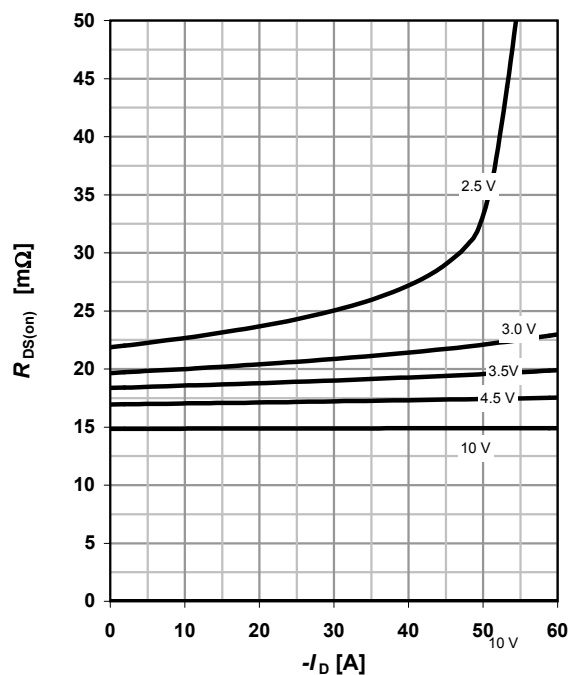

7 Typ. transfer characteristics


$$I_D = f(V_{GS}); |V_{DS}| > 2|I_D|R_{DS(on)max}$$

parameter: T_j

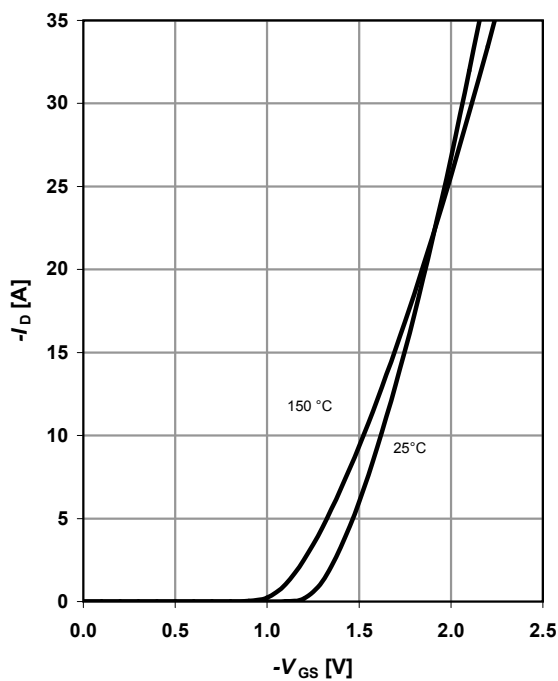


8 Typ. forward transconductance

$$g_{fs} = f(I_D); T_j = 25^\circ\text{C}$$

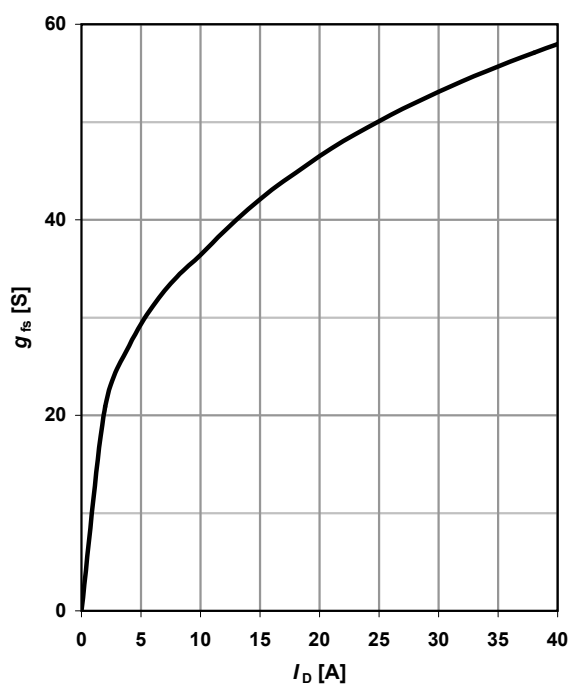


9 Drain-source on-state resistance

$$R_{DS(on)} = f(T_j); I_D = -8.9 \text{ A}; V_{GS} = -4.5 \text{ V}$$

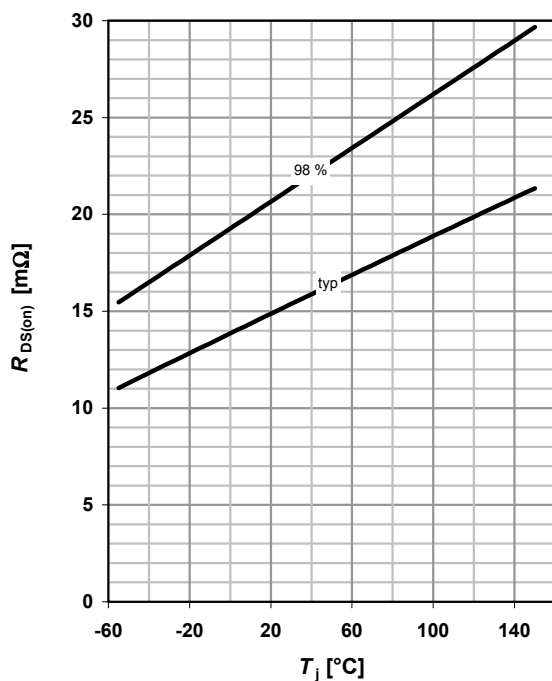


10 Typ. gate threshold voltage

$$V_{GS(th)} = f(T_j); V_{GS} = V_{DS}; I_D = -100 \mu\text{A}$$

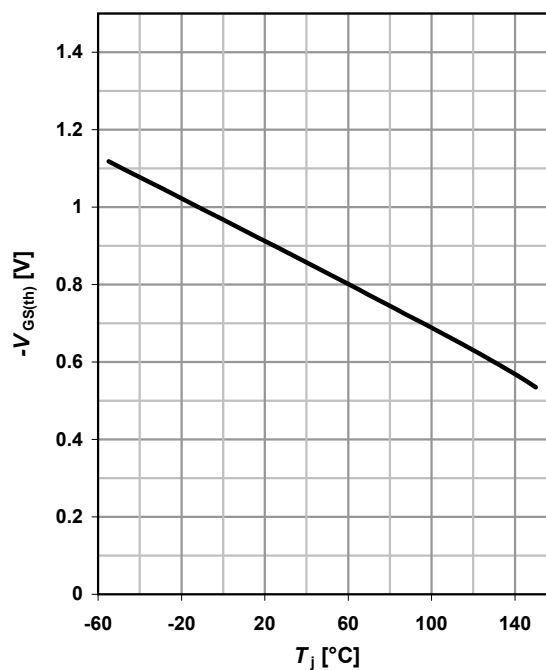

11 Typ. capacitances


$$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$$

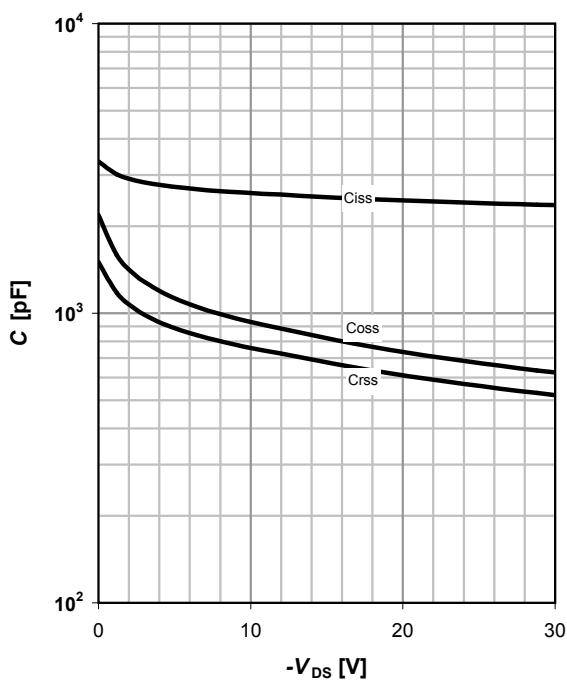

12 Forward characteristics of reverse diode

$$I_F = f(V_{SD})$$


parameter: T_j

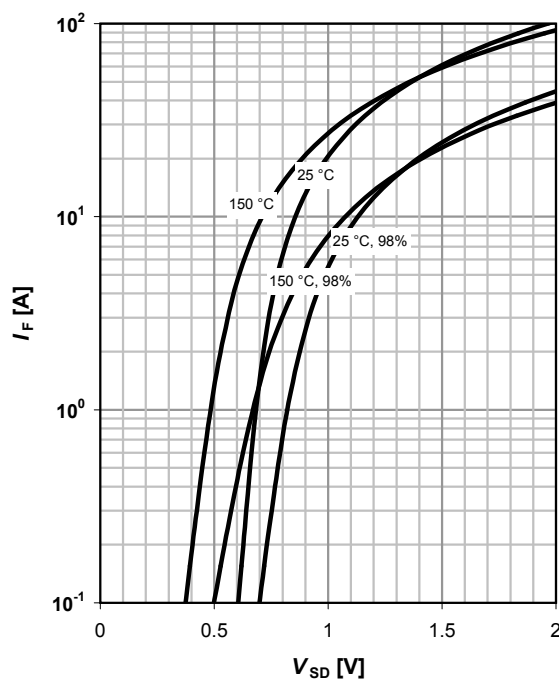

13 Avalanche characteristics

$$I_{AS}=f(t_{AV}); R_{GS}=25\ \Omega$$


parameter: $T_{j(\text{start})}$

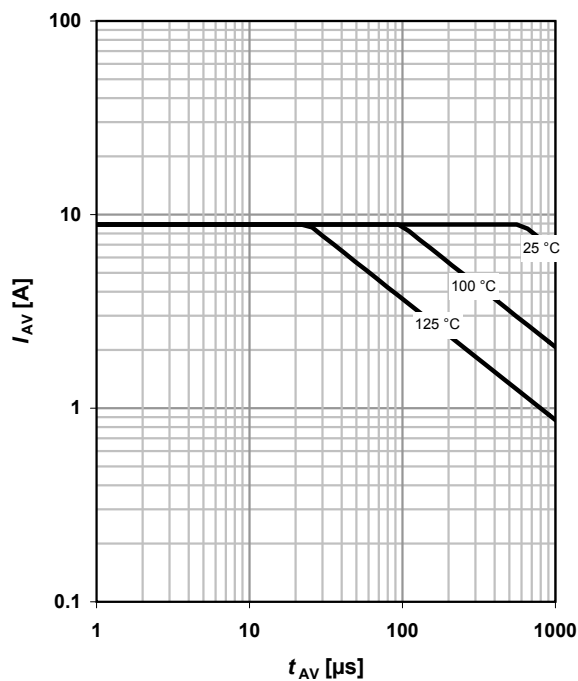

14 Typ. gate charge


$$V_{GS}=f(Q_{\text{gate}}); I_D=-8.9\ \text{A pulsed}$$

parameter: V_{DD}

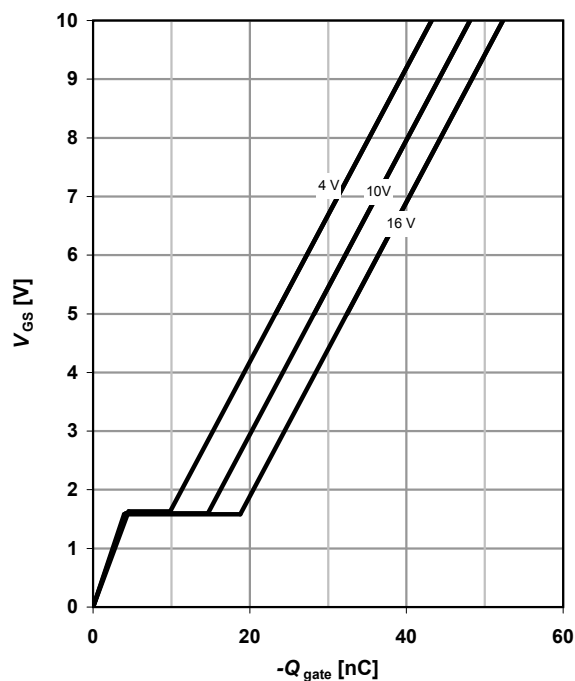


15 Drain-source breakdown voltage

$$V_{BR(DSS)}=f(T_j); I_D=1\ \text{mA}$$

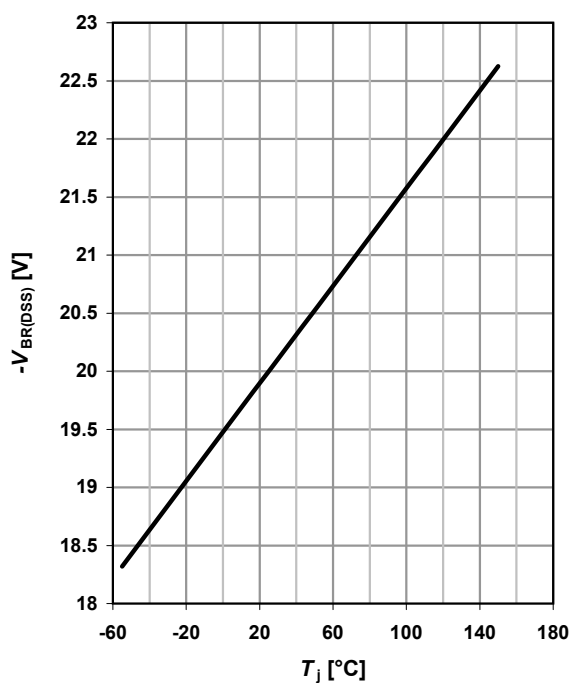

16 Gate charge waveforms

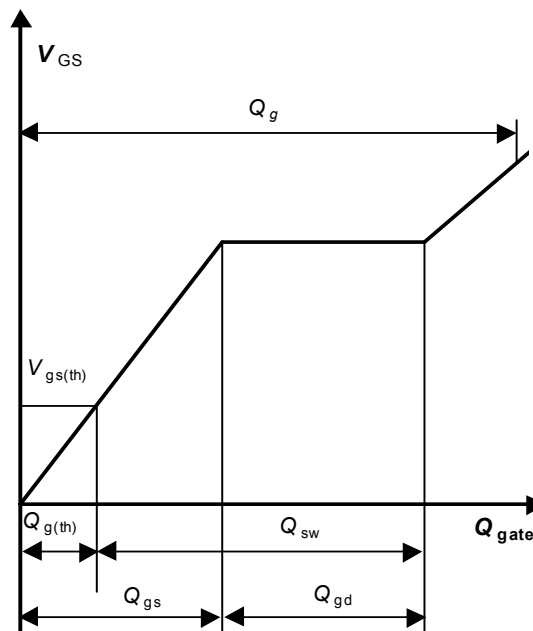

Package Outline

PG-DSO-8: Outline



1) DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	1.75	-	0.069
A1	0.10	-	0.004	-
A2	1.25	1.65	0.049	0.065
b	0.35	0.51	0.014	0.020
c	0.17	0.25	0.007	0.010
D	4.80	5.00	0.189	0.197
E	5.80	6.20	0.228	0.244
E1	3.80	4.00	0.150	0.157
e	1.27		0.050	
N	8		8	
L	0.39	0.89	0.015	0.035
h	0.23	0.50	0.009	0.020
Θ	0°	8°	0°	8°
Θ ₁	-	19°	-	19°
ccc	0.10		0.004	
ddd	0.25		0.010	
F1	5.59	5.79	0.220	0.228
F2	0.55	0.75	0.022	0.030
F3	1.21	1.41	0.048	0.056

DOCUMENT NO. Z8B00003333
SCALE 0 1.0 2mm
EUROPEAN PROJECTION 
ISSUE DATE 09.01.2008
REVISION 02

Published by
Infineon Technologies AG
81726 Munich, Germany
© 2009 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А