


Compact, low-profile type with a height of 0.4mm

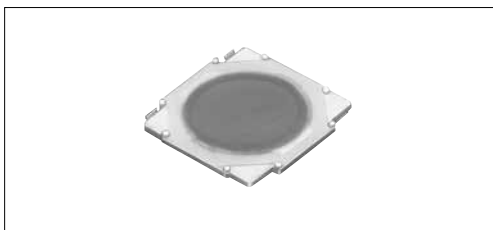

■ Typical Specifications

| Items                      | Specifications     |
|----------------------------|--------------------|
| Rating (max.)              | 50mA 12V DC        |
| Rating (min.)              | 10 $\mu$ A 1V DC   |
| Initial contact resistance | 100m $\Omega$ max. |


■ Product Line

| Product No.       | Operating force | Operating direction | Travel (mm) | Operating life (5mA 5V DC) | Minimum order unit (pcs.) |        |
|-------------------|-----------------|---------------------|-------------|----------------------------|---------------------------|--------|
|                   |                 |                     |             |                            | Japan                     | Export |
| <b>SKRMAAE010</b> | 1.57N           | Top push            | 0.15        | 500,000 cycles             | 10,000                    | 10,000 |
| <b>SKRMABE010</b> | 2.55N           |                     | 0.2         | 100,000 cycles             |                           |        |

■ Packing Specifications

Taping

| Number of packages (pcs.) |                |                         | Tape width (mm) | Export package measurements (mm) |
|---------------------------|----------------|-------------------------|-----------------|----------------------------------|
| 1 reel                    | 1 case / Japan | 1 case / export packing |                 |                                  |
| 10,000                    | 100,000        | 100,000                 | 12              | 395×395×205                      |

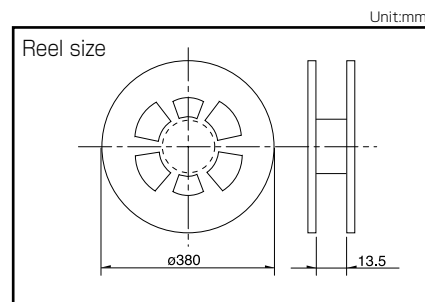


Note

For reels of 330mm diameter, please inquire.







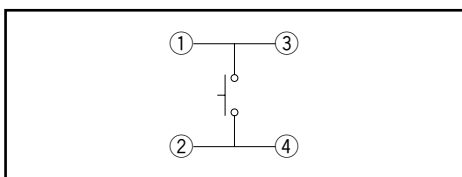







■ Dimensions

| Style | PC board land dimensions (Viewed from switch mounting face) |
|-------|---|
|       |   |

■ Circuit Diagram



Refer to P.249 for soldering conditions.

| Type                        |                                | Sharp Feeling Type   |   |   |   |   |   | SKTC  |
|-----------------------------|--------------------------------|--|---|---|---|---|---|---|
|                             |                                | Surface Mount  |   |   |   |   |   |   |
| Series                      |                                | SKSH   | SKRW  | SKRM  | SKRB  | SKRR  | SKQG  | SKTC  |
| Photo                       |                                |   |    |    |    |    |    |    |
| Features                    |                                | Low-profile  |   |   |   | Low-profile and long life   | Low-profile   | Double action   |
| Water-proof                 |                                | —  | —   | —   | —   | —   | —   | ●   |
| Dust-proof                  |                                | —  | —   | —   | —   | —   | —   | ●   |
| IP standard                 |                                | —  | —   | —   | —   | —   | —   | 67 equivalent   |
| Operating direction         | Top push                       | ●  | ●   | ●   | ●   | ●   | ●   | ●   |
|                             | Side push                      | —  | —   | —   | —   | —   | —   | —   |
| Dimensions (mm)             | W                              | 3.3  | □3.7  | □4.5  | □4.8  | 7.5   | □5.2  | 3.4   |
|                             | D                              | 2.9  |   |   |   | 7   |   | 2.2   |
|                             | H                              | 0.35   |   | 0.4   | 0.55  | 0.6   | 1.5   | 0.62  |
| Operation force coverage    | 1N max.                        | ↕  | ↕   | ↕   | ↕   | ↕   | ↕   | See the relevant pages for respective product descriptions                            |
|                             | 1N to 2N                       |  |   |   |   |   |   |   |
|                             | 2N to 3N                       |  |   |   |   |   |   |   |
|                             | 3N to 4N                       |  |   |   |   |   |   |   |
| 4N to 5N                    |                                |  |   |   |   |   |   |   |
| Travel (mm)                 |                                | 0.15   |   | 0.15/0.2  |   | 0.25  |   | See the relevant pages for respective product descriptions                            |
| Ground terminal             |                                | —  | —   | —   | —   | —   | —   | —   |
| Operating temperature range |                                | -30°C to +85°C   |   |   | -40°C to +85°C  |   | -40°C to +90°C  | -30°C to +85°C  |
| Automotive use              |                                | —  | —   | —   | ●   | —   | ○   | —   |
| Life Cycle                  |                                |   |  |  |  |  |  |  |
| Electrical performance      | Rating (max.) (Resistive load) | 50mA 12V DC  |   |   |   |   |   |   |
|                             | Rating (min.) (Resistive load) | 10μA 1V DC   |   |   |   |   |   |   |
|                             | Insulation resistance          | 100MΩ min. 100V DC 1min.   |   |   |   |   |   |   |
|                             | Voltage proof                  | 100V AC 1min.  |   |   |   | 250V AC 1min.   |   | 100V AC 1min.   |
| Durability                  | Vibration                      | 10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively |   |   |   |   |   |   |
|                             | Lifetime                       | Shall be in accordance with individual specifications.   |   |   |   |   |   |   |
| Environmental performance   | Cold                           | -40°C 96h  |   |   |   |   |   |   |
|                             | Dry heat                       | 90°C 96h   |   |   |   |   |   |   |
|                             | Damp heat                      | 60°C, 90 to 95%RH 96h  |   |   |   |   |   |   |
| Page                        |                                | 201  | 202   | 203   | 204   | 205   | 206   | 207   |

W : Width. The most outer dimension excluding terminal portion.  
D : Depth. The most outer dimension excluding terminal portion.  
H : Height. The minimum dimension if there are variances.

|                                   |     |
|-----------------------------------|-----|
| TACT Switch™ Soldering Conditions | 249 |
| TACT Switch™ Cautions             | 250 |

#### Notes

- The automotive operating temperature range to be individually discussed upon request.
- Indicates applicability to all products in the series, while ○ indicates applicability to some products in the series.

## Condition for Reflow

Available for Surface Mount Type.

Temperature profile



### Notes

1. Please confirm the specifications of our product for the detailed condition.
2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

## Conditions for Auto-dip

Available for Snap-in Type and Radial Type.

| Items                  | Condition   |
|------------------------|---|
| Flux built-up          | Mounting surface should not be exposed to flux                      |
| Preheating temperature | Ambient temperature of the soldered surface of PC board. 100°C max. |
| Preheating time        | 60s max.  |
| Soldering temperature  | 260°C max.  |
| Duration of immersion  | 5s max.   |
| Number of soldering    | 2times max.   |

### SKHH Series

| Items                  | Condition   |
|------------------------|---|
| Flux built-up          | Mounting surface should not be exposed to flux                      |
| Preheating temperature | Ambient temperature of the soldered surface of PC board. 110°C max. |
| Preheating time        | 60s max.  |
| Soldering temperature  | 260°C max.  |
| Duration of immersion  | 5s max.   |
| Number of soldering    | 2times max.   |

### SKHL Top Push Type, SKQJ Series

| Items                  | Condition   |
|------------------------|---|
| Flux built-up          | Mounting surface should not be exposed to flux                      |
| Preheating temperature | Ambient temperature of the soldered surface of PC board. 100°C max. |
| Preheating time        | 45s max.  |
| Soldering temperature  | 255°C max.  |
| Duration of immersion  | 5s max.   |
| Number of soldering    | 2times max.   |

### Notes

1. Prevent flux penetration from the top side of the TACT Switch™.
2. Switch terminals and a PC board should not be coated with flux prior to soldering.
3. The second soldering should be done after the switch is stable with normal temperature.
4. Use the flux with a specific gravity of min 0.81.  
(EC-19S-8 by TAMURA CORPORATION, or equivalents.)

## Manual Soldering

| Items                      | Condition  |
|----------------------------|------------|
| Soldering temperature      | 350°C max. |
| Duration of soldering      | 3s max.    |
| Capacity of soldering iron | 60W max.   |

### SKHH, SKHW Series

| Items                      | Condition  |
|----------------------------|------------|
| Soldering temperature      | 360°C max. |
| Duration of soldering      | 3s max.    |
| Capacity of soldering iron | 60W max.   |

### SKTD, SKTG, SKQJ Series

| Items                      | Condition  |
|----------------------------|------------|
| Soldering temperature      | 350°C max. |
| Duration of soldering      | 3s max.    |
| Capacity of soldering iron | 20W max.   |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А