

## Model TJE

### Precision Gage/Absolute Pressure Transducer



#### DESCRIPTION

Model TJE pressure transducers are all-welded stainless steel sensors built for rugged industrial applications that require high accuracy and measurement stability. The Model TJE is available with a variety of options for extended temperature operation, electrical terminations and high-level outputs including 5 Vdc or 10 Vdc and 4 mA to 20 mA. Most high-level output models have internal shunt calibration circuits as a standard feature to allow easy set-up of the sensor to the data system. An optional internal signature calibration chip provides calibration information for automatic set up with the Model SC four-or-twelve channel digital indicator.

#### FEATURES

- 0.1 % accuracy
- 0.0025 % F.S./°F temperature effect
- 1 psig/a to 60000 psig/a range
- mV/V, 4 mA to 20 mA, 0 Vdc to 5 Vdc, or 0 Vdc to 10 Vdc output
- All-welded, stainless steel construction
- Intrinsically safe available (2N option only)<sup>18</sup>
- CE<sup>19</sup>

The gage Model TJE is a strain gage based transducer and features a unique “true gage” design which utilizes a second welded stainless steel diaphragm that hermetically seals the strain gage circuitry from atmospheric contamination. This design references the primary pressure sensing diaphragm to the atmosphere, and provides a stable zero regardless of the transducer environment.

The absolute Model TJE has an all-welded vacuum reference chamber assuring long-term stability.

# Model TJE

## PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Accuracy <sup>1</sup>	±0.10 % full scale
Linearity	±0.10 % full scale
Hysteresis	±0.05 % full scale
Media	All gases/liquids compatible with wetted parts
Resolution	Infinite
Calibration	5-point calibration: 0 %, 50 %, and 100 % of full scale

## ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature compensated	15 °C to 71 °C [60 °F to 160 °F]
Temperature effect, zero	0.0025 % full scale/°F
Temperature effect, span	0.0025 % reading/°F
Sealing	Hermetically sealed IP68/NEMA 6P



## ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Strain gage type	Bonded foil
Insulation resistance	5000 mOhm @ 50 Vdc
Bridge resistance	350 ohm
Shunt calibration data	Included
Electrical termination (std)	PTIH-10-6P or equiv. (hermetic stainless)
Mating connector (not incl)	PT06A-10-6S or equiv. (AA111)

## MECHANICAL SPECIFICATIONS


Characteristic	Measure
Wetted parts material	number here
< 2000 psig/a	17-4 PH stainless steel
> 2000 psig/a	15-5 PH stainless steel
Weight	10 oz
Case material	304 stainless steel
Marking	Permanent metal name plate MIL-STD130F 4.3; Individual sequential serial number per sensor; Country of origin and date of manufacture

## MOUNTING DIAGRAM AND CHARACTERISTICS

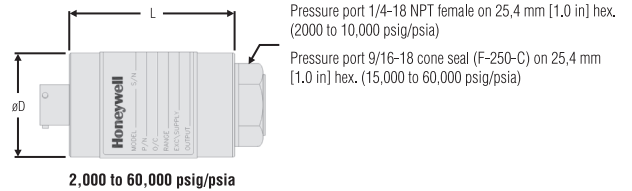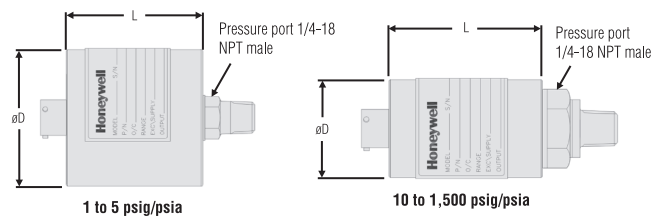

For reference only

## TYPICAL SYSTEM DIAGRAM

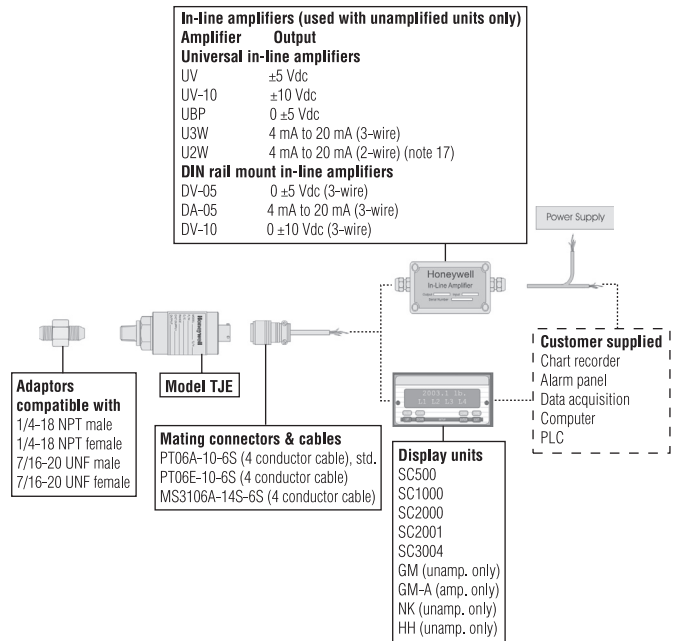

## SPECIAL REQUIREMENTS (CONSULT FACTORY)

Have a special requirement? New case pressure, different cable lengths, electrical connectors, or materials? Consult our factory by calling +1 614-850-5000 (800-848-6564). Customization is key to our test and measurement business. Special outputs, wiring codes, and calibrations are all standard to us.

# Precision Gage/Absolute Pressure Transducer

## RANGE CODES

Pressure range (psi)	1	2	5	10	15	25	50	75	100	150	200	300	500	750	1000	1500				
RANGE CODE	AP	AR	AT	AV	BJ	BL	BN	BP	BR	CJ	CL	CP	CR	CT	CV	DJ				
D mm [in] psia	57 [2.25]			38 [1.50]																
D mm [in] psig	57 [2.25]			45 [1.75]			38 [1.50]													
L mm [in] psia	65 [2.54]			60 [2.35]																
L* mm [in] psia	96 [3.79]			91 [3.60]																
L mm [in] psig	46 [1.81]			51 [2.00]			51 [2.02]													
L* mm [in] psig	78 [3.06]			83 [3.25]			83 [3.27]													
Over pressure (test) (psi)	150 % full scale			150 % full scale																
Over pressure (burst) (psi)	50			100			200			400			800			2 k		3 k	3.5 k	4 k
Port volume cm <sup>3</sup> [in <sup>3</sup> ]	5,2 [0.32]			4,1 [0.25]				2,8 [0.17]												
Natural frequency (Hz)	500	550	1000	1.3 k	2.1 k	2.5 k	2.9 k	3.5 k	4.6 k	6 k	7 k	9 k	9.5 k	12 k	17 k	20 k				

Pressure range (psi)	2000	3000	5000	7500	10000	15000	20000	30000	50000	60000
RANGE CODE	DL	DN	DR	DT	DV	EJ	EL	EN	EP	ES
D mm [in] psia	38 [1.50]					38 [1.50]				
L mm [in] psia	48 [1.90]					56 [2.21]				
L* mm [in] psia	80 [3.15]					89 [3.46]				
Over pressure (test) (psi)	150 % full scale					Consult factory				
Over pressure (burst) (psi)	8 k	12 k	20 k	25 k	25 k	40 k	45 k	60 k	80 k	80 k
Port volume cm <sup>3</sup> [in <sup>3</sup> ]	3,1 [0.12]					1,5 [0.06]				
Natural frequency (Hz)	35 k	40 k	54 k	60 k	80 k	100 k	>100 k	>100 k	>100 k	>100 k

\* Length of pressure transducer with amplified option (see option codes)

\*\* 0.5 psi is available for gage only

# Model TJE

## OPTION CODES

<b>Range Code</b>	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see <a href="http://sensing.honeywell.com/TMsensor-ship">http://sensing.honeywell.com/TMsensor-ship</a> for updated listings.		
<b>Pressure ranges</b>	1, 2, 5, 10, 15, 25, 50, 75, 100, 150, 200 300, 750, 1500, 2000, 15000, 20000, 30000, 50000, 60000 psig/a 500, 1000, 3000, 5000, 7500, 10000 psia 500, 1000, 3000, 5000, 7500, 10000 psig		
<b>Temperature compensation</b>	1a. 60 °F to 160 °F 1b. 30 °F to 130 °F 1c. 0 °F to 185 °F 1d. -20 °F to 130 °F 1e. -20 °F to 200 °F	1f. 70 °F to 250 °F <sup>11</sup> 1g. 70 °F to 325 °F <sup>11</sup> 1h. 70 °F to 400 °F <sup>11</sup> 1i. -65 °F to 250 °F <sup>11</sup>	
<b>Internal amplifiers<sup>10</sup></b>	2a. 0 Vdc to 5 Vdc (four wire) output <sup>15</sup> 2c. 0-5 Vdc output <sup>15</sup> 2j. 4 mA to 20 mA (three wire) output 2k. 4 mA to 20 mA (two wire) output <sup>8, 17</sup>	2n. 4 mA to 20 mA (two wire) intrinsically safe <sup>8, 17</sup> 2t. 0 Vdc to 10 Vdc output 2u. Unamp., mV/V output	
<b>Internal amplifier enhancements</b>	3a. Input/output isolation <sup>15</sup> 3d. Remote buffered shunt calibration		
<b>Pressure ports<sup>9</sup></b>	5a. 1/4-18 NPT female (3000 psig to 10000 psig) 5b. 1/4-18 NPT male (15 psig/a to 10000 psig/a) 5c. 7/16-20 UNF female (per MS33649-4)	5d. 7/16-20 UNF male 5g. G 1/4 male	
<b>Electrical termination</b>	6a. Bendix PTIH-10-6P (or equiv), 6 pin (max 250 °F) 6b. MS type connector to mate with MS3106-14S 6S (max 160 °F) <sup>13</sup> 6e. Integral cable: Teflon (0 °F to 180 °F) 6f. Integral cable: PVC (-20 °F to 160 °F)	6g. Integral cable: Neoprene (0 °F to 180 °F) 6h. Integral cable: Silicone (-65 °F to 300 °F) 6i. Integral underwater cable (max 180 °F) 6j. 1/2-14 conduit fitting with 5 ft of 4 conductor PVC cable	6m. DIN 43650 6q. Molded integral cable: Polyurethane (max 180 °F) 6t. Integral cable with Heyco spring strain relief (5 ft)
<b>Shunt calibration</b>	8a. Precision internal resistor <sup>11</sup>		
<b>Special calibration<sup>9</sup></b>	9a. 10 point (5 up/5 down) 20 % increments @ 70 °F (gage) 9b. 20 point (10 up/10 down) 10 % increments @ 70 °F (gage)		
<b>Wetted diaphragm<sup>9</sup></b>	10a. 316 stainless steel <sup>9</sup> 10b. Crucible A-286	10c. Hastelloy-C 10d. Monel K-500	
<b>Bridge resistance<sup>9</sup></b>	12a. 1000 ohm (foil) (max 400 °F) 12b. 5000 ohm (foil) (max 400 °F)		
<b>Zero and span adjustment</b>	14a. No access to pots 14b. Top access to pots		
<b>Shock and vibration</b>	44a. Shock and vibration resistance		
<b>Interfaces</b>	53e. Signature calibration <sup>11</sup> 53t. TEDS IEEE1451.4 module <sup>16</sup>		

# Precision Gage/Absolute Pressure Transducer

## INTERNAL AMPLIFIERS

Amplifier specifications	mV/V output standard	Voltage output: Option 2a <sup>4</sup>	Vehicle voltage output: Option 2c <sup>4</sup>	Vehicle voltage output: Option 2t <sup>4</sup>	Current three-wire: Option 2j <sup>4</sup>	Current two-wire: Option 2k <sup>4</sup>	Intrinsically safe amp: Option 2N (2n)
<b>Output signal</b>	3 mV/V <sup>2</sup>	0 Vdc to 5 Vdc	0-5 Vdc or ±5 Vdc @ 5 mA	0-10 Vdc or ±10 Vdc @ 5 mA	4 mA to 20 mA	4 mA to 20 mA	4 mA to 20 mA
<b>Input power (voltage)</b>	10 Vdc regulated	±15 Vdc or 26-32 Vdc	11 Vdc to 28 Vdc	15 Vdc to 28 Vdc	22 Vdc to 32 Vdc <sup>3</sup>	9 Vdc to 32 Vdc <sup>3</sup>	9 Vdc to 28 Vdc <sup>3</sup>
<b>Input power (current)</b>	28.5 mA @ 10 Vdc	45 mA	40 mA	40 mA	65 mA	4 mA to 28 mA	4 mA to 24 mA
<b>Freq. resp (amp)</b>	Natural frequency	2000 Hz	3000 Hz	3000 Hz	2500 Hz	2500 Hz	2000 Hz
<b>Power supply rej.</b>	NA	60 db	60 db	60 db	60 db	60 db	60 db
<b>Operating temp.</b>	-73 °C to 121 °C [-100 °F to 250 °F]	-28 °C to 85 °C [-20 °F to 185 °F]	-40 °C to 93 °C [-40 °F to 200 °F]	-40 °C to 85 °C [-40 °F to 185 °F]	-40 °C to 85 °C [-40 °F to 185 °F]	-40 °C to 85 °C [-40 °F to 185 °F]	-28 °C to 85 °C [-20 °F to 185 °F]
<b>Reverse volt. prot.</b>	NA	Yes	Yes	Yes	Yes	Yes	Yes
<b>Short cir. protection</b>	NA	Momentary	Momentary	Momentary	Yes	Yes	Yes
<b>Wiring code: connector (std)<sup>5</sup></b>	A (+) Excitation B (+) Excitation C (-) Excitation D (-) Excitation E (-) Output F (+) Output	A (+) Supply B Output com. C Supply ret. D (+) Output E Shunt Cal 1 F Shunt Cal 2	A (+) Supply B Output com ** C Supply ret ** D (+) Output E Shunt Cal 1 F Shunt Cal 2	A (+) Supply B Output com ** C Supply ret ** D (+) Output E Shunt Cal 1 F Shunt Cal 2	A (+) Supply B Output com ** C Supply ret ** D (+) Output E Shunt Cal 1 F Shunt Cal 2	A (+) Supply B No conn. C No conn. D (+) Output E Case ground F No conn.	A (+) Supply B No conn. C No conn. D (+) Output E Case ground F No conn.
<b>Wiring code: cable<sup>5,6,7</sup></b>	R (+) Excitation Bl (-) Excitation G (-) Output W (+) Output	R (+) Supply Bl Output com. G Supply ret. W (+) Output B Shunt Cal 1 Br Shunt Cal 2	R (+) Supply Bl Output com* G Supply ret.* W (+) Output B Shunt Cal 1 Br Shunt Cal 2	R (+) Supply Bl Output com* G Supply ret.* W (+) Output B Shunt Cal 1 Br Shunt Cal 2	R (+) Supply Bl Output com* G Supply ret.* W (+) Output B Shunt Cal 1 Br Shunt Cal 2	R (+) Supply Bl (+) Output W Case ground	R (+) Supply Bl (+) Output W Case ground
<b>For current information</b>		Reference application sheet #008-0356-00	Reference application sheet #008-0357-00	Reference application sheet #008-0360-00	Reference application sheet #008-0361-00	Reference application sheet #008-0361-60	See Honeywell Web site for info on intrinsically safe approvals. #008-0547-00

\* Black and green wires are internally connected. • \*\* Pins B and C are internally connected.

# Model TJE

# Precision Gage/Absolute Pressure Transducer

## NOTES

1. Accuracies stated are expected for best fit straight line for all errors including linearity, hysteresis & non-repeatability thru zero.
2. Output for 0.5 psig/a, 1 psig/a, 2 psig/a units is 1 mV/V to 2 mV/V.
3. Input power (voltage) for internal amplifier options 2j, 2k, 2n(2N) depends on load resistance.
4. CE mark requires options 6a & 3d.
5. Interconnecting shunt cal. 1 with shunt cal. 2 terminal provides 50 % (unamplified units), 75% (4 mA to 20 mA three-wire units), or 80 % (voltage amp. units) of full scale output for quick calibration. Shunt calibration comes standard with internal amplifier options 2a, 2b, 2c, 2t and 2j.
6. G=Green; B=Blue; W=White; Bl=Black; Br=Brown; Y=Yellow; R=Red; O=Orange. Color specifying cable and number or letter specifying connector.
7. No mating connector necessary with cable option.
8. Options 2k, 2n(2N) only available with option 12b.
9. Availability varies according to range.
10. Not available with temperatures below -29 °C [-20 °F] or above 85 °C [185 °F].
11. Cannot be used with amplified option.
12. Gage pressure units greater than 500 psi are sealed at atmospheric pressure.
13. No pot access available with MS type connector.
14. Temperature 82 °C [180 °F] max., non-shielded standard, shielded available.
15. Input/output isolation only available with voltage output (options 2a, 2b, 2c).
16. Consult factory for TEDS availability with amplified models.
17. 5000 ohm bridge required.
18. Range dependent; consult factory. Termination dependent; consult factory.
19. Internal amp and termination dependent; consult factory.

**Warranty.** Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit [www.honeywell.com/sensing](http://www.honeywell.com/sensing) or call +1-815-235-6847

Email inquiries to [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

### **WARNING** **PERSONAL INJURY**

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARNING** **MISUSE OF DOCUMENTATION**

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

Sensing and Control  
Automation and Control Solutions  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422 USA  
+1-815-235-6847  
[www.honeywell.com/sensing](http://www.honeywell.com/sensing)

008606-1-EN IL50 GLO  
May 2008  
Copyright © 2008 Honeywell International Inc. All rights reserved.

# Honeywell

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А