

■ For Overcurrent Protection




Fig. 1 (Formed Lead Type : Y)




Fig. 2 (Formed Lead Type : U)




Fig. 3 (Formed Straight)

※: An internal element may be exposed. However, this would not affect the function of products.

●12V Class

Type No.	Initial Resistance (at 25°C)	Max. Operating Voltage	Max. Inrush Current	Current Characteristic		Dimensions (mm)				Fig.					
				Normal Current (60°C)	Limiting Current (-10°C)	D	T	F	d						
ZPC11CE2R2A	2.2Ω ±20%	16V	2.1A	300mA or less	760mA or more	5.5	3.0	5.0	0.5	1					
ZPC12CE1R8A	1.8Ω ±20%		2.4A	330mA or less	830mA or more	6.3									
ZPC13CE1R5B	1.5Ω ±20%		3.0A	410mA or less	1030mA or more	7.0									
ZPC15CE1R0B	1.0Ω ±20%		3.6A	520mA or less	1300mA or more	8.0									
ZPC17CE0R8B	0.8Ω ±20%		4.1A	600mA or less	1490mA or more	8.8									
ZPC1CC0R5D	0.5Ω ±20%		5.0A	730mA or less	1830mA or more	10.6									
ZPC1MCC0R3B	0.3Ω ±20%		7.0A	1030mA or less	2580mA or more	14.5									
ZPC15CE1R0B	1.0Ω ±20%	35V	3.6A	520mA or less	1300mA or more	8.0	3.5	5.0	0.6	2					
ZPC17CE0R8B	0.8Ω ±20%		4.1A	600mA or less	1490mA or more	8.8									
ZPC1CC0R5D	0.5Ω ±20%		5.0A	730mA or less	1830mA or more	10.6									
ZPC1MCC0R3B	0.3Ω ±20%		7.0A	1030mA or less	2580mA or more	14.5									
ZPC25CE8R2A	8.2Ω ±20%		35V	1.3A	120mA or less	310mA or more					8.0	3.5	5.0	0.6	3
ZPC29CE6R8A	6.8Ω ±20%			1.4A	200mA or less	510mA or more					9.7				
ZPC29CE4R7A	4.7Ω ±20%	1.6A		230mA or less	570mA or more	9.7									
ZPC2DCE4R7A	4.7Ω ±20%	1.8A		270mA or less	680mA or more	11.4									
ZPC2DCE3R9A	3.9Ω ±20%	1.9A		280mA or less	700mA or more	11.4									
ZPC2ECE3R9A	3.9Ω ±20%	2.1A		300mA or less	760mA or more	11.9									
ZPC2ECE3R3A	3.3Ω ±20%	2.2A		310mA or less	790mA or more	11.9									
ZPC2LCE2R7A	2.7Ω ±20%	2.5A		370mA or less	930mA or more	14.3									
ZPC2LCE2R2A	2.2Ω ±20%	2.8A		400mA or less	1020mA or more	14.3									
ZPC2RCE2R2A	2.2Ω ±20%	3.1A		450mA or less	1150mA or more	15.9									
ZPC2RCE1R8A	1.8Ω ±20%	3.4A		500mA or less	1250mA or more	15.9									
ZPC32CE240D	24Ω ±20%	60V		0.7A	100mA or less	250mA or more	6.5	4.5	5.0	0.5	1				
ZPC35CE150A	15Ω ±20%			0.9A	130mA or less	320mA or more	8.0								
ZPC3ACE8R2C	8.2Ω ±20%		1.3A	190mA or less	480mA or more	10.1	0.6				2				
ZPC3DCE6R2C	6.2Ω ±20%		1.5A	220mA or less	560mA or more	11.4									
ZPC3HCE4R7A	4.7Ω ±20%		1.9A	270mA or less	690mA or more	13.0									
ZPC3MCE3R6A	3.6Ω ±20%		2.2A	310mA or less	790mA or more	14.7	10.0				0.6	3			
ZPC3RCE3R0A	3.0Ω ±20%		2.5A	370mA or less	920mA or more	15.9									
ZPC42CE560A	56Ω ±20%	140V	0.5A	65mA or less	160mA or more	7.0	6.0	5.0	0.5	3					
ZPC45CE300B	30Ω ±20%		0.7A	100mA or less	250mA or more	8.7					2				
ZPC49CE220A	22Ω ±20%		1.0A	130mA or less	340mA or more	10.4				0.6		3			
ZPC4CCE150A	15Ω ±20%		1.1A	160mA or less	410mA or more	11.7									
ZPC4MCE100A	10Ω ±20%		1.5A	210mA or less	540mA or more	15.3									
ZPC4PCE6R8A	6.8Ω ±20%		1.8A	260mA or less	660mA or more	16.2				10.0	0.65	3			
ZPC4RCE5R0A	5Ω ±20%		3.5A	290mA or less	730mA or more	16.8									
ZPC59CE390A	39Ω ±20%	265V	0.8A	100mA or less	250mA or more	10.0	5.0	0.6	3						
ZPC5JCE270A	27Ω ±20%		1.2A	140mA or less	350mA or more	14.0				10.0					

●25V Class

Type No.	Initial Resistance (at 25°C)	Max. Operating Voltage	Max. Inrush Current	Current Characteristic		Dimensions (mm)				Fig.
				Normal Current (60°C)	Limiting Current (-10°C)	D	T	F	d	
ZPC25CE8R2A	8.2Ω ±20%	35V	1.3A	120mA or less	310mA or more	8.0	3.5	5.0	0.6	3
ZPC29CE6R8A	6.8Ω ±20%		1.4A	200mA or less	510mA or more	9.7				
ZPC29CE4R7A	4.7Ω ±20%		1.6A	230mA or less	570mA or more	9.7				
ZPC2DCE4R7A	4.7Ω ±20%		1.8A	270mA or less	680mA or more	11.4				
ZPC2DCE3R9A	3.9Ω ±20%		1.9A	280mA or less	700mA or more	11.4				
ZPC2ECE3R9A	3.9Ω ±20%		2.1A	300mA or less	760mA or more	11.9				
ZPC2ECE3R3A	3.3Ω ±20%		2.2A	310mA or less	790mA or more	11.9				
ZPC2LCE2R7A	2.7Ω ±20%		2.5A	370mA or less	930mA or more	14.3				
ZPC2LCE2R2A	2.2Ω ±20%		2.8A	400mA or less	1020mA or more	14.3				
ZPC2RCE2R2A	2.2Ω ±20%		3.1A	450mA or less	1150mA or more	15.9				
ZPC2RCE1R8A	1.8Ω ±20%		3.4A	500mA or less	1250mA or more	15.9				

●50V Class

Type No.	Initial Resistance (at 25°C)	Max. Operating Voltage	Max. Inrush Current	Current Characteristic		Dimensions (mm)				Fig.		
				Normal Current (60°C)	Limiting Current (-10°C)	D	T	F	d			
ZPC32CE240D	24Ω ±20%	60V	0.7A	100mA or less	250mA or more	6.5	4.5	5.0	0.5	1		
ZPC35CE150A	15Ω ±20%		0.9A	130mA or less	320mA or more	8.0					3	
ZPC3ACE8R2C	8.2Ω ±20%		1.3A	190mA or less	480mA or more	10.1				0.6		2
ZPC3DCE6R2C	6.2Ω ±20%		1.5A	220mA or less	560mA or more	11.4						
ZPC3HCE4R7A	4.7Ω ±20%		1.9A	270mA or less	690mA or more	13.0						
ZPC3MCE3R6A	3.6Ω ±20%		2.2A	310mA or less	790mA or more	14.7				10.0	0.6	3
ZPC3RCE3R0A	3.0Ω ±20%		2.5A	370mA or less	920mA or more	15.9						

●100V,120V,220V Class

Type No.	Initial Resistance (at 25°C)	Max. Operating Voltage	Max. Inrush Current	Current Characteristic		Dimensions (mm)				Fig.		
				Normal Current (60°C)	Limiting Current (-10°C)	D	T	F	d			
ZPC42CE560A	56Ω ±20%	140V	0.5A	65mA or less	160mA or more	7.0	6.0	5.0	0.5	3		
ZPC45CE300B	30Ω ±20%		0.7A	100mA or less	250mA or more	8.7					2	
ZPC49CE220A	22Ω ±20%		1.0A	130mA or less	340mA or more	10.4				0.6		3
ZPC4CCE150A	15Ω ±20%		1.1A	160mA or less	410mA or more	11.7						
ZPC4MCE100A	10Ω ±20%		1.5A	210mA or less	540mA or more	15.3						
ZPC4PCE6R8A	6.8Ω ±20%		1.8A	260mA or less	660mA or more	16.2				10.0	0.65	3
ZPC4RCE5R0A	5Ω ±20%		3.5A	290mA or less	730mA or more	16.8						
ZPC59CE390A	39Ω ±20%	265V	0.8A	100mA or less	250mA or more	10.0	5.0	0.6	3			
ZPC5JCE270A	27Ω ±20%		1.2A	140mA or less	350mA or more	14.0				10.0		


●Other current values are also available upon request.

■ For Overcurrent Protection in Telecommunications Equipment.

■ Features

1. This type responds quickly as having low heat capacity.
2. Noise shall not be generated as this is a non-contact type.
3. Once "Posi-R" is operated, it keeps protecting unless switch is turned off.
4. "Posi-R" returns to the original resistance level by turning off the switch and can be used repeatedly, after abnormal conditions are removed.
(There is no need to exchange.)

■ Examples of applications

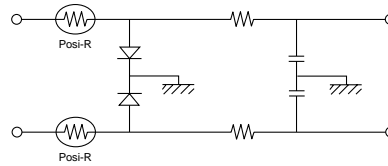

Type No.	Initial Resistance (at 25°C)	Max. Operating Voltage	Max. Inrush Current	Current Characteristic		Dimensions (mm)				Fig.
				Normal Current (60°C)	Limiting Current (-10°C)	D	T	F	d	
ZPC2CBX1R0B	1Ω ±20%	33V	2.4A	290mA-p or less	900mA-p or more	11.5	3.5	5.0	0.5	2
ZPC47BX100B	10Ω ±20%	56V	1.0A	100mA-p or less	330mA-p or more	9.0	5.0		0.6	1
ZPC4RCE5R0A	5Ω ±20%	120V	3.5A	290mA-p or less	730mA-p or more	16.8	6.0	10.0	0.65	3
ZPC4MCE100A	10Ω ±20%	140V	1.5A	210mA-p or less	540mA-p or more	15.3			0.6	
ZPC52CE121A	120Ω ±20%	265V	0.3A	40mA-p or less	100mA-p or more	6.5	5.0	5.0	0.5	1

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А