

# x-mGC

**Part Number: FCU-010M002**




## Features

- **Compliant with IEEE802.3ak (10GBASE-CX4)**
- **XENPAK MSA Rev 3.0 type Compatible module**
- **Industry standard electrical connector, microGiGaCN™ (I/O interface)**
- **XAUI Four channel electrical interface (Host side card edge)**
- **XAUI Standard 70 pin connector for host connection**
- **Front panel hot swap ability.**
- **XENPAK MSA Rev 3.0 compliant MDIO**
- **Link Alarm Status Interrupt (LASI) support**
- **Total Power consumption under 3.0 watt**
- **20 meters over standard InfiniBand copper cable (24AWG)**
- **With media detect converter (o-mGC), up to 100 meters over standard multi mode fiber.**
- **No external clocks requirement – oscillator on board**

## Description

The x-mGC is a 10Gigabit Ethernet CX4 Module that designed to ease XENPAK MSA 3.0 and it is an electrical module that incorporates the complete physical layer functionality from XAUI compliant 4 lanes x 3.125 Gb/s four differential electrical interface to the microGiGaCN™ CX4 compliant electrical interface. The x-mGC is plugged into a XENPAK hosting system and connects to a 4X InfiniBand cable. The control interface (MDIO) is also integrated. The x-mGC module includes 10Gb/s Ethernet transmitter and receiver ports. The host may control the x-mGC registers using XAUI interface as defined in the XENPAK MSA. The MUX/DEMUX, XAUI interface and MDIO management functions are all integrated into the module, as is a precision oscillator that removes any need for an external reference clock.

**x-mGC Block Diagram**

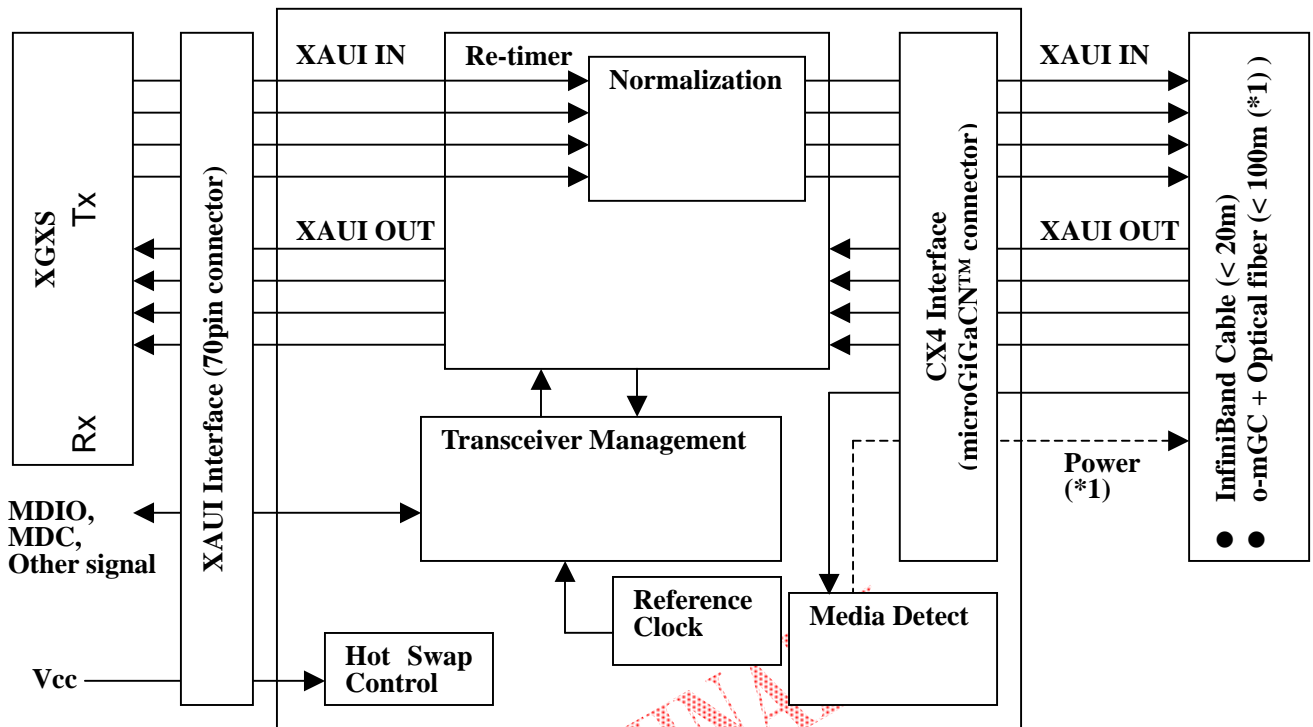

**Figure 1: Functional Block Diagram of x-mGC module**

(\*1) In case of InfiniBand cable is connected, the power does not supply to cable, and if o-mGC is connected, a ground contact is changed Vcc for power supply to o-mGC by Media detect function.

**Absolute Maximum Ratings**

Parameter	Min	Typ	Max	Units	Notes
Storage Temperature	-20		60		
Storage Humidity	0		80	%	Wet bulb 38
Supply Voltage(3.3V)	3.135	3.3	3.465	V	
Adaptable Power Supply(1.5V)	1.425	1.5	1.575	V	
Voltage on LVCMOS pins		1.2		V	

**Recommended Operating Conditions**

Parameter	Min	Typ	Max	Units	Notes
Operating Temperature	0		50		
Operating Humidity	0		80	%	Wet bulb 38

**General Electrical Specification**

- Interface: XAUI side; 70 pin SMT connector (See XENPAK MSA Rev3.0, chapter 8.3 and 10.7)  
CX4 side; InfiniBand 4X connector ( microGiGaCN™ , Fujitsu Component LTD. Patented)
- Differential signal rate: Tx and Rx each 3.125 Gb/s x 4 pair
- Impedance: 100 ohms differential, AC-coupled I/O

- 
- Adaptable Cable and Link Length: InfiniBand 4X cable 20m over

**Environmental Specification**

- Operating case temperature: 0 - 70 degree (In an uniform air flow of 0.5 m/s.)
- Power consumption: 3 Watt Max

**Mechanical Forces**

- Maximum insertion force = 80 N (Includes connector, interposer and connector shield ground spring)
- Maximum extraction force = 50 N
- Minimum retention force (with screws engaged) = 130 N
- Fastener Torque: 0.1 Nm (3mm captive screw)

**Transceiver and Connector Durability**

- Minimum mate/de-mate cycles for transceiver = 50 cycles
- Minimum mate/de-mate cycles for 70-pin connector = 200 cycles
- Minimum mate/de-mate cycles for CX4 connector = 250 cycles

**PRELIMINARY**


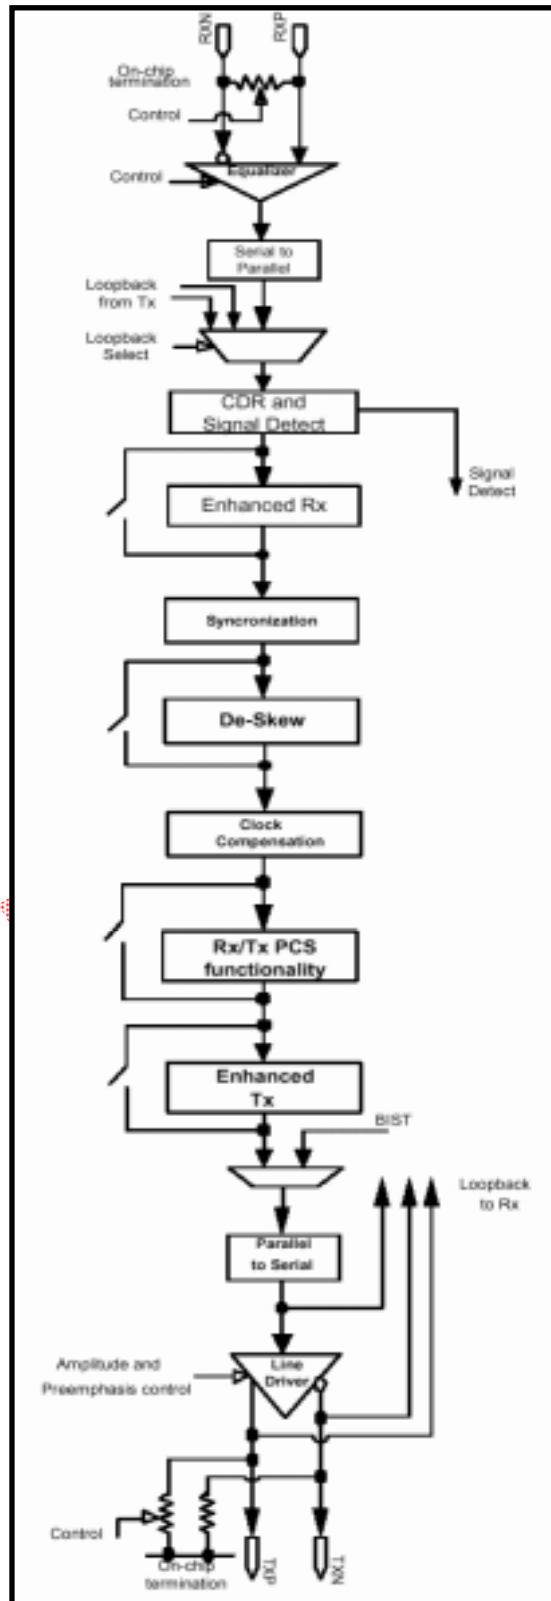


Figure 2: Top Level Block Diagram of x-mGC Driver

**Technical specification**

**Table 1: Transmitter characteristics**


Parameter	Typical	Units	Notes
Signal data rate	3.125	Gb/s	+/-100ppm
Unit interval (UI) nominal	320	ps	
Differential peak to peak output voltage			
Maximum	1200	mVp-p	
Minimum	800	mVp-p	
Differential peak to peak output voltage difference	150	mVp-p	Maximum
Differential output template	See figure 3	V	
Transition time (20-80%)			
Maximum	130	ps	
Minimum	60	ps	

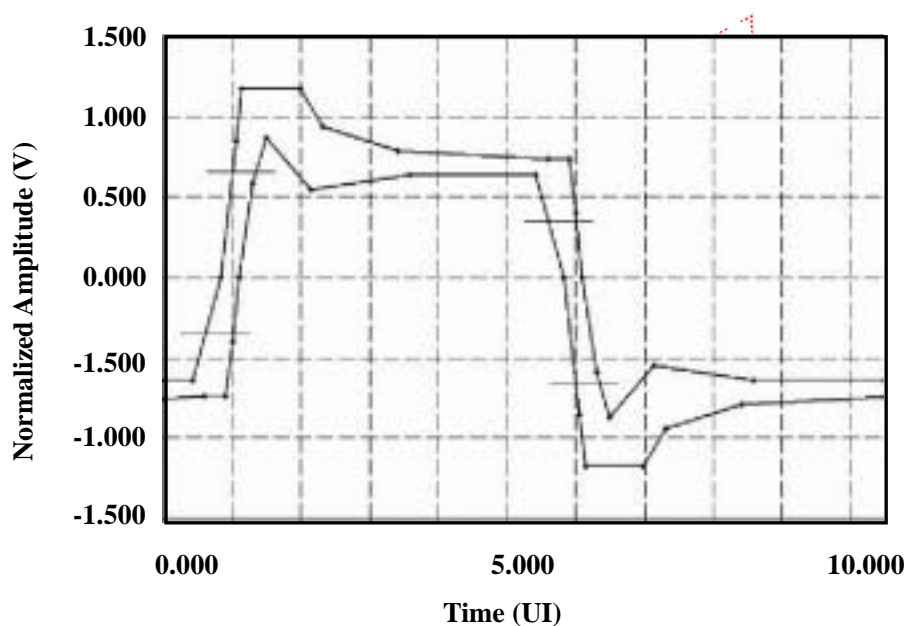

**Figure 3: Normalized transmit template**


**Table 2: Receiver characteristics**

Parameter	Typical	Units	Notes
Bit error ratio	$10^{-12}$		
Signal data rate	3.125	Gb/s	+/-100ppm
Unit interval (UI) nominal	320	ps	
Differential input amplitude	1200	mVp-p	Maximum
Return loss differential (minimum)	See figure 4	dB	100ohm

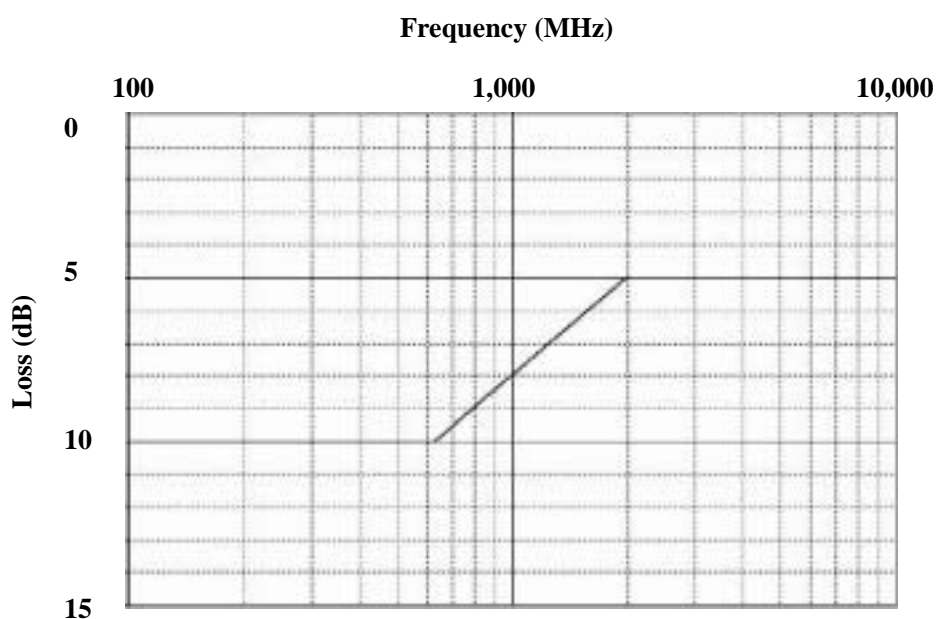

**Figure 4: Return loss differential (minimum)**

**x-mGC XAUI Pin out**

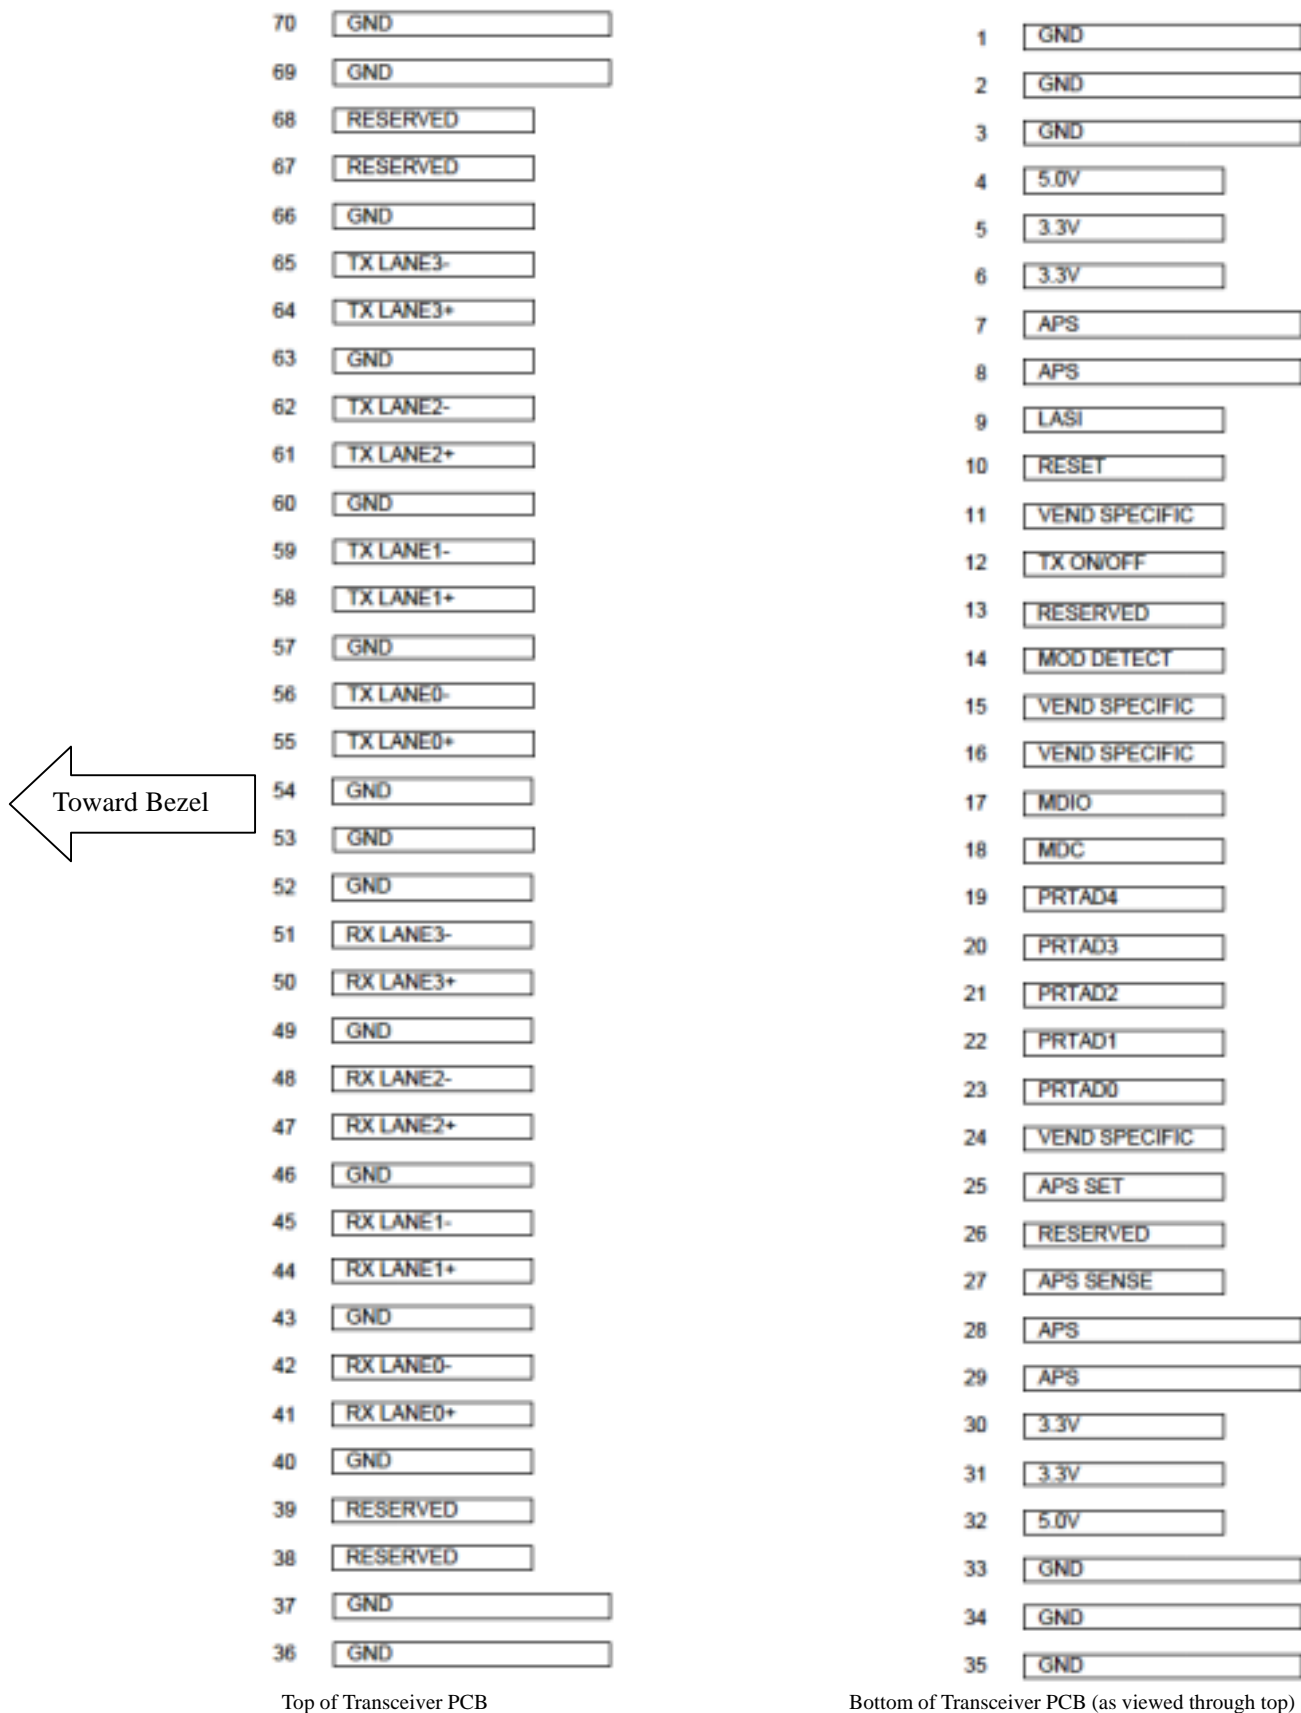

**Figure 6: x-mGC transceiver Electrical pad layout**

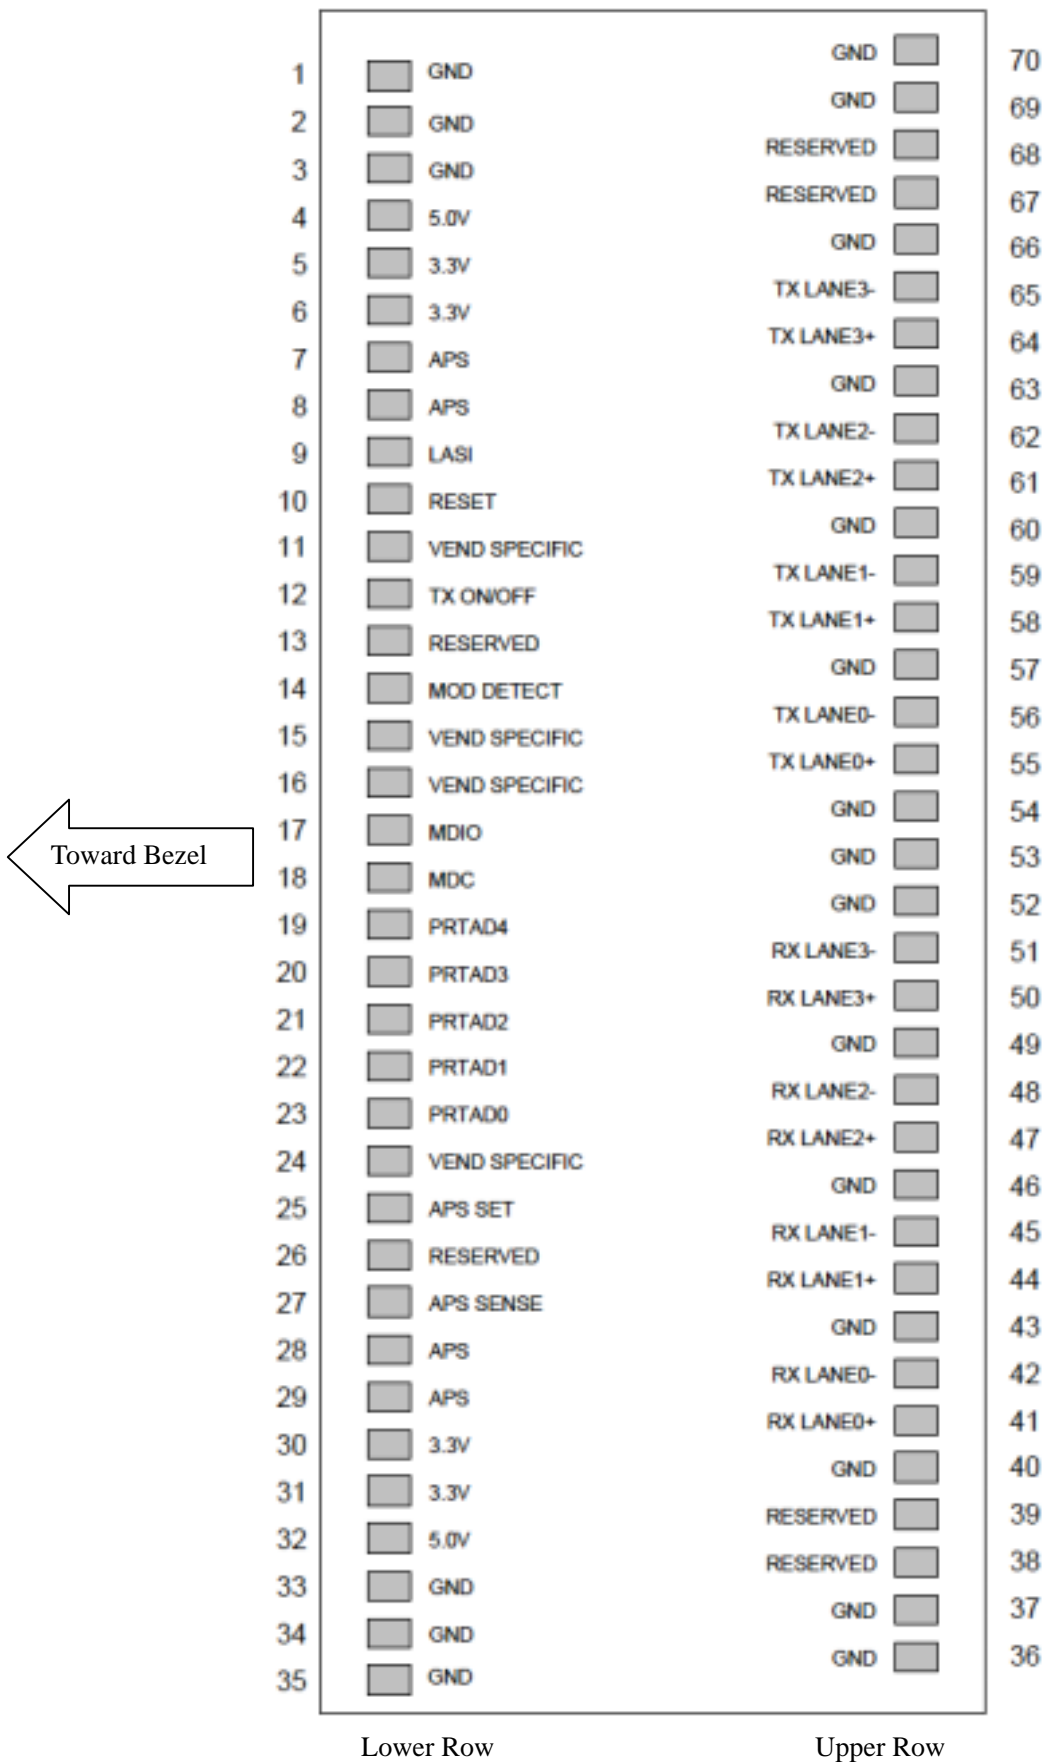


Figure 7: 10Gb host board pad layout



**Pin function definitions**

**Table 6: XAUI Pin function 1**

Pin No	Name	Dir	Function	Notes
1	GND		Electrical Ground	1
2	GND		Electrical Ground	1
3	GND		Electrical Ground	1
4	5.0V		Power	2
5	3.3V		Power	2
6	3.3V		Power	2
7	APS (1.5V)		Adaptive Power Supply	2
8	APS (1.5V)		Adaptive Power Supply	2
9	LASI		LVC MOS 1.2V Open Drain	3
10	RESET	I	LVC MOS 1.2V Open Drain	3
11	VEND SPECIFIC-signal detect		Passive	
12	TX ON/OFF			
13	RESERVED		Reserved	4
14	MOD DETECT	O	Passive	
15	VEND SPECIFIC-spare		Passive	
16	VEND SPECIFIC-spare		Passive	
17	MDIO	I/O	Management Data IO LVC MOS 1.2V Open Drain	3,4
18	MDC	I	Management Data Clock	3,4
19	PRTAD4	I	Port Address Bit 4 (Low = 0)	3
20	PRTAD3	I	Port Address Bit 3 (Low = 0)	3
21	PRTAD2	I	Port Address Bit 2 (Low = 0)	3
22	PRTAD1	I	Port Address Bit 1 (Low = 0)	3
23	PRTAD0	I	Port Address Bit 0 (Low = 0)	3
24	VEND SPECIFIC-not connected		Passive	
25	APS SET (1.5V)		Passive	
26	RESERVED		Reserved	4
27	APS SENSE		Passive Connector to a 348 ohm resistor	
28	APS (1.5V)		Adaptive Power Supply	2
29	APS (1.5V)		Adaptive Power Supply	2
30	3.3V		Power	2
31	3.3V		Power	2
32	5.0V		Power	2
33	GND		Electrical Ground	1
34	GND		Electrical Ground	1
35	GND		Electrical Ground	1

Table 7: XAUI Pin function 2


Pin No	Name	Dir	Function	Notes
36	GND		Electrical Ground	1
37	GND		Electrical Ground	1
38	RESERVED		Reserved	
39	RESERVED		Reserved	
40	GND		Electrical Ground	1
41	RX LANE0+		Module XAUI Output Lane 0+	5
42	RX LANE0-		Module XAUI Output Lane 0-	5
43	GND		Electrical Ground	1
44	RX LANE1+		Module XAUI Output Lane 1+	5
45	RX LANE1-		Module XAUI Output Lane 1-	5
46	GND		Electrical Ground	1
47	RX LANE2+		Module XAUI Output Lane 2+	5
48	RX LANE2-		Module XAUI Output Lane 2-	5
49	GND		Electrical Ground	1
50	RX LANE3+		Module XAUI Output Lane 3+	5
51	RX LANE3-		Module XAUI Output Lane 3-	5
52	GND		Electrical Ground	1
53	GND		Electrical Ground	1
54	GND		Electrical Ground	1
55	TX LANE0+		Module XAUI Input Lane 0+	5
56	TX LANE0-		Module XAUI Input Lane 0-	5
57	GND		Electrical Ground	1
58	TX LANE1+		Module XAUI Input Lane 1+	5
59	TX LANE1-		Module XAUI Input Lane 1-	5
60	GND		Electrical Ground	1
61	TX LANE2+		Module XAUI Input Lane 2+	5
62	TX LANE2-		Module XAUI Input Lane 2-	5
63	GND		Electrical Ground	1
64	TX LANE3+		Module XAUI Input Lane 3+	5
65	TX LANE3-		Module XAUI Input Lane 3-	5
66	GND		Electrical Ground	1
67	RESERVED		Reserved	
68	RESERVED		Reserved	
69	GND		Electrical Ground	1
70	GND		Electrical Ground	1

Notes:

- 1) Ground connections are common for TX and RX.
- 2) All contacts of XAUI 70 pin connector are rated at 0.5A nominal.
- 3) 1.2V CMOS compatible.
- 4) MDIO and MDC timing must comply with IEEE802.3ae, Clause 45.3
- 5) XAUI output characteristics should comply with IEEE802.3ae Clause 47.

**Package Design**

Mechanical design of x-mGC is shown as in following figure8.

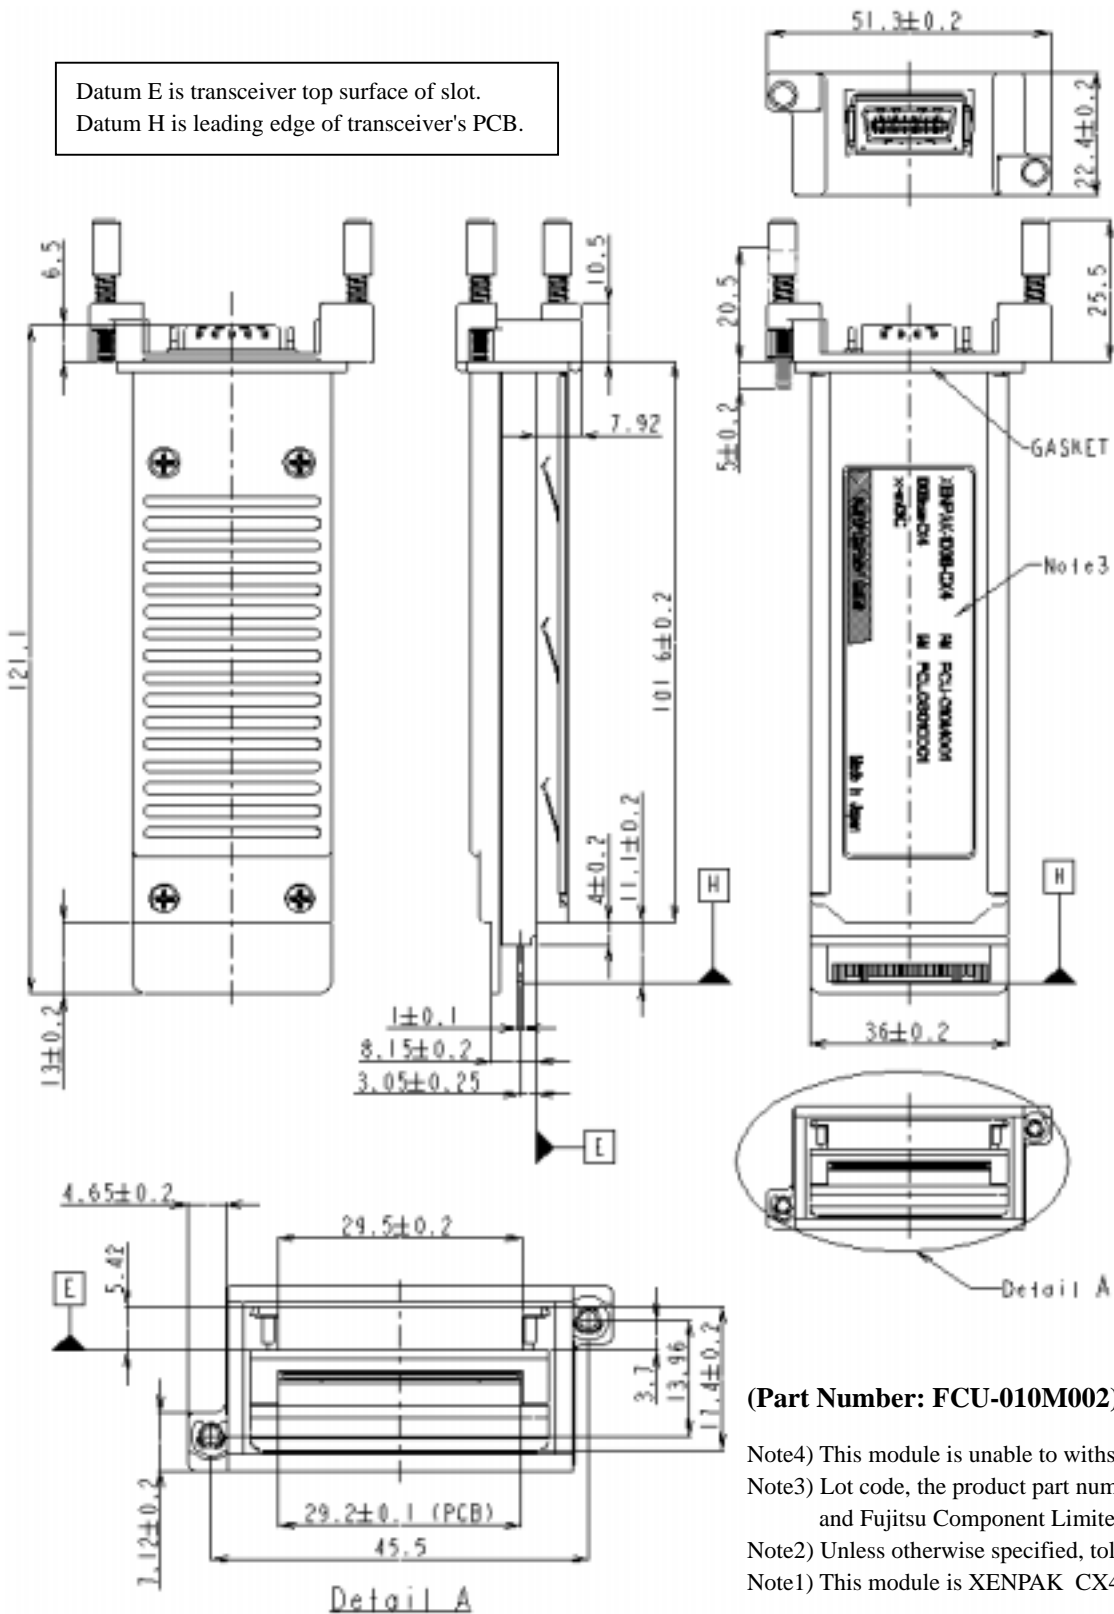

**Figure 8: Mechanical Design**

---

**APPENDIX A : Programmable Logic Implementation**


**1 SCOPE**

This document scopes to x-mGC (XENPAK/X2-CX4), P/N :FCU-010M002-\*\* (XENPAK), FCU-02\*M101-\*\* (X2)

**2 INTRODUCTION**

This document describes management block implementation when x-mGC is used as 10G-CX4 PHY transceiver in XENPAK/X2-type application.

Figure 1 describes the generic x-mGC design block diagram using retimer IC.

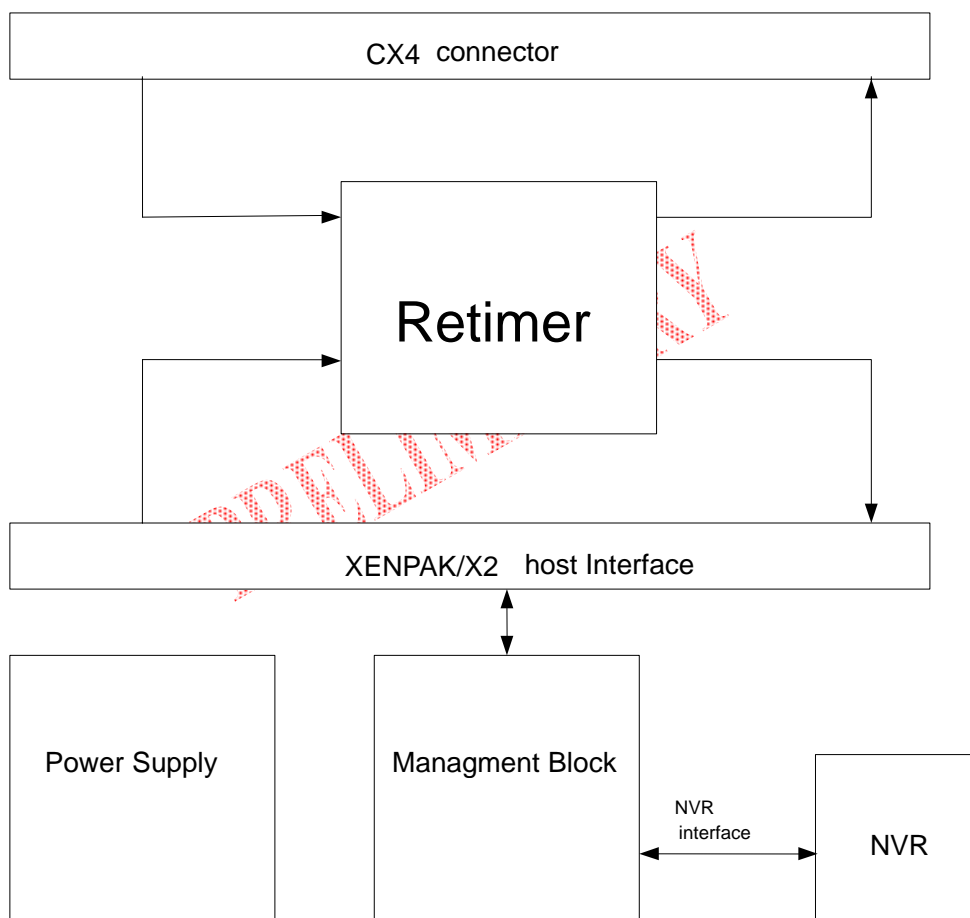

- High speed block includes a retimer IC 10G CX4-compliant device which ensures full-duplex XAUI-to-CX4 communication link
- Power block that includes adaptive power supply support and Power filtering
- The management block includes a register file that host can access. a non volatile memory (NVR) stores the default value of this register file. The host reads the register file for system capabilities, vendor information and link status information.

The host may read or write from the register file, store its content in the NVR or load the default value from the NVR.

---

The host may indirectly access the link and host transceivers to change setting or to read status information. Following reset or power up the management block initializes the host and link transceiver by a pre defined initialization sequence. After the initialization the management reads a defined link of link status registers and stores them in the register file. In case of a link status event the management generates an interrupt signal name Link Alarm Status Interrupt (LASI).

### **3. Functional description**


The Management block in the retimer IC XENPAK/X2-RD is implemented in a FPGA. The The FPGA is updated over JTAG. The code is written to be ported to any other technology with minimal usage of technology specific macro. Any macro that can not be avoided is set to a specific verilog file.

#### **Features**

- Compliant with XENPAK MSA 3.0 / X2 MSA 2.0
- SMI (MDIO/MDC) – 802.3ae compliant
- I2C I/O – to upload EPROM content (Vendor Specific Info)
- Link Alarm Status Interrupt (LASI) support.
- Non volatile memory that contains XENPAK/X2 registers default value.
- In Circuit programming for FPGA over JTAG
- XENPAK/X2 registers file mapped to Host MDIO space with configurable port address.
- Retimer IC initialization
- Retimer IC performance optimization routine (optional)
- Signal detect indication

**Internal architecture**

The following figure describes internal FPGA functionality:

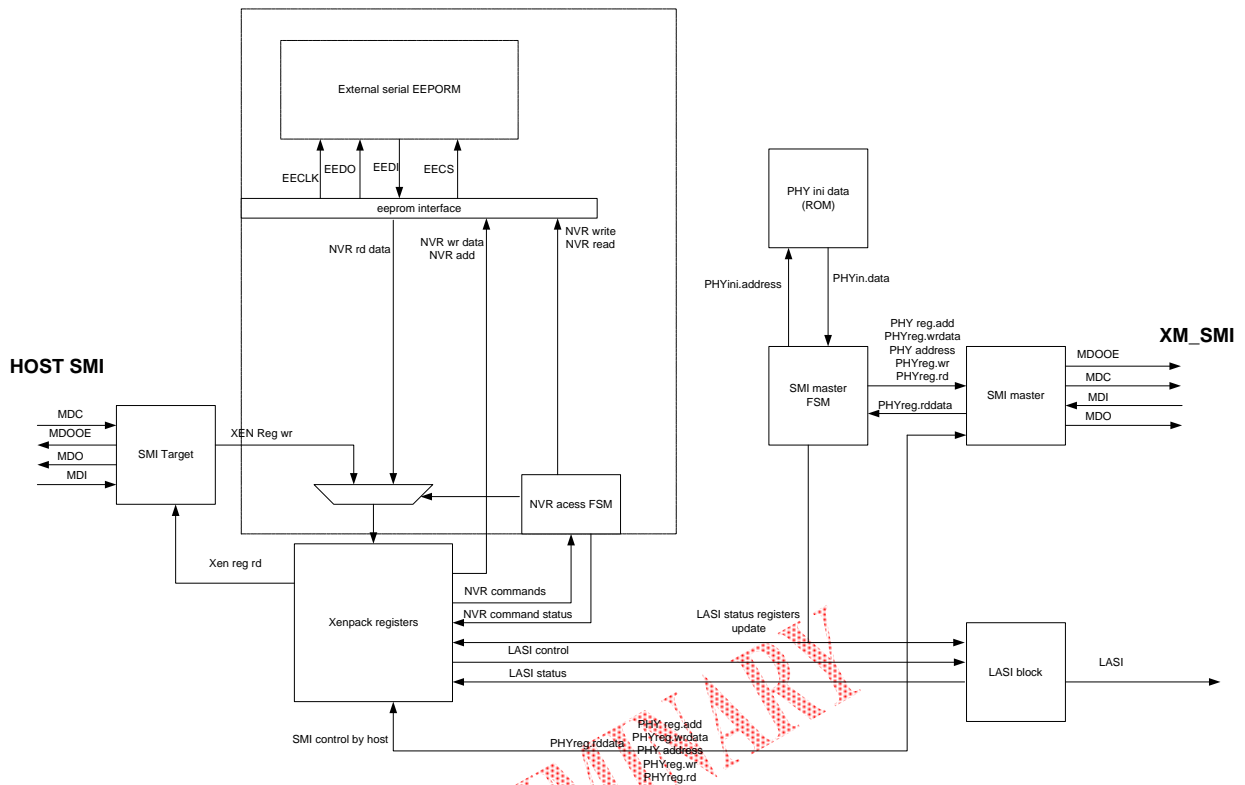

**Figure 1 FPGA block diagram**

The management block is comprised of several sub blocks.

- A XENPAK/X2 register file is a volatile memory that is mapped to the host MDIO address space. The XENPAK/X2 register file is defined by the XENPAK/X2 MSA. It makes use of the lower eight bit of the MDIO data register. (Except from the host indirect SMI access registers)

The host may read or write each register from the XENPAK/X2 register file. It can load or save the whole register file in a Non Volatile memory.

The XENPAK/X2 register file is mapped into device number 2, at the port address set by the host.

- The Non Volatile RAM (NVR) FSM, manages NVR access.

The following NVR commands are supported:

- Write all
- Read all


In case of read/write all the state machine manages address incrementing and data transfer from register file to NVR.

- NVR master, performs a 2 wire NVR commands as described by the EEPROM vendor, this is a separate module support of other NVR devices is done by replacing this module.
- Link Alarm Status Interrupt (LASI) circuit. Generates an interrupt if one of the events in the following table occurs (set). The user may mask each one of the events. The LASI block implementation follows figure 21 in

the MSA. With the following exceptions:

- Global PMD signal PK is not applicable
  - PCS block lock 1 is not applicable.
  - WIS Local fault not applicable
  - Laser Fault not applicable
- Initialization ROM data is a ROM that stores the initialization date.
  - SMI master together read writes the transceivers register files. In initialize the transceivers after power up and reset and reads the status registers used by the LASI block.

The following state machine describes the SMI master state machine.

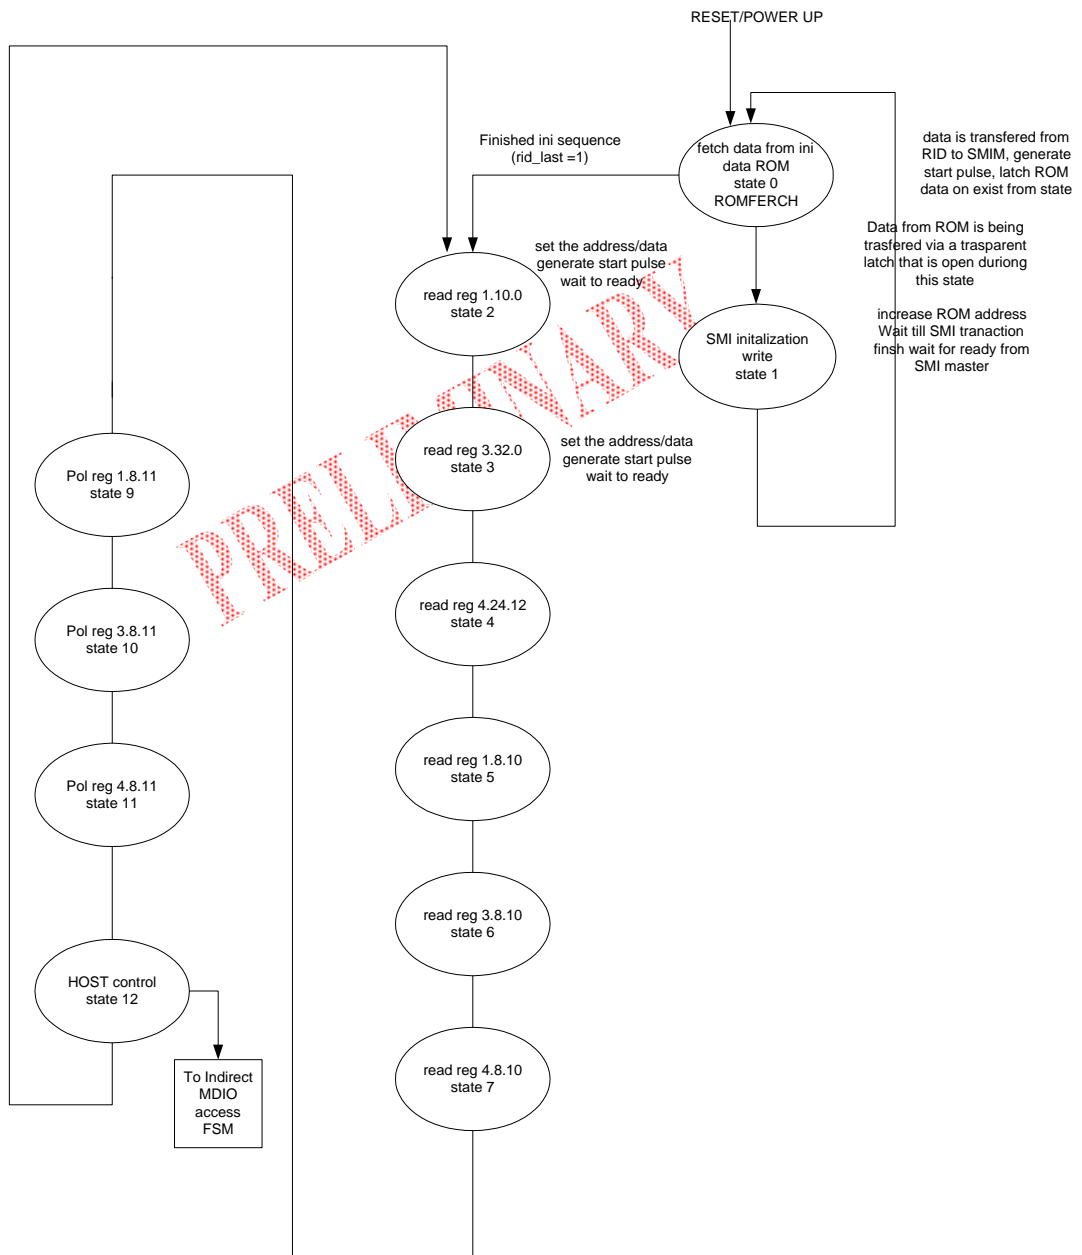

**Interface**

Host interface

Signal Name	Type	Direction	Description
<b>MDC</b>	HSTL	I	<b>Host Management clock</b>
<b>MDI</b>	HSTL	I	<b>Host Management Data Input</b>
<b>MDO</b>	LVC MOS OD	O	<b>Host Management Data Output</b>
<b>XENP_PRTAD [4:0]</b>	HSTL	I	<b>Xenpak/X2 registers Port Address</b>
<b>TX_ON_OFF</b>	HSTL	I	<b>Transmit on off (only apply for optical module)</b>
<b>LASI_OUT</b>	LVC MOS OD	O	<b>Link Alarm Status Interrupt output</b>
<b>VSPEC[3:1]</b>	LVC MOS	O	<b>Vendor specific [3:1]</b>

PHY interface

Signal Name	Type	Direction	Description
<b>XM_MDC</b>	HSTL	O	<b>Xenpak/X2 module management clock output, toggling at XM_CLK /8</b>
<b>XM_MDO</b>	LVC MOS OD	O	<b>Xenpak/X2 module management data output</b>
<b>XM_MDI</b>	HSTL	I	<b>Xenpak/X2 module management input</b>
<b>XM_RST_N</b>	LVC MOS OD	O	<b>Xenpak/X2 module active low reset output</b>
<b>D1_LED_TX0</b>	HSTL	I	<b>Signal detect from port1</b>
<b>D2_LED_TX0</b>	HSTL	I	<b>Signal detect from port2</b>
<b>RMTCTRL</b>	HSTL	O	<b>Remote control</b>

EEPROM interface

Signal Name	Type	Direction	Description
<b>SDA</b>	LVC MOS	IO	<b>EEPROM data</b>
<b>SCL</b>	LVC MOS	O	<b>EEPROM clock</b>
<b>WP</b>	LVC MOS	O	<b>EEPROM Write protect</b>

Global

Signal Name	Type	Direction	Description
<b>XM_CLK</b>	LVC MOS	I	<b>Clock input 20Mhz</b>
<b>HRST_N</b>	LVC MOS	I	<b>Hardware Active Low reset Input</b>



Programming interface

Port and device mapping

The XENPAK/X2 module is mapped to the host MDIO address space. The host accesses the module using SMI transactions. SMI frame description appeared in Table 45-64 in the IEEE 802.3ea standard.

- The Host sets the XENPAK/X2 module port address. The XENPAK/X2 register file is mapped to device 2 at that port address.
- The XENPAK/X2 module as an internal SMI bus that enable the management block to access the retimer registers this bus is S\_SMI. In this bus the line transceiver is at port address 1 and the host transceiver is at port address 2. The registers in the retimer are mapped to devices 4.
- **The host has indirect access to the retimer via registers mapped to the XENPAK/X2 vendor specific space. The XENPAK/X2 module has an internal SMI secondary bus. On that bus, port one is mapped to SMI port address “2” while port two is mapped to SMI port address “3”.**

Register Map

Register Address	Register Name	Default value
32768	NVR control/Status	Refer to page 23
32775	Version	1E
32776	NVR_size 0	1
32777	NVR_size 1	0
32778	Mem_Used	1
32779	Mem_Used	0
32780	Basic Addr	B
32781	Cust Adde	77
32782	Vend Addr	A7
32783	Ext Vend Addr 0	0
32784	Ext Vend Addr 1	0
32785	reserved	0
32786	Tcvt Type	1: XENPAK, 2: X2
32787	Connector	0
32788	Encoding	1
32789	Bit rate H	27
32790	Bit rate L	10
32791	Protocol	1
32792	Std comp Code 0	0
32793	Std comp Code 1	0
32794	Std comp Code 2	0
32795	Std comp Code 3	0
32796	Std comp Code 4	0
32797	Std comp Code 5	0
32798	Std comp Code 6	0
32799	Std comp Code 7	0
32800	Std comp Code 8	0

Register Address	Register Name	Default value
32801	Std comp Code 9	0
32802	Range 0	0
32803	Range 1	2
32804	Fiber type 0	0
32805	Fiber type 1	0
32806	Wave Length ch. 00	0
32807	Wave Length ch. 01	0
32808	Wave Length ch. 02	0
32809	Wave Length ch. 10	0
32810	Wave Length ch. 11	0
32811	Wave Length ch. 12	0
32812	Wave Length ch. 20	0
32813	Wave Length ch. 21	0
32814	Wave Length ch. 22	0
32815	Wave Length ch. 30	0
32816	Wave Length ch. 31	0
32817	Wave Length ch. 32	0
32818	Package OUI 0	0
32819	Package OUI 1	41:XENPAK, C0:X2
32820	Package OUI 2	F4:XENPAK, 98:X2
32821	Package OUI 3	0
32822	Vendor OUI 0	0
32823	Vendor OUI 1	9
32824	Vendor OUI 2	2
32825	Vendor OUI 3	2
32826	Vendor Name 0	46
32827	Vendor Name 1	75
32828	Vendor Name 2	6A
32829	Vendor Name 3	69
32830	Vendor Name 4	74
32831	Vendor Name 5	73
32832	Vendor Name 6	75
32833	Vendor Name 7	43
32834	Vendor Name 8	6F
32835	Vendor Name 9	6D
32836	Vendor Name 10	70
32837	Vendor Name 11	6F
32838	Vendor Name 12	6E
32839	Vendor Name 13	65
32840	Vendor Name 14	6E
32841	Vendor Name 15	74
32842	Vendor P/N 0	46
32843	Vendor P/N 1	43
32844	Vendor P/N 2	55
32845	Vendor P/N 3	2D
32846	Vendor P/N 4	30
32847	Vendor P/N 5	31:XENPAK, 32:X2
32848	Vendor P/N 6	30:XENPAK, 32:X2
32849	Vendor P/N 7	4D
32850	Vendor P/N 8	30:XENPAK, 31:X2
32851	Vendor P/N 9	30

Register Address	Register Name	Default value
32852	Vendor P/N 10	32:XENPAK, 31:X2
32853	Vendor P/N 11	20
32854	Vendor P/N 12	20
32855	Vendor P/N 13	20
32856	Vendor P/N 14	20
32857	Vendor P/N 15	20
32858	Vendor Rev 0	Vender information
32859	Vendor Rev 1	Vender information
32860	Vendor SN 0	0
32861	Vendor SN 1	0
32862	Vendor SN 2	0
32863	Vendor SN 3	0
32864	Vendor SN 4	0
32865	Vendor SN 5	0
32866	Vendor SN 6	0
32867	Vendor SN 7	0
32868	Vendor SN 8	0
32869	Vendor SN 9	0
32870	Vendor SN 10	0
32871	Vendor SN 11	0
32872	Vendor SN 12	0
32873	Vendor SN 13	0
32874	Vendor SN 14	0
32875	Vendor SN 15	0
32876	Data code Year 0	Vender information
32877	Data code Year 1	Vender information
32878	Data code Year 2	Vender information
32879	Data code Year 3	Vender information
32880	Date Code Month 0	Vender information
32881	Date Code Month 1	Vender information
32882	Date Code Day 0	Vender information
32883	Date Code Day 1	Vender information
32884	Date Code Lot 0	Vender information
32885	Date Code Lot 1	Vender information
32886	Current ref 5v	0
32887	Current ref 3.3v	4
32888	Current ref APS Stress	4
32889	APS voltage	10
32890	DOM cap	0
32891	Optional Cap	0
32892	reserved	0
32893	Basic Check sum	0
32894	Customer Area 0	0
32895	Customer Area 1	0
32896	Customer Area 2	0
32897	Customer Area 3	0
32898	Customer Area 4	0
32899	Customer Area 5	0
32900	Customer Area 6	0
32901	Customer Area 7	0
32902	Customer Area 8	0

Register Address	Register Name	Default value
32903	Customer Area 9	0
32904	Customer Area 10	0
32905	Customer Area 11	0
32906	Customer Area 12	0
32907	Customer Area 13	0
32908	Customer Area 14	0
32909	Customer Area 15	0
32910	Customer Area 16	0
32911	Customer Area 17	0
32912	Customer Area 18	0
32913	Customer Area 19	0
32914	Customer Area 20	0
32915	Customer Area 21	0
32916	Customer Area 22	0
32917	Customer Area 23	0
32918	Customer Area 24	0
32919	Customer Area 25	0
32920	Customer Area 26	0
32921	Customer Area 27	0
32922	Customer Area 28	0
32923	Customer Area 29	0
32924	Customer Area 30	0
32925	Customer Area 31	0
32926	Customer Area 32	0
32927	Customer Area 33	0
32928	Customer Area 34	0
32929	Customer Area 35	0
32930	Customer Area 36	0
32931	Customer Area 37	0
32932	Customer Area 38	0
32933	Customer Area 39	0
32934	Customer Area 40	0
32935	Customer Area 41	0
32936	Customer Area 42	0
32937	Customer Area 43	0
32938	Customer Area 44	0
32939	Customer Area 45	0
32940	Customer Area 46	0
32941	Customer Area 47	0
32942	XM_SMI Register address	Refer to page 23
32943	XM_SMI Register data	Refer to page 23
32944	XM_SMI command	Refer to page 23
32945	AGGREGATE_MOD_CTRL	Refer to page 24
32946 - 33030	Vender Specific	0
36864	RX_ALARM_CTRL	Refer to page 24
36865	TX_ALARM_CTRL	Refer to page 24
36866	LASI_CTRL	Refer to page 25
36867	RX_ALARM_STAT	Refer to page 25
36868	TX_ALARM_STAT	Refer to page 25
36869	LASI_STAT	Refer to page 26

Register detailed description

Register 0x8000 -- NVR\_CTRL\_STAT

Address	Name	Description	Mode	Default
0.15:6	Reserved		NO	
0.5	COMM	Command 0 = Read NVR 1 = Write NVR The set this bit to perform write operation or clear it for read operation	RW	0
0.4	Reserved		NO	
0.3:2	COMM_STAT	command status 00 = Idle 01 = Command completed successfully 10 = Command in progress 11 = Command failed	RO	00
0.1:0	EXT_COMM	Extended command 00 = Reserved 01 = Reserved 10 = Reserved 11 = Read/Write all NVR  Writing 11 to this filed performs write or read operation to/from all registers depends on the value of command field.	RW	11

Register 0x80AE -- XM\_SMI\_ADDR

Address	Name	Description	Mode	Default
174.15:0	XM_SMI_ADDR	Address register for HOST indirect SMI transactions	RW	0h

Register 0x80AF -- XM\_SMI\_DATA

Address	Name	Description	Mode	Default
175.15:0	XM_SMI_DATA	Data register for HOST indirect SMI transactions	RW	0h

Register 0x80B0 -- XM\_SMI\_COMMAND

Address	Name	Description	Mode	Default
176.15:3	Reserved		NO	
176.2	WR_COMMAND	Specifies the host initiate SMI write transaction. This register is cleared at the end of the write operation 0 = idle 1 = write command	RW	0
176.1	RD_COMMAND	Specifies the host initiate SMI read transaction This register is cleared at the end of the write operation 0 = idle 1 = read operation  Notice: a write operation has priority over read operation.	RW	0
176.0	HOST_LINE	Specifies to which PHY the host turns 0 = host turns to line phy 1 = host turns to host phy	RW	0

Register 0x80B1 -- AGGREGATE\_MOD\_CTRL

Address	Name	Description	Mode	Default
7:4	Reserved		NO	
3	XMRESET	The content of this register drives xmreset 0 – Normal operation 1 – Retimer is held at reset	RW	0
2	write_protect	This register write protecting the basic region and vendor specific register 0 = vendor specific register area is not write protected 1 = vendor specific is write protected	RW	1
1	D2_INT_AGG	The content of this register drives INT/AGG input of the retimer port 2	RW	1
0	D1_INT_AGG	The content of this register drives INT/AGG input of the retimer port 1	RW	1

Register 0x9000 -- RX\_ALARM\_CTRL

Address	Name	Description	Mode	Default
0.15:5	Reserved		NO	
0.4	PMA_PMD_REC_LOC_FAULT_CTRL	PMA/PMD local receiver fault control, setting this bit enables LASI indication for PMA/PMD local receiver fault. 0 – Disable 1 - Enable	RW	1
0.3	PCS_REC_LOC_FAULT_CTRL	PCS local receiver fault control, setting this bit enables LASI indication for PCS local receiver fault. 0 – Disable 1 - Enable	RW	1
0.2:1	Reserved		NO	
0.0	PHY_XS_REC_LOC_FAULT_CTRL	PHY XS local receiver fault control, setting this bit enables LASI indication for PHY XS local receiver fault. 0 – Disable 1 - Enable	RW	1

Register 0x9001 -- TX\_ALARM\_CTRL

Address	Name	Description	Mode	Default
15:5	Reserved		NO	
4	PMA_PMD_TAR_LOC_FAULT_CTRL	PMA/PMD local transmitter fault control, setting this bit enables LASI indication for PMA/PMD local transmitter fault. 0 – Disable 1 - Enable	RW	1
3	PCS_TAR_LOC_FAULT_CTRL	PCS local transmitter fault control, setting this bit enables LASI indication for PCS local transmitter fault. 0 – Disable 1 - Enable	RW	1
2:1	Reserved		NO	

Address	Name	Description	Mode	Default
0	PHY_XS_TAR_L OC_FAULT_CTR L	PHY XS local transmitter fault control, setting this bit enables LASI indication for PHY XS local transmitter fault. 0 – Disable 1 - Enable	RW	1

Register 0x9002 -- LASI\_CTRL

Address	Name	Description	Mode	Default
15:3	Reserved		NO	
2	RX_ALARM_EN	receive alarm enable 0 – disable 1 - Enable	RW	0
1	TX_ALARM_EN	Transmit alarm enable 0 – disable 1 – enable	RW	0
0	LS_ALARM_EN	LASI alarm enable 0 – disable 1 - enable	RW	0

Register 0x9003 -- RX\_ALARM\_STAT

Address	Name	Description	Mode	Default
15:5	Reserved		NO	
4	PMA_PMD_REC_ LOC_FAULT_STA T	PMA/PMD local receiver fault status, 0 – Normal 1 – Fault indication	RO	0
3	PCS_REC_LOC_F AULT_STAT	PCS local receiver fault status, 0 – Normal 1 – Fault indication	RO	0
2:1	Reserved		NO	
0	PHY_XS_REC_L OC_FAULT_STAT	PHY XS local receiver fault status, 0 – Normal 1 – Fault indication	RO	0

Register 0x9004 -- TX\_ALARM\_STAT

Address	Name	Description	Mode	Default
15:5	Reserved		NO	
4	PMA_PMD_TAR_ LOC_FAULT_STA T	PMA/PMD local transmitter fault status, 0 – Normal 1 – Fault indication	RO	0
3	PCS_TAR_LOC_F AULT_STAT	PCS local transmitter fault status, 0 – Normal 1 – Fault indication	RO	0
2:1	Reserved		NO	
0	PHY_XS_TAR_L OC_FAULT_STAT	PHY XS local transmitter fault status, 0 – Normal 1 – Fault indication	RO	0

---

---

Register 0x9005 -- LASI\_STAT

Address	Name	Description	Mode	Default
15:4	Reserved		NO	
3	SMI_MFSM_HOST_CONTROL_GRANT		RO	0
2	RX_ALARM	Receive alarm status	RO	0
1	TX_ALARM	Transmit alarm status	RO	0
0	LS_ALARM	LASI alarm status	RO	0

References

- XENPAK 10 Gigabit Ethernet MSA rev 3.0, X2 10 Gigabit Ethernet MSA rev 2.0
- IEEE 802.3ae clause 45

PRELIMINARY



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А