

Product Overview

Qorvo’s QPA2308 is a MMIC power amplifier fabricated on Qorvo’s production 0.25 um GaN on SiC process (QGaN25). Operating from 5.0–6.0 GHz, the QPA2308 produces greater than 60 W of saturated output power and greater than 21 dB of large-signal gain while achieving greater than 47% power-added efficiency.

The QPA2308 is offered in a 10-lead 0.6 x 0.6 in bolt-down package. Assembled with a pure-copper base, coupled with its high efficiency, the QPA2308 minimizes the strain on the system-level cooling requirements, further reducing system operating costs. The QPA2308’s performance makes it well suited for both commercial and military applications

Both RF ports are fully matched to 50 ohms with integrated DC blocking capacitors thereby simplifying system integration.

Lead-free and RoHS compliant.




Key Features

- Frequency Range: 5.0 – 6.0 GHz
- P_{SAT} (P_{IN}=26 dBm): 48 dBm
- PAE (P_{IN}=26 dBm): 47 %
- Power Gain (P_{IN}=26 dBm): 22 dB
- Small Signal Gain: > 30 dB
- Bias (pulsed): V_D = 28 V, I_{DQ} = 1200 mA
- Package Dimensions: 0.6 x 0.6 x 0.138 in.
- Package base is pure Cu offering superior thermal management.

Performance is typical across frequency. Please reference electrical specification table and data plots for more details.

Functional Block Diagram

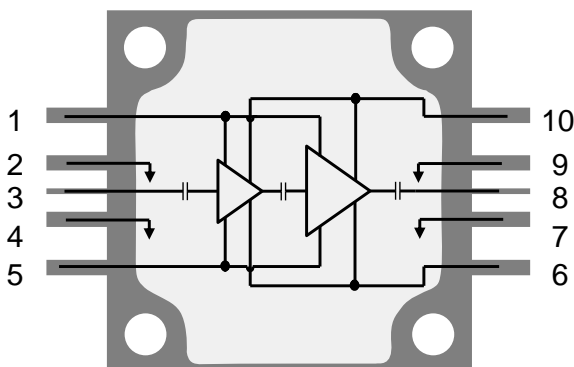

Applications

- C-Band Radar
- Satellite Communications

Ordering Information

Part No.	Description
QPA2308	5-6 GHz 60 Watt GaN Power Amplifier
QPA2308S2	Samples (2 pcs.)
QPA2308EVB1	Evaluation Board for QPA2308

Absolute Maximum Ratings

Parameter	Value / Range
Drain Voltage (V_D)	40 V
Gate Voltage Range (V_G)	-8 V to +1 V
Drain Current (I_D)	7600 mA
Gate Current (I_G)	See plot pg.12
Power Dissipation (P_{DISS}), 50 Ω , Pulsed, 85 °C	169 W
Input Power (P_{IN}), 50 Ω , Pulsed, $V_D=28$ V, $I_{DQ}=1.2$ A, 85 °C	32 dBm
Input Power (P_{IN}), 3.5:1 VSWR, Pulsed, $V_D=28$ V, $I_{DQ}=1.2$ A, 85 °C	32 dBm
Soldering Temperature (30 seconds, maximum)	320 °C
Storage Temperature	-55 to +125 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

Parameter	Value / Range
Drain Voltage (V_D)	28 V
Drain Current (I_{DQ})	1200 mA
Operating Temperature	-40 to +85 °C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.







Electrical Specifications

Parameter	Conditions	Min	Typ	Max	Units
Operational Frequency		5		6	GHz
Output Power ($P_{IN}=26$ dBm)	Freq. = 5.0 GHz	46.5	48.4		dBm
	Freq. = 5.5 GHz	46.5	48.1		
	Freq. = 6.0 GHz	46.5	47.7		
Power Added Efficiency ($P_{IN}=26$ dBm)	Freq. = 5.0 GHz		47.0		%
	Freq. = 5.5 GHz		49.2		
	Freq. = 6.0 GHz		52.4		
Small Signal Gain	Freq. = 5.0 GHz		31.5		dB
	Freq. = 5.5 GHz		32.4		
	Freq. = 6.0GHz		30.5		
Input Return Loss	Freq. = 5.0 GHz		23		dB
	Freq. = 5.5 GHz		14		
	Freq. = 6.0 GHz		14		
Output Return Loss	Freq. = 5.0 GHz		13		dB
	Freq. = 5.5 GHz		13		
	Freq. = 6.0 GHz		13		
Second Harmonic ($P_{OUT} = 45$ dBm)	Freq. = 5.5 GHz		-38		dBc
Third Harmonic ($P_{OUT} = 45$ dBm)	Freq. = 5.5 GHz		-60		dBc
P_{OUT} Temp. Coefficient. ($P_{IN} = 26$ dBm)	Temp.: +25 °C to +85 °C		-0.0001		dB/°C
Sm. Sig. Gain Temp. Coefficient	Temp.: -40 °C to +85 °C		-0.047		dB/°C

Test conditions, unless otherwise noted: $T = 25$ °C, $V_D = 28$ V, $I_{DQ} = 1200$ mA, $PW = 600$ us, Duty Cycle = 20%

Performance Plots – Large Signal







Test conditions, unless otherwise noted: $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $T = +25^\circ\text{C}$, $P_{IN} = 26\text{ dBm}$, $PW = 600\text{ us}$, Duty Cycle = 20%

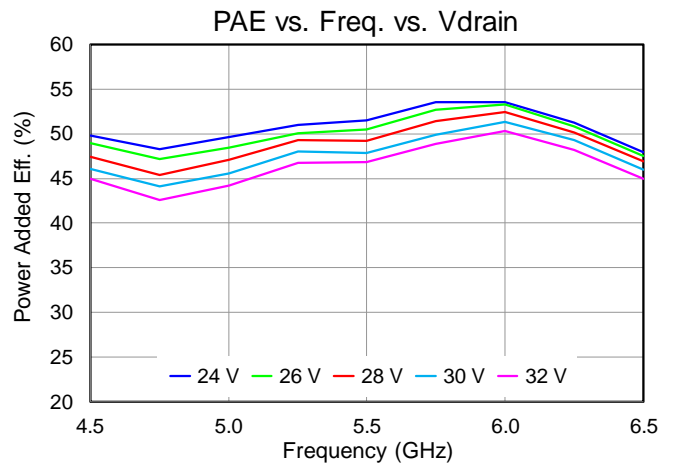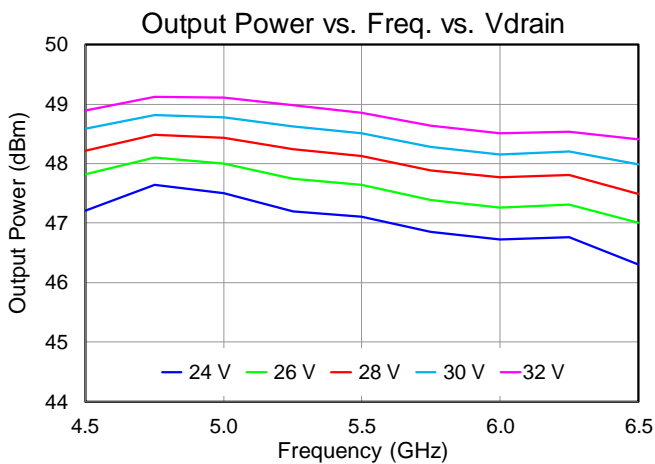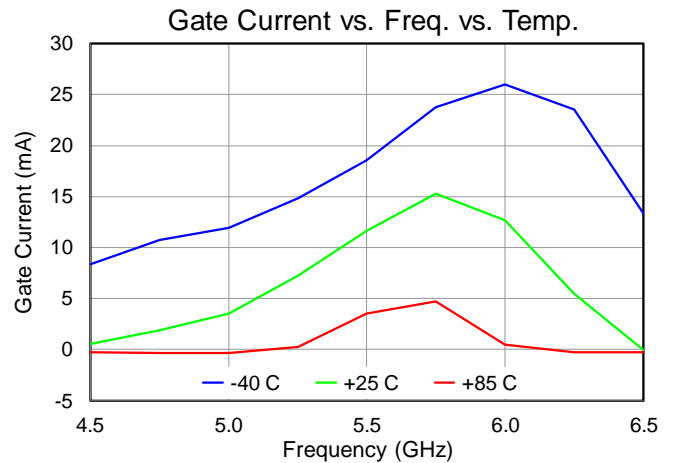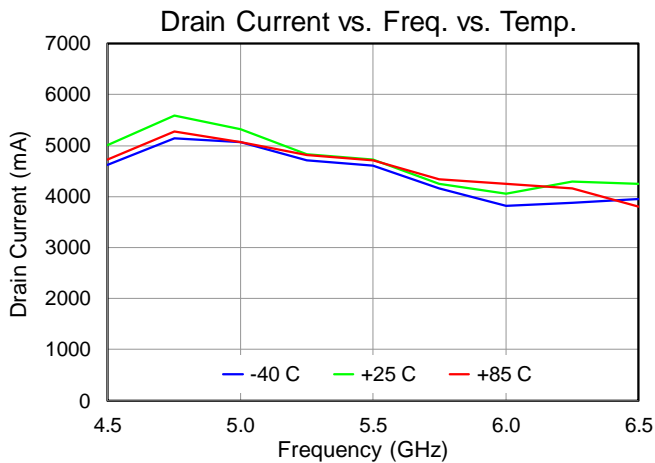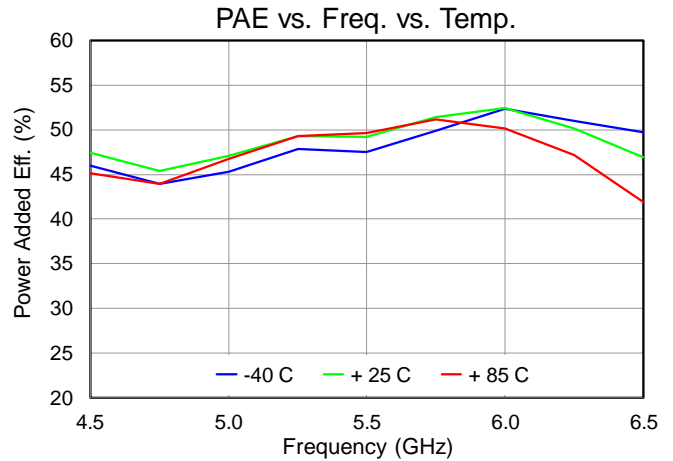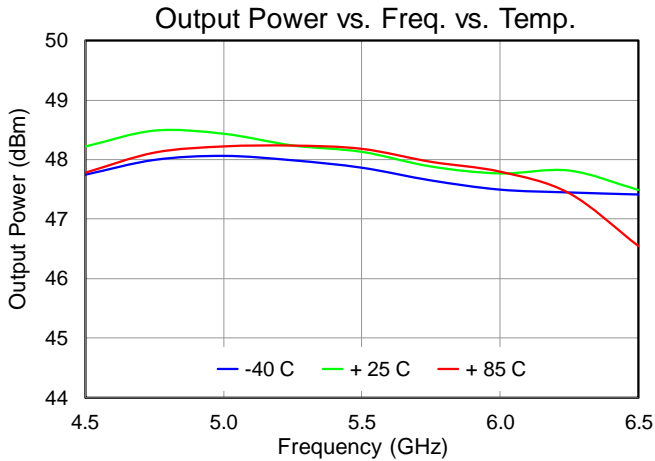

0






Performance Plots – Large Signal

Test conditions, unless otherwise noted: $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $T = +25^\circ\text{C}$, $P_{IN} = 26\text{ dBm}$, $PW = 600\text{ us}$, Duty Cycle = 20%

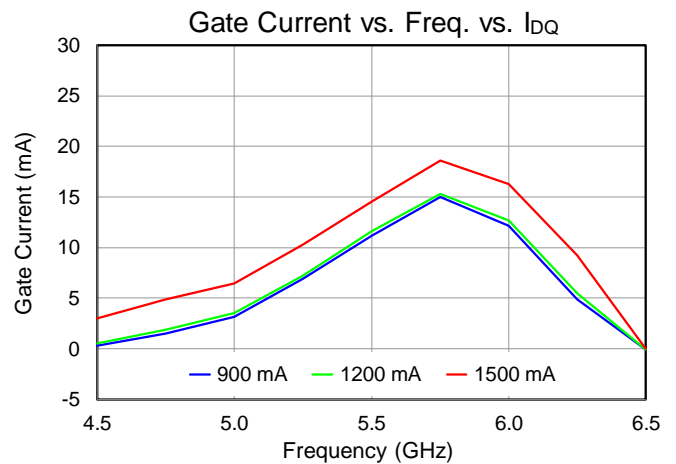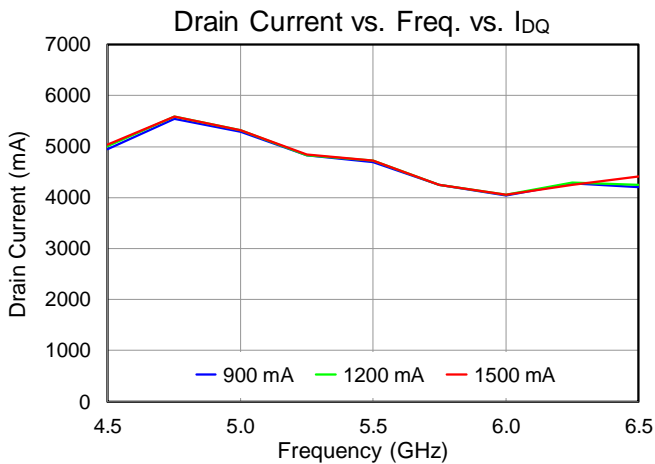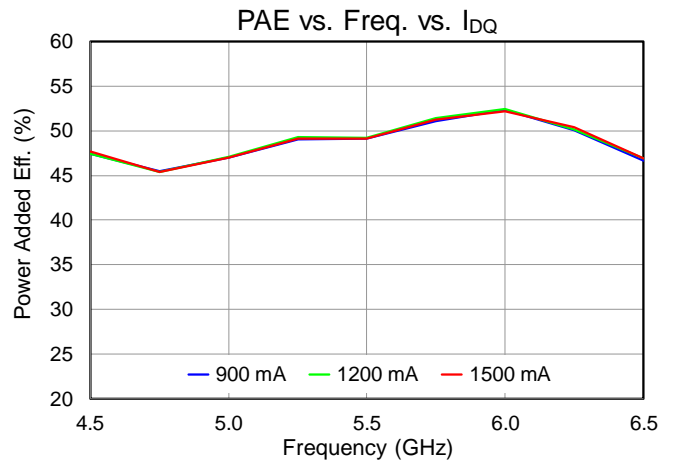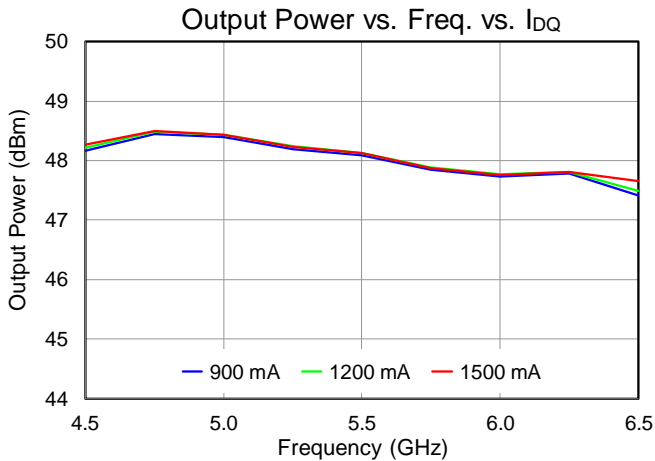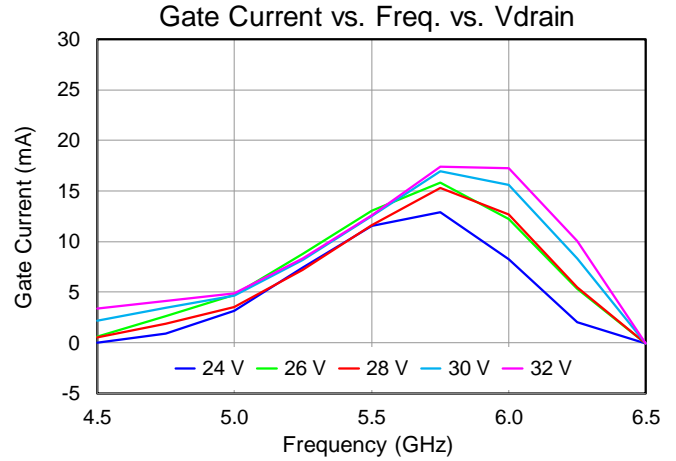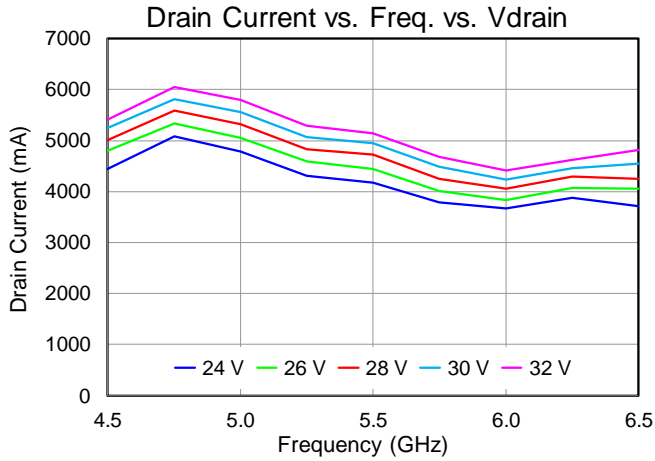







Performance Plots – Large Signal

Test conditions, unless otherwise noted: $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $T = +25\text{ }^\circ\text{C}$, $PW = 600\text{ }\mu\text{s}$, Duty Cycle = 20%

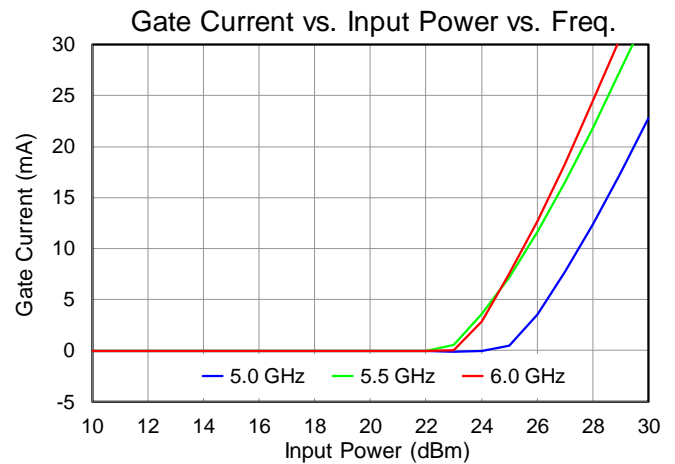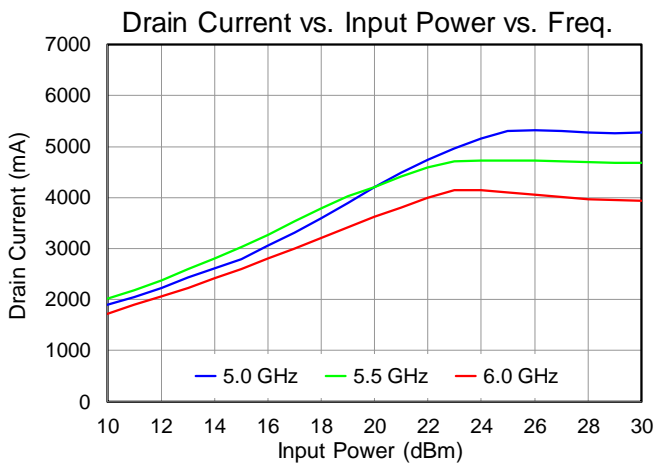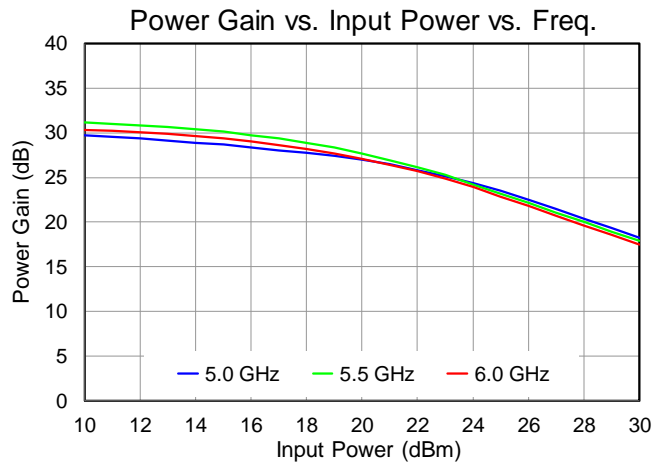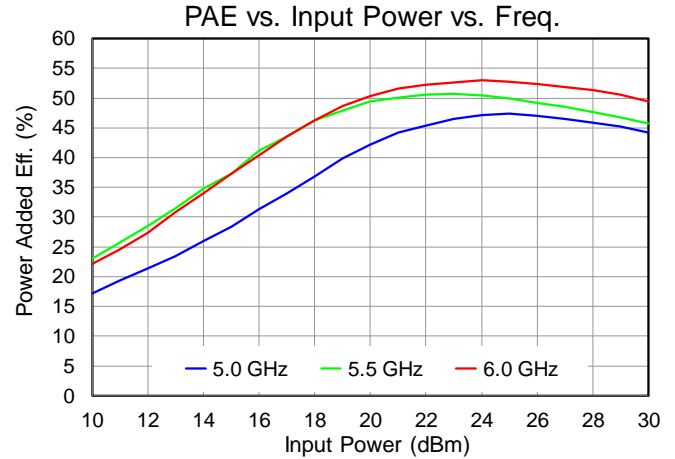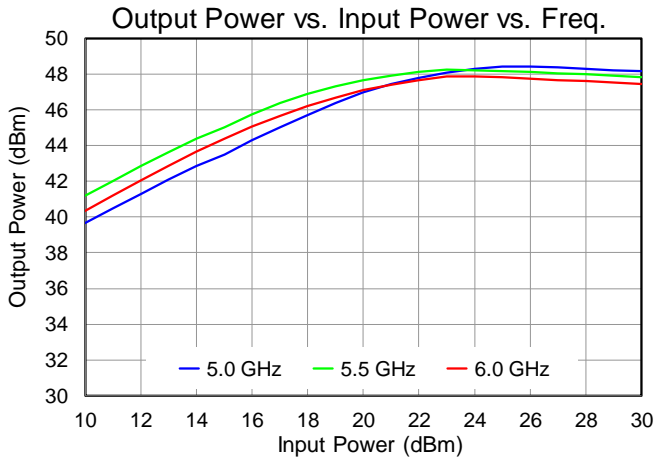




Performance Plots – Large Signal

Test conditions, unless otherwise noted: $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $T = +25\text{ }^\circ\text{C}$, $PW = 600\text{ }\mu\text{s}$, Duty Cycle = 20%

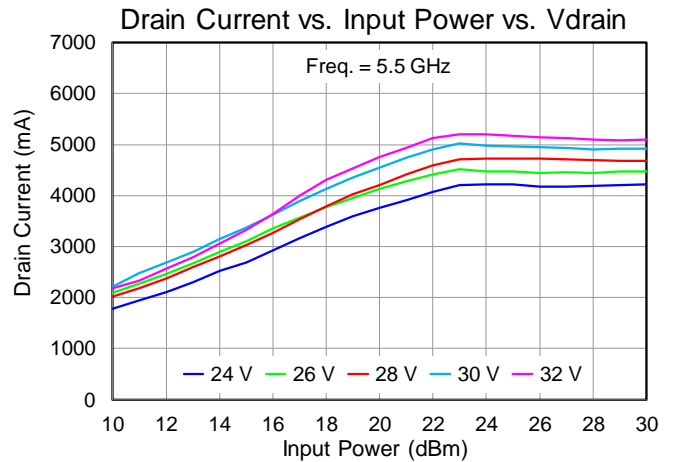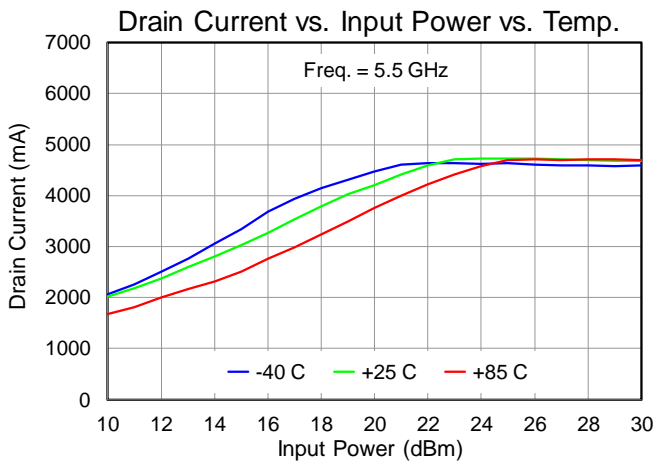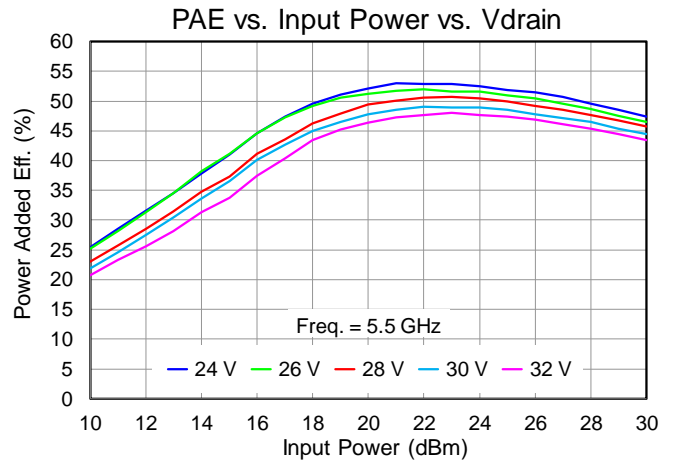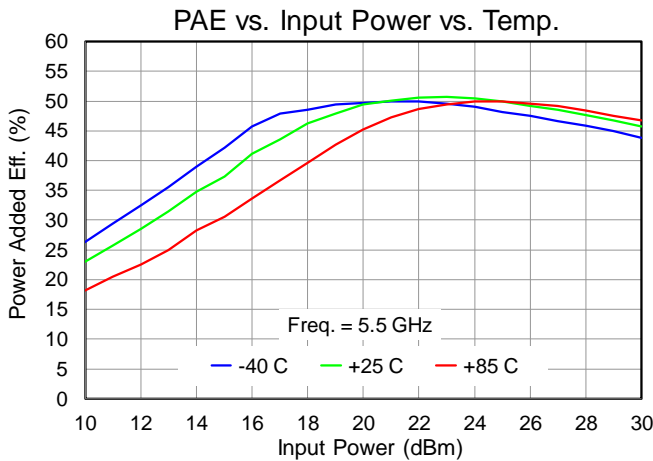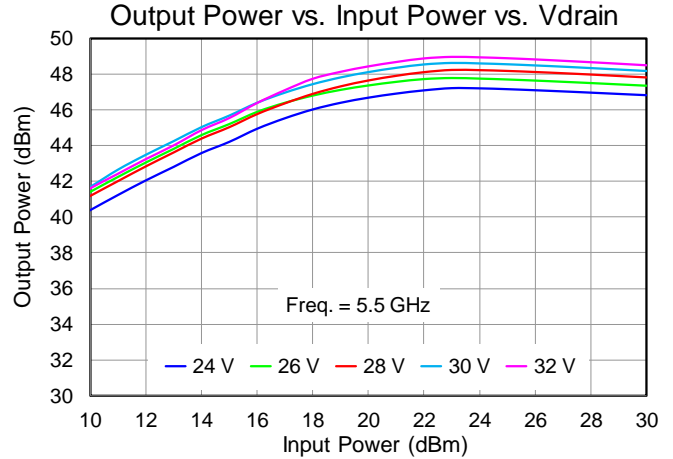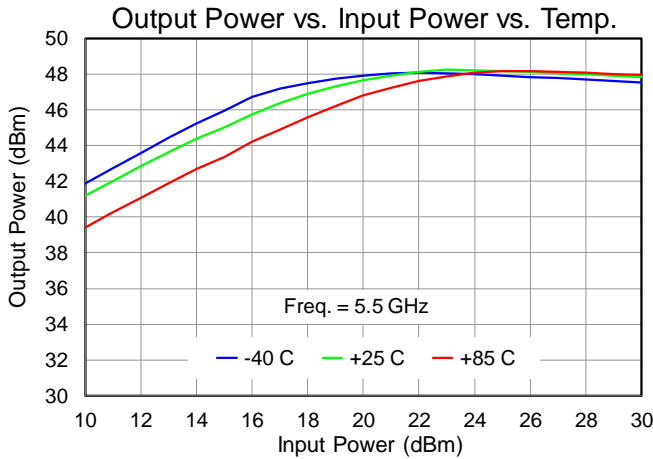







Performance Plots – Large Signal

Test conditions, unless otherwise noted: $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $T = +25\text{ }^\circ\text{C}$, $PW = 600\text{ }\mu\text{s}$, Duty Cycle = 20%

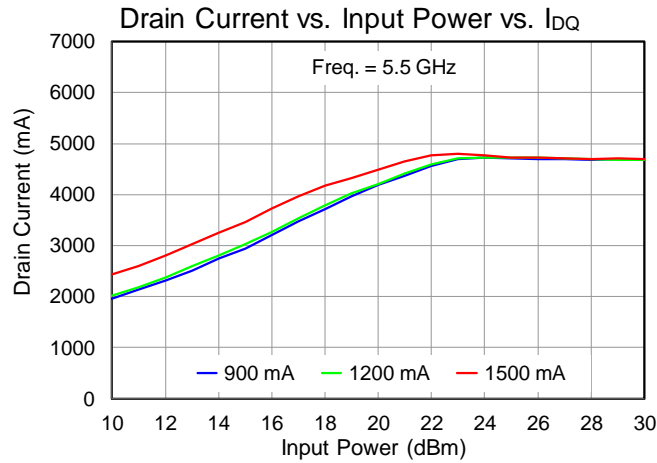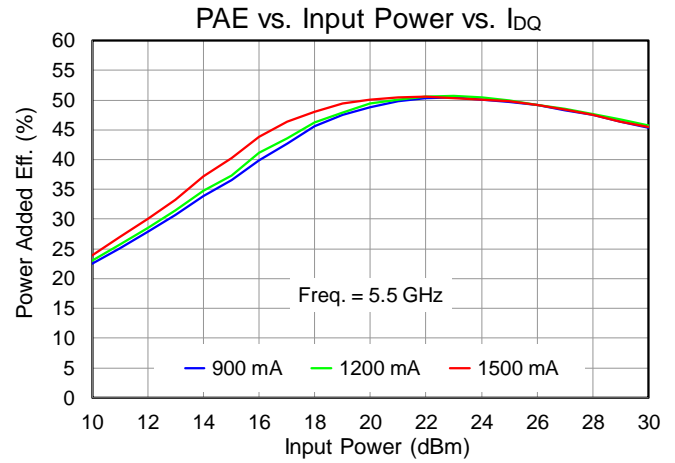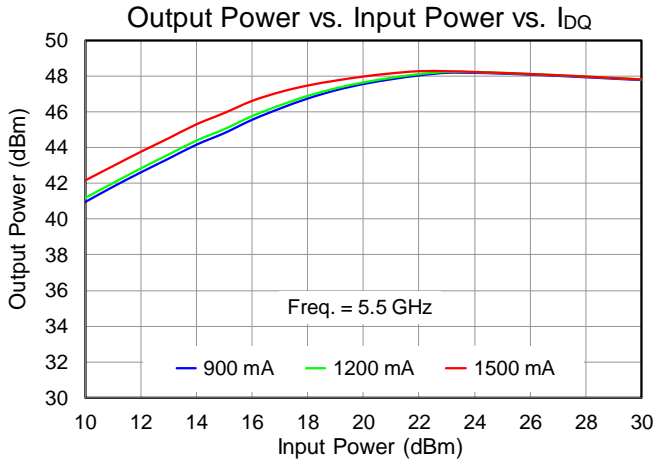







Performance Plots – Harmonics

Test conditions, unless otherwise noted: $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $T = +25\text{ }^\circ\text{C}$, $PW = 600\text{ }\mu\text{s}$, Duty Cycle = 20%

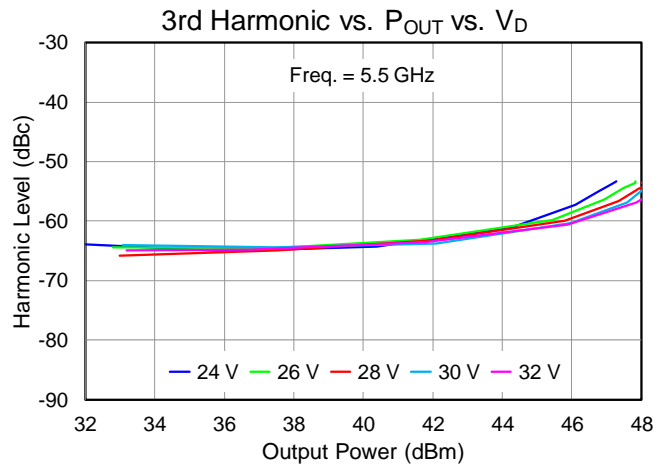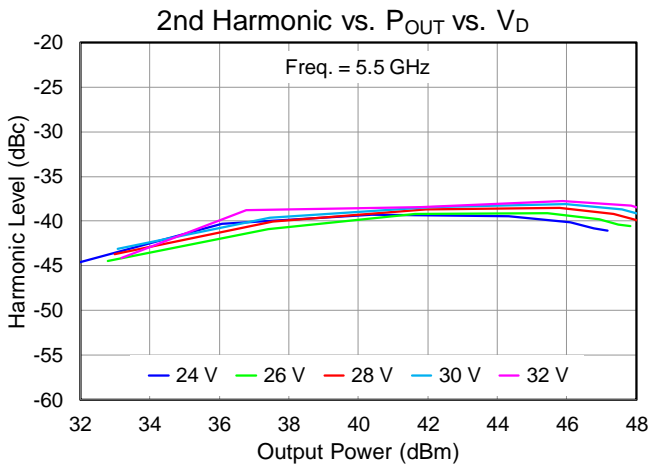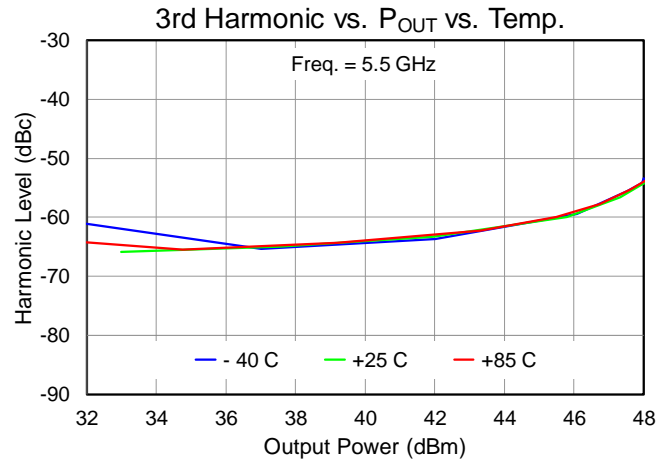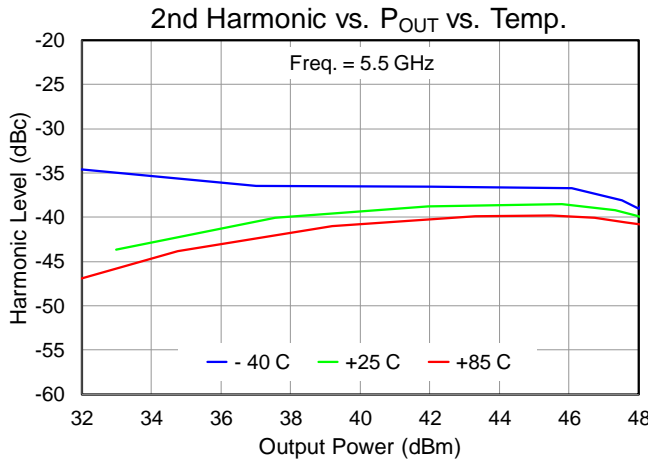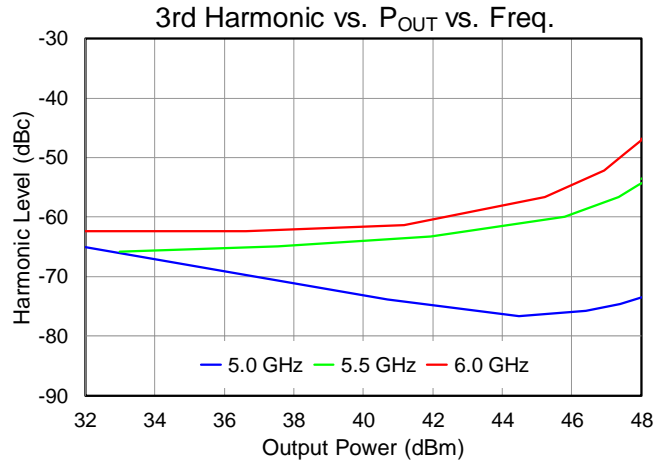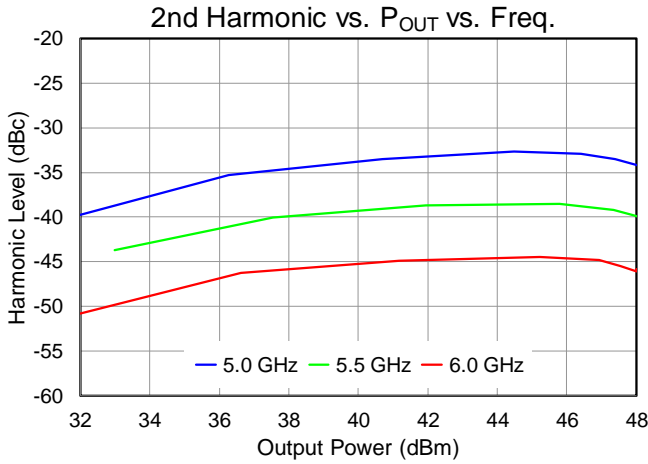




Performance Plots – Small Signal

Test conditions, unless otherwise noted: $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $T = +25\text{ }^\circ\text{C}$

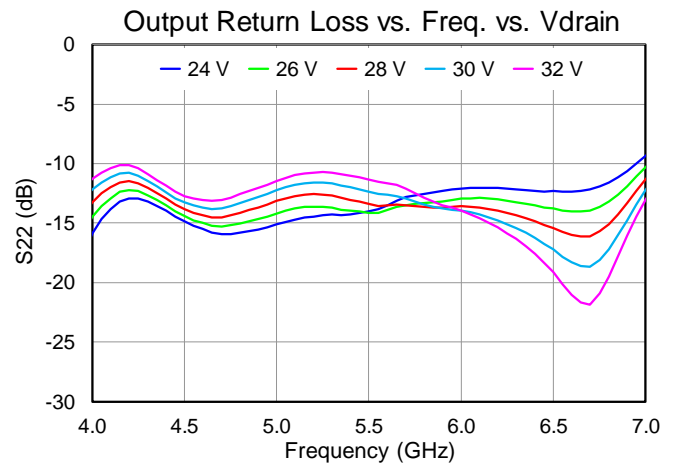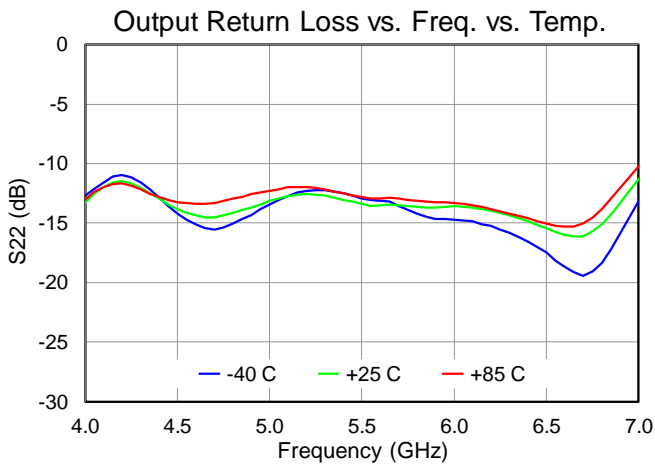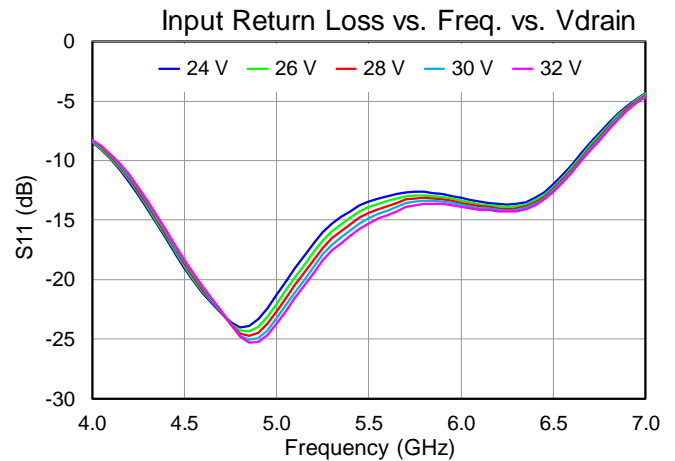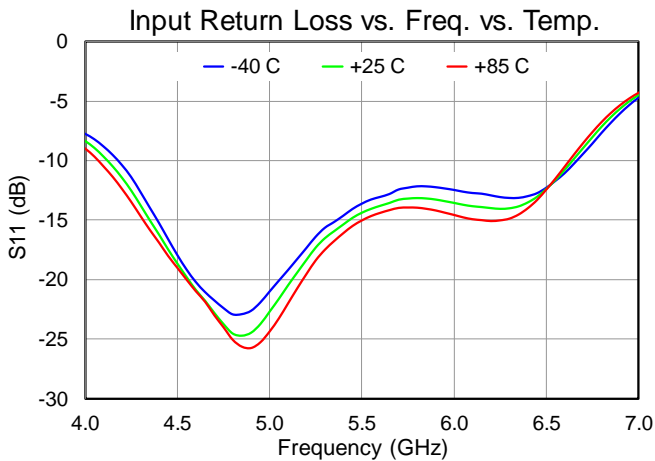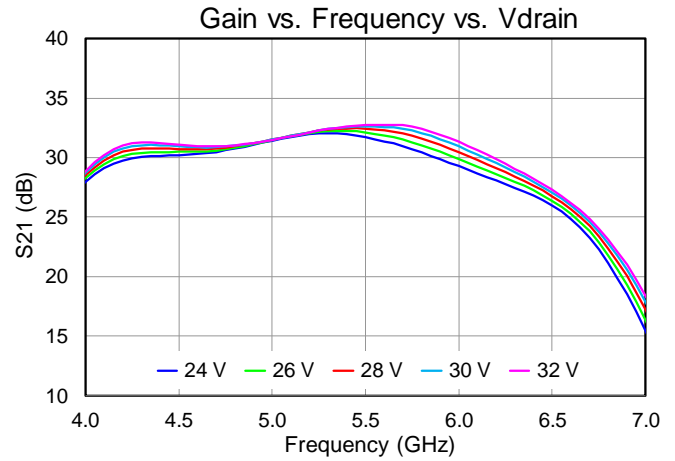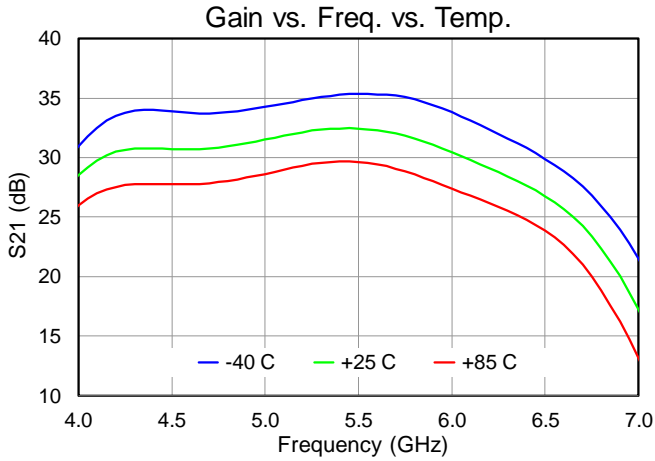

Performance Plots – Small Signal

Test conditions, unless otherwise noted: $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $T = +25^\circ\text{C}$

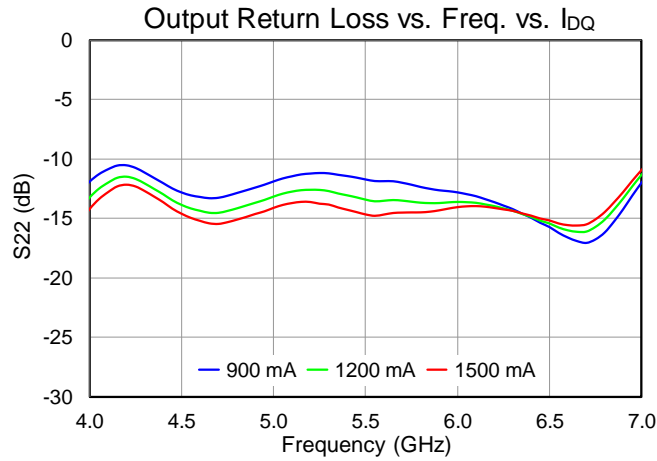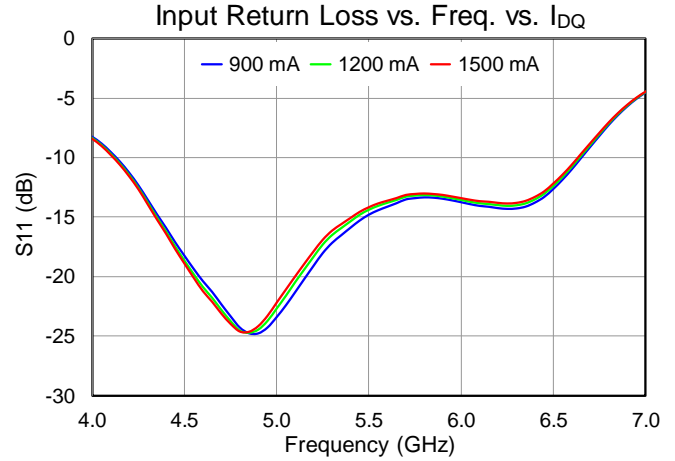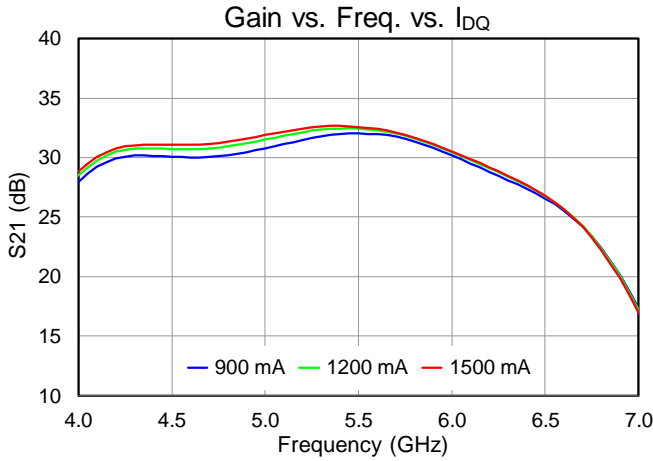



Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC}) ⁽¹⁾	$T_{base} = 85\text{ }^{\circ}\text{C}$, $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $P_{DISS} = 33.6\text{ W}$, No RF (quiescent DC operation)	0.65	$^{\circ}\text{C/W}$
Channel Temperature, T_{CH} (No RF) ⁽²⁾		107	$^{\circ}\text{C}$
Thermal Resistance (θ_{JC}) ⁽¹⁾	$T_{base} = 85\text{ }^{\circ}\text{C}$, $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, Freq = 5.0 GHz, $I_{D_Drive} = 5.1\text{ A}$, $P_{IN} = 26\text{ dBm}$, $P_{OUT} = 48.2\text{ dBm}$, $P_{DISS} = 75.1\text{ W}$	0.72	$^{\circ}\text{C/W}$
Channel Temperature, T_{CH} (Under RF) ⁽²⁾		139	$^{\circ}\text{C}$
Thermal Resistance (θ_{JC}) ⁽¹⁾	$T_{base} = 85\text{ }^{\circ}\text{C}$, $V_D = 32\text{ V}$, $I_{DQ} = 1200\text{ mA}$, Freq = 5.0 GHz, $I_{D_Drive} = 5.41\text{ A}$, $P_{IN} = 26\text{ dBm}$, $P_{OUT} = 48.8\text{ dBm}$, $P_{DISS} = 95.9\text{ W}$	0.73	$^{\circ}\text{C/W}$
Channel Temperature, T_{CH} (Under RF) ⁽²⁾		155	$^{\circ}\text{C}$

Notes:


1. Thermal resistance is referenced to the back of package ($85\text{ }^{\circ}\text{C}$)
2. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

Dissipated Power and Maximum Gate Current

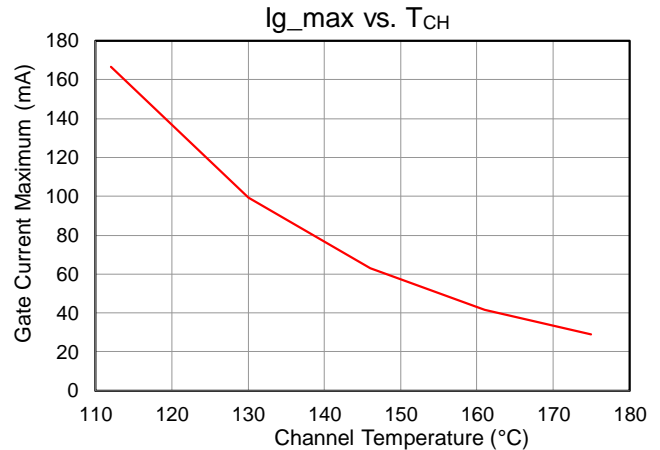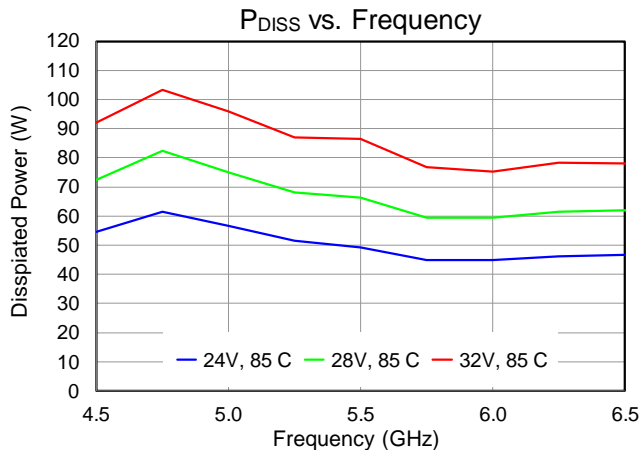

Test conditions, unless otherwise noted: $V_D = 28\text{ V}$, $I_{DQ} = 1200\text{ mA}$, $P_{IN} = 26\text{ dBm}$, $PW = 600\text{ }\mu\text{s}$, Duty Cycle = 20%

Applications Information

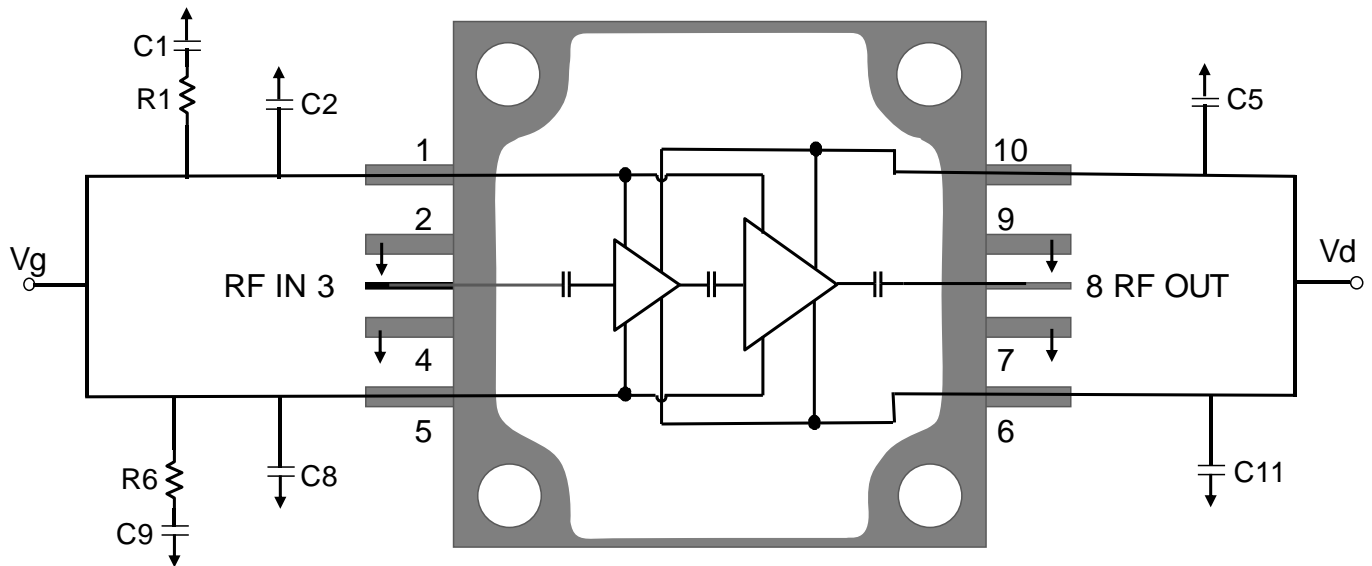

Note: Both top and bottom of Vg and Vd should be biased.


Bias-Up Procedure

1. Set I_D limit to 5500 mA, I_G limit to 30 mA
2. Set V_G to -5.0 V
3. Set V_D +28 V
4. Adjust V_G more positive until $I_{DQ} \approx 1200$ mA
5. Apply RF signal

Bias-Down Procedure

1. Turn off RF signal
2. Reduce V_G to -5.0 V. Ensure $I_{DQ} \sim 0$ mA
4. Set V_D to 0 V
5. Turn off V_D supply
6. Turn off V_G supply

Evaluation Board (EVB) Layout Assembly

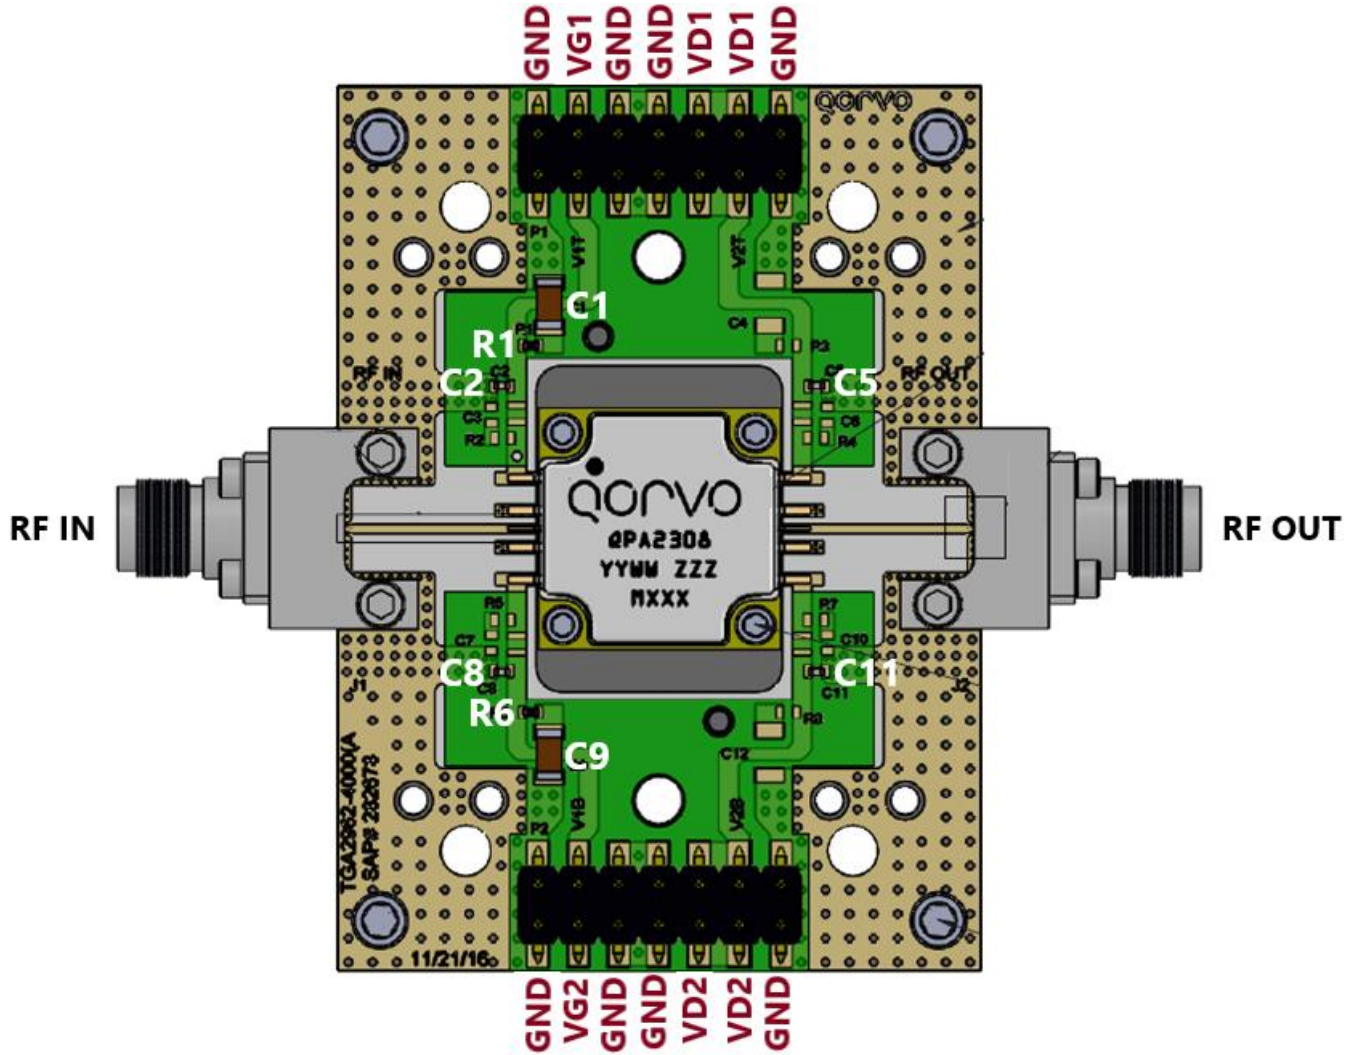


PCB is made from Rogers 6035HTC dielectric, .010 inch thick, 0.5 oz. copper both sides.

Bill of Materials

Reference Des.	Value	Description	Manuf.	Part Number
C1, C9	10 uF	CAP, 10 uF, 20%, 50 V, 20%, X5R, 1206	Various	
C2, C5, C8, C11	0.01 uF	CAP, 0.01 uF, 10%, 50 V, X7R, 0402	Various	
R1, R6	5.1 Ω	RES, 5.1 OHM, 5%, 50 V, 0402	Various	
J1, J2	2.92 mm	CONNECTOR, FEMALE, ENDLAUNCH	Southwest Microwave	1092-01A-5


Assembly Notes

1. Carefully clean the PC board and package leads with alcohol. Allow it to dry fully.
2. To improve the thermal and RF performance, Qorvo recommends attaching a heat sink to the bottom of the PCB and apply thermal compound (Arctic Silver 5 recommended) or 4 mil indium shim between the heat sink and the package.
3. (The following is for *information only*. There are many variables in a second level assembly that Qorvo does not control, so Qorvo does not recommend an absolute torque value.) Use screws to attach the component to the heat sink. A suggested torque value is 16 in-oz. for a 0-80 screw. Start with screws finger tight, then torque to 8 in-oz., then torque to final value. Use the following tightening pattern:



4. Apply no-flux solder to each pin of the QPA2308. The component leads should be manually soldered, and the package cannot be subjected to conventional reflow processes. The use of no-clean solder to avoid washing after soldering is recommended.

Mechanical Information

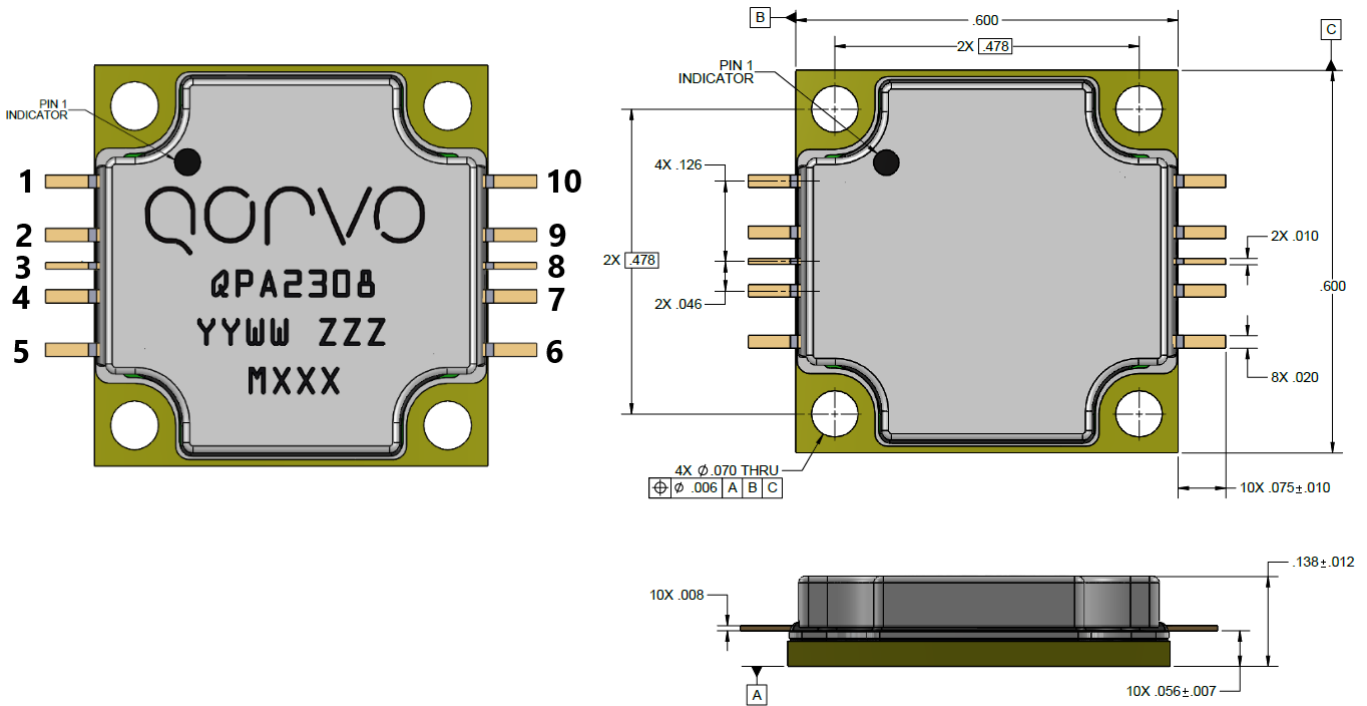

Units: inches

Tolerances: unless specified; x.xxx = ± 0.005

Materials:

Base: Copper

Lid: LCP (Liquid Crystal Polymer)

Lead: Alloy 194

All metalized features are gold plated

Part is epoxy sealed

Marking:

2308: Part number

YY: Part Assembly year

WW: Part Assembly week

ZZZ: Serial Number

MXXX: Batch ID

Pin Description

Pin No.	Symbol	Description
1,5	VG	Gate Voltage; Bias network is required; must be biased from both sides; refer to page 13.
3	RF IN	RF output. 50 Ohms. DC blocked.
2,4,7,9	GND	Must be grounded on the PCB.
6,10	VD	Drain voltage; Bias network is required; must be biased from both sides; refer to page 13.
8	RF OUT	RF output. 50 Ohms. DC blocked.

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	1A	ANSI/ESD/JEDEC JS-001



Caution!
 ESD-Sensitive Device

Solderability

Compatible with the latest version of J-STD-020. Lead-free solder, 260 °C.

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU. This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2019 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А