

TSOP  
Commercial Temp  
Industrial Temp

## 256K x 8 2Mb Asynchronous SRAM

7, 8, 10, 12 ns  
3.3 V  $V_{DD}$   
Center  $V_{DD}$  and  $V_{SS}$

### Features

- Fast access time: 7, 8, 10, 12 ns
- CMOS low power operation: 135/115/95/80 mA at minimum cycle time
- Single 3.3 V power supply
- All inputs and outputs are TTL-compatible
- Fully static operation
- Industrial Temperature Option:  $-40^{\circ}$  to  $85^{\circ}\text{C}$
- Package line up
  - GP:RoHS-compliant 400 mil, 44-pin TSOP Type II package


### Description

The GS72108A is a high speed CMOS Static RAM organized as 262,144 words by 8 bits. Static design eliminates the need for external clocks or timing strobes. The GS operates on a single 3.3 V power supply and all inputs and outputs are TTL-compatible. The GS72108A is available in 400 mil TSOP Type-II packages.


### Pin Descriptions

| Symbol           | Description         |
|------------------|---------------------|
| $A_0$ – $A_{17}$ | Address input       |
| $DQ_1$ – $DQ_8$  | Data input/output   |
| $\overline{CE}$  | Chip enable input   |
| $\overline{WE}$  | Write enable input  |
| $\overline{OE}$  | Output enable input |
| $V_{DD}$         | +3.3 V power supply |
| $V_{SS}$         | Ground              |
| NC               | No connect          |

### TSOP-II 256K x 8-Pin Configuration

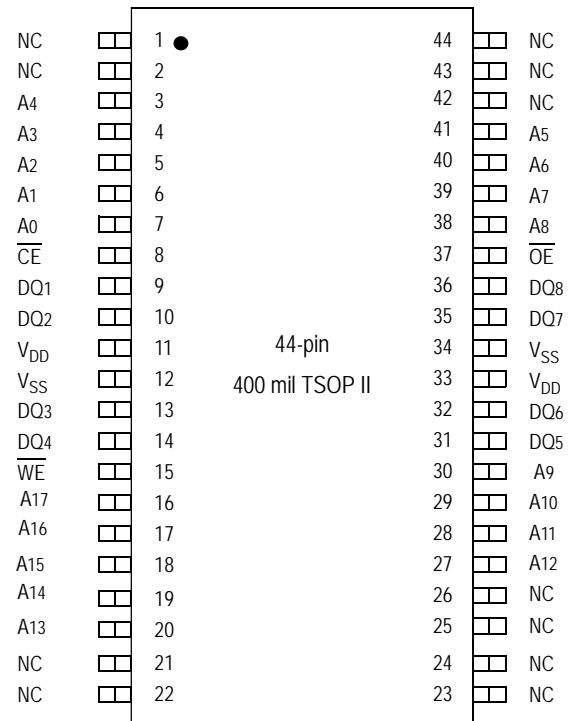

## Block Diagram

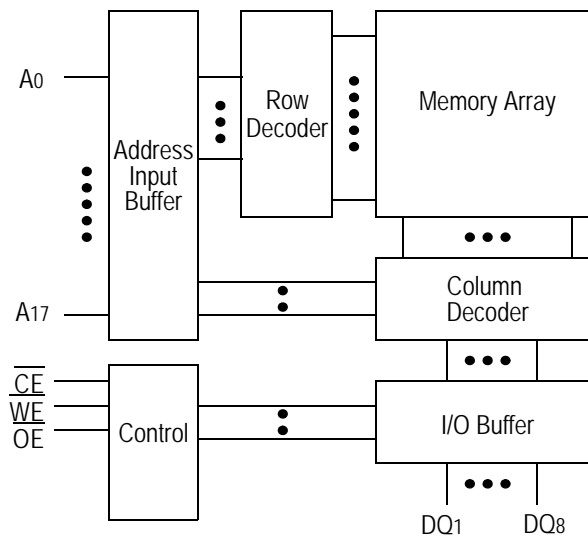

## Truth Table

| $\overline{CE}$ | $\overline{OE}$ | $\overline{WE}$ | DQ1 to DQ8   | $V_{DD}$ Current |
|-----------------|-----------------|-----------------|--------------|------------------|
| H               | X               | X               | Not Selected | ISB1, ISB2       |
| L               | L               | H               | Read         | IDD              |
| L               | X               | L               | Write        |                  |
| L               | H               | H               | High Z       |                  |

## Note:

X: "H" or "L"

### Absolute Maximum Ratings

| Parameter                   | Symbol    | Rating   | Unit        |
|-----------------------------|-----------|--|-------------|
| Supply Voltage              | $V_{DD}$  | -0.5 to +4.6                                   | V           |
| Input Voltage               | $V_{IN}$  | -0.5 to $V_{DD} + 0.5$<br>( $\leq 4.6$ V max.) | V           |
| Output Voltage              | $V_{OUT}$ | -0.5 to $V_{DD} + 0.5$<br>( $\leq 4.6$ V max.) | V           |
| Allowable power dissipation | PD        | 0.7  | W           |
| Storage temperature         | $T_{STG}$ | -55 to 150                                     | $^{\circ}C$ |

**Note:**

Permanent device damage may occur if Absolute Maximum Ratings are exceeded. Functional operation shall be restricted to Recommended Operating Conditions. Exposure to higher than recommended voltages for extended periods of time could affect device reliability.

### Recommended Operating Conditions

| Parameter                                | Symbol   | Min  | Typ | Max            | Unit        |
|--|----------|------|-----|----------------|-------------|
| Supply Voltage for -7/-8/-10/-12         | $V_{DD}$ | 3.0  | 3.3 | 3.6            | V           |
| Input High Voltage                       | $V_{IH}$ | 2.0  | —   | $V_{DD} + 0.3$ | V           |
| Input Low Voltage                        | $V_{IL}$ | -0.3 | —   | 0.8            | V           |
| Ambient Temperature,<br>Commercial Range | $T_{Ac}$ | 0    | —   | 70             | $^{\circ}C$ |
| Ambient Temperature,<br>Industrial Range | $T_{AI}$ | -40  | —   | 85             | $^{\circ}C$ |

**Notes:**

1. Input overshoot voltage should be less than  $V_{DD} + 2$  V and not exceed 20 ns.
2. Input undershoot voltage should be greater than -2 V and not exceed 20 ns.

### Capacitance

| Parameter          | Symbol    | Test Condition  | Max | Unit |
|--------------------|-----------|-----------------|-----|------|
| Input Capacitance  | $C_{IN}$  | $V_{IN} = 0$ V  | 5   | pF   |
| Output Capacitance | $C_{OUT}$ | $V_{OUT} = 0$ V | 7   | pF   |

**Notes:**

1. Tested at  $T_A = 25^{\circ}C$ ,  $f = 1$  MHz
2. These parameters are sampled and are not 100% tested.

## DC I/O Pin Characteristics

| Parameter              | Symbol   | Test Conditions                                   | Min              | Max             |
|------------------------|----------|---|------------------|-----------------|
| Input Leakage Current  | $I_{IL}$ | $V_{IN} = 0 \text{ to } V_{DD}$                   | -1 $\mu\text{A}$ | 1 $\mu\text{A}$ |
| Output Leakage Current | $I_{LO}$ | Output High Z<br>$V_{OUT} = 0 \text{ to } V_{DD}$ | -1 $\mu\text{A}$ | 1 $\mu\text{A}$ |
| Output High Voltage    | $V_{OH}$ | $I_{OH} = -4\text{mA}$                            | 2.4              | —               |
| Output Low Voltage     | $V_{OL}$ | $I_{LO} = +4\text{mA}$                            | —                | 0.4 V           |

## Power Supply Currents


| Parameter                | Symbol                | Test Conditions   | 0 to 70°C |        |       |       | -40 to 85°C |        |        |       |
|--------------------------|-----------------------|---|-----------|--------|-------|-------|-------------|--------|--------|-------|
|                          |                       |   | 7 ns      | 8 ns   | 10 ns | 12 ns | 7 ns        | 8 ns   | 10 ns  | 12 ns |
| Operating Supply Current | $I_{DD}(\text{max})$  | $\overline{CE} \leq V_{IL}$<br>All other inputs $\geq V_{IH}$ or $\leq V_{IL}$<br>Min. cycle time<br>$I_{OUT} = 0 \text{ mA}$ | 135 mA    | 115 mA | 95 mA | 80 mA | 140 mA      | 120 mA | 100 mA | 85 mA |
| Standby Current          | $I_{SB1}(\text{max})$ | $\overline{CE} \geq V_{IH}$<br>All other inputs $\geq V_{IH}$ or $\leq V_{IL}$<br>Min. cycle time                             | 25 mA     | 20 mA  | 20 mA | 15 mA | 30 mA       | 25 mA  | 25 mA  | 20 mA |
| Standby Current          | $I_{SB2}(\text{max})$ | $\overline{CE} \geq V_{DD} - 0.2 \text{ V}$<br>All other inputs $\geq V_{DD} - 0.2 \text{ V}$ or $\leq 0.2 \text{ V}$         | 5 mA      |        |       |       | 10 mA       |        |        |       |

## AC Test Conditions

| Parameter              | Conditions              |
|------------------------|-------------------------|
| Input high level       | $V_{IH} = 2.4\text{ V}$ |
| Input low level        | $V_{IL} = 0.4\text{ V}$ |
| Input rise time        | $t_r = 1\text{ V/ns}$   |
| Input fall time        | $t_f = 1\text{ V/ns}$   |
| Input reference level  | 1.4 V                   |
| Output reference level | 1.4 V                   |
| Output load            | <b>Fig. 1 &amp; 2</b>   |

### Notes:

1. Include scope and jig capacitance.
2. Test conditions as specified with output loading as shown in Fig. 1 unless otherwise noted.
3. Output load 2 for  $t_{LZ}$ ,  $t_{HZ}$ ,  $t_{OLZ}$  and  $t_{OHZ}$

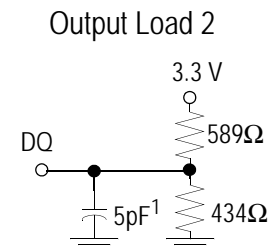


## AC Characteristics

### Read Cycle


| Parameter  | Symbol      | -7  |     | -8  |     | -10 |     | -12 |     | Unit |
|--|-------------|-----|-----|-----|-----|-----|-----|-----|-----|------|
|  |             | Min | Max | Min | Max | Min | Max | Min | Max |      |
| Read cycle time  | $t_{RC}$    | 7   | —   | 8   | —   | 10  | —   | 12  | —   | ns   |
| Address access time  | $t_{AA}$    | —   | 7   | —   | 8   | —   | 10  | —   | 12  | ns   |
| Chip enable access time ( $\overline{CE}$ )                          | $t_{AC}$    | —   | 7   | —   | 8   | —   | 10  | —   | 12  | ns   |
| Byte enable access time ( $\overline{UB}$ , $\overline{LB}$ )        | $t_{AB}$    | —   | 3   | —   | 3.5 | —   | 4   | —   | 5   | ns   |
| Output enable to output valid ( $\overline{OE}$ )                    | $t_{OE}$    | —   | 3   | —   | 3.5 | —   | 4   | —   | 5   | ns   |
| Output hold from address change                                      | $t_{OH}$    | 3   | —   | 3   | —   | 3   | —   | 3   | —   | ns   |
| Chip enable to output in low Z ( $\overline{CE}$ )                   | $t_{LZ}^*$  | 3   | —   | 3   | —   | 3   | —   | 3   | —   | ns   |
| Output enable to output in low Z ( $\overline{OE}$ )                 | $t_{OLZ}^*$ | 0   | —   | 0   | —   | 0   | —   | 0   | —   | ns   |
| Byte enable to output in low Z ( $\overline{UB}$ , $\overline{LB}$ ) | $t_{BLZ}^*$ | 0   | —   | 0   | —   | 0   | —   | 0   | —   | ns   |
| Chip disable to output in High Z ( $\overline{CE}$ )                 | $t_{HZ}^*$  | —   | 3.5 | —   | 4   | —   | 5   | —   | 6   | ns   |
| Output disable to output in High Z ( $\overline{OE}$ )               | $t_{OHZ}^*$ | —   | 3   | —   | 3.5 | —   | 4   | —   | 5   | ns   |

\* These parameters are sampled and are not 100% tested.

Read Cycle 1:  $\overline{CE} = \overline{OE} = V_{IL}, \overline{WE} = V_{IH}$

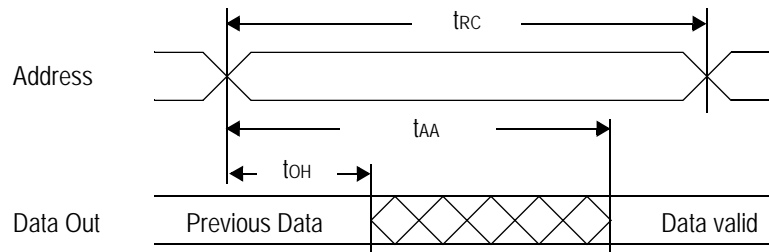


Read Cycle 2:  $\overline{WE} = V_{IH}$

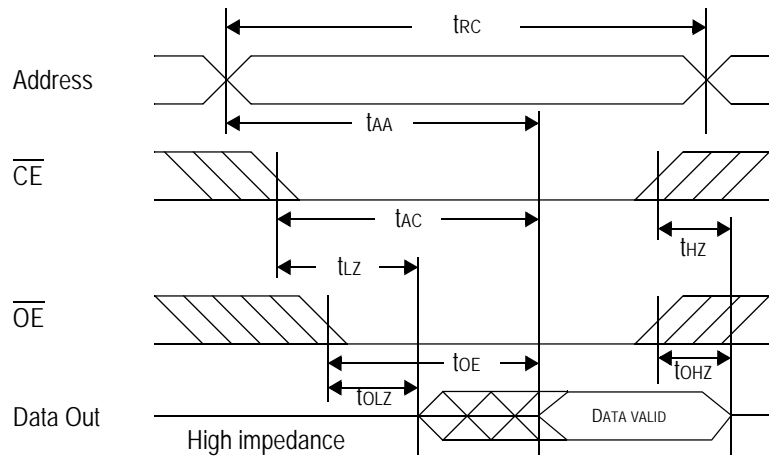


## Write Cycle

| Parameter                               | Symbol | -7  |     | -8  |     | -10 |     | -12 |     | Unit |
|---|--------|-----|-----|-----|-----|-----|-----|-----|-----|------|
|   |        | Min | Max | Min | Max | Min | Max | Min | Max |      |
| Write cycle time                        | tWC    | 7   | —   | 8   | —   | 10  | —   | 12  | —   | ns   |
| Address valid to end of write           | tAW    | 5   | —   | 5.5 | —   | 7   | —   | 8   | —   | ns   |
| Chip enable to end of write             | tCW    | 5   | —   | 5.5 | —   | 7   | —   | 8   | —   | ns   |
| Data set up time                        | tDW    | 3.5 | —   | 4   | —   | 5   | —   | 6   | —   | ns   |
| Data hold time                          | tDH    | 0   | —   | 0   | —   | 0   | —   | 0   | —   | ns   |
| Write pulse width                       | tWP    | 5   | —   | 5.5 | —   | 7   | —   | 8   | —   | ns   |
| Address set up time                     | tAS    | 0   | —   | 0   | —   | 0   | —   | 0   | —   | ns   |
| Write recovery time ( $\overline{WE}$ ) | tWR    | 0   | —   | 0   | —   | 0   | —   | 0   | —   | ns   |
| Write recovery time ( $\overline{CE}$ ) | tWR1   | 0   | —   | 0   | —   | 0   | —   | 0   | —   | ns   |
| Output Low Z from end of write          | tWLZ*  | 3   | —   | 3   | —   | 3   | —   | 3   | —   | ns   |
| Write to output in High Z               | tWHZ*  | —   | 3   | —   | 3.5 | —   | 4   | —   | 5   | ns   |

\* These parameters are sampled and are not 100% tested.

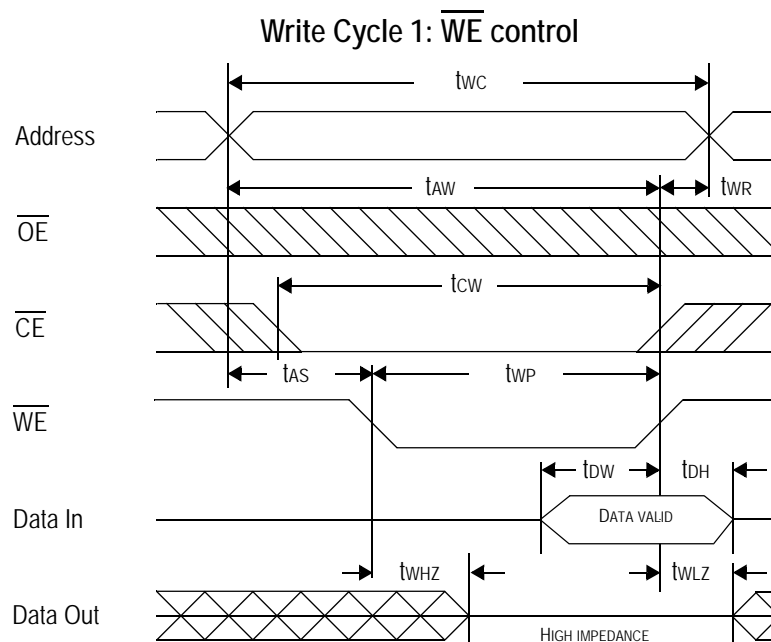


Write Cycle 2:  $\overline{CE}$  control

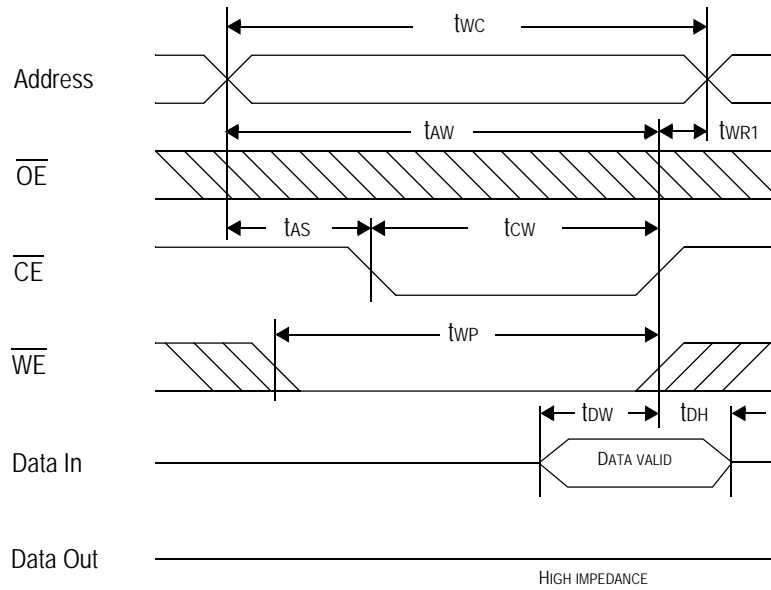



## 44-Pin, 400 mil TSOP-II

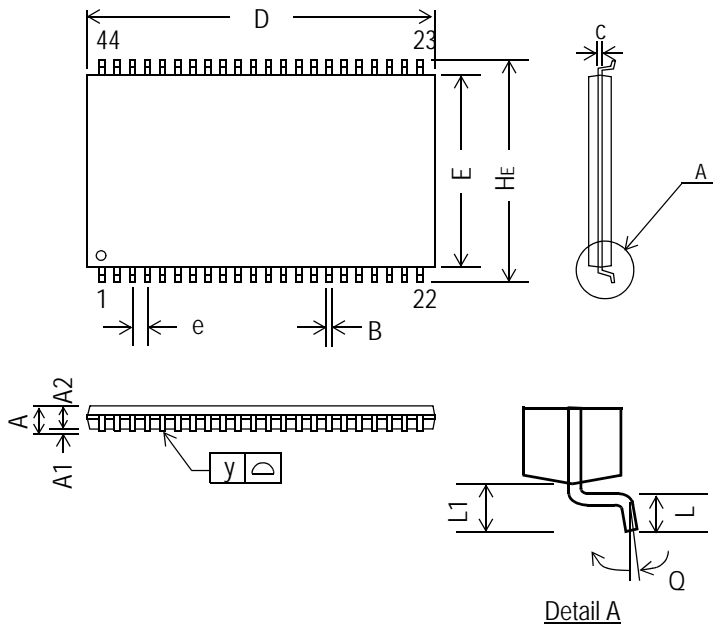

| Symbol | Dimension in inch |       |       | Dimension in mm |       |       |
|--------|-------------------|-------|-------|-----------------|-------|-------|
|        | min               | nom   | max   | min             | nom   | max   |
| A      | —                 | —     | 0.047 | —               | —     | 1.20  |
| A1     | 0.002             | —     | —     | 0.05            | —     | —     |
| A2     | 0.037             | 0.039 | 0.041 | 0.95            | 1.00  | 1.05  |
| B      | 0.01              | 0.014 | 0.018 | 0.25            | 0.35  | 0.45  |
| c      | —                 | 0.006 | —     | —               | 0.15  | —     |
| D      | 0.721             | 0.725 | 0.729 | 18.31           | 18.41 | 18.51 |
| E      | 0.396             | 0.400 | 0.404 | 10.06           | 10.16 | 10.26 |
| e      | —                 | 0.031 | —     | —               | 0.80  | —     |
| HE     | 0.455             | 0.463 | 0.471 | 11.56           | 11.76 | 11.96 |
| L      | 0.016             | 0.020 | 0.024 | 0.40            | 0.50  | 0.60  |
| L1     | —                 | 0.031 | —     | —               | 0.80  | —     |
| y      | —                 | —     | 0.004 | —               | —     | 0.10  |
| Q      | 0°                | —     | 5°    | 0°              | —     | 5°    |

**Notes:**

1. Dimension D & E do not include interlead flash.
2. Dimension B does not include dambar protrusion/intrusion.
3. Controlling dimension: mm

---

**Ordering Information**

| Part Number*   | Package                        | Access Time | Temp. Range |
|----------------|--------------------------------|-------------|-------------|
| GS72108AGP-7   | RoHS-compliant 400 mil TSOP-II | 7 ns        | Commercial  |
| GS72108AGP-8   | RoHS-compliant 400 mil TSOP-II | 8 ns        | Commercial  |
| GS72108AGP-10  | RoHS-compliant 400 mil TSOP-II | 10 ns       | Commercial  |
| GS72108AGP-12  | RoHS-compliant 400 mil TSOP-II | 12 ns       | Commercial  |
| GS72108AGP78I  | RoHS-compliant 400 mil TSOP-II | 7 ns        | Industrial  |
| GS72108AGTP-8I | RoHS-compliant 400 mil TSOP-II | 8 ns        | Industrial  |
| GS72108AGP-10I | RoHS-compliant 400 mil TSOP-II | 10 ns       | Industrial  |
| GS72108AGP-12I | RoHS-compliant 400 mil TSOP-II | 12 ns       | Industrial  |

**Notes:**

1. Customers requiring delivery in Tape and Reel should add the character "T" to the end of the part number. For example: GS72108GP-8T.

## 2Mb Asynchronous Datasheet Revision History

| Rev. Code: Old;<br>New     | Types of Changes<br>Format or Content | Revisions/Reason   |
|----------------------------|---------------------------------------|--|
| 72108A_r1                  |                                       | • Creation of new datasheet  |
| 72108A_r1; 72108A_r1_01    | Content                               | • Added 6 ns speed bin<br>• Updated all power numbers  |
| 72108A_r1_01; 72108A_r1_02 | Content                               | • Updated Recommended Operating Conditions table on page 4<br>• Changed FPBGA package from 6 x 10 to 6 x 8 (package U)                               |
| 72108A_r1_02; 72108A_r1_03 | Content                               | • Removed all references to "U" package  |
| 72108A_r1_03; 72108A_r1_04 | Content                               | • Removed 6 ns speed bin from entire document<br>• Added 7 ns speed bin to entire document   |
| 72108A_r1_04; 72108A_r1_05 | Content                               | • Updated format<br>• Added RoHS-compliant information for TSOP-II package   |
| 72108A_r1_05; 72108A_r1_06 | Content                               | • Added RoHS-compliant 400 mil SOJ   |
| 72108A_r1_06; 72108A_r1_07 | Content                               | • Updated to MP in ordering information table<br>• Rev. 1.07a: Removed SOJ package references, removed Status Column from Ordering Information table |
| 72108A_r1_07; 72108A_r1_08 | Content                               | • Removed 5/6-RoHS TSOP-II references due to EOL   |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А