


## Digital controller for lighting and power supply applications with 6 programmable PWM generators, 96 MHz PLL, DALI

Datasheet – preliminary data

### Features

- Core
    - Max  $f_{CPU}$ : 16 MHz
    - Advanced STM8 core with Harvard architecture and 3-stage pipeline
    - Extended instruction set
  - Memories
    - Flash and EEPROM with read while write (RWW) and error correction code (ECC) capability
    - Program memory: 32 Kbytes Flash; data retention 15 years at 85 °C after 10 kcycles at 25 °C
    - Data memory: 1 Kbyte true data EEPROM; data retention: 15 years at 85 °C after 100 kcycles at 85 °C
    - RAM: 2 Kbytes
  - Clock management
    - Low power crystal resonator oscillator with external clock input
    - Internal, user-trimmable 16 MHz RC and low power 153.6 KHz RC oscillators
    - Internal 96 MHz PLL
    - Clock security system with clock monitor
  - Interrupt management
    - Nested interrupt controller with 32 interrupt vectors
    - Three interrupt priority levels
    - Up to 12 external interrupt request lines on 2 vectors
    - Programmable NMI interrupt sources
  - Peripherals specific product
    - 6 SMEDs (state machine event driven) independent PWM programmable pulse signal generators
  - Communication interfaces
    - UART asynchronous: sw flow-control operating mode
- 

**TSSOP38**
- I<sup>2</sup>C master/slave fast-slow speed rate
  - DALI ballast target device interface
  - Analog to digital converter (ADC)
    - 10-bit, 8 multiplexed channels, sequencing functionality
    - Operational amplifier to extend dynamic range and resolution to 12-bit equivalent
    - Independent channel gain value configurations: x1.6 or x6.4
  - Analog comparators
    - 4 analog comparators with internal programmable reference voltage generated by 4 internal programmable 4-bit DACs
    - 1 analog comparator with additional external reference voltage
    - Comparator cycle time: 50 ns max
    - Repetitive conversion
  - I/Os
    - 12 I/Os multifunction signals
    - Highly robust I/O design, immune against current injection
  - Operating temperature
    - -25 °C to 105 °C

### Description

The STLUX385 is a digital controller for lighting and power supply applications featuring 6 programmable PWM generators, 96 MHz PLL, gain-programmable ADC and DALI interface.

# 1 Introduction

The core of the STLUX385 is the enhanced STM8 MCU, providing increased power processing while maintaining the advantages of the CISC architecture, a 24-bit linear addressing mode, 8-bit data bus and an optimized architecture for low power applications.

The microcontroller includes an in-circuit debug module with a hardware interface (SWIM single wire) which allows non-intrusive application debugging and ultra-fast Flash programming code.


The device has an embedded low power, low voltage, single voltage 32 Kbytes of non volatile program memory and true 1 Kbyte RWW data EEPROM with Error Correction Code (ECC).

The STLUX385 microcontroller provides the following benefits:

- Very high reliability and memory endurance
  - More than 15 years of operating life time
  - More than 15 years of data retention for program and Data Memory after cycling
- Flexible peripherals to form a powerful engine capable of driving all types of switch mode converters. It covers the topologies in the field of lighting and power management starting from simple buck converters for LED driving, boost for power factor correction, half-bridge resonant converters for dimmable fluorescent tube lamp ballasts, up to full bridge control in HID lamp ballasts
  - Fast analog comparators (50 ns max propagation delay)
  - 96 MHz PLL for high output signal resolution
  - Six independent SMED (state machine - event driven) units - programmable signal generators
  - Programmable connection box to interconnect SMEDs and other peripherals into complex timer blocks
  - 10-bit, 8 multiplexed channels ADC with operational amplifier to extend resolution to 12-bit
  - DALI hardware communication cell

## 2 Block diagram


Figure 1. Internal block diagram

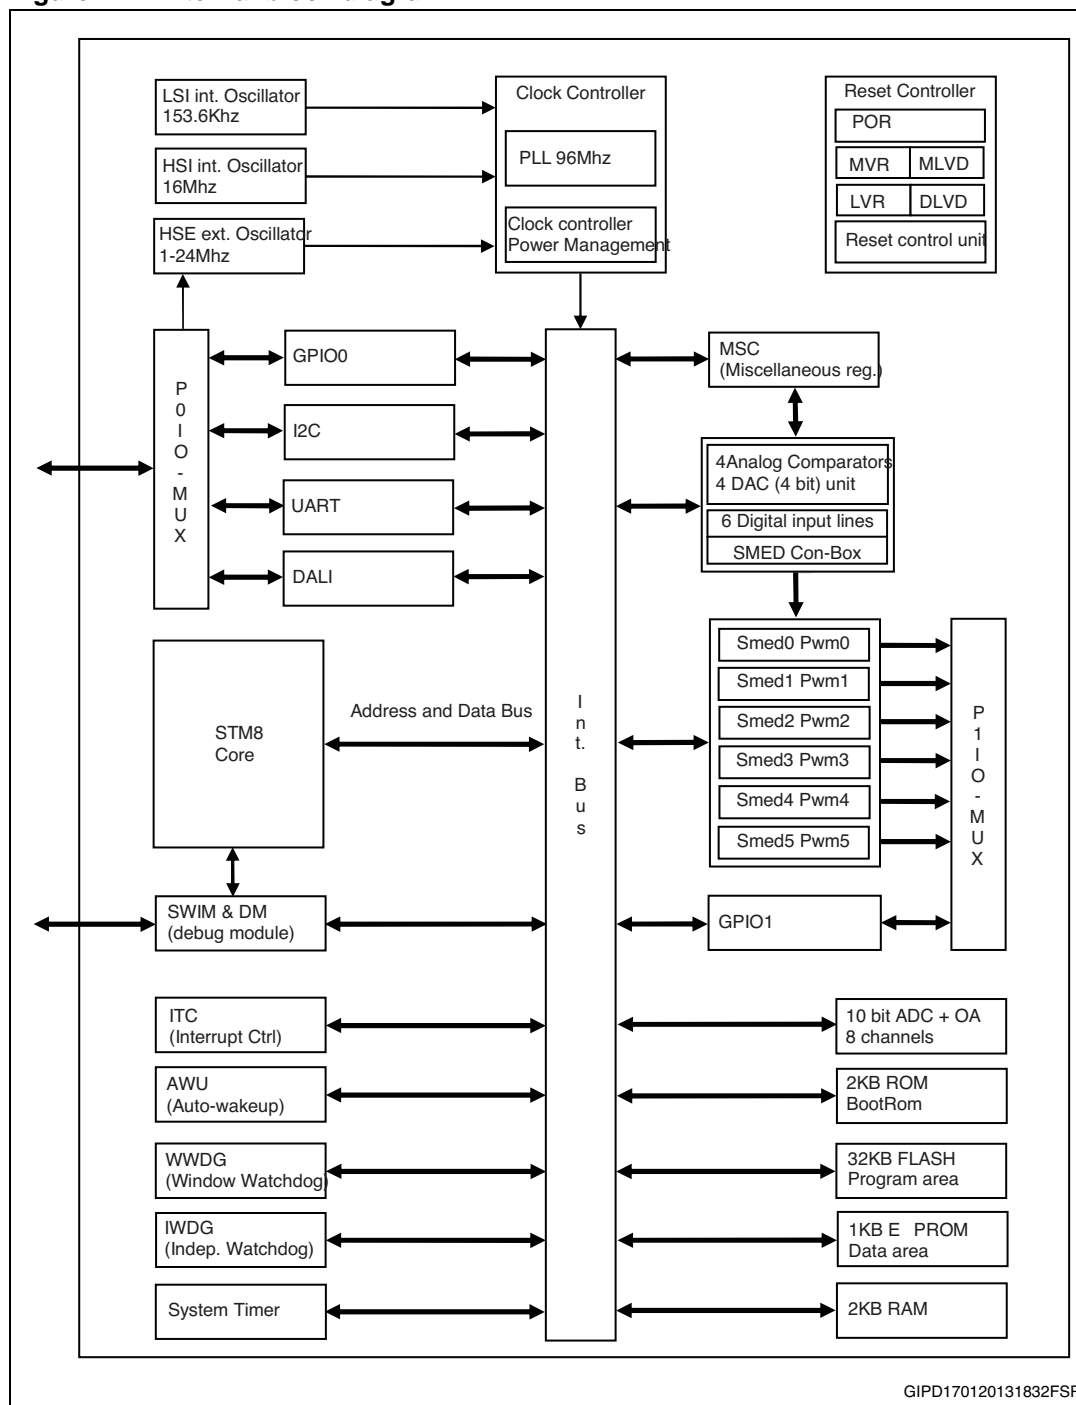

### 3 Pinout and pin description

#### 3.1 Pinout

Figure 2. TSSOP38 pinout

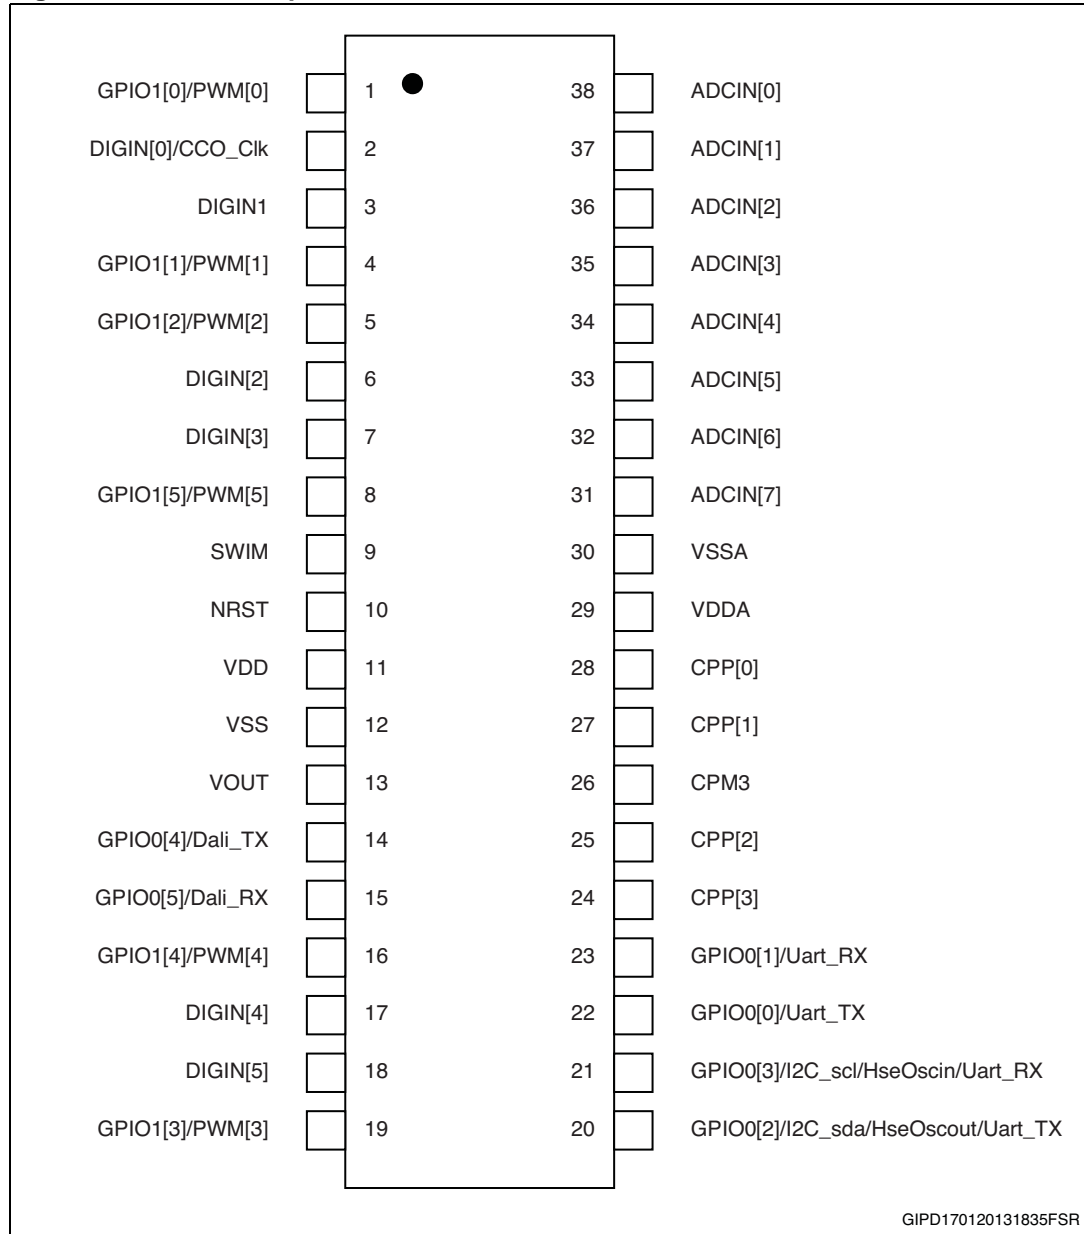

## 3.2 Pin description

Table 1. Pin description

Pin number	Type	Pin name	Main function	Alternate function 1	Alternate function 2	Alternate function 3
1	I/O	GPIO1[0]/PWM[0]	SMED PWM channel 0	General purpose I/O 10	-	-
2	I/O	DIGIN[0]/CCO_clk	Digital input 0	Configurable clock output signal (CCO)	-	-
3	I	DIGIN[1]	Digital input 1	-	-	-
4	I/O	GPIO1[1]/PWM[1]	SMED PWM channel 1	General purpose I/O 11	-	-
5	I/O	GPIO1[2]/PWM[2]	SMED PWM channel 2	General purpose I/O 12	-	-
6	I	DIGIN[2]	Digital input 2	-	-	-
7	I	DIGIN[3]	Digital input 3	-	-	-
8	I/O	GPIO1[5]/PWM[5]	SMED PWM channel 5	General purpose I/O 15	-	-
9	I/O	SWIM	SWIM data interface	-	-	-
10	I/O	NRST	Reset	-	-	-
11	PS	VDD	Digital and I/O power supply	-	-	-
12	PS	VSS	Digital and I/O ground	-	-	-
13	PS	VOUT	1.8 V regulator capacitor	-	-	-
14	I/O	GPIO0[4]/Dali_tx	General purpose I/O 04	DALI data transmit	-	-
15	I/O	GPIO0[5]/Dali_rx	General purpose I/O 05	DALI data receive	-	-
16	I/O	GPIO1[4]/PWM[4]	SMED PWM channel 4	General purpose I/O 14	-	-
17	I	DIGIN[4]	Digital input 4	-	-	-
18	I	DIGIN[5]	Digital input 5	-	-	-
19	I/O	GPIO1[3]/PWM[3]	SMED PWM channel 3	General purpose I/O 13	-	-
20	I/O	GPIO0[2]/I2C_sda/HseOscout/Uart_tx	General purpose I/O 02	I <sup>2</sup> C data	Output crystal oscillator signal	UART data transmit

Table 1. Pin description (continued)

Pin number	Type	Pin name	Main function	Alternate function 1	Alternate function 2	Alternate function 3
21	I/O	GPIO0[3]/I2C_scl/ HseOscin/Uart_rx	General purpose I/O 03	I <sup>2</sup> C clock	Input crystal oscillator signal / input frequency signal	UART data receive
22	I/O	GPIO0[0]/Uart_tx	General purpose I/O 00	UART data transmit	-	-
23	I/O	GPIO0[1]/Uart_rx	General purpose I/O 01	UART data receive	-	-
24	I	CPP[3]	Positive analog comparator input 3	-	-	-
25	I	CPP[2]	Positive analog comparator input 2	-	-	-
26	I	CPM3	Negative analog comparator input 3	-	-	-
27	I	CPP[1]	Positive analog comparator input 1	-	-	-
28	I	CPP[0]	Positive analog comparator input 0	-	-	-
29	PS	VDDA	Analog power supply	-	-	-
30	PS	VSSA	Analog ground	-	-	-
31	I	ADCIN[7]	Analog input 7	-	-	-
32	I	ADCIN[6]	Analog input 6	-	-	-
33	I	ADCIN[5]	Analog input 5	-	-	-
34	I	ADCIN[4]	Analog input 4	-	-	-
35	I	ADCIN[3]	Analog input 3	-	-	-
36	I	ADCIN[2]	Analog input 2	-	-	-
37	I	ADCIN[1]	Analog input 1	-	-	-
38	I	ADCIN[0]	Analog input 0	-	-	-


## 4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK<sup>®</sup> is an ST trademark.

**Table 2. TSSOP38 mechanical data**

Dim.	mm.		
	Min.	Typ.	Max.
A			1.20
A1	0.05		0.15
A2	0.80	1.00	1.05
b	0.17		0.27
c	0.09		0.20
D	9.60	9.70	9.80
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e		0.50	
L	0.45	0.60	0.75
L1		1.00	
k	0		8
aaa			0.10

Figure 3. TSSOP8 package drawing

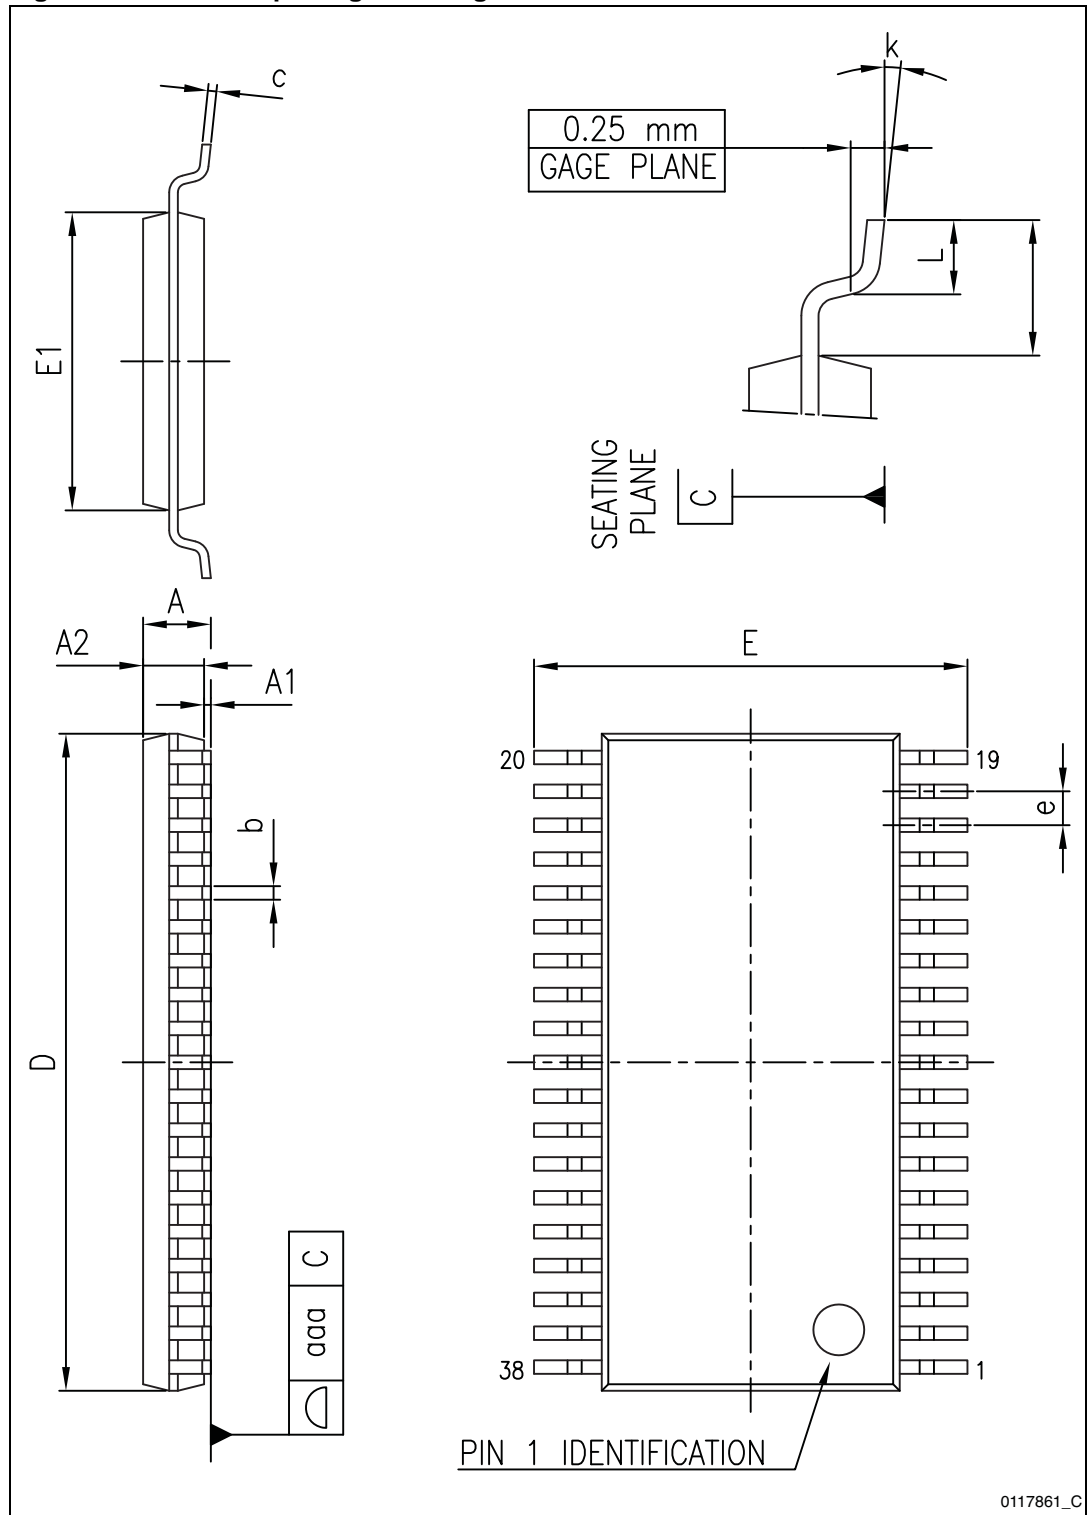



## 5 Revision history

**Table 3. Document revision history**

Date	Revision	Changes
18-Jan-2013	1	Initial release.
08-Feb-2013	2	Updated features and description on the cover page.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А