

Amphenol

SINESYSTEMS

AT Series™ Connectors and AHD Series™ Connectors



INTERCONNECTING YOUR WORLD

Who Are We?

We are Amphenol Sine Systems.

We are a global leader in providing you with interconnection options and solutions.

We fulfill the needs of Industrial, Factory Automation, Heavy Duty and Custom-design markets.

Amphenol Sine Systems, with its 42 year history, 325+ employees worldwide and 3 global facilities, draws on the extensive worldwide resources of Amphenol Corporation to find solutions for our customers. Our engineers design innovative combinations of industry standard connectors and application specific shielding components to create assembly systems that set the standards for performance, reliability, and cost effectiveness. Our engineering, materials, and manufacturing organizations meet the high standards imposed by ISO 9001 as well as many customer specific quality systems. Our performance has earned us ship to stock and world class performance awards from many major OEMs.




Amphenol Sine Systems is a division of **Amphenol Corporation** (www.amphenol.com), one of the largest interconnect solution suppliers in the world. Amphenol Corporation supplies a wide range of product solutions worldwide. Amphenol Corporation, and all its subsidiaries, design, manufacture and market electrical, electronic and fiber-optic connectors, interconnect systems and coaxial and specialty cable. Amphenol has a diversified presence in high growth markets including: Information Technology and Data Communications Equipment, Mobile Devices, Mobile Networks, Broadband Communication, Military and Commercial Aerospace, Industrial and Automotive.

What Are AT Series™ Connectors?

Amphenol Sine Systems AT Series™ connectors were designed as a high-performance, cost-effective solution to be used within the Heavy Equipment, Agricultural, Automotive, Military, Alternative Energy and other demanding interconnect architectures. The AT Series™ connectors contain superior environmental seals, seal retention capabilities and feature Amphenol Sine Systems RockSolid™ Contact technology. In addition, all of our AT Series™ connectors have been developed to be completely compatible with all other existing standard products industry-wide.



Hyperbolic Contacts

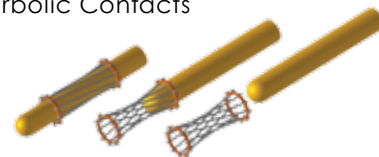

- Longer contact life
- Lower contact resistance
- Immunity to shock and vibration
- Low insertion and extraction forces
- Contact area extends 360° around pins



SEALING PLUGS
- Optional



END CAP
- Optional



HYPERBOLIC CONTACTS
- Optional




STANDARD REAR SEAL
- Also available in **Reduced Diameter**



or **Solid**



ERGONOMICALLY DESIGNED CLIP
The increased size and tactile design of our clips allow for easier mating and unmating.



RECESSED SEALING AREA
The recessed cavity allows for a secure fitting front seal.



FRONT SEAL
The superior design ensures a tight environmental seal when used in conjunction with the recessed cavity of the connector body.



WEDGE (Required) with Added Seal Retention
The added seal retention feature ensures that the Front Seal does not move out of place.

AT Series™ Specifications

The connector design incorporates an integral latching system that ensures a definitive electrical and mechanical connection. Connector housings are manufactured with a thermoplastic material that is not only durable, but has excellent UV resistance, dielectric/mechanical properties and environmentally RoHS compliant. The sealing system is comprised of a front and rear silicone, multi-sealing, perimeter against environmental ingress. Contacts are derived from quality copper alloy to ensure an electrically-reliable connection. For applications demanding higher levels of performance, you can rely on our RockSolid™ contact technology.

Performance Criteria

| | |
|------------------------------|---|
| CURRENT CAPACITY | No. 16, 13 amps (max) |
| WIRE RANGE | No 16 contacts will accept wire ranges of 14 thru 20 awg |
| TEMPERATURE | Operating temperature range: -55°C to +125°C at rated current |
| DIELECTRIC VALUE | Meets or exceeds 1500 volts minimum |
| FLAME RESISTANCE | All dielectric materials have a flammability rating of UL94 HB or better |
| DROP TEST | Shall not become detached or loosened when placed at 750mm and dropped to concrete eight times |
| SHOCK | No latch disengagement or discontinuity shall be the result when subjected to 50 g's in each of three axis (X, Y & Z) |
| VIBRATION | Continued continuity without degradation to mechanical or physical attributes following vibration. (max acceleration 20 g's at Sine sweep of 10-2000Hz) |
| CONNECTOR TERMINAL RETENTION | When subjected to a direct pull, size 14-20 achieves minimum pull-out force of 110 newtons |
| CONNECTOR RETENTION | A mated connector subjected to a pulling force by the exiting wire bundle at 111 newtons times the number of contacts to a maximum of 444 newtons applying load for 30 seconds |
| THERMAL SHOCK | Subjected to 10 cycles at -55°C to +125°C with no cracking, chipping or other damage detrimental to the normal operation of the connector |
| INSULATION RESISTANCE | Insulation resistance at 25°C shall be greater than 20 megohms when 1000 VDC are applied |
| MATING CYCLE DURABILITY | Following 100 cycles of connection engagement and disengagement, degradation either mechanical or electrical is not evident |
| CONTACT MILLIVOLT DROP | No. 16 contacts with 16 awg conductor - *100 millivolt drop max at 13 amps test current |
| ULTRAVIOLET EFFECTS | Test the mated connectors for 1000 hours per ASTM G 154 or ASTM G 153 with 20 hours UV and 4 hours of condensation for each cycle |
| WATER IMMERSION | A mated connection, properly wired, placed in an oven at +125°C for 1 hour, then placed immediately in a depth of water of 1 meter for 4 hours without loss of electronic performance |









Product Material

| | |
|-----------------|--|
| HOUSINGS | Thermoplastic |
| SEALS | Silicone Elastomer |
| SECONDARY LOCKS | Thermoplastic |
| CONTACTS | Copper Alloy, Nickel Plated, Gold optional |



AT Series™ Receptacles, Plugs And Wedges - 2, 3, 4 and 6 Position

Note: the views shown below are mating face views

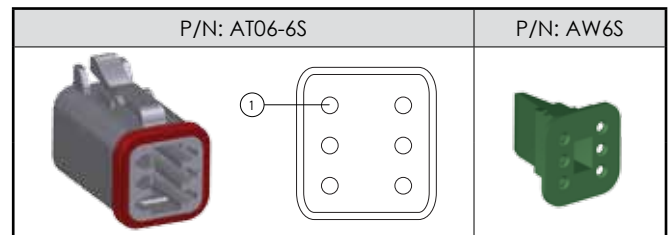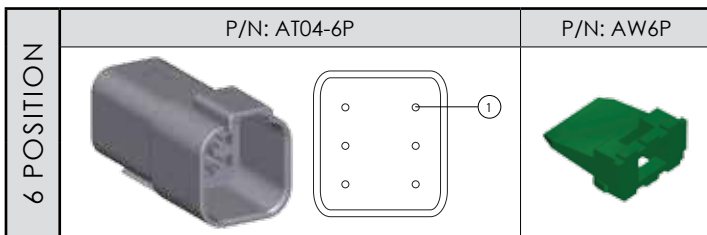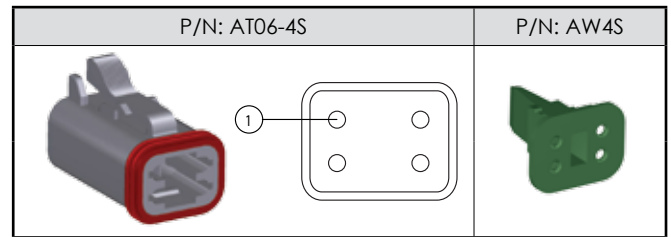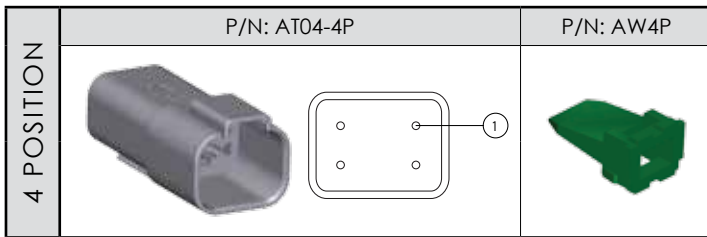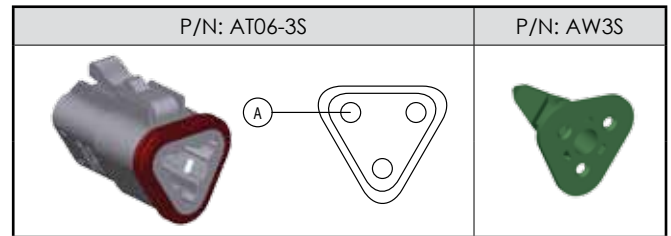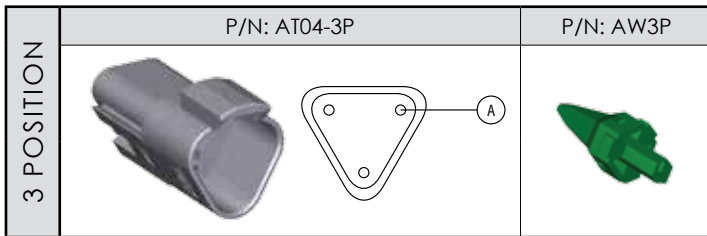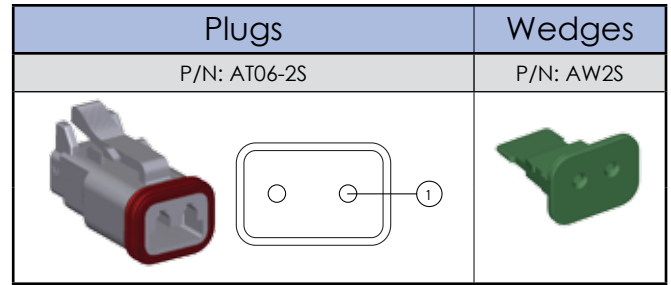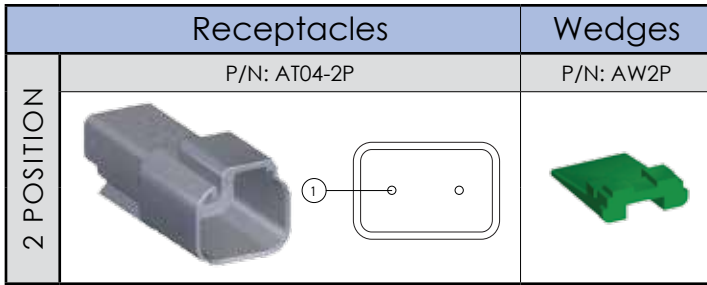









AT Series™ Part Numbering Sequence

(excluding 18 Position Connector)

| | | | | | | | |
|-----------|---------------------------|---|--|-----------------------|--------------------------------------|---|---|
| AT | 06 | - | 12 | S | A | - | XXXX |
| Amphenol | 06 - Plug 04 - Recept. | | # of Positions 2, 3, 4, 6 08 or 12 | S - Socket P - Pin | Key Position A, B, C, D X1, X2 | | Modifications MMXX - Mixed Modification (Consult Sales Rep.) RD01 - Reduced Diameter Seal EC01 - End Cap SS01 - Solid Seal with End Cap |

AT Series™ Receptacles, Plugs and Wedges - 8 (A-D) Position

Note: The views shown below are Mating Face Views

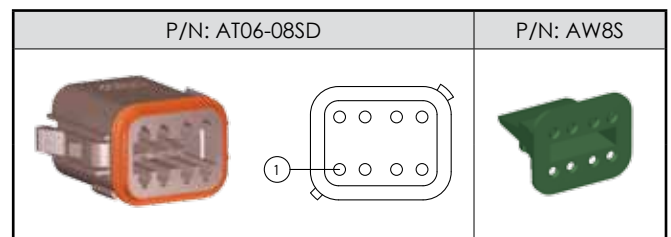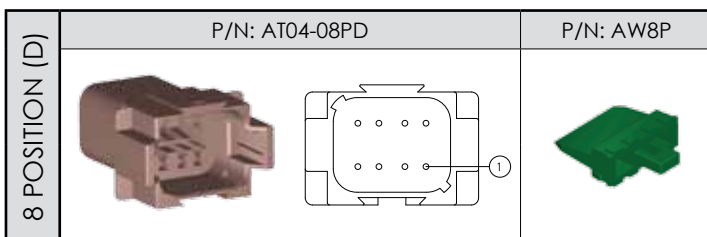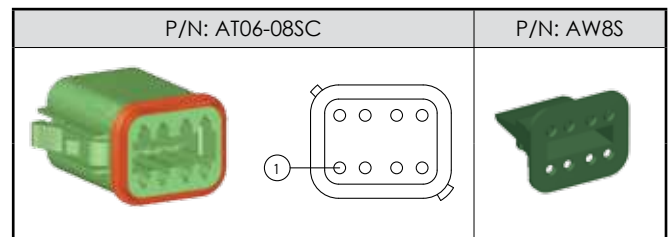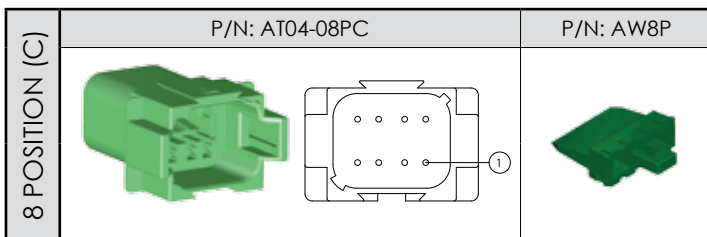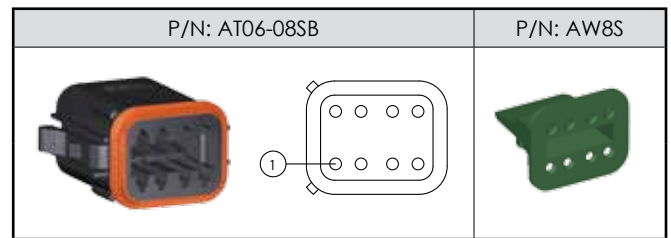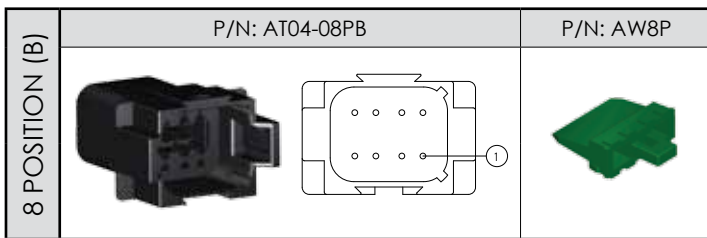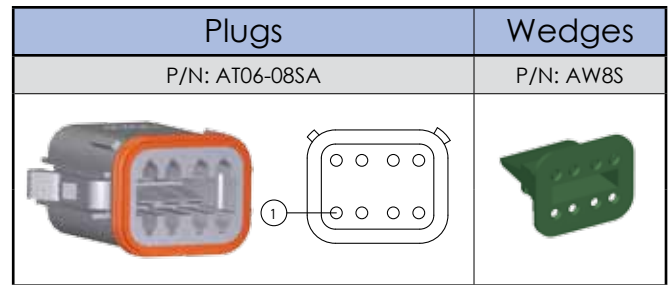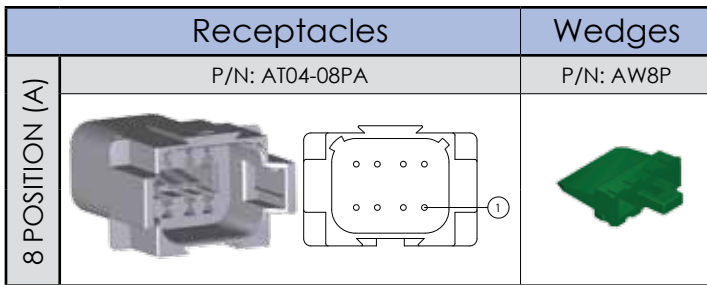









AT Series™ Part Numbering Sequence

(excluding 18 Position Connector)

| | | | | | | | |
|-----------|--------------------------|---|--|-----------------------|--------------------------------------|---|---|
| <u>AT</u> | <u>06</u> | - | <u>12</u> | <u>S</u> | <u>A</u> | - | <u>XXXX</u> |
| Amphenol | 06 - Plug 04 - Recep. | | # of Positions 2, 3, 4, 6 08 or 12 | S - Socket P - Pin | Key Position A, B, C, D X1, X2 | | Modifications MMXX - Mixed Modification (Consult Sales Rep.) RD01 - Reduced Diameter Seal EC01 - End Cap SS01 - Solid Seal with End Cap |

AT Series™ Receptacles, Plugs and Wedges - 12 (A-D) Position

Note: The views shown below are Mating Face Views

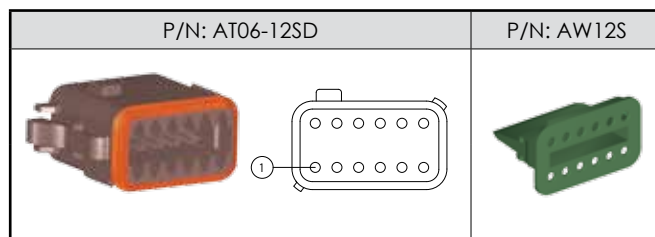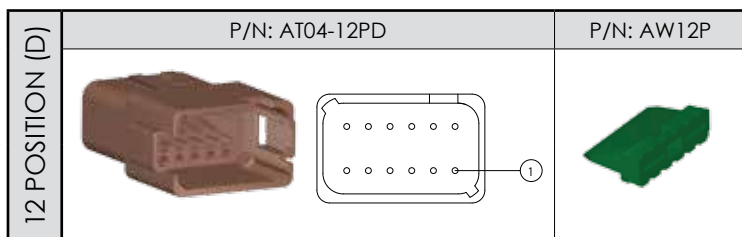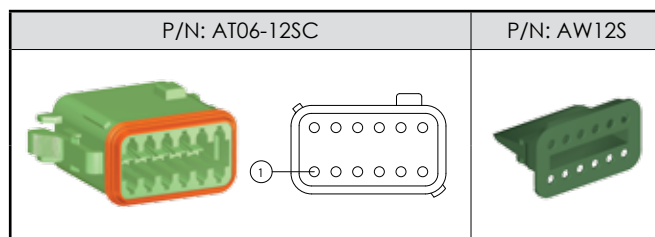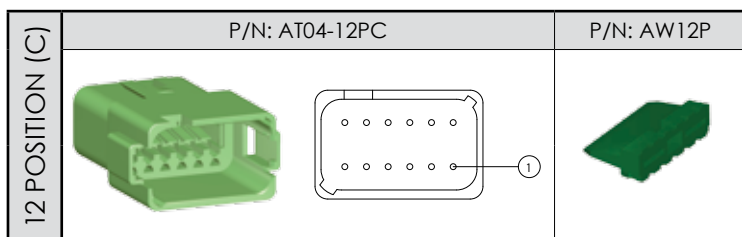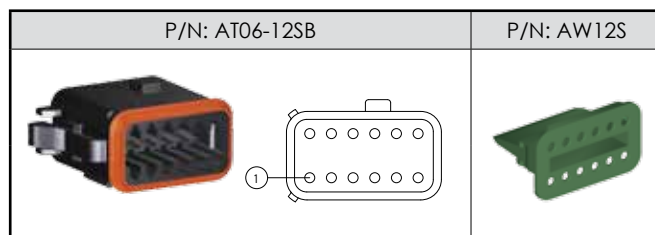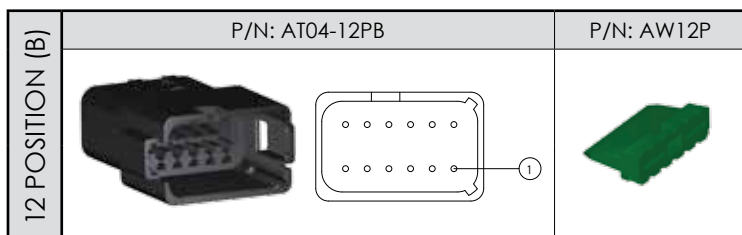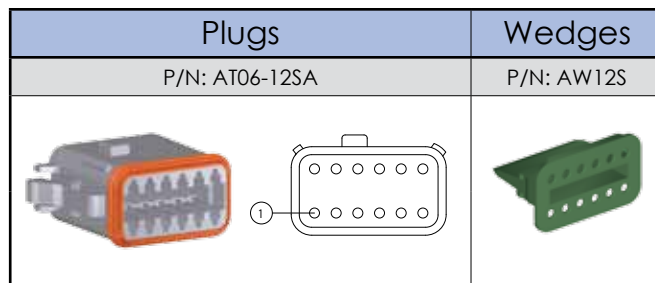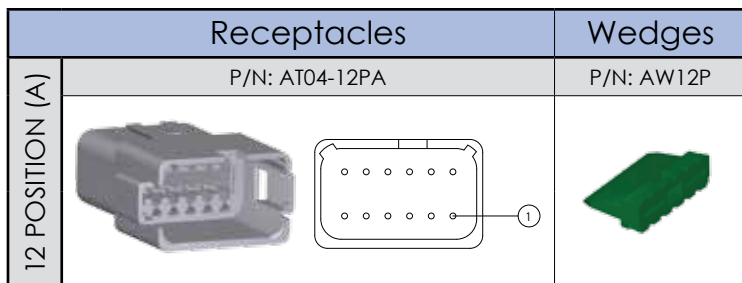




AT Series™ Part Numbering Sequence

(excluding 18 Position Connector)

| | | | | | | | |
|-----------|--------------------------|---|--|-----------------------|--------------------------------------|---|---|
| <u>AT</u> | <u>06</u> | - | <u>12</u> | <u>S</u> | <u>A</u> | - | <u>XXXX</u> |
| Amphenol | 06 - Plug 04 - Recep. | | # of Positions 2, 3, 4, 6 08 or 12 | S - Socket P - Pin | Key Position A, B, C, D X1, X2 | | Modifications MMXX - Mixed Modification (Consult Sales Rep.) RD01 - Reduced Diameter Seal EC01 - End Cap SS01 - Solid Seal with End Cap |

AT Series™ Plugs, Wedges and Connectors - 12 and 18 Position

Note: The views shown below are Mating Face Views

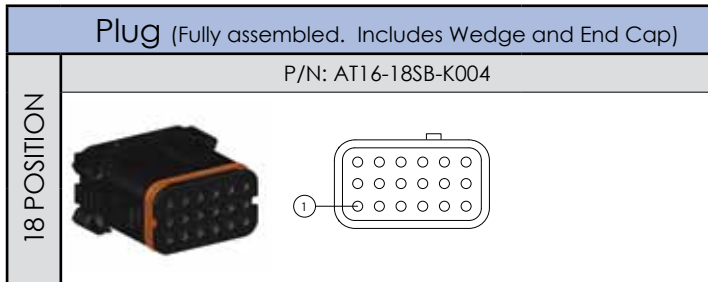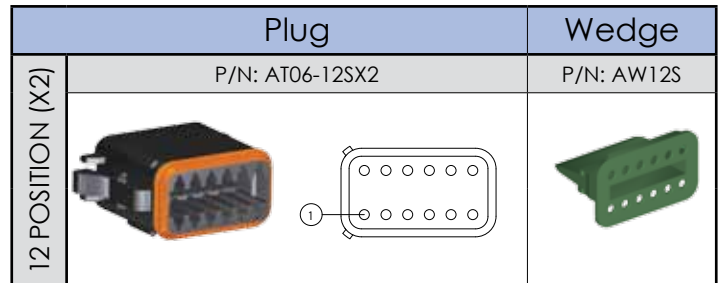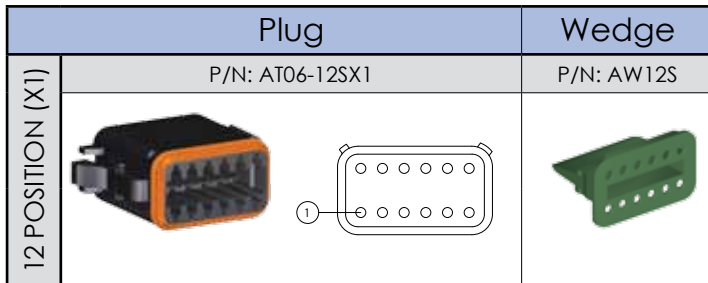

AT Series™ Optional Modifications with Part Numbering Sequencing

| | | | | | |
|-----------------------|---|---|---|-----------------------------------|--|
| <u>AT</u> Amphenol | <u>XX</u> 06 - Plug 04 - Receptacle | - | <u>XX</u> # of Positions 2, 3, 4, 6 08, 12 or 18 | <u>X</u> S - Socket P - Pin | <u>X</u> - Key Position A, B, C, D X1, X2 |
| <u>AT</u> Amphenol | <u>XX</u> 06 - Plug 04 - Receptacle | - | <u>XX</u> # of Positions 2, 3, 4, 6 08, 12 or 18 | <u>X</u> S - Socket P - Pin | <u>X</u> - Key Position A, B, C, D X1, X2 |
| <u>AT</u> Amphenol | <u>XX</u> 06 - Plug 04 - Receptacle | - | <u>XX</u> # of Positions 2, 3, 4, 6 08, 12 or 18 | <u>X</u> S - Socket P - Pin | <u>X</u> - Key Position A, B, C, D X1, X2 |
| <u>AT</u> Amphenol | <u>XX</u> 06 - Plug 04 - Receptacle | - | <u>XX</u> # of Positions 2, 3, 4, 6 08, 12 or 18 | <u>X</u> S - Socket P - Pin | <u>X</u> - Key Position A, B, C, D X1, X2 |

EC01

END CAP

- End Cap
- Standard Seal (.088 - .145 range)



RD01

REDUCED DIAMETER

- Reduced Seal (.053 - .120 range)



MM01

MIXED MODIFICATION

- End Cap
- Reduced Seal (.053 - .120 range)



SS01

SOLID SEAL

- End Cap
- Solid Seal



Note: All dimensions are in inches.



Customized Colors are available in a wide range allowing you complete control over your project. To the left is a sampling of the available colors. Contact a Sales Representative for more details.

What are AHD Series™ Connectors?

Amphenol Sine Systems AHD Series™ Connectors were developed in response to the overwhelming need for an economic alternative to today's existing diagnostic product options. Designed specifically as a cost-conscious, reliable alternative, intermateable to industry standard 6 and 9 pin connectors, the AHD Series™ is ideal for any situation where either controlled and/or uncontrolled environmental conditions exist.

Amphenol Sine Systems AHD Series™ Connectors offer both a smooth, non-sealing option for controlled applications, as well as an environmentally-sealed, threaded option for more demanding applications. The same applies for our DiagnosticGrade™ Cable Assemblies in that we provide both options for our customers.

Features and Advantages

| | |
|------------------------------|--|
| INTEGRATED ALIGNMENT KEYS | Tactile verification for blind mating |
| STRONG THERMOPLASTIC HOUSING | Extended service life |
| OPERATING TEMPERATURE RANGE | -55°C TO +125°C - Wide range compatibility |
| ECONOMICALLY SOUND | Low overall cost |
| RoHS COMPLIANT | Environmentally friendly |
| UL Approval | Certified and compliant |

Performance Criteria

| | |
|------------------------|---|
| CONTACT CURRENT RATING | DiagnosticGrade™ / Military Style: At +125°C, continuous, less thru wire: #12 contact = 25 amps max. current; #16 contact = 13 amps max. current |
| PHYSICAL SHOCK | Military Style: No locking, unmating or other unsatisfactory result after 50 g's in each of three mutually perpendicular planes. |
| DIELECTRICAL STRENGTH | DiagnosticGrade™ / Military Style: 1500 volts minimum |
| VIBRATION | Military Style: Maintains continuity and exhibits no mechanical or physical damage after vibration. (20 g's at 10-2000 Hz) |
| TEMPERATURE | DiagnosticGrade™ / Military Style: Operating temperature range: -55°C TO +125°C at rated current. |
| INSULATION RESISTANCE | DiagnosticGrade™ / Military Style: 1000 megohms minimum at 25°C. |
| DURABILITY | DiagnosticGrade™ / Military Style: No electric or mechanical defects after 100 cycles of engagement and disengagement. |
| CORROSION RESISTANCE | DiagnosticGrade™ / Military Style: Connectors show no evidence of corrosion after exposure to 48 hours of salt spray per MIL-STD 1344 method 1001. |



Product Material

| | |
|----------|--------------------------|
| HOUSINGS | Thermoplastic |
| SEALS | Silicone Elastomer |
| CONTACTS | Copper Alloy/Gold plated |



AHD Series™ Receptacles, Plugs and Caps - 6 Pin

The AHD Series™ products listed below provide a quick connection between Amphenol Sine Systems 6 Pin products and equivalent industry 6 Pin products.

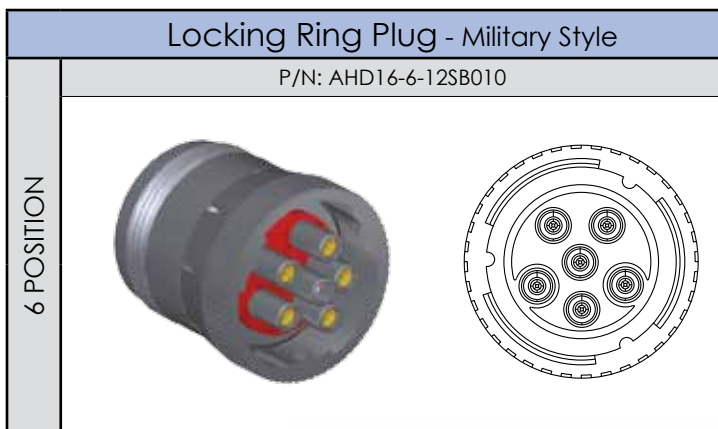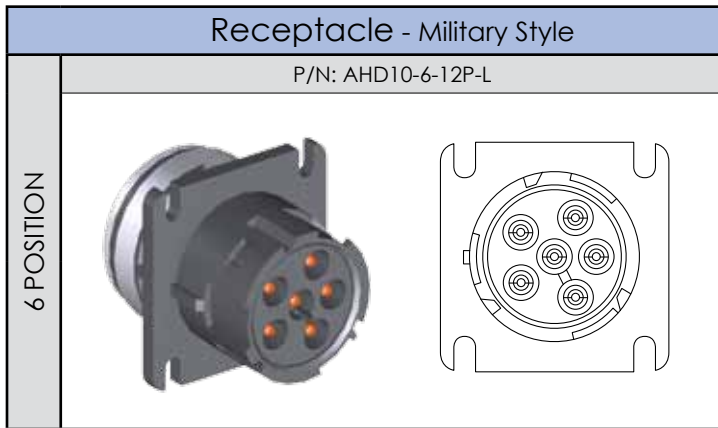

AHD Series™ Receptacles and Plugs - 9 Pin (J1939)

The AHD Series™ products listed below provide a quick connection between Amphenol Sine Systems 9 Pin products and equivalent industry 9 Pin products.

| Receptacle - Military Style | |
|-----------------------------|--|
| P/N: AHD10-9-1939P | |
| 9 POSITION | |

| Smooth Shell Plug - DiagnosticGrade™ | |
|--|--|
| P/N: AHD17-9-1939S (available w/out Rear Seal) | |
| | |

| Receptacle | |
|------------------|--|
| P/N: AHD10-9-96P | |
| 9 POSITION | |

| In-line Receptacle | |
|--------------------|--|
| P/N: AHD14-9-1939P | |
| | |

| Locking Ring Plug - Military Style | |
|------------------------------------|--|
| P/N: AHD16-9-1939S | |
| 9 POSITION | |



| Locking Ring Plug (Non J1939) - Military Style | |
|--|--|
| P/N: AHD16-9-96S | |
| | |



| In-line Receptacle | |
|--------------------|--|
| P/N: AHD14-9-96P | |
| 9 POSITION | |

| Receptacle Cap - Military Style | |
|---------------------------------|--|
| P/N: AHDC-16-9 | |
| | |

Pin Contacts, Socket Contacts and Tooling

The AHD Series™ products listed below provide a quick connection between Amphenol Sine Systems 6 Pin products and equivalent industry 6 Pin products. **Note:** All dimensions are in Inches.
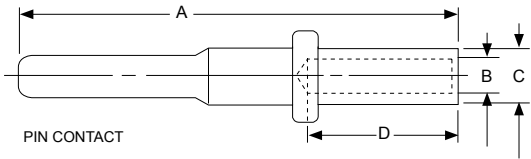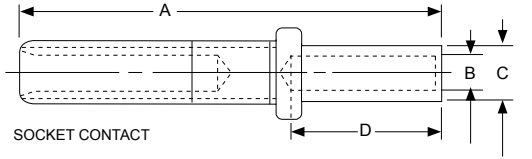
| Military-Style Solid Crimp | | | | | | | |
|---|---------------|--|----------|----------|----------|---------------------|--------------------------|
|  | |  | | | | | |
| Part Numbers (Fits AT Series™ and AHD Series™) | Size/ Type | A Max | B Min | C Max | D Min | Wire Gauge Range | Recomm'd Strip Length |
| AT60-202-1631 (Gold) AT60-202-16141 (Nickel) | 16 PIN | .821 | .066 | .103 | .250 | 16 and 18 | .250-.312 |
| AT62-201-1631 (Gold) AT62-201-16141 (Nickel) | 16 SOC | .759 | .066 | .103 | .250 | 16 and 18 | .250-.312 |
| Part Numbers (Fits AHD Series™ only) | Size/ Type | A Max | B Min | C Max | D Min | Wire Gauge Range | Recomm'd Strip Length |
| AT60-220-1231 (Gold) | 12 PIN | .821 | .098 | .151 | .250 | 12 and 14 | .250-.312 |
| AT62-210-1231 (Gold) | 12 SOC | .759 | .098 | .151 | .250 | 12 and 14 | .250-.312 |
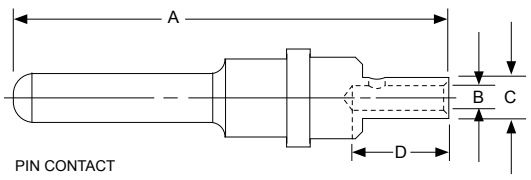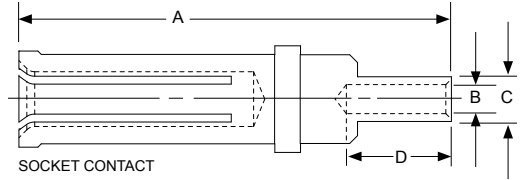
| DiagnosticGrade™ - Solid Crimp | | | | | | | |
|--|---------------|---|----------|----------|----------|---------------------|--------------------------|
|  | |  | | | | | |
| Part Numbers (Fits AT Series™ and AHD Series™) | Size/ Type | A Max | B Min | C Max | D Min | Wire Gauge Range | Recomm'd Strip Length |
| 65-54756 (Gold) | 16 PIN | .826 | .047 | .078 | .165 | 20 | .250-.303 |
| 65-54757 (Gold) | 16 SOC | .763 | .047 | .078 | .165 | 20 | .250-.303 |
| Part Numbers (Fits AHD Series™ only) | Size/ Type | A Max | B Min | C Max | D Min | Wire Gauge Range | Recomm'd Strip Length |
| 65-54749 (Gold) | 12 PIN | .826 | .047 | .078 | .165 | 20 | .250-.303 |
| 65-54748 (Gold) | 12 SOC | .763 | .047 | .078 | .165 | 20 | .250-.303 |




Listed below are quick reference illustrations for RockSolid™ and stamped and formed crimp options, as well as the Amphenol Sine Systems part numbers.




Hyperbolic Contacts

- Longer contact life
- Lower contact resistance
- Immunity to shock and vibration
- Low insertion and extraction forces
- Contact area extends 360° around pins

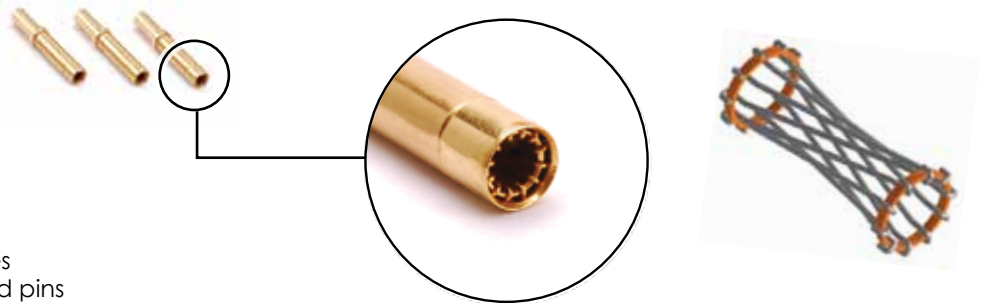

RockSolid™ Gold Contacts

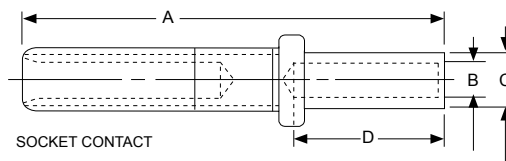

| Part Numbers (Fits AT Series™ and AHD Series™) | Size/ Type | A Max | B Min | C Max | D Min | AWG Range | Recomm'd Strip Length |
|---|---------------|----------|----------|----------|----------|-----------|--------------------------|
| 65-54942-14 | 16 SOC | .759 | .073 | .106 | .250 | 14 | .250-.312 |
| 65-54942-16 | 16 SOC | .759 | .068 | .103 | .250 | 16 | .250-.312 |
| 65-54942-20 | 16 SOC | .759 | .048 | .078 | .172 | 20 | .250-.312 |

Pins and Contacts - Size 16 (Stamped and Formed)



| Part Numbers | AWG Range | Recomm'd Strip Length | Material | Part Numbers | AWG Range | Recomm'd Strip Length | Material |
|--------------|-----------|--------------------------|----------|--------------|-----------|--------------------------|----------|
| AT60-14-0122 | 14-16 | .125 - .175 | Nickel | AT62-14-0122 | 14-16 | .125 - .175 | Nickel |
| AT60-14-0144 | | | Gold | AT62-14-0144 | | | Gold |
| AT60-16-0122 | 16-18 | | Nickel | AT62-16-0122 | 16-18 | | Nickel |
| AT60-16-0144 | | | Gold | AT62-16-0144 | | | Gold |
| AT60-16-0622 | 18-20 | | Nickel | AT62-16-0622 | 18-20 | | Nickel |
| AT60-16-0644 | | | Gold | AT62-16-0644 | | | Gold |

Crimp Die (Stamped & Formed Contacts)

P/N: *MFX 3950 (Size 16)

P/N: *MFX 3953 (Size 16 and 20)

*Consult the Factory for availability



Sealing Plug (Size 16)

P/N: A114017



Plug Assembly - Contact and Wedge Insertion



1. Grasp crimped contact approx. one inch behind the contact barrel.



2. Hold connector with rear grommet facing you.



3. Push contact straight into connector until a 'click' is felt. A slight tug will confirm placement.



4. Insert wedge into connector.



5. A 'click' will be felt when the wedge is fully installed.

Plug Assembly - Contact and Wedge Removal



1. Remove wedge by inserting a flathead screwdriver head underneath the lip of the wedge.



2. Twist the flathead screwdriver until wedge 'pops' out of connector.



3. Use the same flathead screwdriver to remove contact inside connector.

Optional - Contact and Wedge Removal Tool

P/N: ATRT-100



Receptacle Assembly - Contact and Wedge Insertion



1. Grasp crimped contact approx. one inch behind the contact barrel.



2. Hold connector with rear grommet facing you.



3. Push contact straight into receptacle until a 'click' is felt. A slight tug will confirm placement.



4. Insert wedge into receptacle.



5. A 'click' will be felt when the wedge is fully installed.

Receptacle Assembly - Contact and Wedge Removal



1. Remove wedge by inserting a hook into an opening of the wedge.



2. Pull until wedge 'pops' out of receptacle.



3. Remove wedge.

NORTH AMERICA

Amphenol Sine Systems MICHIGAN

44724 Morley Drive
Clinton Township, MI 48036
Toll-Free: 1-800-394-7732
Fax: 1-586-465-1216
Email: sine_info@sineco.com

EUROPE

Amphenol Air LB

29, voie d' Yvois
F-08110 Blagny, France
Phone: 33-3-2422-7849
Fax: 33-3-2422-7875
Email: accueil@amphenol-airlb.fr

Amphenol AIR LB GmbH

Am Kleinbahnhof 4
Saarlouis D-66740, Germany
Phone: 49-6831-981-00
Fax: 49-6831-981-030
Email: info@amphenol-airlb.de

Amphenol BENELUX

Amphenol European Sales Operations
P.O. Box 63, 3990 DB Houten
The Netherlands
Phone: (31) 30-6358000
Fax: (31) 30-6377034
E-mail: info@amphenol-nl.com

Amphenol CENTER EAST EUROPE, POLAND and AUSTRIA

Wiener Gasse 68
2380 Perchtoldsdorf, Austria
Phone: 43-699-10396071
Fax: 43-699-40396071
Email: c.czesch@amphenol-roe.eu

ASIA

Amphenol Sine Systems CHINA

2/F Building A5, Hua Feng Technology Park
Guan Tian, Bei Huan Road, Shi Yan Street
Bao An District, Shenzhen, China 518108
Tel: 86-755-8173-8000 ext. 8098
Fax: 86-755-8173-8180
Email: fount.nee@amphenolpcd.com.cn

Amphenol INTERCONNECT INDIA PRIVATE LTD

105 Bhosari Industrial Area
Pune 411 026, India
Phone: 91-20-712-0363/0463/0155
Fax: 91-20-712-0581

OTHER LOCATIONS

Amphenol MEXICO

Prolongacion Reforma 61-6 B2
Col. Paseo de las Lomas
C.P. 01330 Mexico DF, Mexico
Phone: 52-55-5258-9984
Fax: 52-55-5081-6890
Email: www.amphenolmexico.com

Amphenol ARGENTINA

Avenida Callao 930
2nd floor Office B Plaza
C1023A.P Buenos Aires, Argentina
Phone: 54-11-4815-6886
Fax: 54-11-4814-5779

Amphenol BRASIL LTDA

Rua Diogo Moreira, 132
20 Andar, Rooms 2001-2-3
CEP 05423-101
Sao Paulo- SP, Brazil
Phone: 55-11-3815-1003
Fax: 55-11-3815-1629
Email: vendas@amphenol.com.br

Amphenol ESPANA

Edificio Burgosal, Oficina N 55
C/Comunidad de Madrid, 35 bis
Las Rozas (Madrid), 28230
Phone: 34-91-6407302
Mobile: 34-629054629
Fax: 34-91-6407307
Email: e.bendix@amphenol-roe.eu

Amphenol ITALIA

Via Barbaiana 5
20020 Lainate, Milano, Italy
Phone: 39-02-932541
Fax: 39-02-9325444
Email: r.buscone@amphenol-roe.eu

Amphenol NORDIC

Appelbooms vag 2
SE-18642 Vallentuna, Sweden
Phone: 46-76-8418600
Fax: 46-70-2203197
Email: f.weden@amphenol-roe.eu

Amphenol SOCAPEX

948, Promenade de l'Arve - BP 29
74311 Thyez CEDEX, France
Phone: 33(0)4-50-89-28-40
Fax: 33(0)4-50-96-29-75
Email: jocelyne.anthoine@amphenol-socapex.fr

Amphenol DAESHIN

558, Songnae-2 Dong, SoSa-Gu
Bucheon City, Gyeonggi-do, Korea 422-818
Phone: 81-32-610-3800
Fax: 81-32-673-2507
Email: info@amphenol.co.kr

Amphenol JAPAN

471-1, Deba, Ritto-city
shiga 520-3041, Japan
Phone: 81-77-553-8501
Fax: 81-77-551-2200

Amphenol SOUTH AFRICA

30 Impala Road
2196 Sandton, Chislehurst
South Africa
Phone: 27-11-783-9517
Fax: 27-11-783-9519
Email: amphenol_africa@csi.com

Amphenol AUSTRALIA PTY LIMITED

2 Fiveways Blvd., Keysborough
Melbourne, Victoria 3173 Australia
Phone: 613-8796-8888
Fax: 613-8796-8801

Amphenol TURKEY

Ayazaga Mah. Meyden Sk. No. 28
Beybi Giz Plaza, Kat. 26
34396 Maslak/Istanbul, Turkey
Phone: 90-212-335-2501
Fax: 90-212-335-25-00

Amphenol SWITZERLAND & SOUTH CENTER EUROPE

Switzerland, Slovenia, Serbia, Montenegro,
Yugoslavia, Greece, Bulgaria
948, Promenade de l'Arve - BP29
74311 Thyez - France
Phone: 33-4-50-89-28-00
Fax: 33-4-50-96-29-75

Amphenol TUCHEL GmbH

August-Haessler-Strasse 10
Heilbronn, 74080
Germany
Phone: 49(0)-7131-929-0
Fax: 49(0)-7131-929-486
Email: info@amphenol.de

Amphenol LIMITED

Thanet Way, Whitstable
Kent CT5 3JF, United Kingdom
Phone: 44-1-227-773200
Fax: 44-1-227-276571

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А