

# FM25CL64

## 64Kb FRAM Serial 3V Memory



### Features

#### 64K bit Ferroelectric Nonvolatile RAM

- Organized as 8,192 x 8 bits
- Unlimited Read/Write Cycles
- 10 Year Data Retention
- NoDelay™ Writes
- Advanced High-Reliability Ferroelectric Process

#### Very Fast Serial Peripheral Interface - SPI

- Up to 20 MHz Frequency
- Direct Hardware Replacement for EEPROM
- SPI Mode 0 & 3 (CPOL, CPHA=0,0 & 1,1)

#### Sophisticated Write Protection Scheme

- Hardware Protection
- Software Protection

#### Low Power Consumption

- Low Voltage Operation 2.7-3.65V
- 1  $\mu$ A Standby Current

#### Industry Standard Configuration

- Industrial Temperature -40°C to +85°C
- 8-pin SOIC

### Description


The FM25CL64 is a 64-kilobit nonvolatile memory employing an advanced ferroelectric process. A ferroelectric random access memory or FRAM is nonvolatile and performs reads and writes like a RAM. It provides reliable data retention for 10 years while eliminating the complexities, overhead, and system level reliability problems caused by EEPROM and other nonvolatile memories.

Unlike serial EEPROMs, the FM25CL64 performs write operations at bus speed. No write delays are incurred. The next bus cycle may commence immediately without the need for data polling. The next bus cycle may start immediately. In addition, the product offers virtually unlimited write endurance, orders of magnitude more endurance than EEPROM. Also, FRAM exhibits much lower power during writes than EEPROM since write operations do not require an internally elevated power supply voltage for write circuits.

These capabilities make the FM25CL64 ideal for nonvolatile memory applications requiring frequent or rapid writes. Examples range from data collection, where the number of write cycles may be critical, to demanding industrial controls where the long write time of EEPROM can cause data loss.

The FM25CL64 provides substantial benefits to users of serial EEPROM as a hardware drop-in replacement. The FM25CL64 uses the high-speed SPI bus, which enhances the high-speed write capability of FRAM technology. Device specifications are guaranteed over an industrial temperature range of -40°C to +85°C.

### Pin Configuration

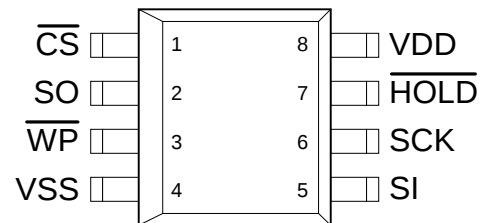

| Pin Name | Function           |
|----------|--------------------|
| /CS      | Chip Select        |
| /WP      | Write Protect      |
| /HOLD    | Hold               |
| SCK      | Serial Clock       |
| SI       | Serial Data Input  |
| SO       | Serial Data Output |
| VDD      | Supply Voltage     |
| VSS      | Ground             |

### Ordering Information

|            |            |
|------------|------------|
| FM25CL64-S | 8-pin SOIC |
|------------|------------|

This product conforms to specifications per the terms of the Ramtron standard warranty. Production processing does not necessarily include testing of all parameters.

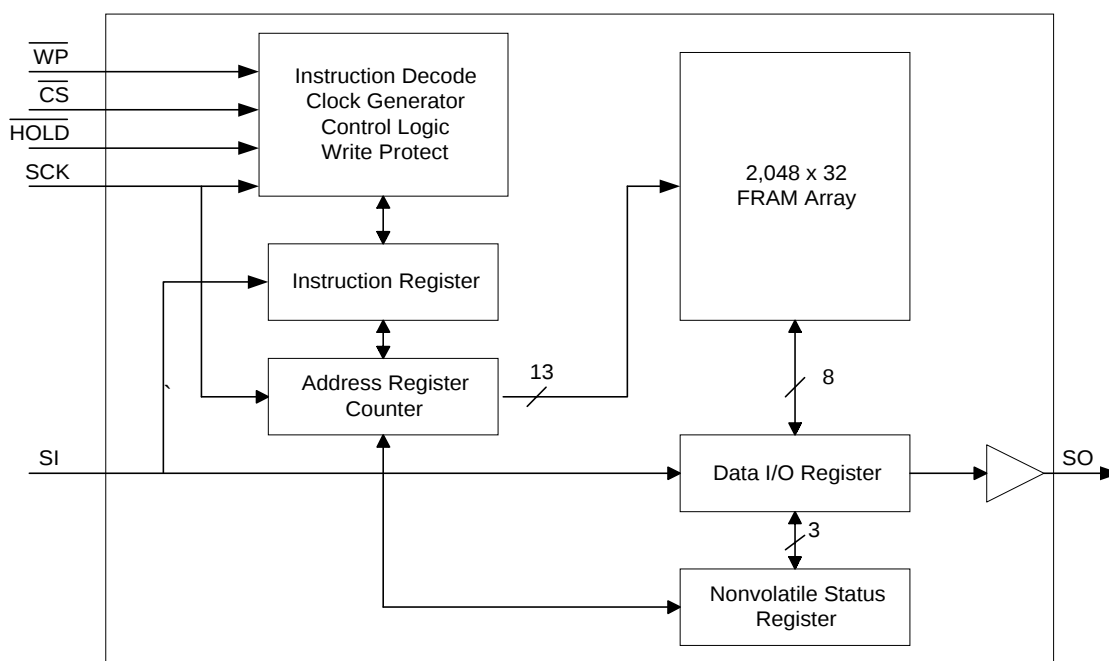


Figure 1. Block Diagram

### Pin Descriptions

| Pin Name | I/O    | Description                                                                                                                                                                                                                                                                                                                                                  |
|----------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| /CS      | Input  | Chip Select: This active low input activates the device. When high, the device enters low-power standby mode, ignores other inputs, and all outputs are tri-stated. When low, the device internally activates the SCK signal. A falling edge on /CS must occur prior to every op-code.                                                                       |
| SCK      | Input  | Serial Clock: All I/O activity is synchronized to the serial clock. Inputs are latched on the rising edge and outputs occur on the falling edge. Since the device is static, the clock frequency may be any value between 0 and 20 MHz and may be interrupted at any time.                                                                                   |
| /HOLD    | Input  | Hold: The /HOLD pin is used when the host CPU must interrupt a memory operation for another task. When /HOLD is low, the current operation is suspended. The device ignores any transition on SCK or /CS. All transitions on /HOLD must occur while SCK is low.                                                                                              |
| /WP      | Input  | Write Protect: This active low pin prevents write operations to the status register. This is critical since other write protection features are controlled through the status register. A complete explanation of write protection is provided below. *Note that the function of /WP is different from the FM25040 where it prevents all writes to the part. |
| SI       | Input  | Serial Input: All data is input to the device on this pin. The pin is sampled on the rising edge of SCK and is ignored at other times. It should always be driven to a valid logic level to meet IDD specifications.<br>* SI may be connected to SO for a single pin data interface.                                                                         |
| SO       | Output | Serial Output: This is the data output pin. It is driven during a read and remains tri-stated at all other times including when /HOLD is low. Data transitions are driven on the falling edge of the serial clock.<br>* SO may be connected to SI for a single pin data interface.                                                                           |
| VDD      | Supply | Power Supply (2.7V to 3.65V)                                                                                                                                                                                                                                                                                                                                 |
| VSS      | Supply | Ground                                                                                                                                                                                                                                                                                                                                                       |

## Overview

The FM25CL64 is a serial FRAM memory. The memory array is logically organized as 8,192 x 8 and is accessed using an industry standard Serial Peripheral Interface or SPI bus. Functional operation of the FRAM is similar to serial EEPROMs. The major difference between the FM25CL64 and a serial EEPROM with the same pinout is the FRAM's superior write performance.

## Memory Architecture

When accessing the FM25CL64, the user addresses 8,192 locations of 8 data bits each. These data bits are shifted serially. The addresses are accessed using the SPI protocol, which includes a chip select (to permit multiple devices on the bus), an op-code, and a two-byte address. The upper 3 bits of the address range are 'don't care' values. The complete address of 13-bits specifies each byte address uniquely.

Most functions of the FM25CL64 either are controlled by the SPI interface or are handled automatically by on-board circuitry. The access time for memory operation is essentially zero, beyond the time needed for the serial protocol. That is, the memory is read or written at the speed of the SPI bus. Unlike an EEPROM, it is not necessary to poll the device for a ready condition since writes occur at bus speed. So, by the time a new bus transaction can be shifted into the device, a write operation will be complete. This is explained in more detail in the interface section.

Users expect several obvious system benefits from the FM25CL64 due to its fast write cycle and high endurance as compared with EEPROM. In addition there are less obvious benefits as well. For example in a high noise environment, the fast-write operation is less susceptible to corruption than an EEPROM since it is completed quickly. By contrast, an EEPROM requiring milliseconds to write is vulnerable to noise during much of the cycle.

Note that the FM25CL64 contains no power management circuits other than a simple internal power-on reset. It is the user's responsibility to ensure that VDD is within datasheet tolerances to prevent incorrect operation.

## Serial Peripheral Interface – SPI Bus

The FM25CL64 employs a Serial Peripheral Interface (SPI) bus. It is specified to operate at speeds up to 20 MHz. This high-speed serial bus provides high performance serial communication to a host microcontroller. Many common microcontrollers have hardware SPI ports allowing a direct interface. It is quite simple to emulate the port using ordinary port pins for microcontrollers that do not. The FM25CL64 operates in SPI Mode 0 and 3.


The SPI interface uses a total of four pins: clock, data-in, data-out, and chip select. It is possible to connect the two data pins together. Figure 2 illustrates a typical system configuration using the FM25CL64 with a microcontroller that offers an SPI port. Figure 3 shows a similar configuration for a microcontroller that has no hardware support for the SPI bus.

### Protocol Overview


The SPI interface is a synchronous serial interface using clock and data pins. It is intended to support multiple devices on the bus. Each device is activated using a chip select. Once chip select is activated by the bus master, the FM25CL64 will begin monitoring the clock and data lines. The relationship between the falling edge of /CS, the clock and data is dictated by the SPI mode. The device will make a determination of the SPI mode on the falling edge of each chip select. While there are four such modes, the FM25CL64 supports modes 0 and 3. Figure 4 shows the required signal relationships for modes 0 and 3. For both modes, data is clocked into the FM25CL64 on the rising edge of SCK and data is expected on the first rising edge after /CS goes active. If the clock begins from a high state, it will fall prior to beginning data transfer in order to create the first rising edge.

The SPI protocol is controlled by op-codes. These op-codes specify the commands to the device. After /CS is activated the first byte transferred from the bus master is the op-code. Following the op-code, any addresses and data are then transferred.

Certain op-codes are commands with no subsequent data transfer. The /CS must go inactive after an operation is complete and before a new op-code can be issued. There is one valid op-code only per active chip select.

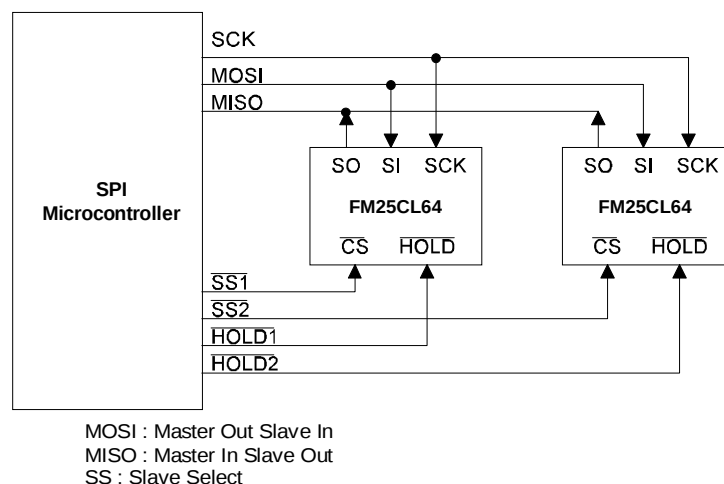


**Figure 2. System Configuration with SPI port**

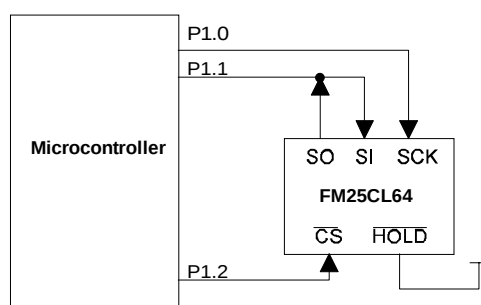


**Figure 3. System Configuration without SPI port**

SPI Mode 0: CPOL=0, CPHA=0

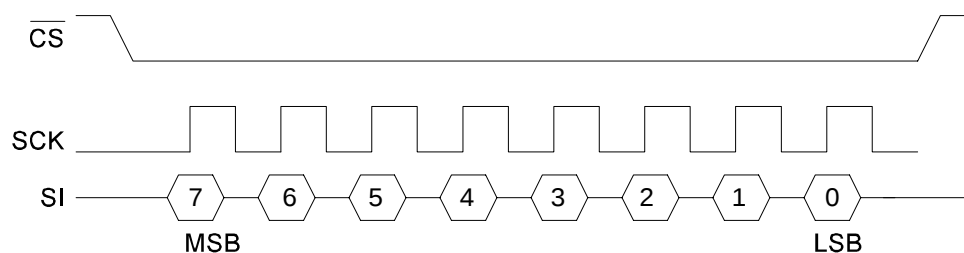

SPI Mode 3: CPOL=1, CPHA=1

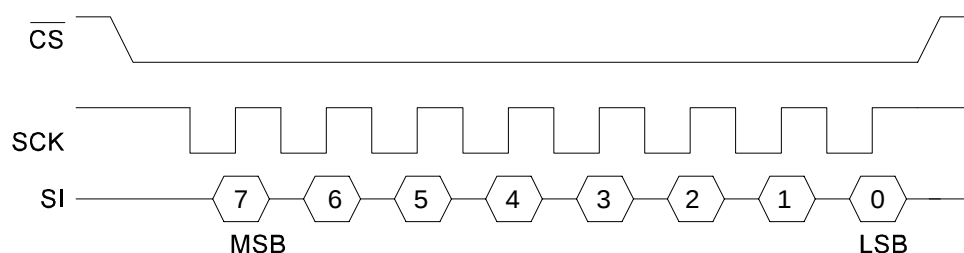

**Figure 4. SPI Modes 0 & 3**

## Data Transfer

All data transfers to and from the FM25CL64 occur in 8-bit groups. They are synchronized to the clock signal (SCK), and they transfer most significant bit (MSB) first. Serial inputs are registered on the rising edge of SCK. Outputs are driven from the falling edge of SCK.

## Command Structure

There are six commands called op-codes that can be issued by the bus master to the FM25CL64. They are listed in the table below. These op-codes control the functions performed by the memory. They can be divided into three categories. First, there are commands that have no subsequent operations. They perform a single function such as to enable a write operation. Second are commands followed by one byte, either in or out. They operate on the status register. The third group includes commands for memory transactions followed by address and one or more bytes of data.

**Table 1. Op-code Commands**

| Name  | Description            | Op-code    |
|-------|------------------------|------------|
| WREN  | Set Write Enable Latch | 0000 0110b |
| WRDI  | Write Disable          | 0000 0100b |
| RDSR  | Read Status Register   | 0000 0101b |
| WRSR  | Write Status Register  | 0000 0001b |
| READ  | Read Memory Data       | 0000 0011b |
| WRITE | Write Memory Data      | 0000 0010b |


## WREN - Set Write Enable Latch

The FM25CL64 will power up with writes disabled. The WREN command must be issued prior to any write operation. Sending the WREN op-code will allow the user to issue subsequent op-codes for write operations. These include writing the status register and writing the memory.


Sending the WREN op-code causes the internal Write Enable Latch to be set. A flag bit in the status register, called WEL, indicates the state of the latch. WEL=1 indicates that writes are permitted. Attempting to write the WEL bit in the status register has no effect. Completing any write operation will automatically clear the write-enable latch and prevent further writes without another WREN command. Figure 5 below illustrates the WREN command bus configuration.

## WRDI - Write Disable

The WRDI command disables all write activity by clearing the Write Enable Latch. The user can verify that writes are disabled by reading the WEL bit in the status register and verifying that WEL=0. Figure 6 illustrates the WRDI command bus configuration.

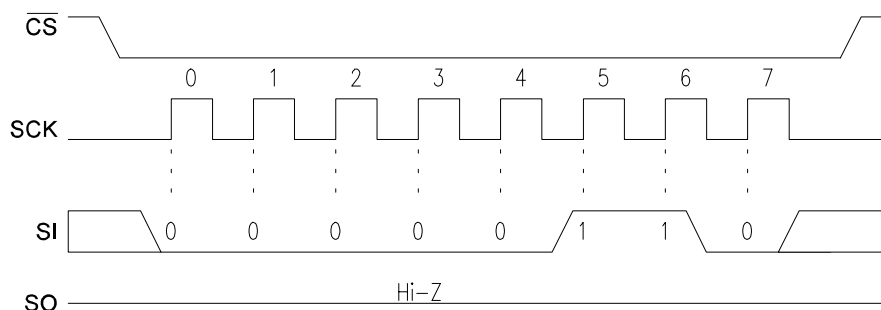

**Figure 5. WREN Bus Configuration**

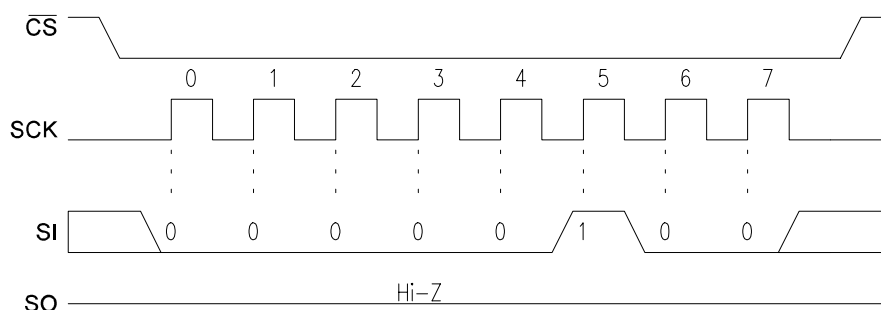


**Figure 6. WRDI Bus Configuration**

### RDSR - Read Status Register


The RDSR command allows the bus master to verify the contents of the Status register. Reading Status provides information about the current state of the write protection features. Following the RDSR op-code, the FM25CL64 will return one byte with the contents of the Status register. The Status register is described in detail in a later section.

### WRSR – Write Status Register

The WRSR command allows the user to select certain write protection features by writing a byte to the Status register. Prior to issuing a WRSR command, the /WP pin must be high or inactive. Note that on the FM25CL64, /WP only prevents writing to the Status register, not the memory array. Prior to sending the WRSR command, the user must send a WREN command to enable writes. Note that executing a WRSR command is a write operation and therefore clears the Write Enable Latch. The bus configuration of RDSR and WRSR are shown below.

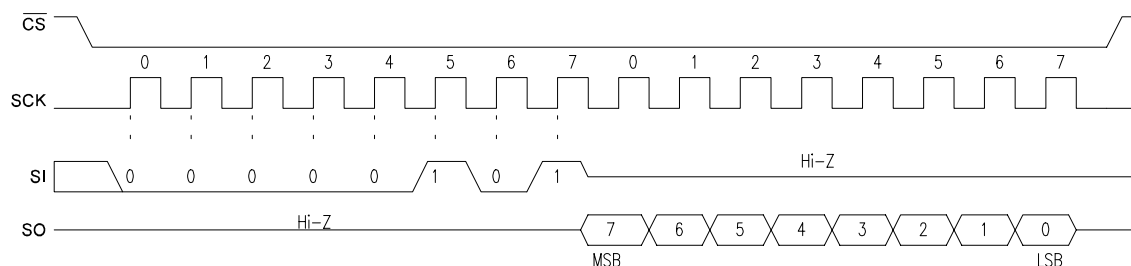

**Figure 7. RDSR Bus Configuration**

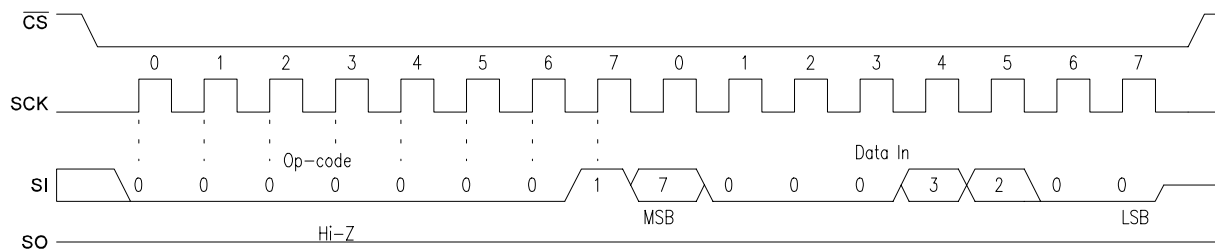

**Figure 8. WRSR Bus Configuration**

### Status Register & Write Protection

The write protection features of the FM25CL64 are multi-tiered. First, a WREN op-code must be issued prior to any write operation. Assuming that writes are enabled using WREN, writes to memory are controlled by the Status register. As described above, writes to the status register are performed using the WRSR command and subject to the /WP pin. The Status register is organized as follows.

**Table 2. Status Register**

| Bit  | 7    | 6 | 5 | 4 | 3   | 2   | 1   | 0 |
|------|------|---|---|---|-----|-----|-----|---|
| Name | WPEN | 0 | 0 | 0 | BP1 | BP0 | WEL | 0 |

Bits 0 and 4-6 are fixed at 0 and cannot be modified. Note that bit 0 (Ready in EEPROMs) is unnecessary as the FRAM writes in real-time and is never busy. The WPEN, BP1 and BP0 control write protection

features. They are nonvolatile! The WEL flag indicates the state of the Write Enable Latch. Attempting to directly write the WEL bit in the status register has no effect on its state. This bit is internally set and cleared via the WREN and WRDI commands, respectively.

BP1 and BP0 are memory block write protection bits. They specify portions of memory that are write protected as shown in the following table.

**Table 3. Block Memory Write Protection**

| BP1 | BP0 | Protected Address Range  |
|-----|-----|--------------------------|
| 0   | 0   | None                     |
| 0   | 1   | 1800h to 1FFFh (upper ¼) |
| 1   | 0   | 1000h to 1FFFh (upper ½) |
| 1   | 1   | 0000h to 1FFFh (all)     |

The BP1 and BP0 bits and the Write Enable Latch are the only mechanisms that protect the memory from writes. The remaining write protection features protect inadvertent changes to the block protect bits.

The WPEN bit controls the effect of the hardware /WP pin. When WPEN is low, the /WP pin is ignored. When WPEN is high, the /WP pin controls write access to the status register. Thus the Status register is write protected if WPEN=1 and /WP=0.

This scheme provides a write protection mechanism, which can prevent software from writing the memory under any circumstances. This occurs if the BP1 and BP0 are set to 1, the WPEN bit is set to 1, and /WP is set to 0. This occurs because the block protect bits prevent writing memory and the /WP signal in hardware prevents altering the block protect bits (if WPEN is high). Therefore in this condition, hardware must be involved in allowing a write operation. The following table summarizes the write protection conditions.

**Table 4. Write Protection**

| WEL | WPEN | /WP | Protected Blocks | Unprotected Blocks | Status Register |
|-----|------|-----|------------------|--------------------|-----------------|
| 0   | X    | X   | Protected        | Protected          | Protected       |
| 1   | 0    | X   | Protected        | Unprotected        | Unprotected     |
| 1   | 1    | 0   | Protected        | Unprotected        | Protected       |
| 1   | 1    | 1   | Protected        | Unprotected        | Unprotected     |

## Memory Operation

The SPI interface, which is capable of a relatively high clock frequency, highlights the fast write capability of the FRAM technology. Unlike SPI-bus EEPROMs, the FM25CL64 can perform sequential writes at bus speed. No page register is needed and any number of sequential writes may be performed.

### Write Operation

All writes to the memory array begin with a WREN op-code. The next op-code is the WRITE instruction. This op-code is followed by a two-byte address value. The upper 3-bits of the address are ignored. In total, the 13-bits specify the address of the first data byte of the write operation. Subsequent bytes are data and they are written sequentially. Addresses are incremented internally as long as the bus master continues to issue clocks. If the last address of 1FFFh is reached, the counter will roll over to 0000h. Data is written MSB first. A write operation is shown in Figure 9.

Unlike EEPROMs, any number of bytes can be written sequentially and each byte is written to memory immediately after it is clocked in (after the



8<sup>th</sup> clock). The rising edge of /CS terminates a WRITE op-code operation.

### Read Operation

After the falling edge of /CS, the bus master can issue a READ op-code. Following this instruction is a two-byte address value. The upper 3-bits of the address are ignored. In total, the 13-bits specify the address of the first byte of the read operation. After the op-code and address are complete, the SI line is ignored. The bus master issues 8 clocks, with one bit read out for each. Addresses are incremented internally as long as the bus master continues to issue clocks. If the last address of 1FFFh is reached, the counter will roll over to 0000h. Data is read MSB first. The rising edge of /CS terminates a READ op-code operation. A read operation is shown in Figure 10.

### Hold

The /HOLD pin can be used to interrupt a serial operation without aborting it. If the bus master pulls the /HOLD pin low while SCK is low, the current operation will pause. Taking the /HOLD pin high while SCK is low will resume an operation. The transitions of /HOLD must occur while SCK is low, but the SCK pin can toggle during a hold state.

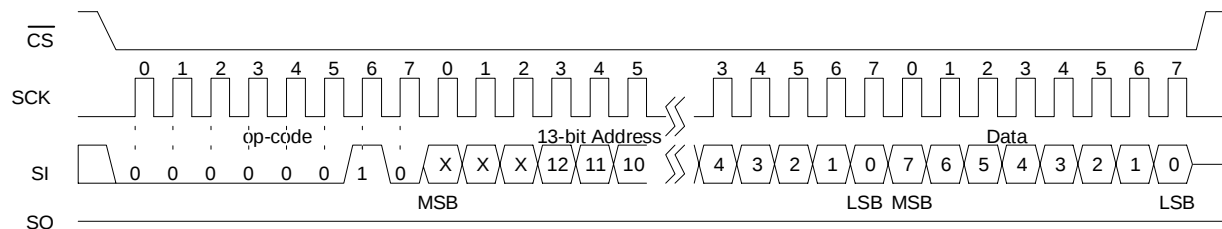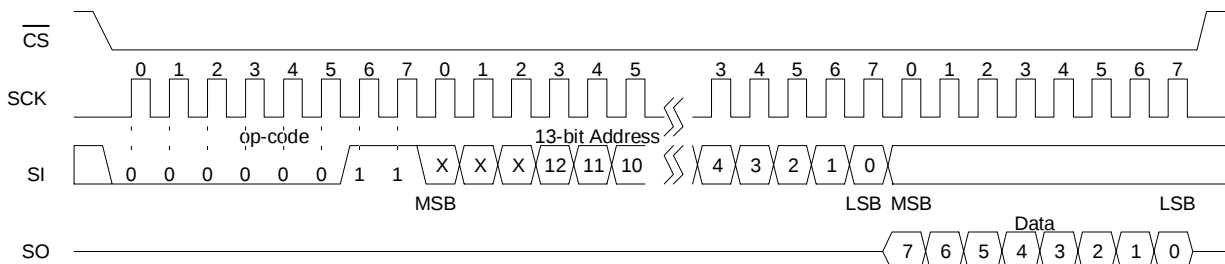
**Figure 9. Memory Write**

**Figure 10. Memory Read**

## Applications

The versatility of FRAM technology fits into many diverse applications. The strength of higher write endurance and faster writes make FRAM superior to EEPROM in all but one-time programmable applications. The advantage is most obvious in data collection environments where writes are frequent and data must be nonvolatile.

The attributes of fast writes and high write endurance combine in many innovative ways. A short list of ideas is provided here.

1. **Data collection.** In applications that collect and save data, FRAM provides a superior alternative to other solutions. It is more cost effective than battery backup for SRAM and provides better write attributes than EEPROM.
2. **Configuration.** Any nonvolatile memory can retain a configuration. However, if the configuration changes and power failure is a possibility, the higher write endurance of FRAM allows changes to be recorded without restriction. Any time the system-state is altered, the change can be written. This avoids writing to memory on power-down when the available time is short and power scarce.
3. **High noise environments.** Writing to EEPROM in a noisy environment can be challenging. When severe noise or power fluctuations are present, the long write time of EEPROM creates a window of vulnerability during which the write can be

corrupted. The fast write of FRAM is complete within a microsecond. This time is typically too short for noise or power fluctuations to disturb it.

4. **Time to market.** In a complex system, multiple software routines may need to access the nonvolatile memory. In this environment the time delay associated with programming EEPROM adds complexity to the software development. Each software routine must wait for complete programming before allowing access to the next routine. When time to market is critical, FRAM can eliminate this simple obstacle. As soon as a write is issued to the FM25CL64, it is effectively done -- no waiting.

5. **RF/ID.** In the area of contactless memory, FRAM provides an ideal solution. Since RF/ID memory is powered by an RF field, the long programming time and high current consumption needed to write EEPROM is unattractive. FRAM provides a superior solution. The FM25CL64 is suitable for multi-chip RF/ID products.

6. **Maintenance tracking.** In sophisticated systems, the operating history and system-state during a failure is important knowledge. Maintenance can be expedited when this information has been recorded. Due to the high write endurance, FRAM makes an ideal system log. In addition, the convenient interface of the FM25CL64 allows memory to be distributed throughout the system using minimal additional resources.

## Electrical Specifications

### Absolute Maximum Ratings

| Symbol     | Description                                   | Ratings                                        |
|------------|-----------------------------------------------|------------------------------------------------|
| $V_{DD}$   | Power Supply Voltage with respect to $V_{SS}$ | -1.0V to +5.0V                                 |
| $V_{IN}$   | Voltage on any pin with respect to $V_{SS}$   | -1.0V to +5.0V<br>and $V_{IN} < V_{DD} + 1.0V$ |
| $T_{STG}$  | Storage Temperature                           | -55°C to +125°C                                |
| $T_{LEAD}$ | Lead Temperature (Soldering, 10 seconds)      | 300° C                                         |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only, and the functional operation of the device at these or any other conditions above those listed in the operational section of this specification is not implied. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.

### DC Operating Conditions ( $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ , $V_{DD} = 2.7V$ to $3.65V$ unless otherwise specified)

| Symbol    | Parameter                                                                    | Min            | Typ             | Max                | Units         | Notes |
|-----------|------------------------------------------------------------------------------|----------------|-----------------|--------------------|---------------|-------|
| $V_{DD}$  | Power Supply Voltage                                                         | 2.7            | 3.3             | 3.65               | V             |       |
| $I_{DD}$  | VDD Supply Current<br>@ SCK = 1.0 MHz<br>@ SCK = 5.0 MHz<br>@ SCK = 20.0 MHz |                | 0.2<br>1.4<br>5 | 0.8<br>3.0<br>10.0 | mA            | 1     |
| $I_{SB}$  | Standby Current                                                              | -              |                 | 1                  | $\mu\text{A}$ | 2     |
| $I_{LI}$  | Input Leakage Current                                                        | -              |                 | 1                  | $\mu\text{A}$ | 3     |
| $I_{LO}$  | Output Leakage Current                                                       | -              |                 | 1                  | $\mu\text{A}$ | 3     |
| $V_{IH}$  | Input High Voltage                                                           | $0.7 V_{DD}$   |                 | $V_{DD} + 0.5$     | V             |       |
| $V_{IL}$  | Input Low Voltage                                                            | -0.3           |                 | $0.3 V_{DD}$       | V             |       |
| $V_{OH}$  | Output High Voltage<br>@ $I_{OH} = -2\text{ mA}$                             | $V_{DD} - 0.8$ |                 | -                  | V             |       |
| $V_{OL}$  | Output Low Voltage<br>@ $I_{OL} = 2\text{ mA}$                               | -              |                 | 0.4                | V             |       |
| $V_{HYS}$ | Input Hysteresis                                                             | $0.05 V_{DD}$  |                 | -                  | V             | 4     |

#### Notes

1. SCK toggling between  $V_{DD}-0.3V$  and  $V_{SS}$ , other inputs  $V_{SS}$  or  $V_{DD}-0.3V$ .
2. SCK = SI = /CS =  $V_{DD}$ . All inputs  $V_{SS}$  or  $V_{DD}$ .
3.  $V_{SS} \leq V_{IN} \leq V_{DD}$  and  $V_{SS} \leq V_{OUT} \leq V_{DD}$ .
4. Characterized but not 100% tested in production.

**AC Parameters** ( $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ,  $C_L = 30\text{pF}$ )

| Symbol    | Parameter                 | $V_{DD} 2.7$ to $3.0\text{V}$ |     | $V_{DD} 3.0$ to $3.65\text{V}$ |     | Units | Notes |
|-----------|---------------------------|-------------------------------|-----|--------------------------------|-----|-------|-------|
|           |                           | Min                           | Max | Min                            | Max |       |       |
| $f_{CK}$  | SCK Clock Frequency       | 0                             | 18  | 0                              | 20  | MHz   |       |
| $t_{CH}$  | Clock High Time           | 25                            |     | 22                             |     | ns    | 1     |
| $t_{CL}$  | Clock Low Time            | 25                            |     | 22                             |     | ns    | 1     |
| $t_{CSU}$ | Chip Select Setup         | 10                            |     | 10                             |     | ns    |       |
| $t_{CSH}$ | Chip Select Hold          | 10                            |     | 10                             |     | ns    |       |
| $t_{OD}$  | Output Disable Time       |                               | 20  |                                | 20  | ns    | 2     |
| $t_{ODV}$ | Output Data Valid Time    |                               | 25  |                                | 20  | ns    |       |
| $t_{OH}$  | Output Hold Time          | 0                             |     | 0                              |     | ns    |       |
| $t_D$     | Deselect Time             | 60                            |     | 60                             |     | ns    |       |
| $t_R$     | Data In Rise Time         |                               | 50  |                                | 50  | ns    | 1,3   |
| $t_F$     | Data In Fall Time         |                               | 50  |                                | 50  | ns    | 1,3   |
| $t_{SU}$  | Data Setup Time           | 5                             |     | 5                              |     | ns    |       |
| $t_H$     | Data Hold Time            | 5                             |     | 5                              |     | ns    |       |
| $t_{HS}$  | /Hold Setup Time          | 10                            |     | 10                             |     | ns    |       |
| $t_{HH}$  | /Hold Hold Time           | 10                            |     | 10                             |     | ns    |       |
| $t_{HZ}$  | /Hold Low to Hi-Z         |                               | 20  |                                | 20  | ns    | 2     |
| $t_{LZ}$  | /Hold High to Data Active |                               | 20  |                                | 20  | ns    | 2     |

**Notes**

- $t_{CH} + t_{CL} = 1/f_{CK}$ .
- Characterized but not 100% tested in production.
- Rise and fall times measured between 10% and 90% of waveform.

**Capacitance** ( $T_A = 25^\circ\text{C}$ ,  $f = 1.0\text{ MHz}$ ,  $V_{DD} = 3.3\text{V}$ )


| Symbol | Parameter               | Min | Max | Units | Notes |
|--------|-------------------------|-----|-----|-------|-------|
| $C_O$  | Output capacitance (SO) | -   | 8   | pF    | 1     |
| $C_I$  | Input capacitance       | -   | 6   | pF    | 1     |

**Notes**

- This parameter is periodically sampled and not 100% tested.

**AC Test Conditions**



|                                |                         |
|--------------------------------|-------------------------|
| Input Pulse Levels             | 10% and 90% of $V_{DD}$ |
| Input rise and fall times      | 5 ns                    |
| Input and output timing levels | 30% and 70% of $V_{DD}$ |

**Equivalent AC Load Circuit**

**Data Retention** ( $V_{DD} = 2.7\text{V}$  to  $3.65\text{V}$  unless otherwise specified)


| Parameter      | Min | Max | Units | Notes |
|----------------|-----|-----|-------|-------|
| Data Retention | 10  | -   | Years | 1     |

**Notes**

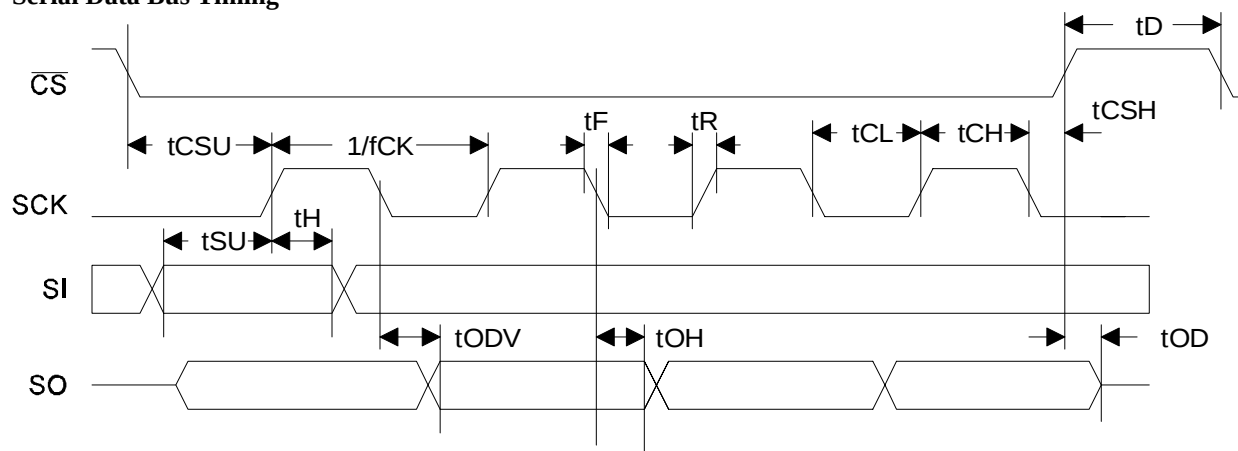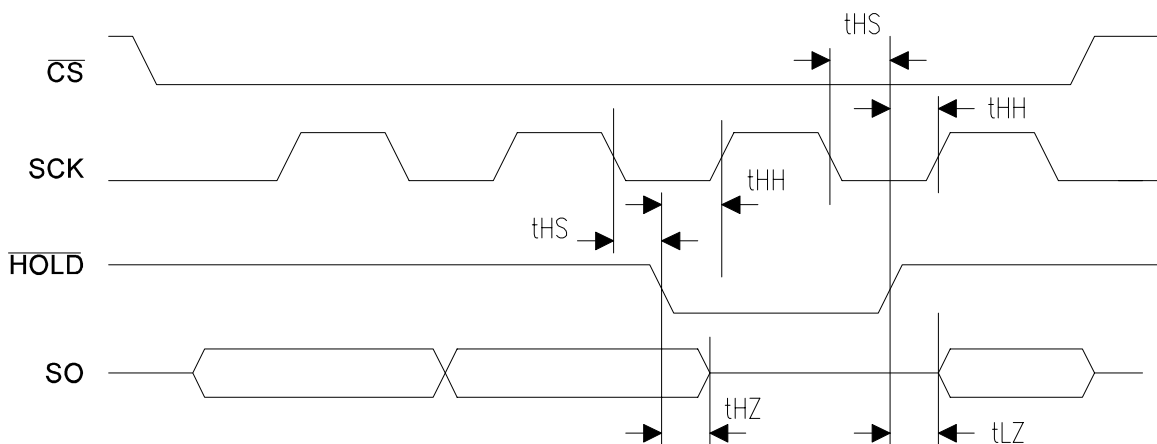- The relationship between retention, temperature, and the associated reliability level is characterized separately. Endurance is the guaranteed number of read or write cycles per address that can be performed while maintaining the specified data retention. It is unlikely to reach this limit for most applications.

**Serial Data Bus Timing**

**/Hold Timing**

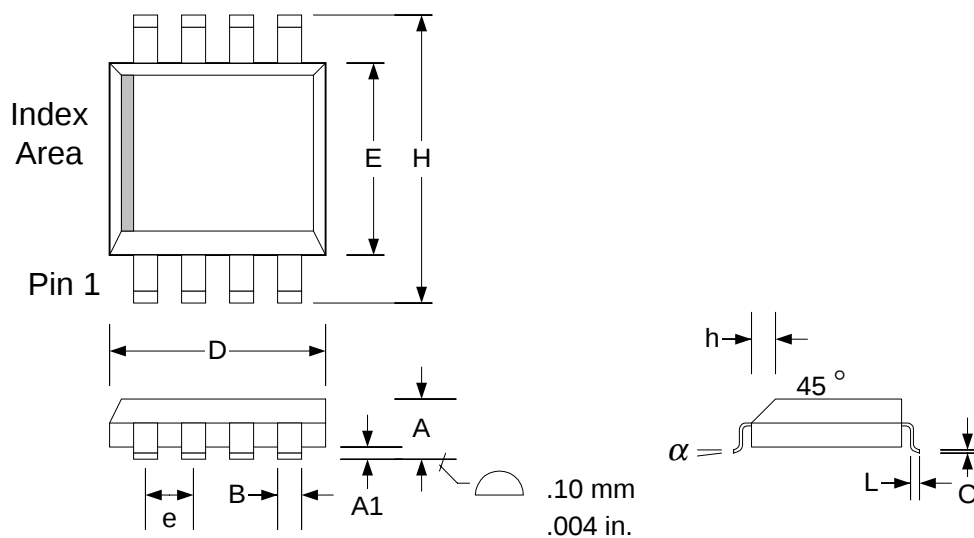
# **Mechanical Drawing (8-pin SOIC - JEDEC Standard MS-012)**



## **Selected Dimensions**

| Symbol   | Dim       | Min           | Nom.                     | Max           |
|----------|-----------|---------------|--------------------------|---------------|
| A        | mm<br>in. | 1.35<br>0.053 |                          | 1.75<br>0.069 |
| A1       | mm<br>in. | 0.10<br>0.004 |                          | 0.25<br>0.010 |
| B        | mm<br>in. | 0.33<br>0.013 |                          | 0.51<br>0.020 |
| C        | mm<br>in. | 0.19<br>0.007 |                          | 0.25<br>0.010 |
| D        | mm<br>in. | 4.80<br>0.189 |                          | 5.00<br>0.197 |
| E        | mm<br>in. | 3.80<br>0.150 |                          | 4.00<br>0.157 |
| e        | mm<br>in. |               | 1.27 BSC<br>0.050<br>BSC |               |
| H        | mm<br>in. | 5.80<br>0.228 |                          | 6.20<br>0.244 |
| h        | mm<br>in. | 0.25<br>0.010 |                          | 0.50<br>0.197 |
| L        | mm<br>in. | 0.40<br>0.016 |                          | 1.27<br>0.050 |
| $\alpha$ |           | 0°            |                          | 8°            |

Refer to JEDEC MS-012 for complete dimensions and notes.  
Controlling dimensions in millimeters.  
Conversions to inches are not exact.

**Revision History**

| <b>Revision</b> | <b>Date</b> | <b>Summary</b>                                                                                                                             |
|-----------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 0.0             | 5/10/01     | Initial Release                                                                                                                            |
| 0.1             | 7/5/01      | Updated AC and DC specifications. Changed AC Test Conditions and Load Circuit.                                                             |
| 0.2             | 10/11/01    | Added unlimited endurance bullet. Changed Data Retention table.                                                                            |
| 0.3             | 1/8/02      | Changed operating Vdd voltage range to 3.0 – 3.65V. Reduced Idd supply current limits.                                                     |
| 2.0             | 2/19/03     | Updated to Production status. Added note to Output Data Valid spec.                                                                        |
| 2.1             | 4/22/03     | Changed operating Vdd voltage range to 2.7 – 3.65V with separate AC timing specs defined below 3.0V operation. Reduced input leakage spec. |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А