

## Overview

KEMET's ALS32/33 Series of screw terminal capacitors meets the requirements of the Asian market. This range offers high CV per unit volume coupled with high ripple currents and long-life performance.

## Applications

KEMET's ALS32/33 Series of capacitors is designed for industrial and commercial applications such as switch mode power supplies (SMPS), uninterruptible power supply (UPS) systems, variable speed drives, frequency inverters, welding equipment, and energy storage in pulse discharge applications.

## Benefits

- Case sizes and terminals for the Asian market
- Long life, up to 20,000 hours at +85°C ( $V_R$ ,  $I_R$  applied)
- High ripple current
- Excellent surge voltage capability
- Optimized designs available upon request



Click image above for interactive 3D content

*Open PDF in Adobe Reader for full functionality*

## Part Number System

| ALS3                                 | 2                                           | A                     | 391                                                                                    | D2C                 | 350                                              |
|--------------------------------------|---------------------------------------------|-----------------------|----------------------------------------------------------------------------------------|---------------------|--------------------------------------------------|
| Series                               | Stud Option                                 | Termination           | Capacitance Code (µF)                                                                  | Size Code           | Rated Voltage (VDC)                              |
| Screw Terminal Aluminum Electrolytic | 2 = Plain Can<br>3 = Threaded mounting stud | See Termination Table | First two digits represent significant figures. Third digit specifies number of zeros. | See Dimension Table | 350 = 350<br>400 = 400<br>450 = 450<br>500 = 500 |

## Performance Characteristics

| Item                          | Performance Characteristics                                                                        |                                                                                                                                                      |                                                                                                                                           |
|-------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Capacitance Range             | 220 – 18,000 $\mu$ F                                                                               |                                                                                                                                                      |                                                                                                                                           |
| Rated Voltage                 | 350 – 500 VDC                                                                                      |                                                                                                                                                      |                                                                                                                                           |
| Operating Temperature         | -40 to +85°C                                                                                       |                                                                                                                                                      |                                                                                                                                           |
| Storage Temperature Range     | -55 to +85°C                                                                                       |                                                                                                                                                      |                                                                                                                                           |
| Capacitance Tolerance         | $\pm$ 20% at 100 Hz/+20°C                                                                          |                                                                                                                                                      |                                                                                                                                           |
| Operational Lifetime          | D (mm)                                                                                             | Rated Voltage and Ripple Current at +85°C (hours)                                                                                                    | Rated Voltage at +85°C (hours)                                                                                                            |
|                               | 36                                                                                                 | 11,000                                                                                                                                               | 22,000                                                                                                                                    |
|                               | 51                                                                                                 | 18,000                                                                                                                                               | 36,000                                                                                                                                    |
|                               | 63.5                                                                                               | 19,000                                                                                                                                               | 38,000                                                                                                                                    |
|                               | 77.90                                                                                              | 20,000                                                                                                                                               | 40,000                                                                                                                                    |
| End of Life Requirement       | $\Delta$ C/C < $\pm$ 10%, ESR < 2 x initial ESR value, IL < initial specified limit                |                                                                                                                                                      |                                                                                                                                           |
| Shelf Life                    | 2,000 hours at +85°C or 30,000 hours at +40°C 0 VDC                                                |                                                                                                                                                      |                                                                                                                                           |
| Leakage Current               | I = 0.006 CV or 6,000 ( $\mu$ A, whichever is smaller)                                             |                                                                                                                                                      |                                                                                                                                           |
|                               | C = rated capacitance ( $\mu$ F), V = rated voltage (VDC). Voltage applied for 5 minutes at +20°C. |                                                                                                                                                      |                                                                                                                                           |
| Vibration Test Specifications |                                                                                                    | Procedure                                                                                                                                            | Requirements                                                                                                                              |
|                               | Case Length < 220 mm                                                                               | 0.75 mm displacement amplitude or 10 g maximum acceleration. Vibration applied for three 2-hour sessions at 10 – 55 Hz (Capacitor clamped by body).  | No leakage of electrolyte or other visible damage. Deviations in capacitance from initial measurements must not exceed: $\Delta$ C/C < 5% |
|                               | Case Length $\geq$ 220 mm                                                                          | 0.35 mm displacement amplitude or 5 g maximum acceleration. Vibration applied for three 0.5 hour sessions at 10 – 55 Hz (Capacitor clamped by body). |                                                                                                                                           |
| Standards                     | IEC 60384–4 long life grade 40/85/56                                                               |                                                                                                                                                      |                                                                                                                                           |

## Surge Voltage

| Condition                                                                                        | Voltage (VDC) |     |     |     |
|--------------------------------------------------------------------------------------------------|---------------|-----|-----|-----|
|                                                                                                  | 350           | 400 | 450 | 500 |
| $\leq$ 30s Surge followed by a no load period of 330 s, 1,000 cycles at +85°C                    | 385           | 440 | 495 | 550 |
| $\leq$ 500 ms surge, 100 cycles at 20°C, occurring randomly throughout the life of the capacitor | 500           | 520 | 550 | 600 |

## Test Method & Performance

| Endurance Life Test          |                                                                                                  |                                 |
|------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------|
| Conditions                   | Performance                                                                                      |                                 |
| Temperature                  | +85°C                                                                                            |                                 |
| Test Duration                | 5,000 hours                                                                                      |                                 |
| Ripple Current               | Rated ripple current in specified table                                                          |                                 |
| Voltage                      | The sum of DC voltage and the peak AC voltage must not exceed the rated voltage of the capacitor |                                 |
| <b>Performance</b>           | <b>The following specifications will be satisfied when the capacitor is tested at +20°C:</b>     |                                 |
| Capacitance Change           | ≤ 160 V                                                                                          | Within 15% of the initial value |
|                              | > 160 V                                                                                          | Within 10% of the initial value |
| Equivalent Series Resistance | Does not exceed 200% of the initial value                                                        |                                 |
| Leakage Current              | Does not exceed leakage current limit                                                            |                                 |

## Termination Tables

| Termination Code | A | C |
|------------------|---|---|
| Diameter (mm)    |   |   |
| 34.9             | • |   |
| 50.8             | • |   |
| 63.5             | • | • |
| 76.2             | • | • |
| 88.9             | • | • |

| Termination Code            | Thread | Termination Style | T    | DT   | Thread Depth (TD) | Z       |
|-----------------------------|--------|-------------------|------|------|-------------------|---------|
|                             |        |                   | ±0.5 | ±0.5 | Minimum           | Nominal |
| Standard Termination Option |        |                   |      |      |                   |         |
| A (D = 36)                  | M5     | Round             | 7.14 | 8    | 10                |         |
| A (D > 36)                  | M5     | Oval              | 5.5  | 13   | 10                | 10      |
| Other Termination Options   |        |                   |      |      |                   |         |
| C                           | M6     | Round             | 5.5  | 13   | 10                |         |
| Dimensions in mm            |        |                   |      |      |                   |         |


### Case Polarity

Due to the presence of electrolyte in the capacitor, the aluminum can and stud mounting will essentially be at the same polarity as the negative terminal. We recommend that the stud and can be insulated (see accessories for insulating nuts).

### Terminations

Aluminum inserts with M5 threads as standard, maximum torque 2NM. Optional M6 threaded inserts have a maximum torque 4NM. Maximum torque for stud mounting M8:4NM and M12:8NM.

## Dimensions – Millimeters

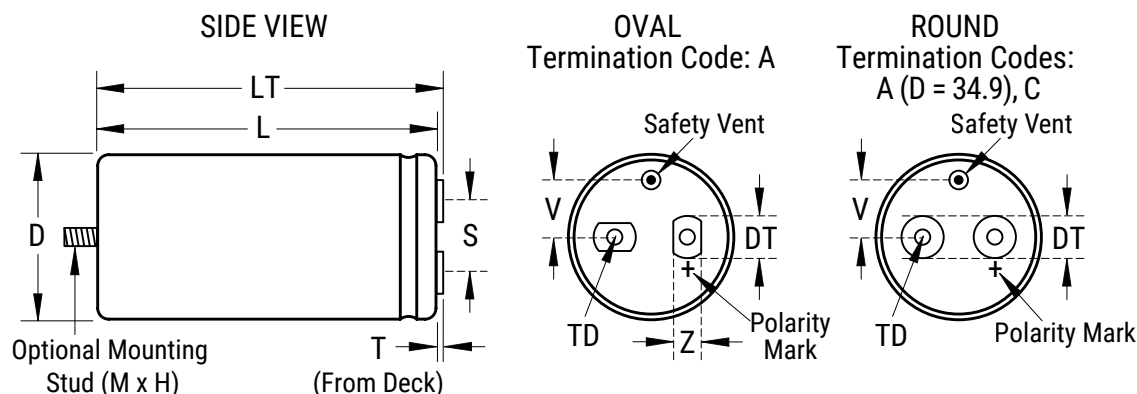

| Reference Size (mm)                                                                                                                                                                        | Size Code | Dimensions in mm |       |       |      |      |         | Mounting Stud (M x H) | Mounting Clip | Approximate Weight Grams |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------|-------|-------|------|------|---------|-----------------------|---------------|--------------------------|
|                                                                                                                                                                                            |           | D                | L     | LT    | S    | T    | V       |                       |               |                          |
|                                                                                                                                                                                            |           | ±0.8             | ±1.6  | ±1    | ±0.5 | ±0.8 | Nominal |                       |               |                          |
| 36 x 55                                                                                                                                                                                    | D2C       | 34.9             | 54.0  | 61.5  | 12.8 | 7.14 | 8       | M8 x 12               | V3/H2/2736    | 80                       |
| 36 x 80                                                                                                                                                                                    | D3C       | 34.9             | 79.4  | 87.5  | 12.8 | 7.14 | 8       | M8 x 12               | V3/H2/2736    | 114                      |
| 36 x 93                                                                                                                                                                                    | D3L       | 34.9             | 92.1  | 100.5 | 12.8 | 7.14 | 8       | M8 x 12               | V3/H2/2736    | 131                      |
| 51 x 68                                                                                                                                                                                    | K2L       | 50.8             | 66.7  | 73.0  | 22.2 | 5.5  | 13.7    | M12 x 16              | V4/2737       | 165                      |
| 51 x 93                                                                                                                                                                                    | K3L       | 50.8             | 92.1  | 98.0  | 22.2 | 5.5  | 13.7    | M12 x 16              | V4/2737       | 275                      |
| 51 x 115                                                                                                                                                                                   | KJA       | 50.8             | 114.3 | 119.0 | 22.2 | 5.5  | 13.7    | M12 x 16              | V4/2737       | 340                      |
| 51 x 131                                                                                                                                                                                   | K5C       | 50.8             | 130.2 | 136.0 | 22.2 | 5.5  | 13.7    | M12 x 16              | V4/2737       | 385                      |
| 63.5 x 93                                                                                                                                                                                  | L3L       | 63.5             | 92.1  | 97.0  | 28.5 | 5.5  | 15.8    | M12 x 16              | V8            | 430                      |
| 63.5 x 115                                                                                                                                                                                 | LJA       | 63.5             | 114.3 | 119.0 | 28.5 | 5.5  | 15.8    | M12 x 16              | V8            | 535                      |
| 63.5 x 131                                                                                                                                                                                 | L5C       | 63.5             | 130.2 | 135.0 | 28.5 | 5.5  | 15.8    | M12 x 16              | V8            | 600                      |
| 77 x 115                                                                                                                                                                                   | NJA       | 76.2             | 114.3 | 119.0 | 31.8 | 5.5  | 19      | M12 x 16              | V11           | 770                      |
| 77 x 131                                                                                                                                                                                   | N5C       | 76.2             | 130.2 | 135.0 | 31.8 | 5.5  | 19      | M12 x 16              | V11           | 865                      |
| 77 x 150                                                                                                                                                                                   | N5R       | 76.2             | 149.2 | 154.0 | 31.8 | 5.5  | 19      | M12 x 16              | V11           | 990                      |
| 90 x 150                                                                                                                                                                                   | Q5R       | 88.9             | 149.2 | 154.0 | 31.8 | 5.5  | 25      | M12 x 16              | PYC6045       | 1360                     |
| 90 x 194                                                                                                                                                                                   | Q7L       | 88.9             | 193.7 | 198.0 | 31.8 | 5.5  | 25      | M12 x 16              | PYC6045       | 1870                     |
| 90 x 220                                                                                                                                                                                   | Q8L       | 88.9             | 219.1 | 224.0 | 31.8 | 5.5  | 25      | M12 x 16              | PYC6045       | 2000                     |
| Note: Add 0.4 mm to D (1.1 mm when D = 88.9) and 1.1 mm to L for sleeving. LT listed is for A-type termination code.<br>Information for other termination codes is available upon request. |           |                  |       |       |      |      |         |                       |               |                          |

## Shelf Life

The capacitance, ESR and impedance of a capacitor will not change significantly after extended storage periods, however the leakage current will very slowly increase. KEMET products are particularly stable and allow a shelf life in excess of three years at 40°C. See sectional specification under each product series for specific data.

## Re-age (Reforming) Procedure

Apply the rated voltage to the capacitor at room temperature for a period of one hour, or until the leakage current has fallen to a steady value below the specified limit. During re-aging a maximum charging current of twice the specified leakage current or 5 mA (whichever is greater) is suggested.

## Reliability

The reliability of a component can be defined as the probability that it will perform satisfactorily under a given set of conditions for a given length of time.

In practice, it is impossible to predict with absolute certainty how any individual component will perform; thus, we must utilize probability theory. It is also necessary to clearly define the level of stress involved (e.g. operating voltage, ripple current, temperature and time). Finally, the meaning of satisfactory performance must be defined by specifying a set of conditions which determine the end of life of the component.

Reliability as a function of time,  $R(t)$ , is normally expressed as:  $R(t) = e^{-\lambda t}$

where  $R(t)$  is the probability that the component will perform satisfactorily for time  $t$ , and  $\lambda$  is the failure rate.

## Failure Rate

The failure rate is the number of components failing per unit time. The failure rate of most electronic components follows the characteristic pattern:

- Early failures are removed during the manufacturing process.
- The operational life is characterized by a constant failure rate.
- The wear out period is characterized by a rapidly increasing failure rate.

The failures in time (FIT) are given with a 60% confidence level for the various type codes. By convention, FIT is expressed as  $1 \times 10^{-9}$  failures per hour. Failure rate is also expressed as a percentage of failures per 1,000 hours.

e.g., 100 FIT =  $1 \times 10^{-7}$  failures per hour = 0.01%/1,000 hours

## End of Life Definition

Catastrophic Failure: short circuit, open circuit or safety vent operation


Parametric Failure:

- Change in capacitance  $> \pm 10\%$
- Leakage current  $>$  specified limit
- ESR  $> 2 \times$  initial ESR value

## MTBF

The mean time between failures (MTBF) is simply the inverse of the failure rate.

$$MTBF = 1/\lambda$$

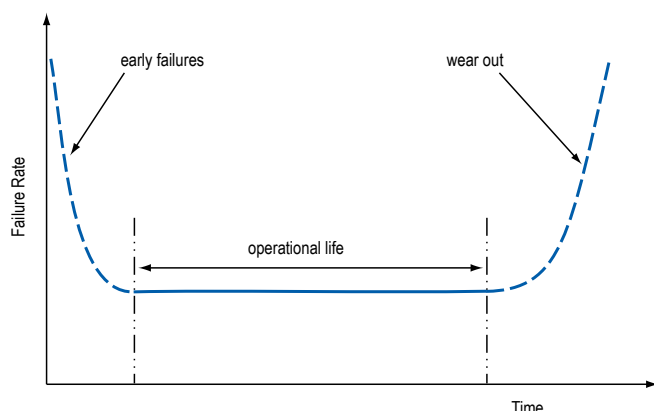

The failure rate is derived from our periodic test results. The failure rate ( $\lambda_R$ ) is, therefore, only given at test temperature for life tests. An estimation is also given at 40°C. The expected failure rate for this capacitor range is based on our periodic test results for capacitors with structural similarity. Failure rate is frequently quoted in FIT (Failures In Time) where 1 FIT =  $1 \times 10^{-9}$  failures per hour. Failure rate per hour includes both catastrophic and parametric failures.

| $T_a$ | Failure Rate per Hour |
|-------|-----------------------|
| 85°C  | 250 FIT               |
| 40°C  | 12 FIT                |

## Environmental Compliance

As an environmentally conscious company, KEMET is working continuously with improvements concerning the environmental effects of both our capacitors and their production. In Europe (RoHS Directive) and in some other geographical areas like China, legislation has been put in place to prevent the use of some hazardous materials, such as lead (Pb), in electronic equipment. All products in this catalog are produced to help our customers' obligations to guarantee their products and fulfill these legislative requirements. The only material of concern in our products has been lead (Pb), which has been removed from all designs to fulfill the requirement of containing less than 0.1% of lead in any homogeneous material. KEMET will closely follow any changes in legislation world wide and makes any necessary changes in its products, whenever needed.

Some customer segments such as medical, military and automotive electronics may still require the use of lead in electrode coatings. To clarify the situation and distinguish products from each other, a special symbol is used on the packaging labels for RoHS compatible capacitors.

Because of customer requirements, there may appear additional markings such as LF = Lead Free or LFW = Lead Free Wires on the label.

**Table 1 – Ratings & Part Number Reference**

| VDC | Rated Capacitance   | Size Code | Case Size  | Ripple Current     |                    | ESR Maximum         | Impedance Maximum   | Part Number         |
|-----|---------------------|-----------|------------|--------------------|--------------------|---------------------|---------------------|---------------------|
|     | 120 Hz<br>25°C (µF) |           |            | 120 Hz<br>85°C (A) | 20 kHz<br>85°C (A) | 120 Hz<br>25°C (mΩ) | 20 kHz<br>25°C (mΩ) |                     |
| 350 | 390                 | D2C       | 36 x 55    | 2.8                | 5.2                | 352                 | 227                 | ALS3(1)(2)391D2C350 |
| 350 | 470                 | D3C       | 36 x 80    | 3.5                | 6.7                | 291                 | 187                 | ALS3(1)(2)471D3C350 |
| 350 | 560                 | D3C       | 36 x 80    | 3.8                | 7.2                | 245                 | 158                 | ALS3(1)(2)561D3C350 |
| 350 | 680                 | D3C       | 36 x 80    | 4.1                | 7.7                | 203                 | 132                 | ALS3(1)(2)681D3C350 |
| 350 | 820                 | D3L       | 36 x 93    | 4.8                | 8.8                | 170                 | 110                 | ALS3(1)(2)821D3L350 |
| 350 | 1000                | D3L       | 36 x 93    | 5.2                | 9.3                | 141                 | 92                  | ALS3(1)(2)102D3L350 |
| 350 | 1200                | K2L       | 51 x 68    | 5.5                | 8.9                | 116                 | 75                  | ALS3(1)(2)122K2L350 |
| 350 | 1500                | K2L       | 51 x 68    | 5.8                | 8.9                | 99                  | 66                  | ALS3(1)(2)152K2L350 |
| 350 | 1800                | K3L       | 51 x 93    | 7.7                | 12.5               | 78                  | 50                  | ALS3(1)(2)182K3L350 |
| 350 | 2200                | K3L       | 51 x 93    | 8.2                | 12.5               | 67                  | 44                  | ALS3(1)(2)222K3L350 |
| 350 | 2700                | K5C       | 51 x 131   | 10.4               | 16.7               | 52                  | 34                  | ALS3(1)(2)272K5C350 |
| 350 | 3300                | K5C       | 51 x 131   | 11.1               | 16.8               | 45                  | 30                  | ALS3(1)(2)332K5C350 |
| 350 | 3900                | LJA       | 63.5 x 115 | 10.8               | 15.3               | 38                  | 25                  | ALS3(1)(2)392LJA350 |
| 350 | 5600                | NJA       | 77 x 115   | 16.4               | 22.7               | 30                  | 21                  | ALS3(1)(2)562NJA350 |
| 350 | 6800                | N5C       | 77 x 131   | 18.2               | 23.6               | 28                  | 21                  | ALS3(1)(2)682N5C350 |
| 350 | 8200                | N5R       | 77 x 150   | 19.9               | 25.5               | 24                  | 18                  | ALS3(1)(2)822N5R350 |
| 350 | 10000               | Q5R       | 90 x 150   | 25.5               | 33.5               | 18                  | 13                  | ALS3(1)(2)103Q5R350 |
| 350 | 12000               | Q5R       | 90 x 150   | 25.9               | 32.4               | 16                  | 12                  | ALS3(1)(2)123Q5R350 |
| 350 | 15000               | Q7L       | 90 x 194   | 32.4               | 41.2               | 13                  | 10                  | ALS3(1)(2)153Q7L350 |
| 350 | 18000               | Q8L       | 90 x 220   | 38.5               | 47.6               | 12                  | 9                   | ALS3(1)(2)183Q8L350 |
| 400 | 330                 | D2C       | 36 x 55    | 2.6                | 5.4                | 351                 | 207                 | ALS3(1)(2)331D2C400 |
| 400 | 390                 | D3C       | 36 x 80    | 3.3                | 6.9                | 295                 | 174                 | ALS3(1)(2)391D3C400 |
| 400 | 470                 | D3C       | 36 x 80    | 3.6                | 7.5                | 246                 | 146                 | ALS3(1)(2)471D3C400 |
| 400 | 560                 | D3C       | 36 x 80    | 3.9                | 8.0                | 208                 | 123                 | ALS3(1)(2)561D3C400 |
| 400 | 680                 | D3L       | 36 x 93    | 4.5                | 8.7                | 182                 | 112                 | ALS3(1)(2)681D3L400 |
| 400 | 820                 | D3L       | 36 x 93    | 4.9                | 9.2                | 152                 | 94                  | ALS3(1)(2)821D3L400 |
| 400 | 1000                | K2L       | 51 x 68    | 5.2                | 9.0                | 132                 | 84                  | ALS3(1)(2)102K2L400 |
| 400 | 1200                | K2L       | 51 x 68    | 5.6                | 9.1                | 113                 | 74                  | ALS3(1)(2)122K2L400 |
| 400 | 1500                | K3L       | 51 x 93    | 7.3                | 12.4               | 89                  | 57                  | ALS3(1)(2)152K3L400 |
| 400 | 1800                | K3L       | 51 x 93    | 7.8                | 12.5               | 76                  | 50                  | ALS3(1)(2)182K3L400 |
| 400 | 2200                | K5C       | 51 x 131   | 9.8                | 16.4               | 59                  | 37                  | ALS3(1)(2)222K5C400 |
| 400 | 2700                | L3L       | 63.5 x 93  | 11.3               | 18.3               | 49                  | 31                  | ALS3(1)(2)272L3L400 |
| 400 | 3300                | LJA       | 63.5 x 115 | 13.2               | 21.1               | 40                  | 26                  | ALS3(1)(2)332LJA400 |
| 400 | 3900                | L5C       | 63.5 x 131 | 14.6               | 22.1               | 37                  | 25                  | ALS3(1)(2)392L5C400 |
| 400 | 4700                | NJA       | 77 x 115   | 15.9               | 22.7               | 32                  | 21                  | ALS3(1)(2)472NJA400 |
| 400 | 5600                | N5C       | 77 x 131   | 17.6               | 23.7               | 30                  | 21                  | ALS3(1)(2)562N5C400 |
| 400 | 6800                | N5R       | 77 x 150   | 19.3               | 25.6               | 25                  | 18                  | ALS3(1)(2)682N5R400 |
| 400 | 8200                | Q5R       | 90 x 150   | 25.6               | 36.3               | 18                  | 12                  | ALS3(1)(2)822Q5R400 |
| 400 | 10000               | Q5R       | 90 x 150   | 26.5               | 35.6               | 16                  | 11                  | ALS3(1)(2)103Q5R400 |
| 400 | 12000               | Q7L       | 90 x 194   | 30.9               | 40.7               | 14                  | 10                  | ALS3(1)(2)123Q7L400 |
| 400 | 15000               | Q8L       | 90 x 220   | 37.4               | 47.7               | 12                  | 9                   | ALS3(1)(2)153Q8L400 |
| 450 | 270                 | D2C       | 36 x 55    | 2.5                | 5.4                | 383                 | 215                 | ALS3(1)(2)271D2C450 |
| 450 | 330                 | D3C       | 36 x 80    | 3.2                | 6.9                | 312                 | 175                 | ALS3(1)(2)331D3C450 |
| 450 | 390                 | D3C       | 36 x 80    | 3.4                | 7.4                | 265                 | 149                 | ALS3(1)(2)391D3C450 |
| 450 | 470                 | D3C       | 36 x 80    | 3.7                | 7.9                | 221                 | 125                 | ALS3(1)(2)471D3C450 |
| 450 | 560                 | D3L       | 36 x 93    | 4.2                | 8.6                | 196                 | 115                 | ALS3(1)(2)561D3L450 |
| 450 | 680                 | D3L       | 36 x 93    | 4.6                | 9.2                | 163                 | 96                  | ALS3(1)(2)681D3L450 |
| 450 | 820                 | K2L       | 51 x 68    | 5.0                | 9.0                | 142                 | 86                  | ALS3(1)(2)821K2L450 |
| 450 | 1000                | K2L       | 51 x 68    | 5.3                | 9.1                | 120                 | 75                  | ALS3(1)(2)102K2L450 |
| 450 | 1200                | K3L       | 51 x 93    | 6.9                | 12.3               | 94                  | 56                  | ALS3(1)(2)122K3L450 |
| 450 | 1500                | KJA       | 51 x 115   | 8.1                | 14.5               | 75                  | 45                  | ALS3(1)(2)152KJA450 |
| 450 | 1800                | K5C       | 51 x 131   | 9.3                | 16.3               | 63                  | 38                  | ALS3(1)(2)182K5C450 |
| 450 | 2200                | L3L       | 63.5 x 93  | 10.7               | 18.3               | 53                  | 32                  | ALS3(1)(2)222L3L450 |
| 450 | 2700                | LJA       | 63.5 x 115 | 12.5               | 21.1               | 43                  | 26                  | ALS3(1)(2)272LJA450 |
| 450 | 3300                | L5C       | 63.5 x 131 | 14.6               | 24.1               | 36                  | 22                  | ALS3(1)(2)332L5C450 |
| 450 | 3900                | NJA       | 77 x 115   | 15.3               | 22.7               | 33                  | 22                  | ALS3(1)(2)392NJA450 |
| 450 | 4700                | N5C       | 77 x 131   | 18.0               | 26.5               | 28                  | 18                  | ALS3(1)(2)472N5C450 |
| 450 | 5600                | N5R       | 77 x 150   | 19.7               | 28.4               | 24                  | 16                  | ALS3(1)(2)562N5R450 |
| VDC | Rated Capacitance   | Size Code | Case Size  | Ripple Current     |                    | ESR                 | Impedance           | Part Number         |

(1) Mounting Code: 2 = plain can, 3 = threaded mounting stud

(2) Termination Code: See Termination Tables for available options

**Table 1 – Ratings & Part Number Reference cont'd**

| VDC | Rated Capacitance   | Size Code | Case Size  | Ripple Current     |                    | ESR Maximum         | Impedance Maximum   | Part Number         |
|-----|---------------------|-----------|------------|--------------------|--------------------|---------------------|---------------------|---------------------|
|     | 120 Hz<br>25°C (µF) |           |            | 120 Hz<br>85°C (A) | 20 kHz<br>85°C (A) | 120 Hz<br>25°C (mΩ) | 20 kHz<br>25°C (mΩ) |                     |
| 450 | 6800                | Q5R       | 90 x 150   | 24.6               | 36.3               | 19                  | 13                  | ALS3(1)(2)682Q5R450 |
| 450 | 8200                | Q5R       | 90 x 150   | 25.7               | 35.8               | 17                  | 12                  | ALS3(1)(2)822Q5R450 |
| 450 | 10000               | Q7L       | 90 x 194   | 30.0               | 40.7               | 15                  | 10                  | ALS3(1)(2)103Q7L450 |
| 450 | 12000               | Q8L       | 90 x 220   | 35.7               | 46.9               | 14                  | 10                  | ALS3(1)(2)123Q8L450 |
| 500 | 220                 | D2C       | 36 x 55    | 2.3                | 4.1                | 602                 | 427                 | ALS3(1)(2)221D2C500 |
| 500 | 270                 | D3C       | 36 x 80    | 2.9                | 5.3                | 489                 | 347                 | ALS3(1)(2)271D3C500 |
| 500 | 330                 | D3C       | 36 x 80    | 3.2                | 5.8                | 402                 | 285                 | ALS3(1)(2)331D3C500 |
| 500 | 390                 | D3C       | 36 x 80    | 3.5                | 6.2                | 341                 | 243                 | ALS3(1)(2)391D3C500 |
| 500 | 470                 | D3L       | 36 x 93    | 3.9                | 6.8                | 303                 | 221                 | ALS3(1)(2)471D3L500 |
| 500 | 560                 | D3L       | 36 x 93    | 4.3                | 7.3                | 256                 | 187                 | ALS3(1)(2)561D3L500 |
| 500 | 680                 | K2L       | 51 x 68    | 4.6                | 7.4                | 219                 | 162                 | ALS3(1)(2)681K2L500 |
| 500 | 820                 | K2L       | 51 x 68    | 4.9                | 7.7                | 186                 | 138                 | ALS3(1)(2)821K2L500 |
| 500 | 1000                | K3L       | 51 x 93    | 6.4                | 10.3               | 146                 | 107                 | ALS3(1)(2)102K3L500 |
| 500 | 1200                | KJA       | 51 x 115   | 7.2                | 11.0               | 142                 | 109                 | ALS3(1)(2)122KJA500 |
| 500 | 1500                | K5C       | 51 x 131   | 8.4                | 12.7               | 114                 | 88                  | ALS3(1)(2)152K5C500 |
| 500 | 1800                | L3L       | 63.5 x 93  | 9.9                | 15.3               | 83                  | 61                  | ALS3(1)(2)182L3L500 |
| 500 | 2200                | LJA       | 63.5 x 115 | 11.6               | 17.8               | 68                  | 51                  | ALS3(1)(2)222LJA500 |
| 500 | 2700                | L5C       | 63.5 x 131 | 13.2               | 19.3               | 65                  | 50                  | ALS3(1)(2)272L5C500 |
| 500 | 3300                | NJA       | 77 x 115   | 14.2               | 19.7               | 56                  | 44                  | ALS3(1)(2)332NJA500 |
| 500 | 3900                | N5C       | 77 x 131   | 16.9               | 23.5               | 42                  | 32                  | ALS3(1)(2)392N5C500 |
| 500 | 4700                | N5R       | 77 x 150   | 18.5               | 25.3               | 35                  | 27                  | ALS3(1)(2)472N5R500 |
| 500 | 5600                | Q5R       | 90 x 150   | 23.1               | 32.2               | 29                  | 22                  | ALS3(1)(2)562Q5R500 |
| 500 | 6800                | Q5R       | 90 x 150   | 24.1               | 32.3               | 25                  | 19                  | ALS3(1)(2)682Q5R500 |
| 500 | 8200                | Q7L       | 90 x 194   | 28.6               | 37.8               | 21                  | 16                  | ALS3(1)(2)822Q7L500 |
| 500 | 10000               | Q8L       | 90 x 220   | 34.4               | 44.3               | 18                  | 14                  | ALS3(1)(2)103Q8L500 |
| VDC | Rated Capacitance   | Size Code | Case Size  | Ripple Current     |                    | ESR                 | Impedance           | Part Number         |

(1) Mounting Code: 2 = plain can, 3 = threaded mounting stud

(2) Termination Code: See Termination Tables for available options

## Mechanical Data

### Polarity and Reversed Voltage

Aluminium Electrolytic capacitors manufactured for use in DC applications contain an anode foil and a cathode foil. As such, they are polarized devices and must be connected with the +ve to the anode foil and the -ve to the cathode foil. If this were to be reversed then the electrolytic process that took place in forming the oxide layer on the anode would be recreated in trying to form an oxide layer on the cathode. In forming the cathode foil in this way, heat would be generated and gas given off within the capacitor, usually leading to catastrophic failure.

The cathode foil already possesses a thin stabilized oxide layer. This thin oxide layer is equivalent to a forming voltage of approximately 2 V. As a result, the capacitor can withstand a voltage reversal of up to 2 V for short periods. Above this voltage, the formation process will commence. Aluminium Electrolytic capacitors can also be manufactured for use in intermittent AC applications by using two anode foils in place of one anode and one cathode.

### Mounting Position

The capacitor can be mounted in any position as long as the safety vent can operate. It is possible for some electrolyte to be expelled. As this is a conducting liquid, suitable precautions should be initiated by the system designer to avoid secondary short circuits.

The capacitors are designed to be mounted in free air and are not suitable for submersion in liquid.

### Vibration

10 – 55 Hz at 0.75 mm or 10 g for 3 x 2 hours duration, except 220 mm long cans 10 – 55 Hz at 0.35 mm or 5 g for 3 x 0.5 hours duration. Custom designs can be made in a 66 mm diameter (M6 deck), with a vibration capability of 20 g (10 – 56 Hz at 0.75 mm and 56 – 500 Hz 20 g for 3 x 0.5 hours duration)

### Insulating Resistance

≥ 100 MΩ at 100 VDC across insulating sleeve. UL recognized sleeving is available for custom parts in this range, upon request.

(UL No. E358957)


### Voltage Proof

≥ 2,500 VDC across insulating sleeve


### Safety Vent

A safety vent for overpressure is featured on terminal deck. This is in the form of a rubber plug designed to relieve build-up of internal pressure due to overstress or catastrophic failure.

## Marking

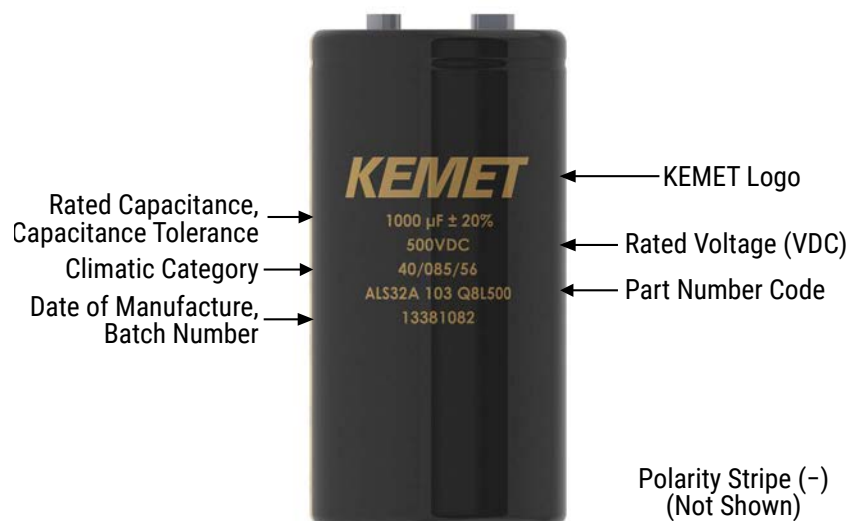

## Construction

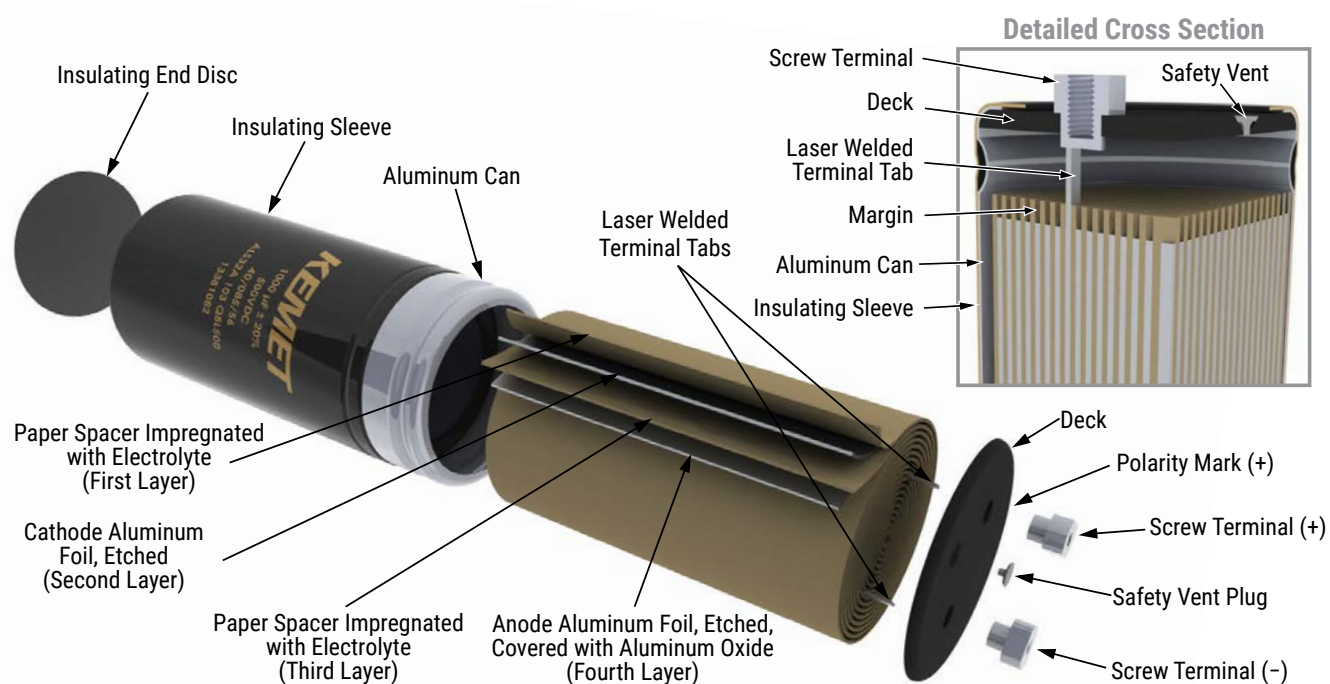

## Construction Data

The manufacturing process begins with the anode foil being electrochemically etched to increase the surface area and then “formed” to produce the aluminum oxide layer. Both the anode and cathode foils are then interleaved with absorbent paper and wound into a cylinder. During the winding process, aluminum tabs are attached to each foil to provide the electrical contact.

The deck, complete with terminals, is attached to the tabs and then folded down to rest on top of the winding. The complete winding is impregnated with electrolyte before being housed in a suitable container, usually an aluminum can, and sealed. Throughout the process, all materials inside the housing must be maintained at the highest purity and be compatible with the electrolyte.

Each capacitor is aged and tested before being sleeved and packed. The purpose of aging is to repair any damage in the oxide layer and thus reduce the leakage current to a very low level. Aging is normally carried out at the rated temperature of the capacitor and is accomplished by applying voltage to the device while carefully controlling the supply current. The process may take several hours to complete.

Damage to the oxide layer can occur due to variety of reasons:

- Slitting of the anode foil after forming
- Attaching the tabs to the anode foil
- Minor mechanical damage caused during winding

A sample from each batch is taken by the quality department after completion of the production process. This sample size is controlled by the use of recognized sampling tables defined in BS 6001.



The following tests are applied and may be varied at the request of the customer. In this case the batch, or special procedure, will determine the course of action.

### Electrical:

- Leakage current
- Capacitance
- ESR
- Impedance
- Tan Delta

### Mechanical/Visual:

- Overall dimensions
- Torque test of mounting stud
- Print detail
- Box labels
- Packaging, including packed quantity

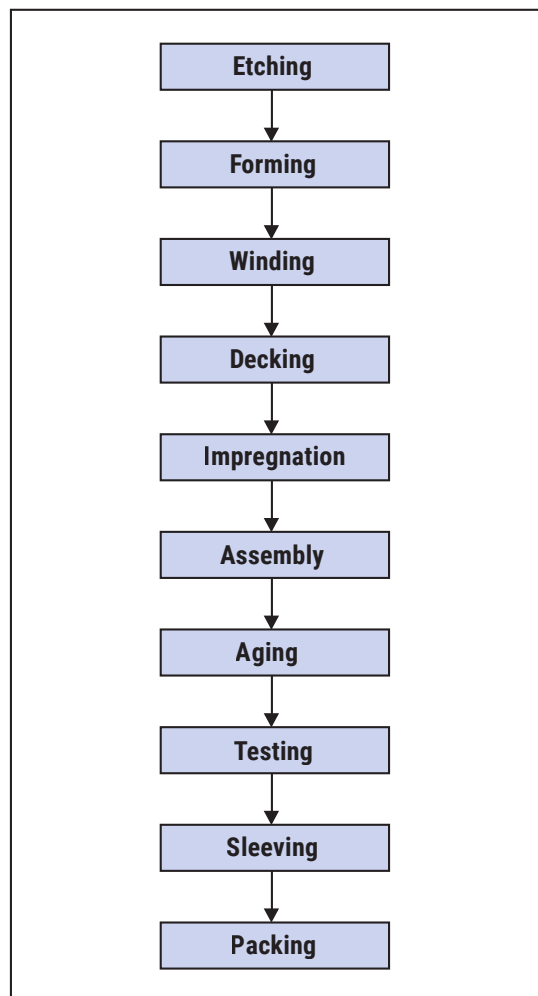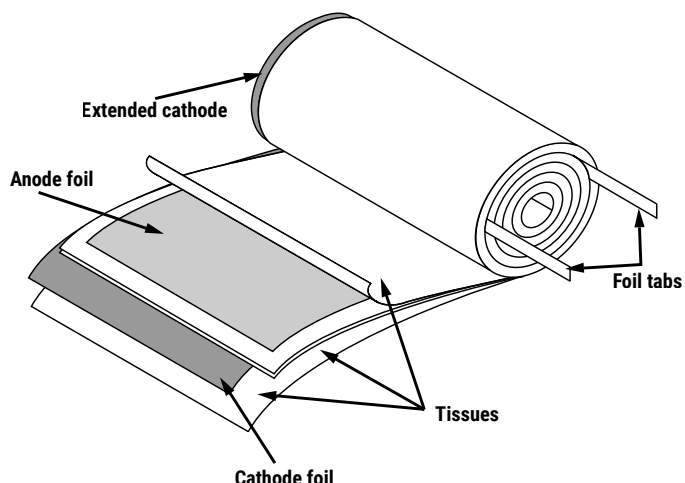

## KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit [www.kemet.com/sales](http://www.kemet.com/sales).

---

## Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

*KEMET is a registered trademark of KEMET Electronics Corporation.*

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А