

# 50 W Power Resistor, Thick Film Technology, TO-220




## FEATURES

- 50 W at 25 °C heatsink mounted
- Adjusted by sand trimming
- Leaded or surface mount versions
- High power to size ratio
- Non inductive element
- Material categorization: For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**RoHS**  
COMPLIANT

Because of the knowledge and experience in Thick Film technology, Vishay Sfernice has been able to develop a high power resistor in a TO-220 package called RTO 50. The special design of this component allows the dissipation of 50 W when mounted on a heatsink. The ohmic value is adjusted by sand trimming. This process does not generate hot spots as in laser trimming, which could lead to microcracks on each side of the curve. This process improves the reliability and the stability of the resistor and at the same time gives a good overload capability.

## DIMENSIONS in millimeters

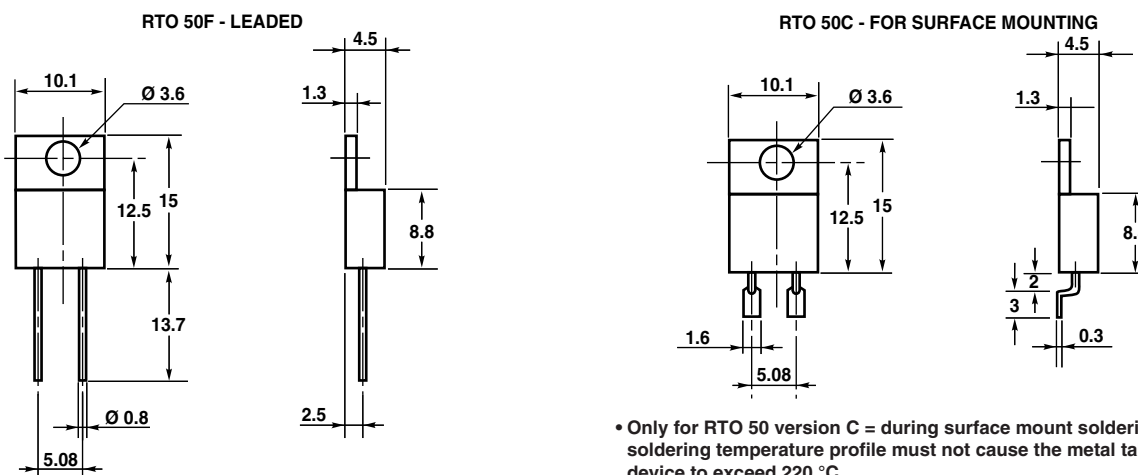

• Only for RTO 50 version C = during surface mount soldering, the soldering temperature profile must not cause the metal tab of this device to exceed 220 °C.

## STANDARD ELECTRICAL SPECIFICATIONS

| MODEL  | SIZE   | RESISTANCE RANGE<br>$\Omega$ | RATED POWER<br>$P_{25^\circ\text{C}}$<br>W | LIMITING ELEMENT VOLTAGE<br>$U_L$<br>V | TOLERANCE<br>$\pm \%$ | TEMPERATURE COEFFICIENT<br>$\pm \text{ppm}/^\circ\text{C}$ | CRITICAL RESISTANCE<br>$\Omega$ |
|--------|--------|------------------------------|--------------------------------------------|----------------------------------------|-----------------------|------------------------------------------------------------|---------------------------------|
| RTO 50 | TO-220 | 0.010 to 550K <sup>(1)</sup> | 50                                         | 300                                    | 1, 2, 5, 10           | 150                                                        | 1.8K                            |

Note

<sup>(1)</sup> E24 series

## MECHANICAL SPECIFICATIONS

|                       |                     |
|-----------------------|---------------------|
| Mechanical Protection | Molded              |
| Resistive Element     | Thick film          |
| Connections           | Tinned copper alloy |
| Weight                | 2.2 g max.          |

## ENVIRONMENTAL SPECIFICATIONS

|                   |                                                          |
|-------------------|----------------------------------------------------------|
| Temperature Range | - 55 °C to 155 °C                                        |
| Climatic Category | 55/155/156                                               |
| Sealing           | Sealed container, solder immersion                       |
| Flammability      | IEC 60695-11-5,<br>2 applications 30 s separated by 60 s |

Note

- Not compatible with RoHS reflow profile

## TECHNICAL SPECIFICATIONS

|                                       |                                                                            |
|---------------------------------------|----------------------------------------------------------------------------|
| Dissipation and Associated            | Onto a heatsink                                                            |
| Thermal Resistance and Nominal Power  | 50 W at + 25 °C<br>$R_{TH(j-c)}$ : 2.6 °C/W<br>Free air: 2.25 W at + 25 °C |
| Dielectric Strength MIL STD 202 (301) | 2000 $V_{RMS}$ - 1 min<br>10 mA max.                                       |
| Insulation Resistance                 | $\geq 10^6 \text{ M}\Omega$                                                |
| Inductance                            | $\leq 0.1 \mu\text{H}$                                                     |

## DIMENSIONS

|                  |                       |
|------------------|-----------------------|
| Standard Package | TO-220 insulated case |
|------------------|-----------------------|

| PERFORMANCE              |                                                                                                  |                               |
|--------------------------|--------------------------------------------------------------------------------------------------|-------------------------------|
| TESTS                    | CONDITIONS                                                                                       | REQUIREMENTS                  |
| Momentary Overload       | EN 60115-1<br>2 Pr 5 s for $R < 2 \Omega$<br>1.6 Pr 5 s for $R \geq 2 \Omega$<br>$U_S < 1.5 U_L$ | $\pm (0.25 \% + 0.05 \Omega)$ |
| Rapid Temperature Change | EN 60115-1<br>60 068-2-14<br>5 cycles - 55 °C to + 155 °C                                        | $\pm (0.5 \% + 0.05 \Omega)$  |
| Load Life                | EN 60115-1<br>Pr at + 25 °C, 1000 h CEI 115_1                                                    | $\pm (1 \% + 0.05 \Omega)$    |
| Humidity (Steady State)  | EN 60115-1<br>56 days RH 95 %                                                                    | $\pm (0.5 \% + 0.05 \Omega)$  |
| Vibration                | MIL STD 202<br>method 204 C test D                                                               | $\pm (0.2 \% + 0.05 \Omega)$  |
| Terminal Strength        | MIL STD 202<br>method 211 test A1                                                                | $\pm (0.2 \% + 0.05 \Omega)$  |

| RESISTANCE VALUE IN RELATION TO TOLERANCE AND TCR         |                                      |                                      |                                      |                                      |
|-----------------------------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| Resistance Values                                         | $\geq 0.01 \Omega$                   | $\geq 0.015 \Omega$                  | $\geq 0.1 \Omega$                    | $\geq 0.5 \Omega$                    |
| Tolerances                                                | $\pm 1 \%$ at $\pm 10 \%$            |                                      |                                      |                                      |
| Temperature Coefficient<br>(- 55 °C to + 155 °C) Standard | $\pm 900 \text{ ppm/}^\circ\text{C}$ | $\pm 700 \text{ ppm/}^\circ\text{C}$ | $\pm 250 \text{ ppm/}^\circ\text{C}$ | $\pm 150 \text{ ppm/}^\circ\text{C}$ |

## CHOICE OF THE HEATSINK

The user must choose according to the working conditions of the component (power, room temperature).

Maximum working temperature must not exceed 155 °C. The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{[R_{TH(j-c)} + R_{TH(c-a)}]} \quad (1)$$

|                 |                                                                                                                                                                                                      |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| P:              | Expressed in W                                                                                                                                                                                       |
| $\Delta T$ :    | Difference between maximum working temperature and room temperature                                                                                                                                  |
| $R_{TH(j-c)}$ : | Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component: (Special Features Table)                                    |
| $R_{TH(c-a)}$ : | Thermal resistance value measured between outer side of the resistor and room temperature. It is the thermal resistance of the heatsink itself (type, shape) and the quality of the fastening device |

### Example:

$R_{TH(c-a)}$ : For RTO 50 power rating 13 W at ambient temperature + 30 °C

Thermal resistance  $R_{TH(j-c)}$ : 26 °C/W

Considering equation (1) we have:

$$\Delta T \leq 155 \text{ }^\circ\text{C} - 30 \text{ }^\circ\text{C} \leq 125 \text{ }^\circ\text{C}$$

$$R_{TH(j-c)} + R_{TH(c-a)} = \frac{\Delta T}{P} = \frac{125}{13} = 9.6 \text{ }^\circ\text{C/W}$$

$$R_{TH(c-a)} \leq 9.6 \text{ }^\circ\text{C/W} - 2.6 \text{ }^\circ\text{C/W} \leq 7 \text{ }^\circ\text{C/W}$$



## OVERLOADS


The applied voltage must always be lower than the maximum overload voltage of 450 V.

The values indicated on the graph below are applicable to resistors in air or mounted onto a heatsink.


## MARKING

Model, style, resistance value (in  $\Omega$ ), tolerance (in %), manufacturing date, Vishay Sfernice trademark.

## ENERGY CURVE

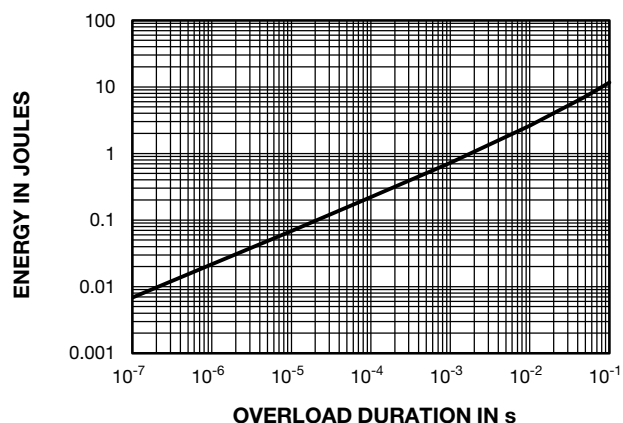


## POWER CURVE

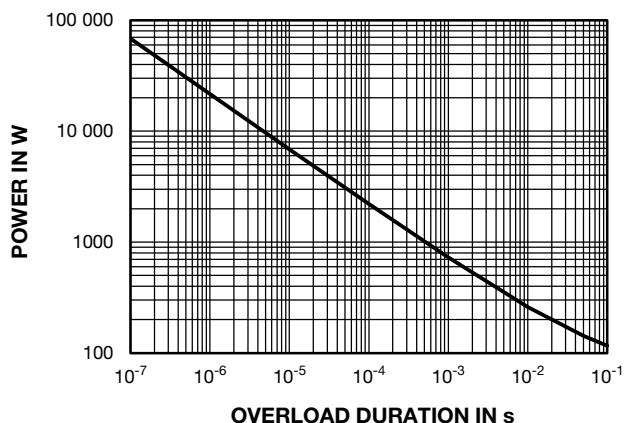

## POWER RATING

The temperature of the heatsink should be maintained within the limits specified.

To improve the thermal conductivity, surfaces in contact should be coated with a silicone grease and the torque applied on the screw for tightening should be around 1 Nm.

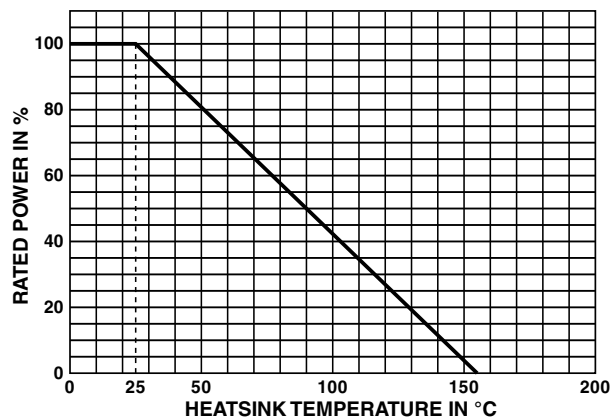

## PACKAGING

Tube of 50 units



### ORDERING INFORMATION

| RTO   | 50    | F                                   | 100K             | ± 1%                          | XXX                                                   | TU50      | e1             |
|-------|-------|-------------------------------------|------------------|-------------------------------|-------------------------------------------------------|-----------|----------------|
| MODEL | STYLE | CONNECTIONS                         | RESISTANCE VALUE | TOLERANCE                     | CUSTOM DESIGN                                         | PACKAGING | LEAD (Pb)-FREE |
|       |       | F: Radial leads<br>C: Surface mount |                  | ± 1%<br>± 2%<br>± 5%<br>± 10% | Optional<br>on request:<br>Special TCR,<br>shap, etc. |           |                |

### GLOBAL PART NUMBER INFORMATION

|              |   |      |   |                                       |   |                                                                                                                                                                                                                                                                    |   |   |   |   |   |                                           |   |                                               |   |
|--------------|---|------|---|---------------------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|---|---|---|-------------------------------------------|---|-----------------------------------------------|---|
| R            | T | O    | 0 | 5                                     | 0 | F                                                                                                                                                                                                                                                                  | R | 6 | 8 | 0 | 0 | J                                         | T | E                                             | 1 |
| GLOBAL MODEL |   | SIZE |   | LEADS                                 |   | OHMIC VALUE                                                                                                                                                                                                                                                        |   |   |   |   |   | TOLERANCE                                 |   | PACKAGING                                     |   |
| RTO          |   | 050  |   | F = Radial leads<br>C = Surface mount |   | The first four digits are significant figures and the last digit specifies the number of zeros to follow.<br>R designates decimal point.<br>48R70 = 48.7 Ω<br>48701 = 48 700 Ω<br>10002 = 100 000 Ω<br>R0100 = 0.01 Ω<br>R6800 = 0.68 Ω<br>27000 = 2700 Ω = 2.7 kΩ |   |   |   |   |   | F = 1 %<br>G = 2 %<br>J = 5 %<br>K = 10 % |   | T = Tube<br>Size 30 and 50:<br>Tube 50 pieces |   |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А