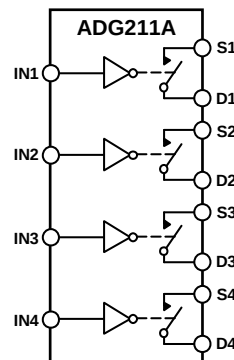


FEATURES

44 V supply maximum rating
±15 V analog signal range
Low R_{ON} : 115 Ω maximum
Low leakage: 0.5 nA typical
Break-before-make switching
Single supply operation possible
Extended plastic temperature range: -40°C to +85°C
TTL/CMOS compatible
Available in 16-lead PDIP/SOIC and 20-lead PLCC packages
Pin compatible to DG211/DG212


FUNCTIONAL BLOCK DIAGRAM



NOTES
 1. SWITCHES SHOWN FOR A LOGIC 1 INPUT.

10950-001

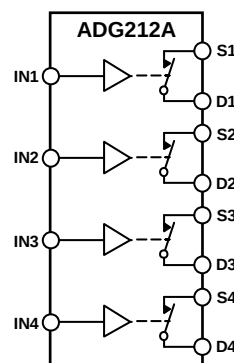Figure 1.



NOTES
 1. SWITCHES SHOWN FOR A LOGIC 1 INPUT.

10950-002

Figure 2.

GENERAL DESCRIPTION

The **ADG211A** and **ADG212A** are monolithic CMOS devices comprising four independently selectable switches. They are designed on an enhanced LC²MOS process, which gives an increased signal handling capability of ± 15 V. These switches also feature high switching speeds and low R_{ON} .

The **ADG211A** and **ADG212A** consist of four SPST switches. They differ only in that the digital control logic is inverted. In multiplexer applications, all switches exhibit break-before-make switching action when driven simultaneously. Inherent in the design is low charge injection for minimum transients when switching the digital inputs.

PRODUCT HIGHLIGHTS

- Extended Signal Range.**
 These switches are fabricated on an enhanced LC²MOS process, resulting in high breakdown and an increased analog signal range of ± 15 V.
- Single Supply Operation.**
 For applications where the analog signal is unipolar (0 V to 15 V), the switches can be operated from a single 15 V supply.
- Low Leakage.**
 Leakage currents in the range of 500 pA make these switches suitable for high precision circuits. The added feature of break-before-make allows for multiple outputs to be tied together for multiplexer applications while keeping leakage errors to a minimum.

Rev. C

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

Features	1	ESD Caution.....	4
Functional Block Diagram	1	Pin Configurations and Function Descriptions	5
General Description	1	Typical Performance Characteristics	6
Product Highlights	1	Terminology	9
Revision History	2	Test Circuits.....	10
Specifications.....	3	Outline Dimensions	12
Absolute Maximum Ratings.....	4	Ordering Guide	13

REVISION HISTORY

10/12—Rev. B to Rev. C

Updated Format.....	Universal
Added Pin Descriptions, Table 3	5
Moved Table 4	5
Changes to Figure 5, Figure 6, Figure 8, and Figure 9.....	6
Updated Outline Dimensions	13
Changes to Ordering Guide	14

9/02—Rev. A to Rev. B

SPECIFICATIONS

$V_{DD} = +15\text{ V}$, $V_{SS} = -15\text{ V}$, $V_L = 5\text{ V}$, unless otherwise noted.

Table 1.

Parameter	25°C			–40°C to +85°C			Unit	Test Conditions/Comments
	Min	Typ	Max	Min	Typ	Max		
ANALOG SWITCH								
Analog Signal Range		±15			±15		V	–10 V ≤ V _S ≤ +10 V, I _{DS} = 1 mA, see Figure 21
R _{ON}			115			175	Ω	
R _{ON} vs. V _D (V _S)		20					%	
R _{ON} Drift		0.5					%/°C	
R _{ON} Match		5					%	
V _S = 0 V, I _{DS} = 1 mA								
LEAKAGE CURRENTS								
I _S (Off)		0.5					nA	V _D = ±14 V; V _S = ∓ 14 V; see Figure 22
Off Input Leakage			5			100	nA	
I _D (Off)		0.5					nA	V _D = ±14 V; V _S = ∓ 14 V; see Figure 22
Off Output Leakage			5			100	nA	
I _D (On)		0.5					nA	V _D = V _S = ±14 V; see Figure 23
On Channel Leakage			5			200	nA	
DIGITAL CONTROL								
V _{INH} , Input High Voltage				2.4			V	TTL compatibility is independent of V _L
V _{INL} , Input Low Voltage						0.8	V	
I _{NL} or I _{NH}						1	μA	
C _{IN} , Digital Input Capacitance		5					pF	
DYNAMIC CHARACTERISTICS								
t _{OPEN} ¹		30					ns	See Figure 24
t _{ON} ¹			600				ns	See Figure 25
t _{OFF} ¹			450				ns	See Figure 25
Off Isolation		80					dB	V _S = 10 V (p-p); f = 100 kHz; R _L = 75 Ω; see Figure 26
Channel-to-Channel Crosstalk		80					dB	See Figure 27
C _S (Off)		5					pF	R _S = 0 Ω; C _L = 1000 pF; V _S = 0 V; see Figure 28
C _D (Off)		5					pF	
C _S , C _D (On)		16					pF	
Q _{INJ} , Charge Injection		20					pC	
POWER SUPPLY								
I _{DD}		0.6					mA	Digital inputs = V _{INL} or V _{INH}
I _{DD}			1				mA	
I _{SS}		0.1					mA	
I _{SS}			0.2				mA	
I _L			0.9				mA	

¹ Sample tested at 25°C to ensure compliance.

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$, unless otherwise stated.

Table 2.

Parameter	Rating
V_{DD} to V_{SS}	44 V
V_{DD} to GND	25 V
V_{SS} to GND	–25 V
V_L to GND	–0.3 V, 25 V
Analog Inputs ¹	
Voltage at S, D	$V_{SS} - 0.3\text{ V}$ to $V_{DD} + 0.3\text{ V}$
Continuous Current, S or D	30 mA
Pulsed Current S or D	
1 ms Duration, 10% Duty Cycle	70 mA
Digital Inputs ¹	
Voltage at IN	$V_{SS} - 2\text{ V}$ to $V_{DD} + 2\text{ V}$ or 20 mA, Whichever Occurs First
Power Dissipation (Any Package)	
Up to $+75^\circ\text{C}$	470 mW
Derates above $+75^\circ\text{C}$ by	6 mW/ $^\circ\text{C}$
Operating Temperature	-40°C to $+85^\circ\text{C}$
Storage Temperature Range	-65°C to $+150^\circ\text{C}$
Lead Temperature (Soldering 10 sec)	$+300^\circ\text{C}$

¹ Overvoltage at IN, S, or D will be clamped by diodes. Current should be limited to the Maximum Rating listed in Table 2.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ESD CAUTION



ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS





Figure 3. PDIP, SOIC Pin Configuration



NOTES
1. NIC = NO INTERNAL CONNECTION.

Figure 4. PLCC Pin Configuration

Table 3. Pin Function Descriptions

Pin No.		Mnemonic	Description
PDIP, SOIC	PLCC		
1	2	IN1	Logic Control Input.
2	3	D1	Drain Terminal. Can be an input or output.
3	4	S1	Source Terminal. Can be an input or output.
4	5	V _{SS}	Most Negative Power Supply Potential.
5	7	GND	Ground (0 V) Reference.
6	8	S4	Source Terminal. Can be an input or output.
7	9	D4	Drain Terminal. Can be an input or output.
8	10	IN4	Logic Control Input.
9	12	IN3	Logic Control Input.
10	13	D3	Drain Terminal. Can be an input or output.
11	14	S3	Source Terminal. Can be an input or output.
12	15	V _L	Logic Supply Voltage.
13	17	V _{DD}	Most Positive Power Supply Potential.
14	18	S2	Source Terminal. Can be an input or output.
15	19	D2	Drain Terminal. Can be an input or output.
16	20	IN2	Logic Control Input.
	1, 6, 11, 16	NIC	No Internal Connection.

Table 4. Truth Table

ADG211A In	ADG212A In	Switch Condition
0	1	On
1	0	Off

TYPICAL PERFORMANCE CHARACTERISTICS

The switches can comfortably operate anywhere in the 10 V to 15 V single or dual supply range, with only a slight degradation in performance. The following graphs show the relevant performance curves. The test circuits and test conditions are given in a following section, Test Circuits.

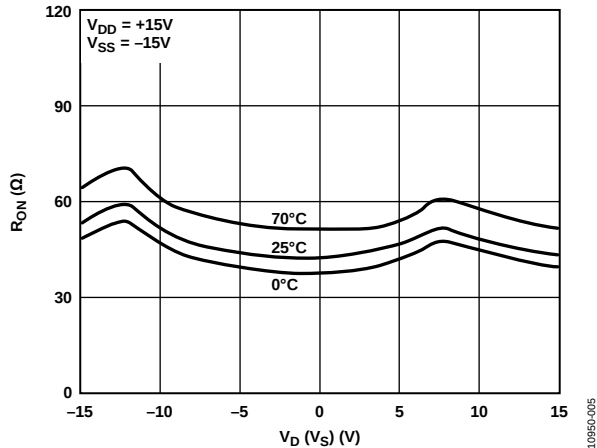


Figure 5. R_{ON} as a Function of V_D (V_S), Dual ± 15 V Supplies

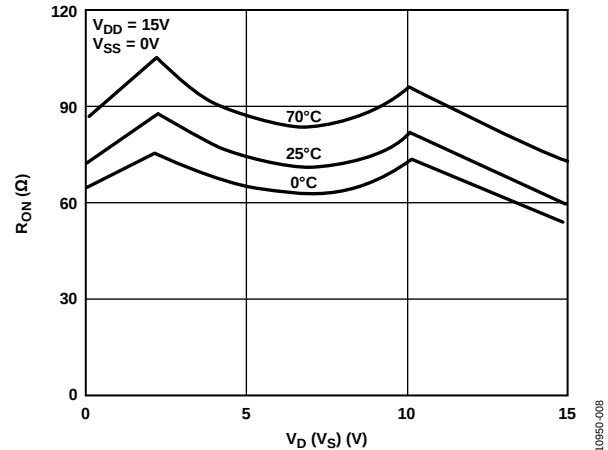


Figure 8. R_{ON} as a Function of V_D (V_S), Single +15 V Supply

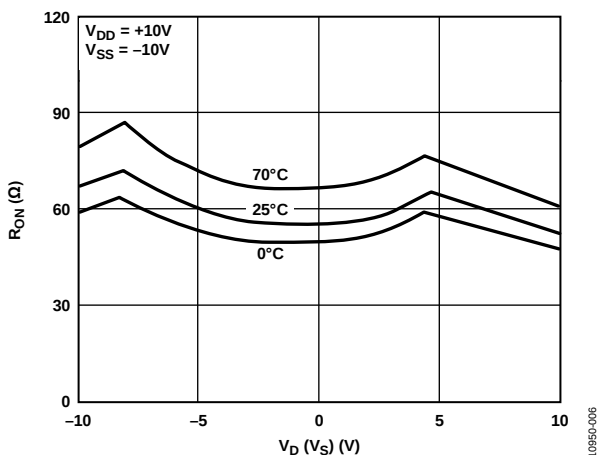


Figure 6. R_{ON} as a Function of V_D (V_S), Dual ± 10 V Supplies

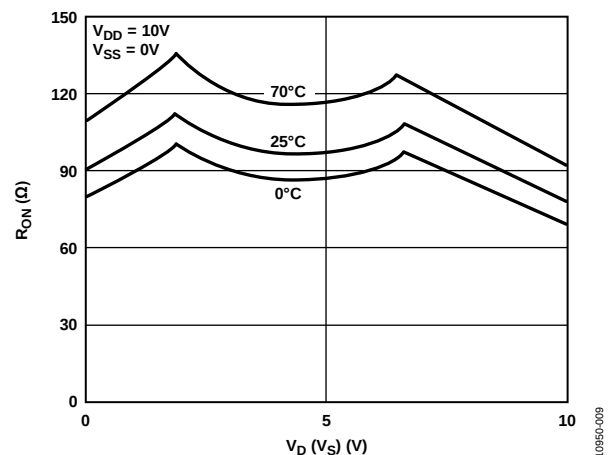


Figure 9. R_{ON} as a Function of V_D (V_S), Single +10 V Supply

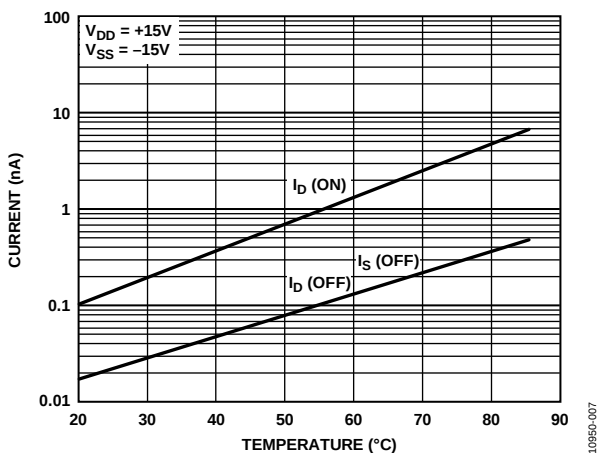


Figure 7. Leakage Current as a Function of Temperature
(Note That Leakage Current Reduces as the Supply Voltages Reduce)

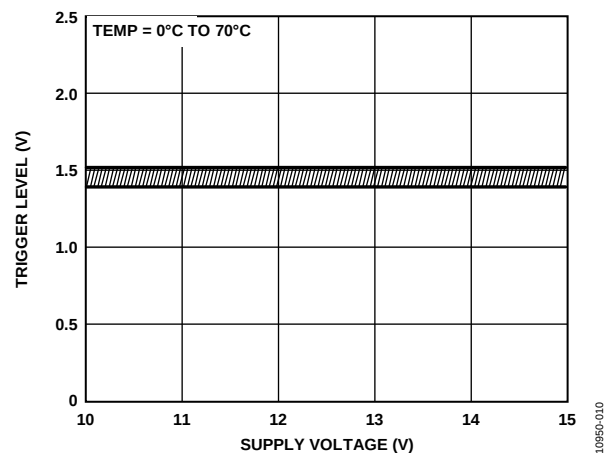


Figure 10. Trigger Levels vs. Power Supply Voltage, Dual or Single Supply Voltage

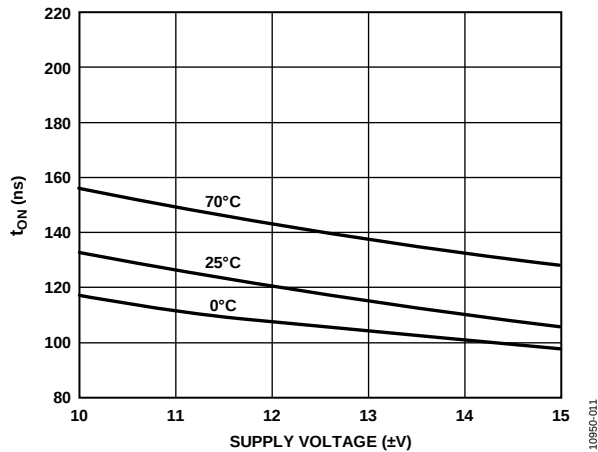
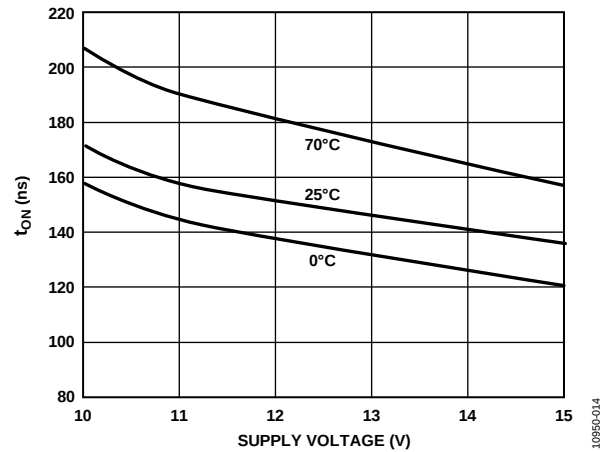
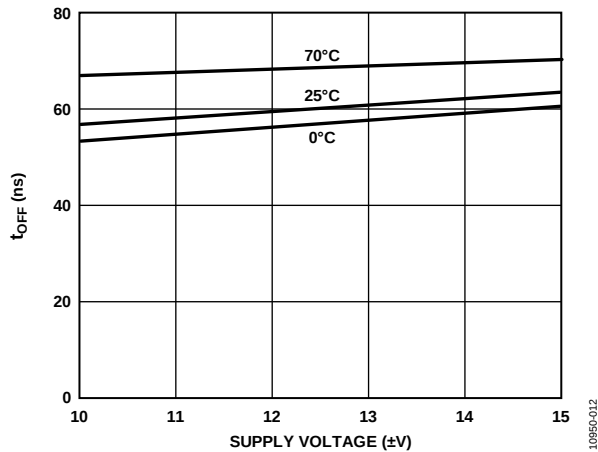
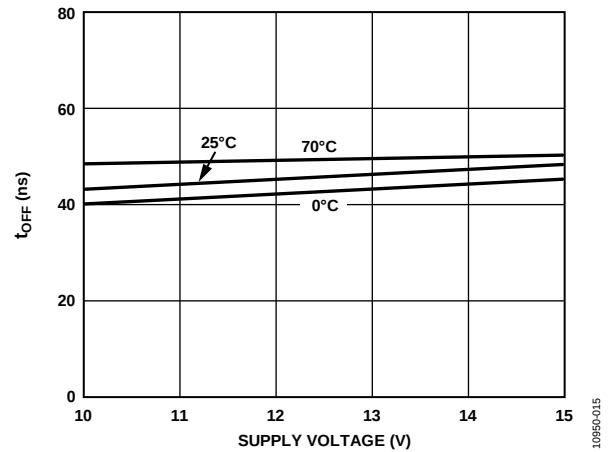
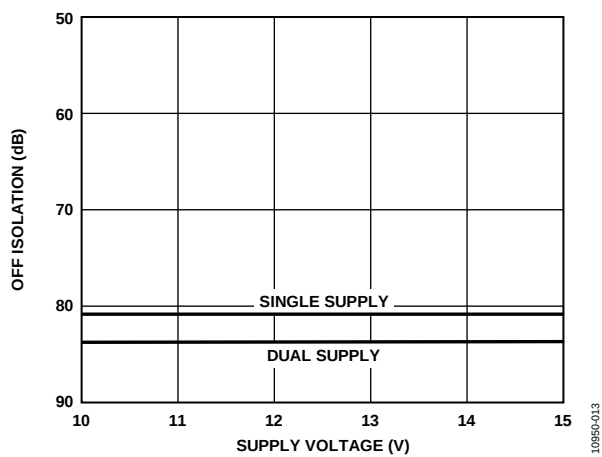
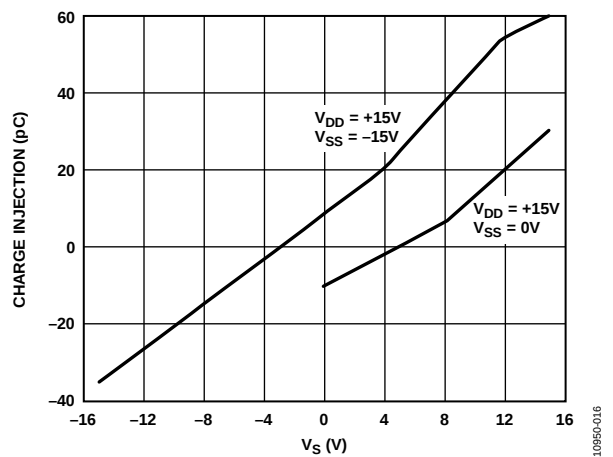
Figure 11. t_{ON} vs. Supply Voltage (Dual Supply)Figure 14. t_{ON} vs. Supply Voltage (Single Supply)Figure 12. t_{OFF} vs. Supply Voltage (Dual Supply)Figure 15. t_{OFF} vs. Supply Voltage (Single Supply)

Figure 13. Off Isolation and Channel-to-Channel Crosstalk vs. Supply Voltage

Figure 16. Charge Injection vs. Source Voltage (V_S) for Dual and Single 15 V Supplies

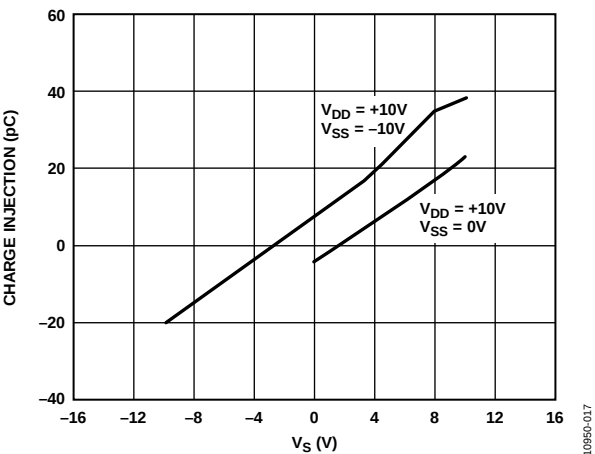


Figure 17. Charge Injection vs. Source Voltage for Dual and Single 10 V Supplies

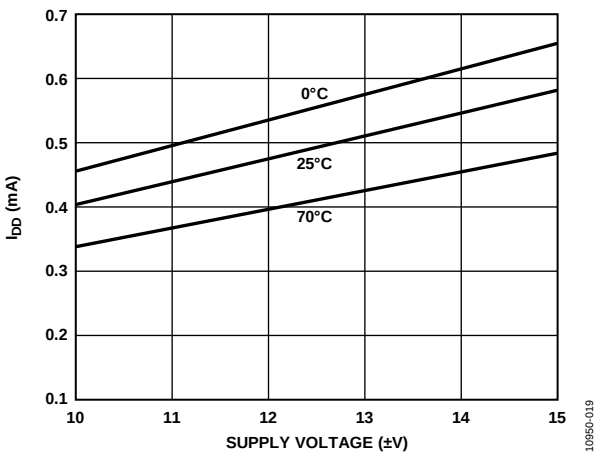


Figure 19. I_{DD} vs. Supply Voltage, (Dual Supply)

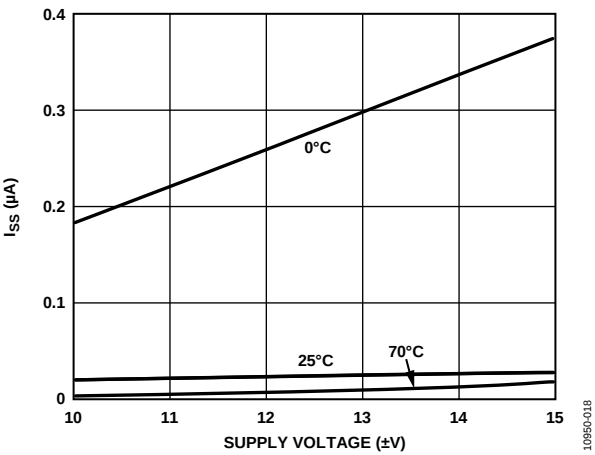


Figure 18. I_{SS} vs. Supply Voltage (Dual Supply)

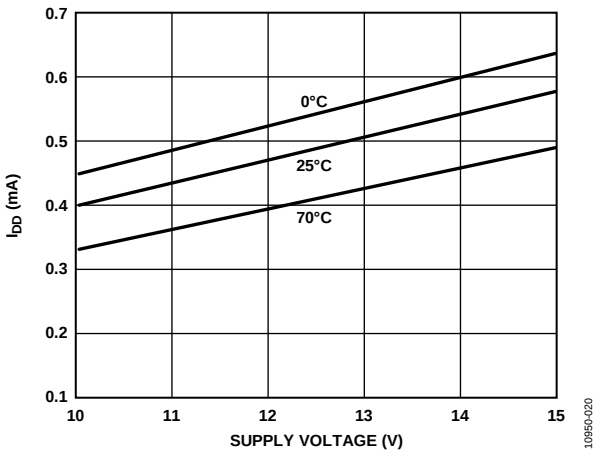


Figure 20. I_{DD} vs. Supply Voltage (Single Supply)

TERMINOLOGY

R_{ON}

Ohmic resistance between the out and S terminals.

R_{ON} Match

Difference between the R_{ON} of any two channels.

I_S (Off)

Source terminal leakage current when the switch is off.

I_D (Off)

Drain terminal leakage current when the switch is off.

I_D (On)

Leakage current that flows from the closed switch into the body.

V_D (V_S)

Analog voltage on the D, S terminals.

C_S (Off)

Switch input capacitance off condition.

C_D (Off)

Switch output capacitance off condition.

C_{IN}

Digital input capacitance.

C_D, C_S (On)

Input or output capacitance when the switch is on.

t_{ON}

Delay time between the 50% and 90% points of the digital input and switch on condition.

t_{OFF}

Delay time between the 50% and 90% points of the digital input and switch off condition.

t_{OPEN}

Off time measured between 50% points of both switches, which are connected as a multiplexer when switching from one address state to another.

V_{INL}

Maximum input voltage for a logic low.

V_{INH}

Minimum input voltage for a logic high.

I_{INL} (I_{INH})

Input current of the digital input.

V_{DD}

Most positive voltage supply.

V_{SS}

Most negative voltage supply.

V_L

Logic supply voltage.

I_{DD}

Positive supply current.

I_{SS}

Negative supply current.

TEST CIRCUITS




Figure 21.




Figure 23.






Figure 22.

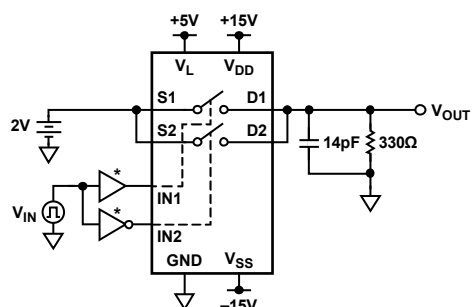

* BOTH THE BUFFER AND INVERTER SHOULD HAVE THE SAME PROPAGATION DELAY.

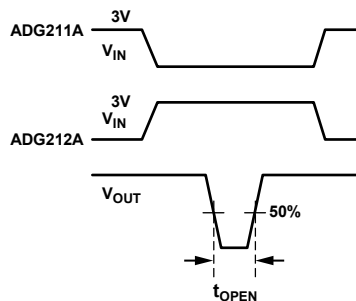Figure 24.



10950-024


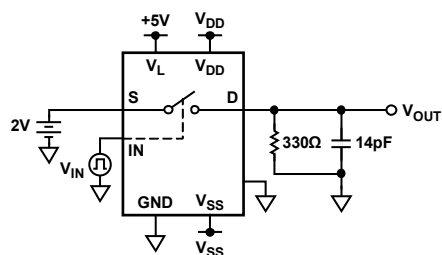


Figure 25.

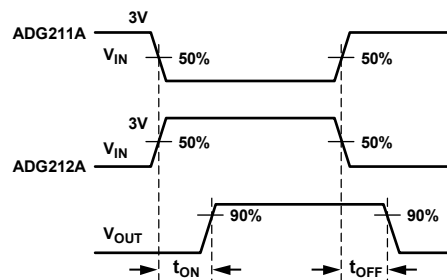

10950-025

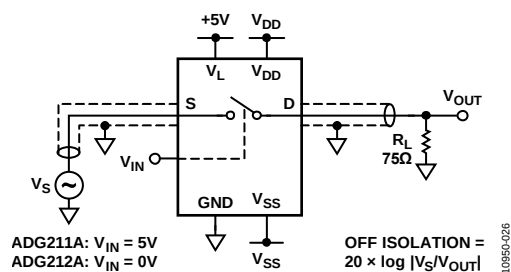


Figure 26. Off Isolation

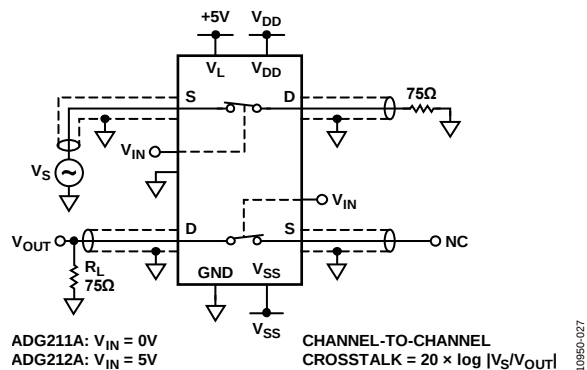


Figure 27. Channel-to-Channel Crosstalk


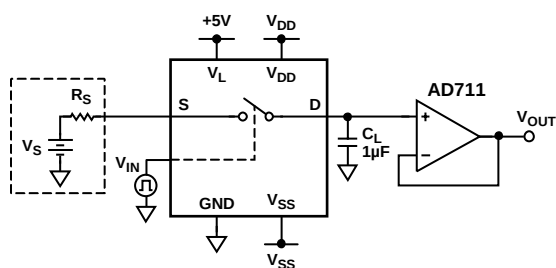


Figure 28. Charge Injection

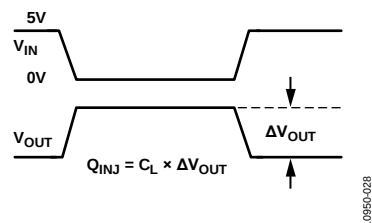

0.800 (20.32)
0.790 (20.07)
0.780 (19.81)

16 9
1 8

0.280 (7.11)
0.250 (6.35)
0.240 (6.10)

0.100 (2.54)
BSC

0.210 (5.33)
MAX

0.150 (3.81)
0.130 (3.30)
0.115 (2.92)

0.022 (0.56)
0.018 (0.46)
0.014 (0.36)

0.070 (1.78)
0.060 (1.52)
0.045 (1.14)

0.015 (0.38)
MIN

SEATING PLANE

0.005 (0.13)
MIN

0.325 (8.26)
0.310 (7.87)
0.300 (7.62)

0.060 (1.52)
MAX

0.015 (0.38)
GAUGE PLANE


0.195 (4.95)
0.130 (3.30)
0.115 (2.92)

0.014 (0.36)
0.010 (0.25)
0.008 (0.20)


0.430 (10.92)
MAX

Figure 29. 16-Lead Plastic Dual In-Line Package [PDIP]
Narrow Body
(N-16)

073106-B



060606-A

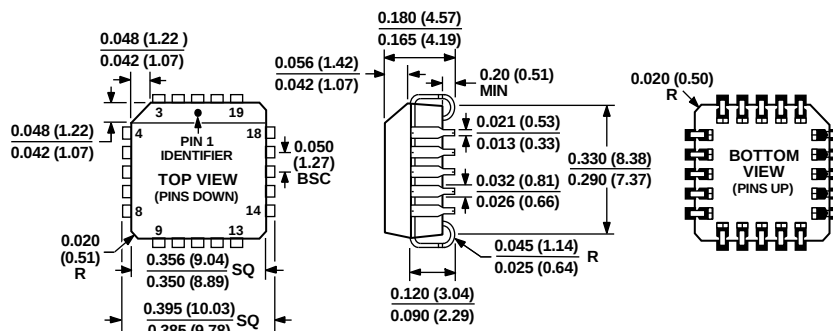

COMPLIANT TO JEDEC STANDARDS MO-047-AA
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 31. 20-Lead Plastic Leaded Chip Carrier [PLCC]
(P-20)

Dimensions shown in inches and (millimeters)

ORDERING GUIDE

Model ¹	Temperature Range	Package Description	Package Option
ADG211AKN	−40°C to +85°C	16-Lead PDIP	N-16
ADG211AKNZ	−40°C to +85°C	16-Lead PDIP	N-16
ADG211AKPZ	−40°C to +85°C	20-Lead PLCC	P-20
ADG211AKR	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG211AKRZ	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG211AKRZ-REEL	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG211AKRZ-REEL7	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG212AKNZ	−40°C to +85°C	16-Lead PDIP	N-16
ADG212AKPZ	−40°C to +85°C	20-Lead PLCC	P-20
ADG212AKPZ-REEL	−40°C to +85°C	20-Lead PLCC	P-20
ADG212AKR	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG212AKRZ	−40°C to +85°C	16-Lead SOIC_N	R-16
ADG212AKRZ-REEL	−40°C to +85°C	16-Lead SOIC_N	R-16

¹ Z = RoHS Compliant Part.

NOTES

NOTES

NOTES

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А