





**Both N.O. and N.C. contacts incorporated in a compact DIP8-pin Reinforced insulation**

**PhotoMOS®  
GE 1 Form A & 1 Form B  
(AQW61○EH)**



(Height includes standoff)

mm inch



**RoHS compliant**

### FEATURES

- 60V type couples high capacity (0.5A) with low on-resistance (Typ. 1Ω).**
- Reinforced insulation 5,000 V**  
More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).
- Approx. 1/2 the space compared with the mounting area of a set of 1 Form A and 1 Form B PhotoMOS**
- Applicable for 1 Form A and 1 Form B use as well as two independent 1 Form A and 1 Form B use**
- Controls low-level analog signals**  
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

### 6. High sensitivity and high speed response

Can control max. 0.14 A load current with 5 mA input current. Fast operation speed of Typ. 0.5 ms [N.O.] (AQW610EH).

### 7. Low-level off-state leakage current

### TYPICAL APPLICATIONS

- Power supply
- Measuring instruments
- Security equipment
- Modem
- Telephone equipment
- Electricity, plant equipment
- Sensing equipment

### TYPES

	I/O isolation voltage	Output rating*		Package	Part No.				Packing quantity	
					Through hole terminal	Surface-mount terminal		Tube	Tape and reel	
		Tube packing style				Tape and reel packing style				
		Load voltage	Load current		Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side				
AC/DC dual use	Reinforced 5,000 Vrms	60 V	500 mA	DIP8-pin	AQW612EH	AQW612EHA	AQW612EHAX	AQW612EHAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.
		350 V	120 mA		AQW610EH	AQW610EHA	AQW610EHAX	AQW610EHAZ		
		400 V	100 mA		AQW614EH	AQW614EHA	AQW614EHAX	AQW614EHAZ		

\*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING

#### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQW612EH(A)	AQW610EH(A)	AQW614EH(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA			
	LED reverse voltage	V <sub>R</sub>	5 V			
	Peak forward current	I <sub>FP</sub>	1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW			
Output	Load voltage (peak AC)	V <sub>L</sub>	60 V	350 V	400 V	
	Continuous load current	I <sub>L</sub>	0.5 A (0.6 A)	0.12 A (0.14 A)	0.1 A (0.13 A)	Peak AC, DC ( ): in case of using only 1a or 1b, 1 channel
	Peak load current	I <sub>peak</sub>	1.5 A	0.36 A	0.3 A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	800 mW			
Total power dissipation		P <sub>T</sub>	850 mW			
I/O isolation voltage		V <sub>iso</sub>	5,000 Vrms			
Ambient temperature	Operating	T <sub>opr</sub>	-40 to +85°C -40 to +185°F			(Non-icing at low temperatures)
	Storage	T <sub>stg</sub>	-40 to +100°C -40 to +212°F			

# GE 1 Form A & 1 Form B (AQW610EH)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW612EH(A)	AQW610EH(A)	AQW614EH(A)	Condition
Input	LED operate current	Typical	1.4 mA			I <sub>L</sub> =Max.
		Maximum	3.0 mA			
	LED reverse current	Minimum	0.4 mA			I <sub>L</sub> =Max.
		Typical	1.3 mA			
LED dropout voltage	Typical	1.25 (1.14 V at I <sub>F</sub> = 5 mA)			I <sub>F</sub> =50 mA	
	Maximum	1.5 V				
Output	On resistance	Typical	1Ω	18Ω	26Ω	I <sub>F</sub> =5mA (N.O.) I <sub>F</sub> = 0mA (N.C.) I <sub>L</sub> = Max. Within 1 s
		Maximum	2.5Ω	25Ω	35Ω	
	Off state leakage current	Maximum	1μA (N.O.), 10μA (N.C.)			I <sub>F</sub> =0 mA (N.O.) I <sub>F</sub> = 5 mA (N.C.) V <sub>L</sub> = Max.
Transfer characteristics	Operate time*	Typical	1.0 ms (N.O.) 3.0 ms (N.C.)	0.5 ms (N.O.) 1.0 ms (N.C.)	0.5 ms (N.O.) 0.8 ms (N.C.)	I <sub>F</sub> = 0 mA → 5 mA I <sub>L</sub> = Max.
		Maximum	4.0 ms (N.O.) 10.0 ms (N.C.)	3.0 ms		
	Reverse time*	Typical	0.05ms (N.O.), 0.2ms (N.C.)	0.08ms (N.O.), 0.3ms (N.C.)	0.08ms (N.O.), 0.2ms (N.C.)	I <sub>F</sub> = 5 mA → 0 mA I <sub>L</sub> = Max.
		Maximum	1.0ms			
	I/O capacitance	Typical	0.8 pF			f = 1MHz V <sub>B</sub> = 0 V
		Maximum	1.5 pF			
Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	1,000MΩ			500 V DC

\*Operate/Reverse time

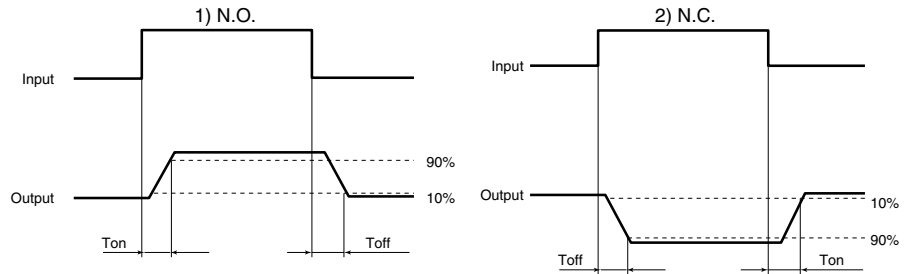

## 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Number of used channels	Min.	Max.	Unit
LED current	I <sub>F</sub>		5	30	mA
AQW612EH(A)	Load voltage (Peak AC)		—	48	V
	Continuous load current	1ch 2ch	—	0.6 0.5	A
AQW610EH(A)	Load voltage (Peak AC)		—	280	V
	Continuous load current	1ch 2ch	—	0.14 0.12	A
AQW614EH(A)	Load voltage (Peak AC)		—	320	V
	Continuous load current	1ch 2ch	—	0.13 0.1	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

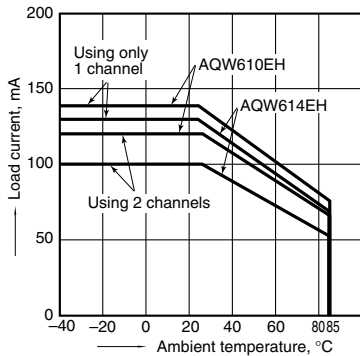


1-(2). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

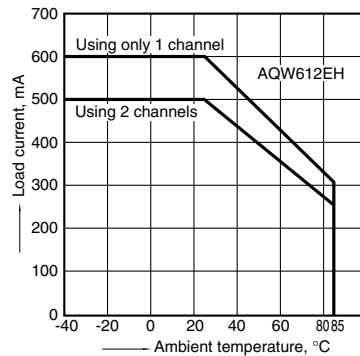


2-(1). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage; Max. (DC)  
Continuous load current: Max. (DC)

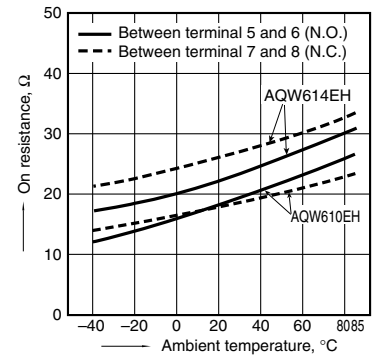


2-(2). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage; Max. (DC)  
Continuous load current: Max. (DC)

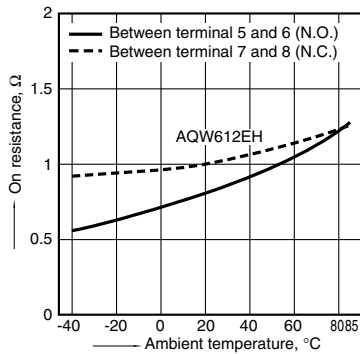


3. Operate time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage; Max. (DC);  
Continuous load current: Max. (DC)

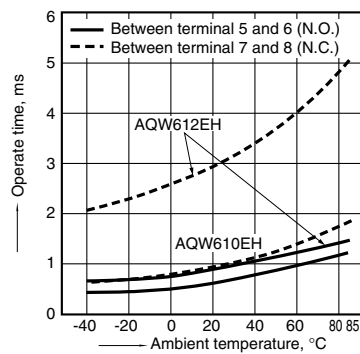


4. Reverse time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage; Max. (DC);  
Continuous load current: Max. (DC)

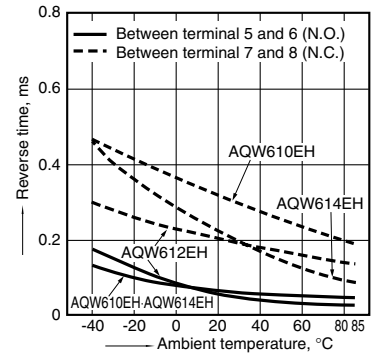


5. LED operate current vs. ambient temperature characteristics

Sample: All types; Load voltage; Max. (DC);  
Continuous load current: Max. (DC)

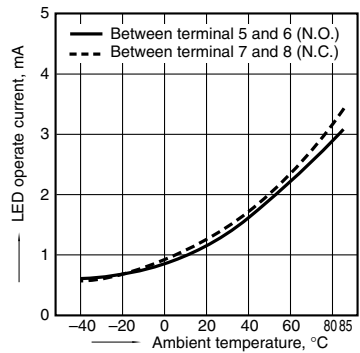


6. LED reverse current vs. ambient temperature characteristics

Sample: All types; Load voltage; Max. (DC);  
Continuous load current: Max. (DC)

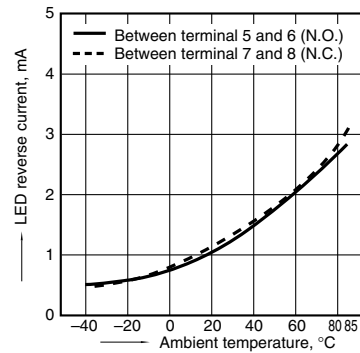


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;  
LED current: 5 to 50 mA

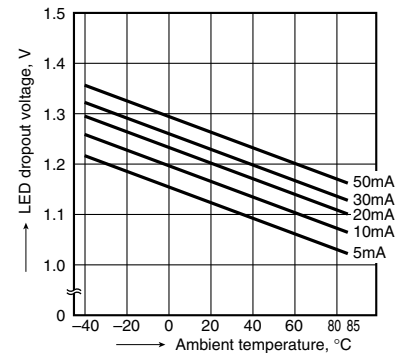


8-(1). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F




8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

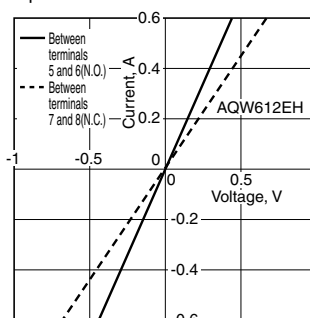

9-(1). Off state leakage current vs. load voltage characteristics


Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

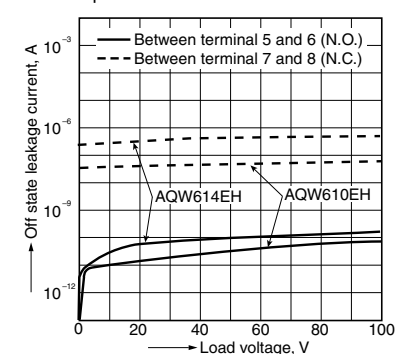

# GE 1 Form A & 1 Form B (AQW61○EH)


## 9-(2). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

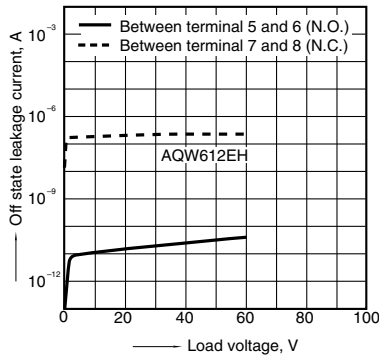


## 10-(1). Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

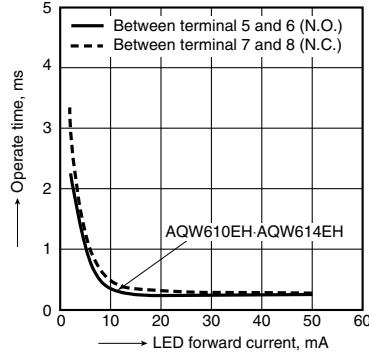


## 10-(2). Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

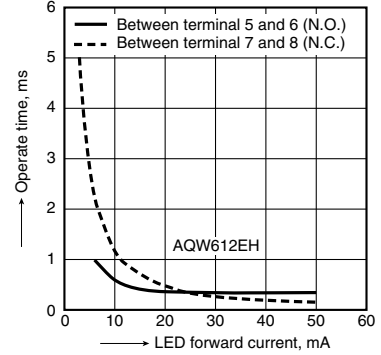


## 11-(1). Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

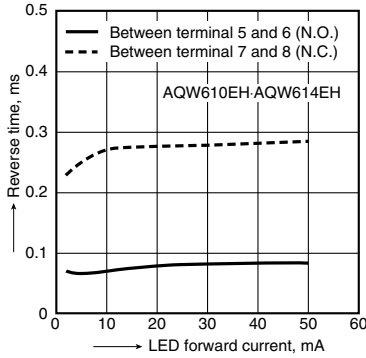


## 11-(2). Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

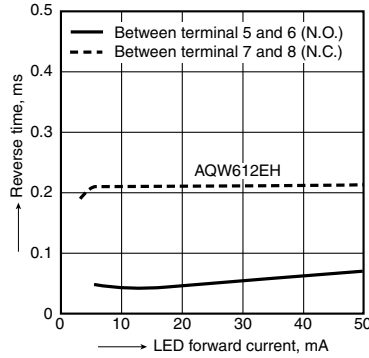


## 12-(1). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

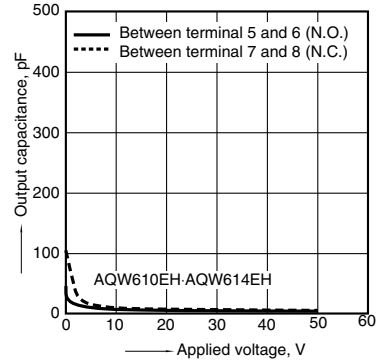

## 12-(2). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

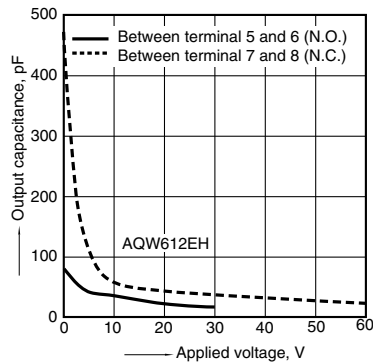

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[AQW610EHA](#) [AQW614EHA](#) [AQW612EH](#) [AQW614EH](#) [AQW610EH](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А