



# Film Capacitors

## Metallized Polypropylene Film Capacitors (MFP)

**Series/Type:** B32682 ... B32686

**Date:** June 2018

© EPCOS AG 2018. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

**Very high pulse (wound)**
**Typical applications**

- Smoothing
- Snubbing
- Electronic ballast
- Switch mode power supplies
- High-frequency AC loads
- High voltages and very high currents

**Climatic**

- Max. operating temperature: 110 °C
- Climatic category (IEC 60068-1:2013): 55/100/56

**Construction**

- Dielectric: polypropylene (PP)
- Film metallized on one side and metal foils internally connected in series
- Plastic case (UL 94 V-0)
- Epoxy resin sealing (UL 94 V-0)

**Features**

- Very high pulse strength
- Highest possible contact reliability
- Self-healing properties
- RoHS-compatible

**Terminals**

- Parallel wire leads, lead-free tinned
- Special lead lengths available on request

**Marking**

Manufacturer's logo, lot number, type number, rated capacitance (coded), capacitance tolerance (code letter), rated DC voltage, date of manufacture (coded)

**Delivery mode**

Bulk (untaped), Taped (Ammo pack or reels)

**Dimensional drawing**


Dimensions in mm

Lead spacing	Lead diameter	Type
$e \pm 0.4$	$d_1 \pm 0.05$	
15.0	0.8	B32682
22.5	0.8	B32683
27.5	0.8	B32684
37.5	1.0	B32686



**Overview of available types**

Lead spacing	15.0 mm						22.5 mm						
Type	B32682						B32683						
Page	5						7						
V <sub>R</sub> (V DC)	400	630	1000	1250	1600	2000	400	630	1000	1250	1600	2000	2500
C <sub>R</sub> (nF)													
0.47													
0.68													
1.0													
1.5													
2.2													
3.3													
4.7													
6.8													
10													
15													
22													
33													
47													
68													
100													
150													




B32682 ... B32686

Very high pulse (wound)

### Overview of available types

Lead spacing	27.5 mm						37.5 mm				
Type	B32684						B32686				
Page	9						10				
$V_R$ (V DC)	400	630	1000	1250	1600	2000	630	1000	1250	1600	2000
$C_R$ (nF)											
15											
22											
33											
47											
68											
100											
150											
220											
330											
470											
680											
1000											
1500											


**Ordering codes and packing units (lead spacing 15 mm)**

$V_R$	$V_{RMS}$ $f \leq 1$ kHz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	nF					
400	250	15.0	5.0 × 10.5 × 18.0	B32682A4153+***	4680	5200	4000
		22.0	6.0 × 11.0 × 18.0	B32682A4223+***	3840	4400	4000
		33.0	7.0 × 12.5 × 18.0	B32682A4333+***	3320	3600	4000
		47.0	8.5 × 14.5 × 18.0	B32682A4473+***	2720	2800	2000
630	300	4.7	5.0 × 10.5 × 18.0	B32682A6472+***	4680	5200	4000
		6.8	5.0 × 10.5 × 18.0	B32682A6682+***	4680	5200	4000
		10.0	5.0 × 10.5 × 18.0	B32682A6103+***	4680	5200	4000
		15.0	6.0 × 11.0 × 18.0	B32682A6153+***	3840	4400	4000
		22.0	7.0 × 12.5 × 18.0	B32682A6223+***	3320	3600	4000
		33.0	8.5 × 14.5 × 18.0	B32682A6333+***	2720	2800	2000
		47.0	9.0 × 17.5 × 18.0	B32682A6473+***	2560	2800	2000
1000	400	3.3	5.0 × 10.5 × 18.0	B32682A0332+***	4680	5200	4000
		4.7	5.0 × 10.5 × 18.0	B32682A0472+***	4680	5200	4000
		6.8	6.0 × 12.0 × 18.0	B32682A0682+***	3840	4400	4000
		10.0	7.0 × 12.5 × 18.0	B32682A0103+***	3320	3600	4000
		15.0	8.5 × 14.5 × 18.0	B32682A0153+***	2720	2800	2000
1250	450	2.2	5.0 × 10.5 × 18.0	B32682A7222+***	4680	5200	4000
		3.3	5.0 × 10.5 × 18.0	B32682A7332+***	4680	5200	4000
		4.7	6.0 × 12.0 × 18.0	B32682A7472+***	3840	4400	4000
		6.8	7.0 × 12.5 × 18.0	B32682A7682+***	3320	3600	4000
		10.0	8.5 × 14.5 × 18.0	B32682A7103+***	2720	2800	2000

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
Intermediate capacitances values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack

189 = Straight terminals, Reel

000 = Straight terminals, untaped  
(lead length 6 – 1 mm)



**B32682**

**Very high pulse (wound)**

**Ordering codes and packing units (lead spacing 15 mm)**

$V_R$	$V_{RMS}$ $f \leq 1$ kHz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	nF					
1600	500	1.5	5.0 × 10.5 × 18.0	B32682A1152+***	4680	5200	4000
		2.2	6.0 × 11.0 × 18.0	B32682A1222+***	3840	4400	4000
		3.3	7.0 × 12.5 × 18.0	B32682A1332+***	3320	3600	4000
		4.7	8.5 × 14.5 × 18.0	B32682A1472+***	2720	2800	2000
		6.8	9.0 × 17.5 × 18.0	B32682A1682+***	2560	2800	2000
2000	550	0.47	5.0 × 10.5 × 18.0	B32682A2471M***	4680	5200	4000
		0.68	5.0 × 10.5 × 18.0	B32682A2681M***	4680	5200	4000
		1.0	5.0 × 10.5 × 18.0	B32682A2102+***	4680	5200	4000
		1.5	6.0 × 12.0 × 18.0	B32682A2152+***	3840	4400	4000
		2.2	7.0 × 12.5 × 18.0	B32682A2222+***	3320	3600	4000
		3.3	8.5 × 14.5 × 18.0	B32682A2332+***	2720	2800	2000

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Intermediate capacitances values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

J = ±5%

\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack

189 = Straight terminals, Reel

000 = Straight terminals, untaped  
(lead length 6 – 1 mm)


**Ordering codes and packing units (lead spacing 22.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 1$ kHz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	nF					
400	250	33.0	6.0 × 15.0 × 26.5	B32683A4333+ <sup>***</sup>	2720	2800	2880
		47.0	6.0 × 15.0 × 26.5	B32683A4473+ <sup>***</sup>	2720	2800	2880
		68.0	7.0 × 16.0 × 26.5	B32683A4683+ <sup>***</sup>	2320	2400	2520
		100.0	8.5 × 16.5 × 26.5	B32683A4104+ <sup>***</sup>	1920	2000	2040
		150.0	10.5 × 18.5 × 26.5	B32683A4154+ <sup>***</sup>	1560	1600	2160
630	300	33.0	6.0 × 15.0 × 26.5	B32683A6333+ <sup>***</sup>	2720	2800	2880
		47.0	7.0 × 16.0 × 26.5	B32683A6473+ <sup>***</sup>	2320	2400	2520
		68.0	8.5 × 16.5 × 26.5	B32683A6683+ <sup>***</sup>	1920	2000	2040
		100.0	10.5 × 18.5 × 26.5	B32683A6104+ <sup>***</sup>	1560	1600	2160
		150.0	12.0 × 22.0 × 26.5	B32683A6154+ <sup>***</sup>	–	–	1800
1000	400	10.0	6.0 × 15.0 × 26.5	B32683A0103+ <sup>***</sup>	2720	2800	2880
		15.0	6.0 × 15.0 × 26.5	B32683A0153+ <sup>***</sup>	2720	2800	2880
		22.0	7.0 × 16.0 × 26.5	B32683A0223+ <sup>***</sup>	2320	2400	2520
		33.0	8.5 × 16.5 × 26.5	B32683A0333+ <sup>***</sup>	1920	2000	2040
		47.0	10.5 × 18.5 × 26.5	B32683A0473+ <sup>***</sup>	1560	1600	2160
		68.0	12.0 × 22.0 × 26.5	B32683A0683+ <sup>***</sup>	–	–	1800
1250	450	10.0	6.0 × 15.0 × 26.5	B32683A7103+ <sup>***</sup>	2720	2800	2880
		15.0	7.0 × 16.0 × 26.5	B32683A7153+ <sup>***</sup>	2320	2400	2520
		22.0	8.5 × 16.5 × 26.5	B32683A7223+ <sup>***</sup>	1920	2000	2040
		33.0	10.5 × 18.5 × 26.5	B32683A7333+ <sup>***</sup>	1560	1600	2160
1600	500	6.8	6.0 × 15.0 × 26.5	B32683A1682+ <sup>***</sup>	2720	2800	2880
		10.0	7.0 × 16.0 × 26.5	B32683A1103+ <sup>***</sup>	2320	2400	2520
		15.0	8.5 × 16.5 × 26.5	B32683A1153+ <sup>***</sup>	1920	2000	2040
		22.0	10.5 × 18.5 × 26.5	B32683A1223+ <sup>***</sup>	1560	1600	2160

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Intermediate capacitances values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

J = ±5%

\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack

189 = Straight terminals, Reel

000 = Straight terminals, untaped  
(lead length 6 – 1 mm)



**B32683**

**Very high pulse (wound)**

**Ordering codes and packing units (lead spacing 22.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 1$ kHz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	nF					
2000	550	3.3	6.0 × 15.0 × 26.5	B32683A2332+***	2720	2800	2880
		4.7	6.0 × 15.0 × 26.5	B32683A2472+***	2720	2800	2880
		6.8	7.0 × 16.0 × 26.5	B32683A2682+***	2320	2400	2520
		10.0	8.5 × 16.5 × 26.5	B32683A2103+***	1920	2000	2040
		15.0	10.5 × 18.5 × 26.5	B32683A2153+***	1560	1600	2160
2500	750	1.5	6.0 × 15.0 × 26.5	B32683A3152+***	2720	2800	2880
		2.2	7.0 × 16.0 × 26.5	B32683A3222+***	2320	2400	2520
		3.3	8.5 × 16.5 × 26.5	B32683A3332+***	1920	2000	2040
		4.7	10.5 × 18.5 × 26.5	B32683A3472+***	1560	1600	2160
		6.8	12.0 × 22.0 × 26.5	B32683A3682+***	—	—	1800

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Intermediate capacitances values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

J = ±5%


\*\*\* = Packaging code:

289 = Straight terminals, Ammo pack

189 = Straight terminals, Reel

000 = Straight terminals, untaped  
(lead length 6 – 1 mm)




**Ordering codes and packing units (lead spacing 27.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 1$ kHz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Untaped pcs./MOQ
V DC	V AC	nF			
400	250	150.0	11.0 × 19.0 × 31.5	B32684A4154+000	1280
		220.0	11.0 × 21.0 × 31.5	B32684A4224+000	1280
		330.0	13.5 × 23.0 × 31.5	B32684A4334+000	1040
		470.0	18.0 × 27.5 × 31.5	B32684A4474+000	800
		680.0	19.0 × 30.0 × 31.5	B32684A4684+000	720
630	300	100.0	11.0 × 19.0 × 31.5	B32684A6104+000	1280
		150.0	11.0 × 21.0 × 31.5	B32684A6154+000	1280
		220.0	13.5 × 23.0 × 31.5	B32684A6224+000	1040
		330.0	15.0 × 24.5 × 31.5	B32684A6334+000	960
		470.0	19.0 × 30.0 × 31.5	B32684A6474+000	720
1000	400	47.0	11.0 × 19.0 × 31.5	B32684A0473+000	1280
		68.0	11.0 × 21.0 × 31.5	B32684A0683+000	1280
		100.0	13.5 × 23.0 × 31.5	B32684A0104+000	1040
		150.0	18.0 × 27.5 × 31.5	B32684A0154+000	800
		220.0	21.0 × 31.0 × 31.5	B32684A0224+000	784
1250	450	33.0	11.0 × 19.0 × 31.5	B32684A7333+000	1280
		47.0	11.0 × 21.0 × 31.5	B32684A7473+000	1280
		68.0	13.5 × 23.0 × 31.5	B32684A7683+000	1040
		100.0	15.0 × 24.5 × 31.5	B32684A7104+000	960
		150.0	19.0 × 30.0 × 31.5	B32684A7154+000	720
1600	500	22.0	11.0 × 19.0 × 31.5	B32684A1223+000	1280
		33.0	11.0 × 21.0 × 31.5	B32684A1333+000	1280
		47.0	13.5 × 23.0 × 31.5	B32684A1473+000	1040
		68.0	15.0 × 24.5 × 31.5	B32684A1683+000	960
		100.0	19.0 × 30.0 × 31.5	B32684A1104+000	720
2000	550	15.0	11.0 × 19.0 × 31.5	B32684A2153+000	1280
		22.0	11.0 × 21.0 × 31.5	B32684A2223+000	1280
		33.0	13.5 × 23.0 × 31.5	B32684A2333+000	1040
		47.0	18.0 × 27.5 × 31.5	B32684A2473+000	800
		68.0	19.0 × 30.0 × 31.5	B32684A2683+000	720

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
Intermediate capacitances values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

J = ±5%

Packaging code:

000 = Untaped (lead length 6 – 1 mm)


**B32686**
**Very high pulse (wound)**
**Ordering codes and packing units (lead spacing 37.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 1$ kHz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Untaped pcs./MOQ
V DC	V AC	nF			
630	300	680.0	18.0 × 32.5 × 42.0	B32686A6684+000	192
		1000.0	20.0 × 39.5 × 42.0	B32686A6105+000	128
		1500.0	28.0 × 42.5 × 42.0	B32686A6155+000	216
1000	400	68.0	12.0 × 22.0 × 42.0	B32686A0683+000	288
		100.0	12.0 × 22.0 × 42.0	B32686A0104+000	288
		150.0	14.0 × 25.0 × 42.0	B32686A0154+000	224
		220.0	16.0 × 28.5 × 42.0	B32686A0224+000	192
		330.0	20.0 × 39.5 × 42.0	B32686A0334+000	128
		470.0	28.0 × 37.0 × 42.0	B32686A0474+000	128
1250	450	68.0	12.0 × 22.0 × 42.0	B32686A7683+000	288
		100.0	14.0 × 25.0 × 42.0	B32686A7104+000	224
		150.0	16.0 × 28.5 × 42.0	B32686A7154+000	192
		220.0	18.0 × 32.5 × 42.0	B32686A7224+000	192
		330.0	20.0 × 39.5 × 42.0	B32686A7334+000	128
1600	500	47.0	12.0 × 22.0 × 42.0	B32686A1473+000	288
		68.0	14.0 × 25.0 × 42.0	B32686A1683+000	224
		100.0	18.0 × 32.5 × 42.0	B32686A1104+000	192
		150.0	20.0 × 39.5 × 42.0	B32686A1154+000	192
		220.0	28.0 × 37.0 × 42.0	B32686A1224+000	216
2000	550	22.0	12.0 × 22.0 × 42.0	B32686A2223+000	288
		33.0	12.0 × 22.0 × 42.0	B32686A2333+000	288
		47.0	14.0 × 25.0 × 42.0	B32686A2473+000	224
		68.0	16.0 × 28.5 × 42.0	B32686A2683+000	192
		100.0	18.0 × 32.5 × 42.0	B32686A2104+000	192

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Intermediate capacitances values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

J = ±5%

Packaging code:

000 = Untaped (lead length 6 – 1 mm)

**Technical data**

Operating temperature range	Max. operating temperature $T_{op,max}$ +110 °C Upper category temperature $T_{max}$ +100 °C Lower category temperature $T_{min}$ -55 °C Rated DC temperature $T_{RDC}$ +85 °C Rated AC temperature $T_{RAC}$ +75 °C			
Voltage Derating	The rated voltage is decreased with 1.25%/°C between rated temperature and +100 °C			
Dissipation factor $\tan \delta$ at 20 °C (upper limit values)	at	$C_R \leq 0.1 \mu F$	$0.1 \mu F < C_R \leq 1 \mu F$	$C_R > 1 \mu F$
	1 kHz	0.0004	0.0004	0.0004
	10 kHz	0.0004	0.0006	—
	100 kHz	0.001	—	—
Insulation resistance $R_{ins}$ or time constant $t = C_R \times R_{ins}$ at 20 °C, rel. humidity $\leq 65\%$ (minimum as-delivered values)	$C_R \leq 0.33 \mu F$ 100 GΩ		$C_R > 0.33 \mu F$ 30000 s	
	DC test voltage $2.0 \cdot V_R, 2 s$			
Category voltage $V_C$	$T_{op} (°C)$	DC voltage derating	AC voltage derating	
$V_{DC}$ continuous operation	$T_{op} \leq 85$	$V_C = V_R$		
	$85 < T_{op} \leq 100$	$V_C = V_R \cdot (165 - T_{op})/80$		
$V_{AC}$ continuous operation at $f \leq 1$ kHz	$T_{op} \leq 85$		$V_C = V_{RMS}$	
	$75 < T_{op} \leq 100$		$V_{C,RMS} = V_{RMS} \cdot (155 - T_{op})/80$	
Damp heat test	56 days/40 °C/93% relative humidity			
Limit values after damp heat test	Capacitance change $ \Delta C/C $		$\leq 2\%$	
	Dissipation factor change $\Delta \tan \delta$		$\leq 1.0 \cdot 10^{-3}$ (at 10 kHz)	
	Insulation resistance $R_{ins}$		$\geq 50\%$ of minimum as delivered values	
Reliability:				
Endurance test AC	1.25 · $V_C$ / 85 °C / 1000 h			
Endurance test DC	1.25 · $V_C$ / 85 °C / 100 °C / 1000 h			
Failure rate $\lambda$	1 fit ( $\leq 2 \cdot 10^{-3}$ at $0.5 \cdot V_R, 40$ °C)			
Service life $t_{SL}$	200 000 h at $1.0 \cdot V_R, 85$ °C			
	For conversion to other operating conditions and temperatures, refer to chapter "Quality, 2 Reliability".			
Failure criteria:				
Total failure	Short circuit or open circuit			
Failure due to variation of parameters	Capacitance change $ \Delta C/C $		$> 10\%$	
	Dissipation factor $\tan \delta$		$> 4 \cdot$ upper limit value	
	Insulation resistance $R_{ins}$ or time constant $t = C_R \cdot R_{ins}$		$< 1500$ MΩ ( $C_R \leq 0.33 \mu F$ ) $< 500$ s ( $C_R > 0.33 \mu F$ )	



**B32682 ... B32686**

**Very high pulse (wound)**



### Pulse handling capability

"dV/dt" represents the maximum permissible voltage change per unit of time for non-sinusoidal voltages, expressed in V/μs.

"k<sub>0</sub>" represents the maximum permissible pulse characteristic of the waveform applied to the capacitor, expressed in V<sup>2</sup>/μs.

*Note:*

*The values of dV/dt and k<sub>0</sub> provided below must not be exceeded in order to avoid damaging the capacitor.*

### dV/dt values

Lead spacing		15 mm	22.5 mm	27.5 mm	37.5 mm
V <sub>R</sub> V DC	V <sub>RMS</sub> V AC	dV/dt in V/μs			
400	250	7 000	5 000	4 000	–
630	300	12 000	7 000	5 000	3 000
1000	400	15 000	11 000	9 000	5 000
1250	450	27 000	11 000	9 000	6 000
1600	500	27 000	17 000	11 000	9 000
2000	550	39 000	21 000	11 000	9 000
2500	750	–	21 000	–	–

### k<sub>0</sub> values


Lead spacing		15 mm	22.5 mm	27.5 mm	37.5 mm
V <sub>R</sub> V DC	V <sub>RMS</sub> V AC	k <sub>0</sub> in V <sup>2</sup> /μs			
400	250	5 600 000	4 000 000	3 200 000	–
630	300	15 120 000	8 820 000	6 300 000	3 780 000
1000	400	30 000 000	22 000 000	18 000 000	10 000 000
1250	450	67 500 000	27 500 000	22 500 000	15 000 000
1600	500	86 400 000	54 400 000	35 200 000	28 800 000
2000	550	156 000 000	84 000 000	44 000 000	36 000 000
2500	750	–	105 000 000	–	–



**B32682 ... B32686**


**Very high pulse (wound)**

**Impedance Z versus frequency f**  
(typical values)

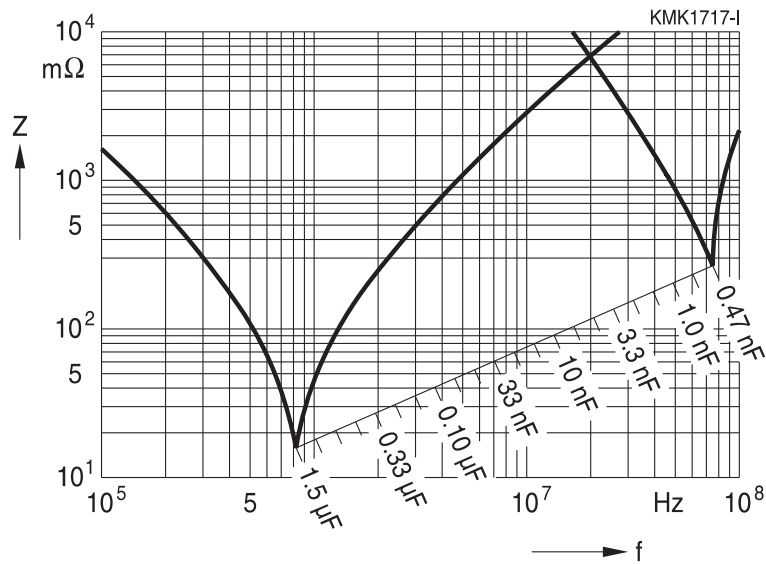

**B32682**

**Very high pulse (wound)**




**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 90^\circ C$ )**


For  $T_A > 90^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 15 mm**


**400 V DC/250 V AC**

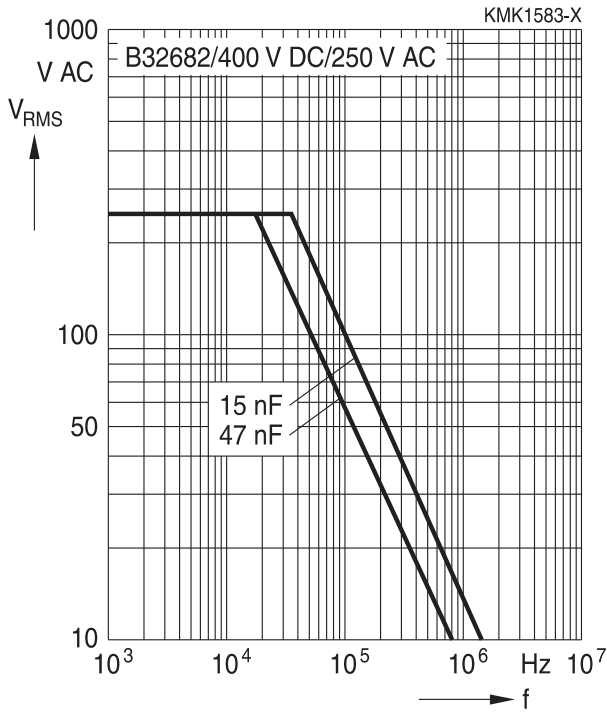


**630 V DC/300 V AC**

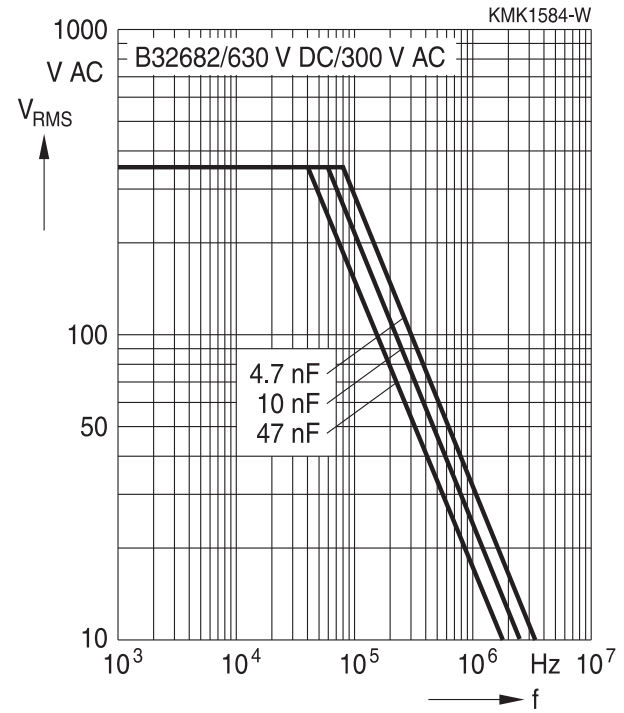

**1000 V DC/400 V AC**

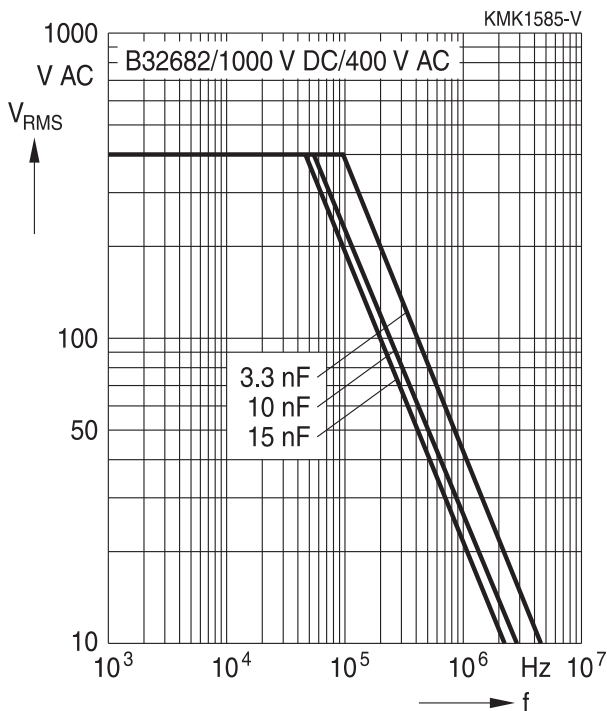

**1250 V DC/450 V AC**

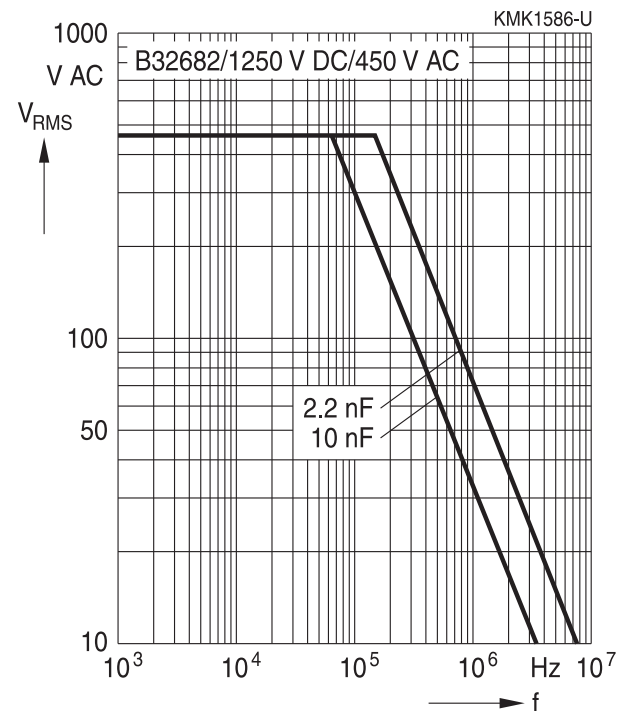



**B32682**


**Very high pulse (wound)**

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 90^\circ C$ )**


For  $T_A > 90^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 15 mm**

1600 V DC/500 V AC

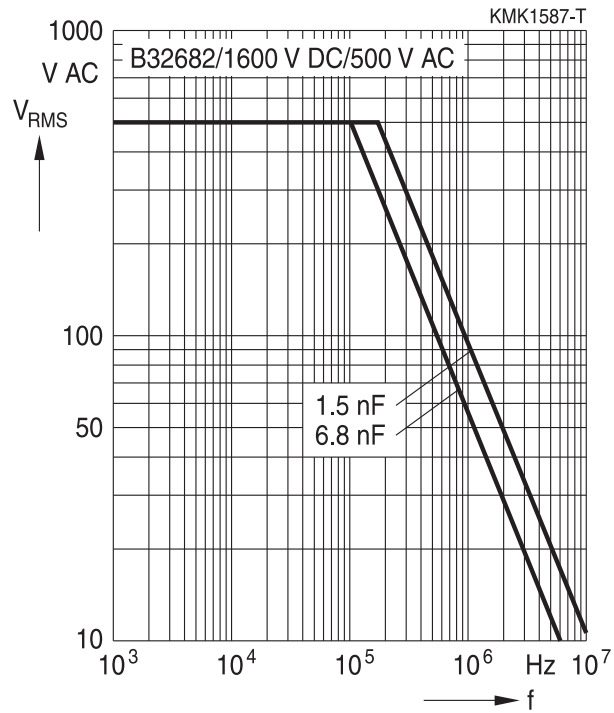


2000 V DC/550 V AC

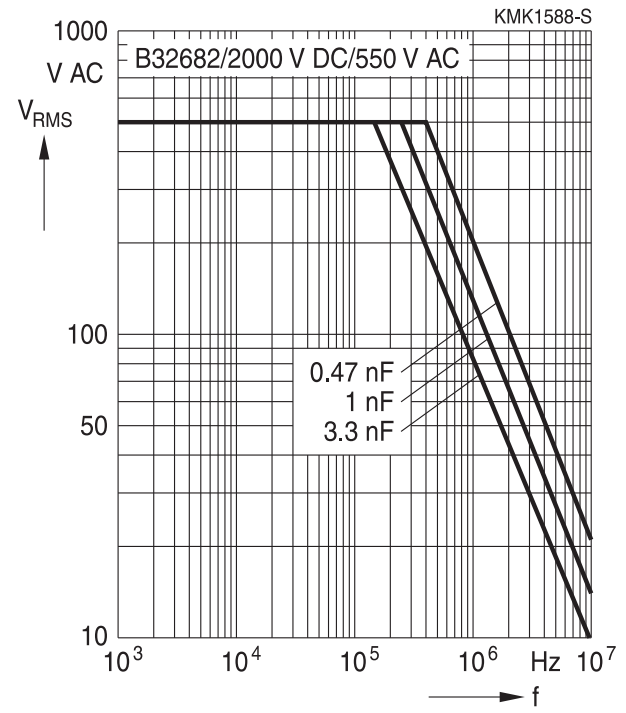



B32683

Very high pulse (wound)




**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 90^\circ C$ )**


For  $T_A > 90^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 22.5 mm**


400 V DC/250 V AC

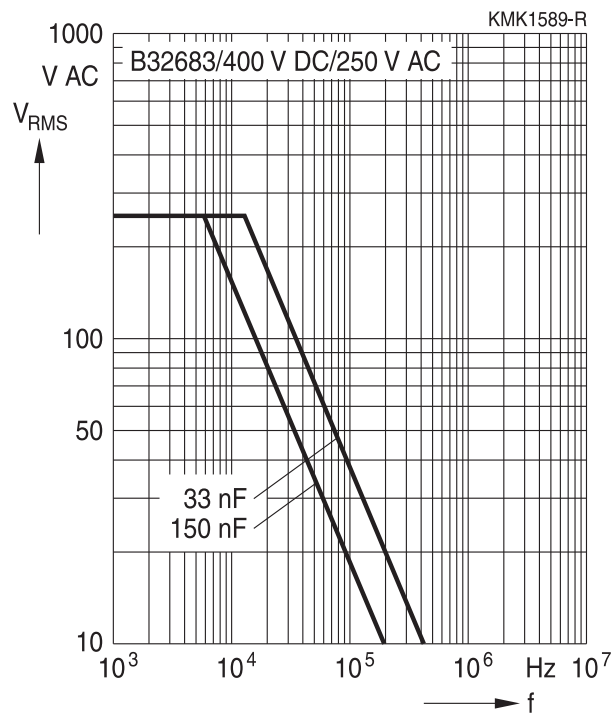


630 V DC/300 V AC

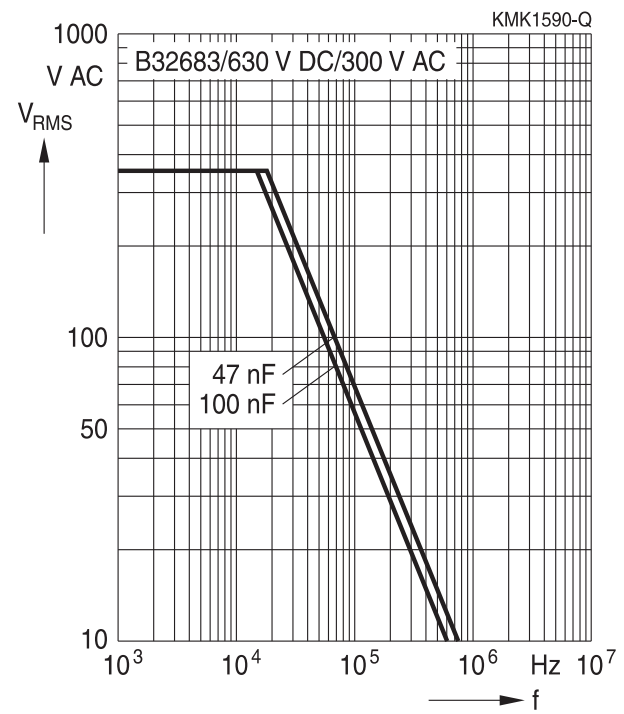


1000 V DC/400 V AC

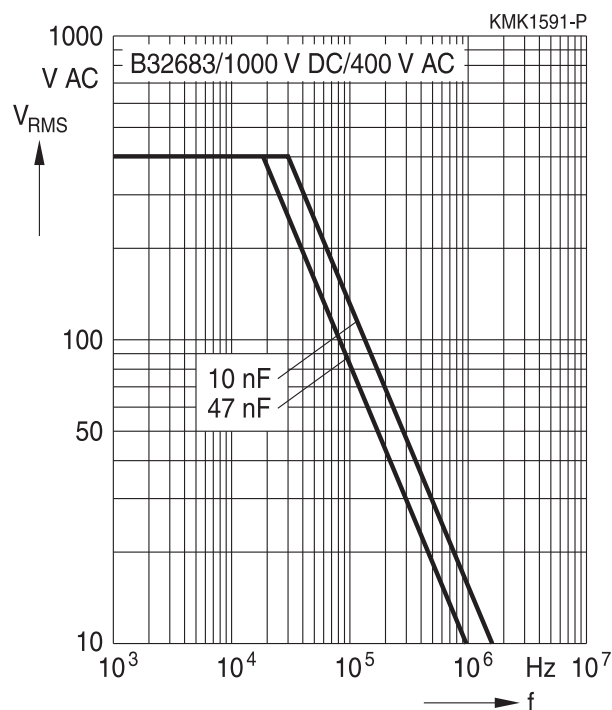

1250 V DC/450 V AC

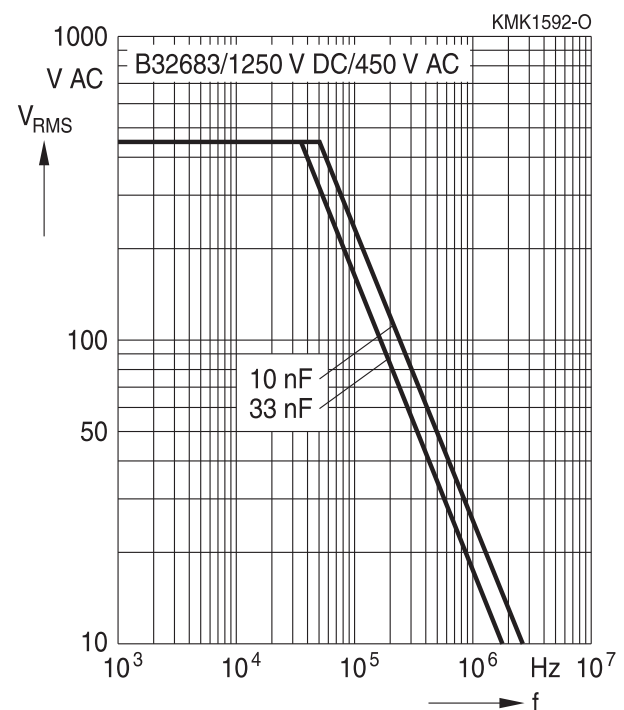



**B32683**


**Very high pulse (wound)**

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 90^\circ C$ )**


For  $T_A > 90^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 22.5 mm**

1600 V DC/500 V AC

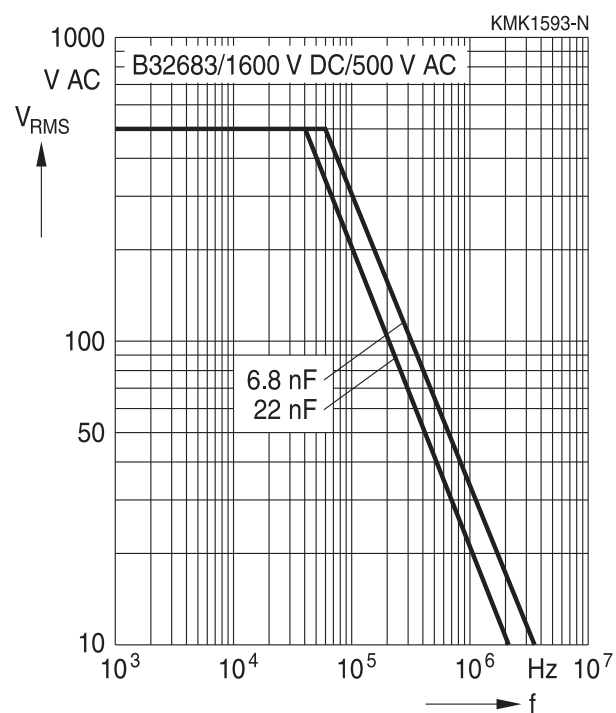


2000 V DC/550 V AC

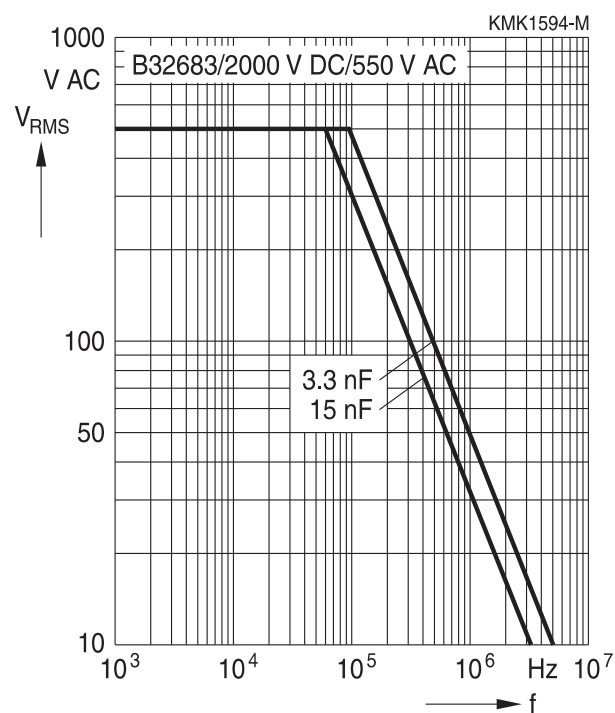

B32684

Very high pulse (wound)




**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 90^\circ C$ )**


For  $T_A > 90^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 27.5 mm**


400 V DC/250 V AC

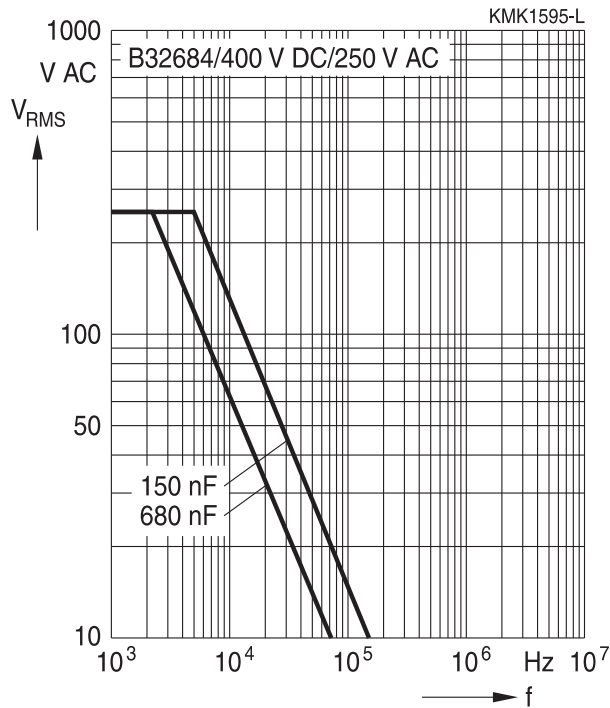


630 V DC/300 V AC

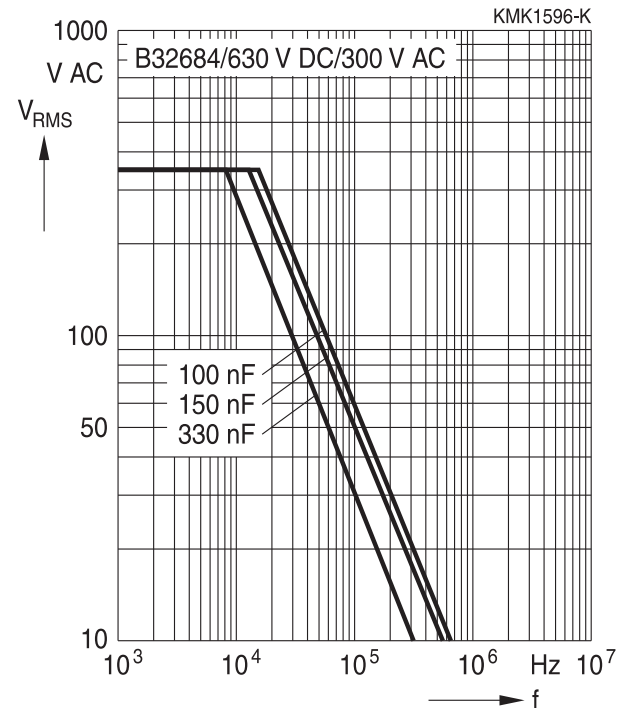


1000 V DC/400 V AC

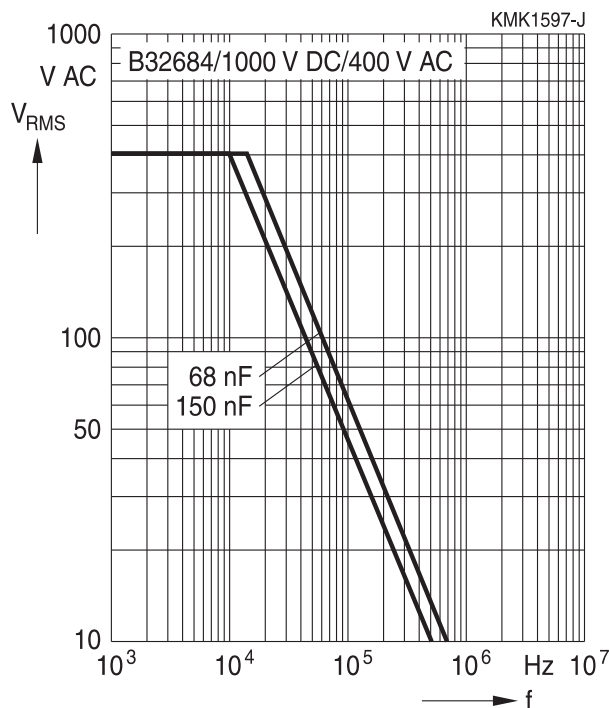

1250 V DC/450 V AC

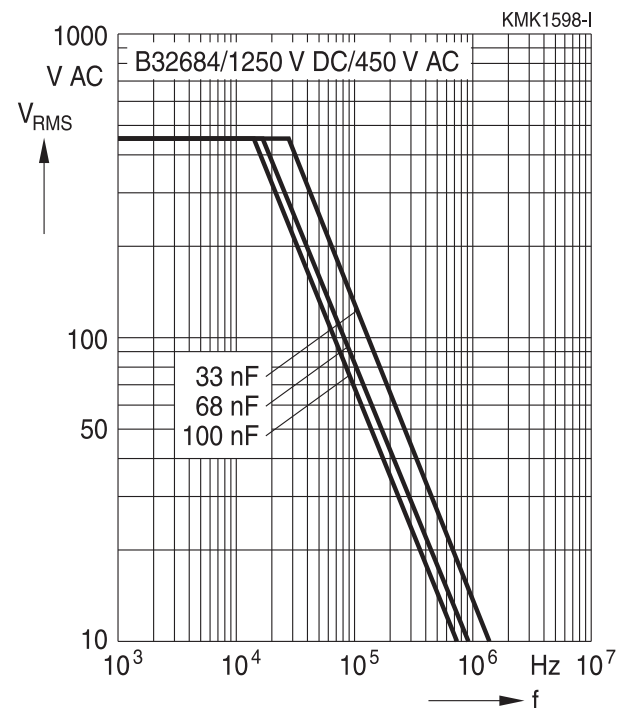



**B32684**

**Very high pulse (wound)**



**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 90^\circ C$ )**

For  $T_A > 90^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 27.5 mm**


1600 V DC/500 V AC

2000 V DC/550 V AC

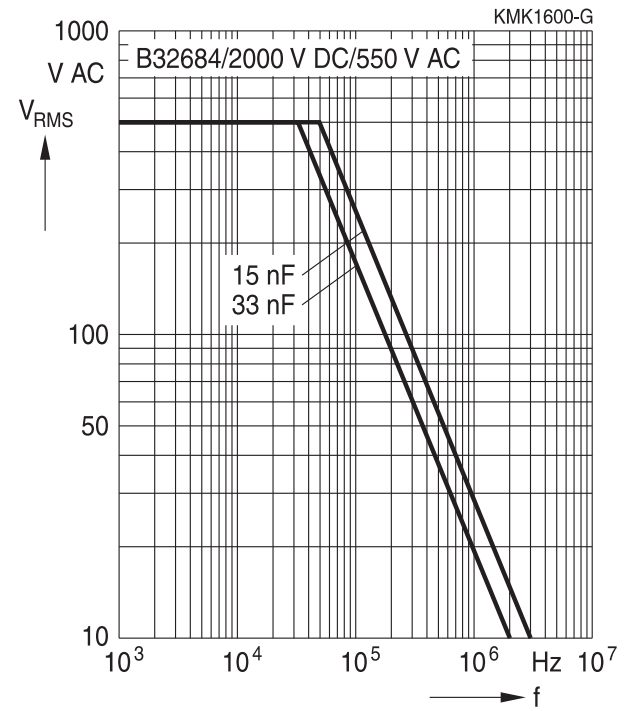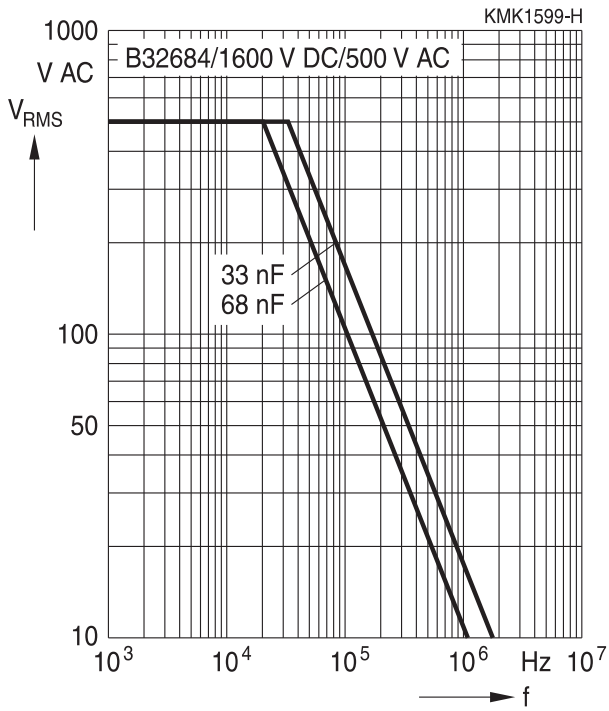

**B32686**

**Very high pulse (wound)**




**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 90^\circ C$ )**


For  $T_A > 90^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 37.5 mm**


**630 V DC/300 V AC**

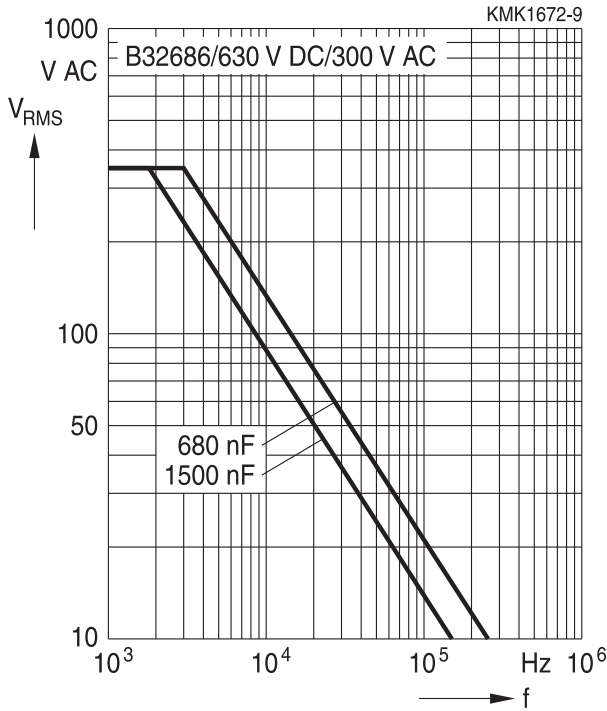


**1000 V DC/400 V AC**

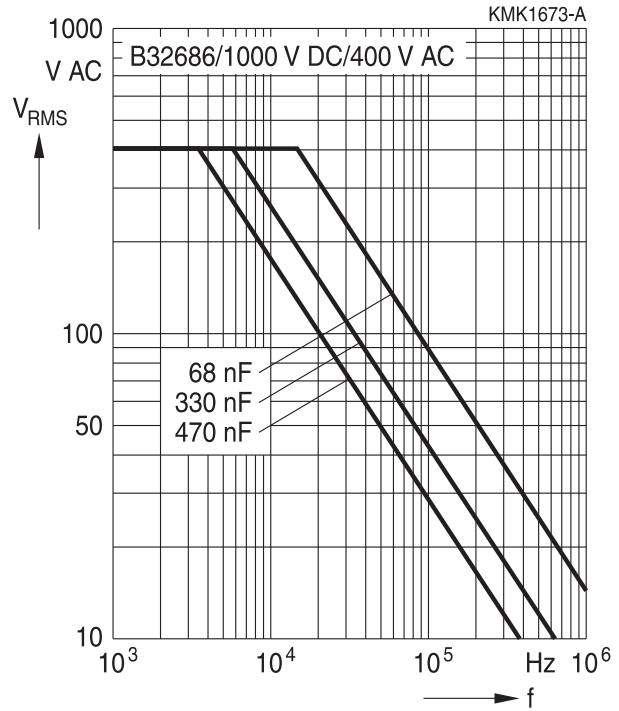


**1250 V DC/450 V AC**

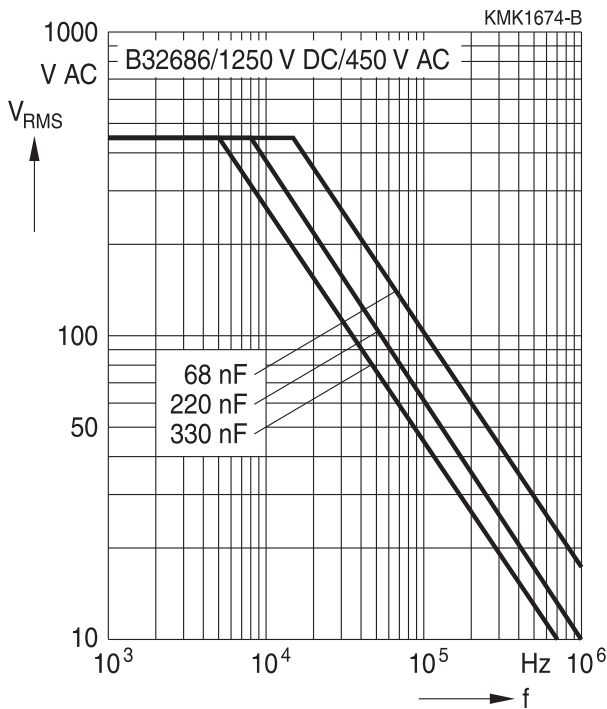

**1600 V DC/500 V AC**

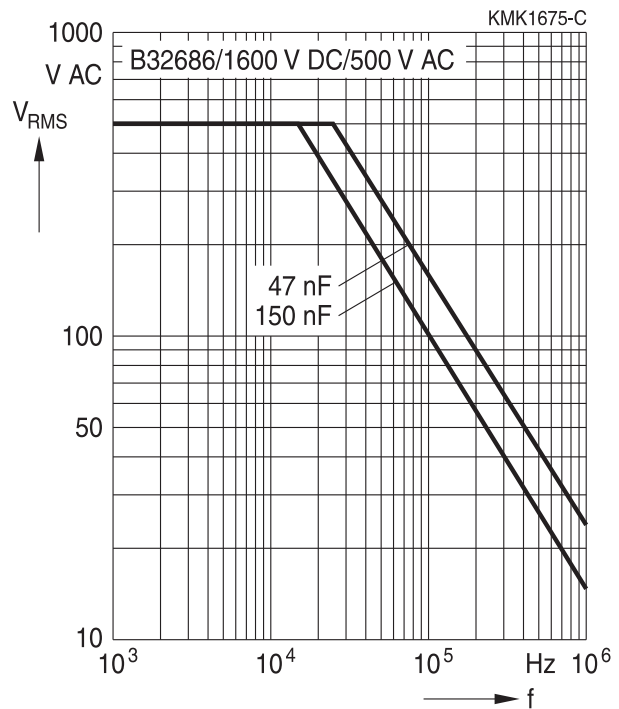



**B32686**


**Very high pulse (wound)**


**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 90^\circ\text{C}$ )**

For  $T_A > 90^\circ\text{C}$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 37.5 mm**

2000 V DC/550 V AC

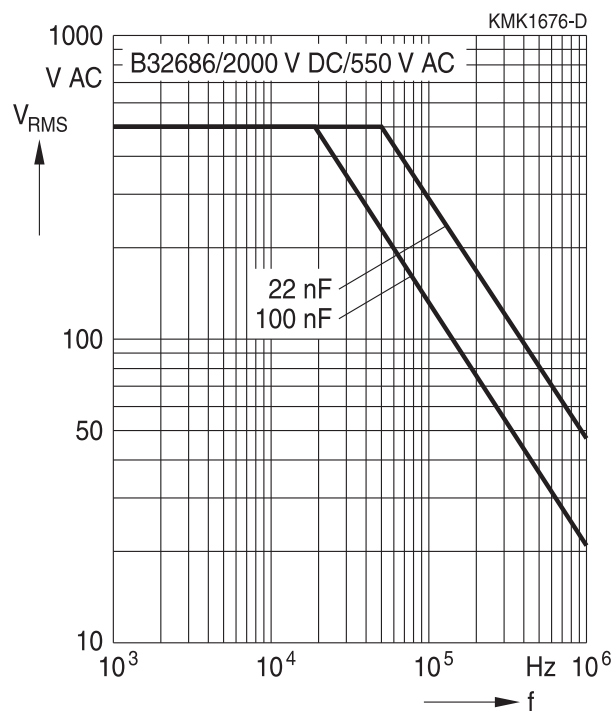



## Mounting guidelines

### 1 Soldering

#### 1.1 Solderability of leads

The solderability of terminal leads is tested to IEC 60068-2-20:2008, test Ta, method 1.

Before a solderability test is carried out, terminals are subjected to accelerated ageing (to IEC 60068-2-2:2007, test Ba: 4 h exposure to dry heat at 155 °C). Since the ageing temperature is far higher than the upper category temperature of the capacitors, the terminal wires should be cut off from the capacitor before the ageing procedure to prevent the solderability being impaired by the products of any capacitor decomposition that might occur.

Solder bath temperature	235 ±5 °C
Soldering time	2.0 ±0.5 s
Immersion depth	2.0 +0/−0.5 mm from capacitor body or seating plane
Evaluation criteria: Visual inspection	Wetting of wire surface by new solder ≥90%, free-flowing solder

#### 1.2 Resistance to soldering heat

Resistance to soldering heat is tested to IEC 60068-2-20:2008, test Tb, method 1.

Conditions:

Series	Solder bath temperature	Soldering time
MKT boxed (except 2.5 × 6.5 × 7.2 mm) coated uncoated (lead spacing >10 mm)	260 ±5 °C	10 ±1 s
MFP MKP (lead spacing >7.5 mm)		
MKT boxed (case 2.5 × 6.5 × 7.2 mm)		5 ±1 s
MKP (lead spacing ≤7.5 mm)		<4 s
MKT uncoated (lead spacing ≤10 mm) insulated (B32559)		recommended soldering profile for MKT uncoated (lead spacing ≤ 10 mm) and insulated (B32559)



B32682 ... B32686

Very high pulse (wound)




Immersion depth	2.0 +0/−0.5 mm from capacitor body or seating plane
Shield	Heat-absorbing board, (1.5 ±0.5) mm thick, between capacitor body and liquid solder
Evaluation criteria:	
Visual inspection	No visible damage
$\Delta C/C_0$	2% for MKT/MKP/MFP 5% for EMI suppression capacitors
$\tan \delta$	As specified in sectional specification

### 1.3 General notes on soldering

Permissible heat exposure loads on film capacitors are primarily characterized by the upper category temperature  $T_{max}$ . Long exposure to temperatures above this type-related temperature limit can lead to changes in the plastic dielectric and thus change irreversibly a capacitor's electrical characteristics. For short exposures (as in practical soldering processes) the heat load (and thus the possible effects on a capacitor) will also depend on other factors like:

- Pre-heating temperature and time
- Forced cooling immediately after soldering
- Terminal characteristics:  
diameter, length, thermal resistance, special configurations (e.g. crimping)
- Height of capacitor above solder bath
- Shadowing by neighboring components
- Additional heating due to heat dissipation by neighboring components
- Use of solder-resist coatings






The overheating associated with some of these factors can usually be reduced by suitable countermeasures. For example, if a pre-heating step cannot be avoided, an additional or reinforced cooling process may possibly have to be included.


**EPCOS recommendations**

As a reference, the recommended wave soldering profile for our film capacitors is as follows:

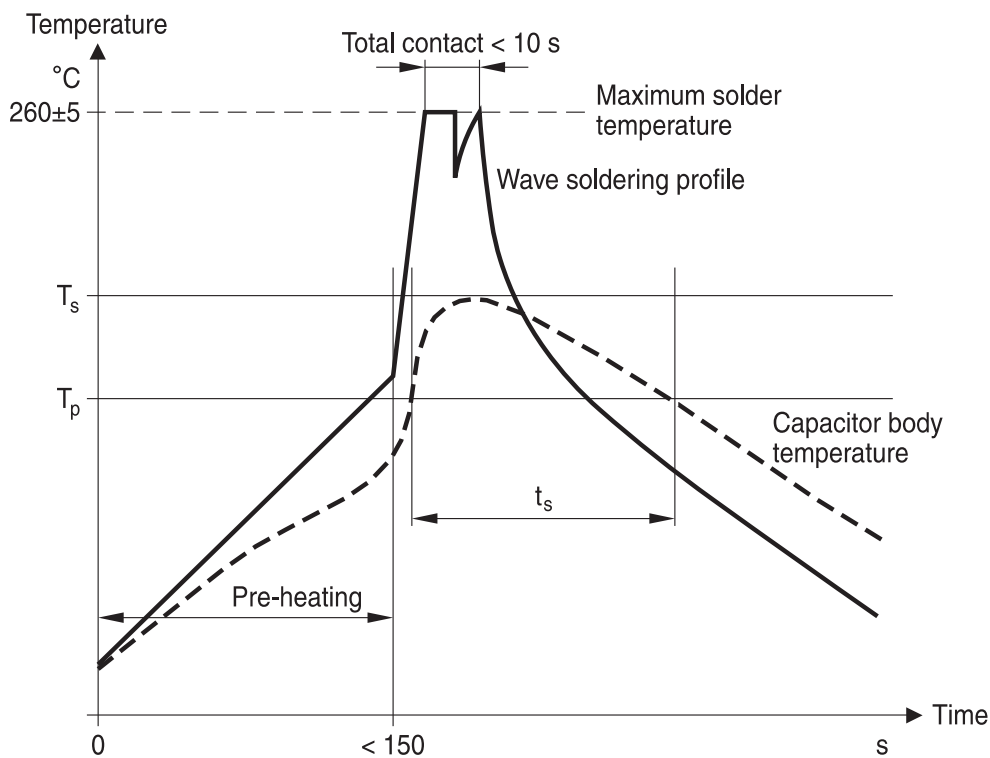

T<sub>s</sub>: Capacitor body maximum temperature at wave soldering  
 T<sub>p</sub>: Capacitor body maximum temperature at pre-heating

KMK1745-A-E

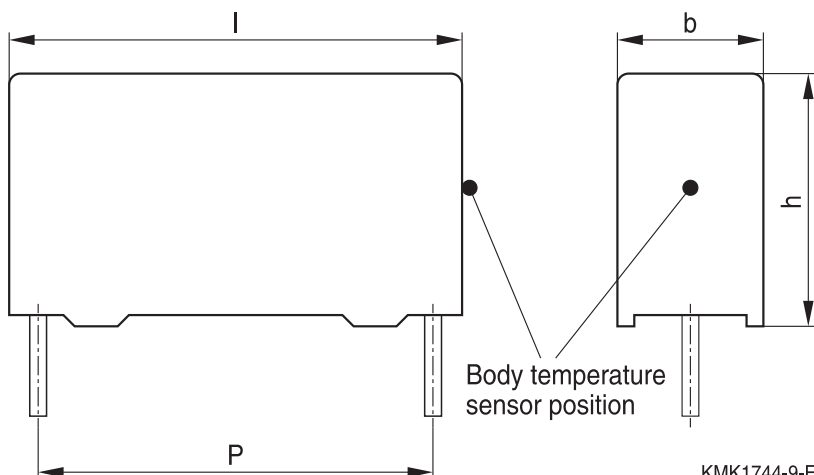

KMK1744-9-E



B32682 ... B32686

Very high pulse (wound)

Body temperature should follow the description below:

- MKP capacitor
  - During pre-heating:  $T_p \leq 110 \text{ }^\circ\text{C}$
  - During soldering:  $T_s \leq 120 \text{ }^\circ\text{C}$ ,  $t_s \leq 45 \text{ s}$
- MKT capacitor
  - During pre-heating:  $T_p \leq 125 \text{ }^\circ\text{C}$
  - During soldering:  $T_s \leq 160 \text{ }^\circ\text{C}$ ,  $t_s \leq 45 \text{ s}$

When SMD components are used together with leaded ones, the film capacitors should not pass into the SMD adhesive curing oven. The leaded components should be assembled after the SMD curing step.

Leaded film capacitors are not suitable for reflow soldering.

In order to ensure proper conditions for manual or selective soldering, the body temperature of the capacitor ( $T_s$ ) must be  $\leq 120 \text{ }^\circ\text{C}$ .

One recommended condition for manual soldering is that the tip of the soldering iron should be  $< 360 \text{ }^\circ\text{C}$  and the soldering contact time should be no longer than 3 seconds.

For uncoated MKT capacitors with lead spacings  $\leq 10 \text{ mm}$  (B32560/B32561) the following measures are recommended:

- pre-heating to not more than  $110 \text{ }^\circ\text{C}$  in the preheater phase
- rapid cooling after soldering

Please refer to EPCOS Film Capacitor Data Book in case more details are needed.



## Cautions and warnings

- Do not exceed the upper category temperature (UCT).
- Do not apply any mechanical stress to the capacitor terminals.
- Avoid any compressive, tensile or flexural stress.
- Do not move the capacitor after it has been soldered to the PC board.
- Do not pick up the PC board by the soldered capacitor.
- Do not place the capacitor on a PC board whose PTH hole spacing differs from the specified lead spacing.
- Do not exceed the specified time or temperature limits during soldering.
- Avoid external energy inputs, such as fire or electricity.
- Avoid overload of the capacitors.
- Consult us if application is with severe temperature and humidity condition.
- There are no serviceable or repairable parts inside the capacitor. Opening the capacitor or any attempts to open or repair the capacitor will void the warranty and liability of EPCOS.
- Please note that the standards referred to in this publication may have been revised in the meantime.

The table below summarizes the safety instructions that must always be observed. A detailed description can be found in the relevant sections of the chapters "General technical information" and "Mounting guidelines".

Topic	Safety information	Reference chapter "General technical information"
Storage conditions	Make sure that capacitors are stored within the specified range of time, temperature and humidity conditions.	4.5 "Storage conditions"
Flammability	Avoid external energy, such as fire or electricity (passive flammability), avoid overload of the capacitors (active flammability) and consider the flammability of materials.	5.3 "Flammability"
Resistance to vibration	Do not exceed the tested ability to withstand vibration. The capacitors are tested to IEC 60068-2-6:2007. EPCOS offers film capacitors specially designed for operation under more severe vibration regimes such as those found in automotive applications. Consult our catalog "Film Capacitors for Automotive Electronics".	5.2 "Resistance to vibration"

Topic	Safety information	Reference chapter "Mounting guidelines"
Soldering	Do not exceed the specified time or temperature limits during soldering.	1 "Soldering"
Cleaning	Use only suitable solvents for cleaning capacitors.	2 "Cleaning"




B32682 ... B32686

Very high pulse (wound)

Topic	Safety information	Reference chapter "Mounting guidelines"
Embedding of capacitors in finished assemblies	When embedding finished circuit assemblies in plastic resins, chemical and thermal influences must be taken into account. Caution: Consult us first, if you also wish to embed other uncoated component types!	3 "Embedding of capacitors in finished assemblies"


### Display of ordering codes for EPCOS products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications and the website of EPCOS, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under [www.epcos.com/orderingcodes](http://www.epcos.com/orderingcodes).



## Symbols and terms

Symbol	English	German
$\alpha$	Heat transfer coefficient	Wärmeübergangszahl
$\alpha_C$	Temperature coefficient of capacitance	Temperaturkoeffizient der Kapazität
A	Capacitor surface area	Kondensatoroberfläche
$\beta_C$	Humidity coefficient of capacitance	Feuchtekoeffizient der Kapazität
C	Capacitance	Kapazität
$C_R$	Rated capacitance	Nennkapazität
$\Delta C$	Absolute capacitance change	Absolute Kapazitätsänderung
$\Delta C/C$	Relative capacitance change (relative deviation of actual value)	Relative Kapazitätsänderung (relative Abweichung vom Ist-Wert)
$\Delta C/C_R$	Capacitance tolerance (relative deviation from rated capacitance)	Kapazitätstoleranz (relative Abweichung vom Nennwert)
dt	Time differential	Differentielle Zeit
$\Delta t$	Time interval	Zeitintervall
$\Delta T$	Absolute temperature change (self-heating)	Absolute Temperaturänderung (Selbsterwärmung)
$\Delta \tan \delta$	Absolute change of dissipation factor	Absolute Änderung des Verlustfaktors
$\Delta V$	Absolute voltage change	Absolute Spannungsänderung
dV/dt	Time differential of voltage function (rate of voltage rise)	Differentielle Spannungsänderung (Spannungsflankensteilheit)
$\Delta V/\Delta t$	Voltage change per time interval	Spannungsänderung pro Zeitintervall
E	Activation energy for diffusion	Aktivierungsenergie zur Diffusion
ESL	Self-inductance	Eigeninduktivität
ESR	Equivalent series resistance	Ersatz-Serienwiderstand
f	Frequency	Frequenz
$f_1$	Frequency limit for reducing permissible AC voltage due to thermal limits	Grenzfrequenz für thermisch bedingte Reduzierung der zulässigen Wechselspannung
$f_2$	Frequency limit for reducing permissible AC voltage due to current limit	Grenzfrequenz für strombedingte Reduzierung der zulässigen Wechselspannung
$f_r$	Resonant frequency	Resonanzfrequenz
$F_D$	Thermal acceleration factor for diffusion	Therm. Beschleunigungsfaktor zur Diffusion
$F_T$	Derating factor	Deratingfaktor
i	Current (peak)	Stromspitze
$I_C$	Category current (max. continuous current)	Kategoriestrom (max. Dauerstrom)



B32682 ... B32686

Very high pulse (wound)

Symbol	English	German
$I_{RMS}$	(Sinusoidal) alternating current, root-mean-square value	(Sinusförmiger) Wechselstrom
$i_z$	Capacitance drift	Inkonstanz der Kapazität
$k_0$	Pulse characteristic	Impuls Kennwert
$L_S$	Series inductance	Serieninduktivität
$\lambda$	Failure rate	Ausfallrate
$\lambda_0$	Constant failure rate during useful service life	Konstante Ausfallrate in der Nutzungsphase
$\lambda_{test}$	Failure rate, determined by tests	Experimentell ermittelte Ausfallrate
$P_{diss}$	Dissipated power	Abgegebene Verlustleistung
$P_{gen}$	Generated power	Erzeugte Verlustleistung
$Q$	Heat energy	Wärmeenergie
$\rho$	Density of water vapor in air	Dichte von Wasserdampf in Luft
$R$	Universal molar constant for gases	Allg. Molarkonstante für Gas
$R$	Ohmic resistance of discharge circuit	Ohmscher Widerstand des Entladekreises
$R_i$	Internal resistance	Innenwiderstand
$R_{ins}$	Insulation resistance	Isolationswiderstand
$R_P$	Parallel resistance	Parallelwiderstand
$R_S$	Series resistance	Serienwiderstand
$S$	severity (humidity test)	Schärfegrad (Feuchtetest)
$t$	Time	Zeit
$T$	Temperature	Temperatur
$\tau$	Time constant	Zeitkonstante
$\tan \delta$	Dissipation factor	Verlustfaktor
$\tan \delta_D$	Dielectric component of dissipation factor	Dielektrischer Anteil des Verlustfaktors
$\tan \delta_P$	Parallel component of dissipation factor	Parallelanteil des Verlustfaktors
$\tan \delta_S$	Series component of dissipation factor	Serienanteil des Verlustfaktors
$T_A$	Temperature of the air surrounding the component	Temperatur der Luft, die das Bauteil umgibt
$T_{max}$	Upper category temperature	Obere Kategorietemperatur
$T_{min}$	Lower category temperature	Untere Kategorietemperatur
$t_{OL}$	Operating life at operating temperature and voltage	Betriebszeit bei Betriebstemperatur und -spannung
$T_{op}$	Operating temperature, $T_A + \Delta T$	Betriebstemperatur, $T_A + \Delta T$
$T_R$	Rated temperature	Nenntemperatur
$T_{ref}$	Reference temperature	Referenztemperatur
$t_{SL}$	Reference service life	Referenz-Lebensdauer



Symbol	English	German
$V_{AC}$	AC voltage	Wechselspannung
$V_C$	Category voltage	Kategorie <span>spannung</span>
$V_{C,RMS}$	Category AC voltage	(Sinusförmige) Kategorie-Wechselspannung
$V_{CD}$	Corona-discharge onset voltage	Teilentlade-Einsatzspannung
$V_{ch}$	Charging voltage	Ladespannung
$V_{DC}$	DC voltage	Gleichspannung
$V_{FB}$	Fly-back capacitor voltage	Spannung (Flyback)
$V_i$	Input voltage	Eingangsspannung
$V_o$	Output voltage	Ausgangsspannung
$V_{op}$	Operating voltage	Betriebsspannung
$V_p$	Peak pulse voltage	Impuls-Spitzen <span>spannung</span>
$V_{pp}$	Peak-to-peak voltage Impedance	Spannungshub
$V_R$	Rated voltage	Nennspannung
$\hat{V}_R$	Amplitude of rated AC voltage	Amplitude der Nenn-Wechselspannung
$V_{RMS}$	(Sinusoidal) alternating voltage, root-mean-square value	(Sinusförmige) Wechselspannung
$V_{SC}$	S-correction voltage	Spannung bei Anwendung "S-correction"
$V_{sn}$	Snubber capacitor voltage	Spannung bei Anwendung "Beschaltung"
$Z$	Impedance	Scheinwiderstand
$e$	Lead spacing	Rastermaß

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.



## Important notes

7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard.** The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements (“CSR”) TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System.** For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.
8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).

Release 2018-06

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## EPCOS / TDK:

[B32686A104K](#) [B32686A1104J](#) [B32686A1104K](#) [B32686A1154J](#) [B32686A154K](#) [B32686A2104J](#) [B32686A2104K](#)  
[B32686A2223J](#) [B32686A224K](#) [B32686A2333J](#) [B32686A2473J](#) [B32686A474J](#) [B32686A7224K](#) [B32686A7334J](#)  
[B32686A7334K](#) [B32686A2683J](#) [B32686A7104K](#) [B32682A0103K](#) [B32682A0153K](#) [B32682A0332K](#) [B32682A0472K](#)  
[B32682A0682K](#) [B32682A1152K](#) [B32682A1222J](#) [B32682A1222K](#) [B32682A1332K](#) [B32682A1472K](#) [B32682A1682K](#)  
[B32682A2102J](#) [B32682A2102K](#) [B32682A2102K189](#) [B32682A2152K](#) [B32682A2222K](#) [B32682A2332K](#)  
[B32682A4153K](#) [B32682A6103J](#) [B32682A6103K](#) [B32682A6153K](#) [B32682A6222K](#) [B32682A6223J](#) [B32682A6223K](#)  
[B32682A6333K](#) [B32682A6472K](#) [B32682A6472K189](#) [B32682A6473J](#) [B32682A6473K](#) [B32682A6473K189](#)  
[B32682A6682K](#) [B32682A7103K](#) [B32682A7222J](#) [B32682A7222K](#) [B32682A7332K](#) [B32682A7472K](#) [B32682A7682K](#)  
[B32683A0103K](#) [B32683A0153K](#) [B32683A0223K](#) [B32683A0333K](#) [B32683A0473K](#) [B32683A1103J](#) [B32683A1103K](#)  
[B32683A1153K](#) [B32683A1223J](#) [B32683A1223K](#) [B32683A1682K](#) [B32683A2103J](#) [B32683A2103K](#) [B32683A2153J](#)  
[B32683A2332K](#) [B32683A2472J](#) [B32683A2472K](#) [B32683A2682K](#) [B32683A6104K](#) [B32683A6154J](#) [B32683A6154K](#)  
[B32683A6333K](#) [B32683A6473J](#) [B32683A6473K](#) [B32683A6683J189](#) [B32683A6683K](#) [B32683A7103J](#)  
[B32683A7103K](#) [B32683A7153K](#) [B32683A7223K](#) [B32683A7333K](#) [B32684A0104K](#) [B32684A0154K](#) [B32684A0473K](#)  
[B32684A0683K](#) [B32684A1104K](#) [B32684A1333K](#) [B32684A1473J](#) [B32684A1473K](#) [B32684A1683K](#) [B32684A2153J](#)  
[B32684A2153K](#) [B32684A2223K](#) [B32684A2333K](#) [B32684A2473K](#) [B32684A2683K](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А